

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

To all our customers

---

## **Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.**

---

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.  
Customer Support Dept.  
April 1, 2003

# M30201 Group

User's Manual

MITSUBISHI 16-BIT SINGLE-CHIP  
MICROCOMPUTER  
M16C FAMILY

### Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

### Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishichips.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

## How to Use This Manual

This user's manual is written for the M30201 group.


The reader of this manual is expected to have the basic knowledge of electric and logic circuits and microcomputers.

This manual is for the use of the models below.

- M30201M4-XXXSP/FP
- M30201M4T-XXXFP
- M30201M6-XXXFP
- M30201M6T-XXXFP
- M30201F6SP/FP
- M30201F6TFP

These products have similar features except for the memories, which differ from one product to another. This manual gives descriptions of M30201M4-XXXSP. Memories built-in are as shown below. Be careful when writing a program, as the memories have different capacities.

The figure of each register configuration describes its functions, contents at reset, and attributes as follows :

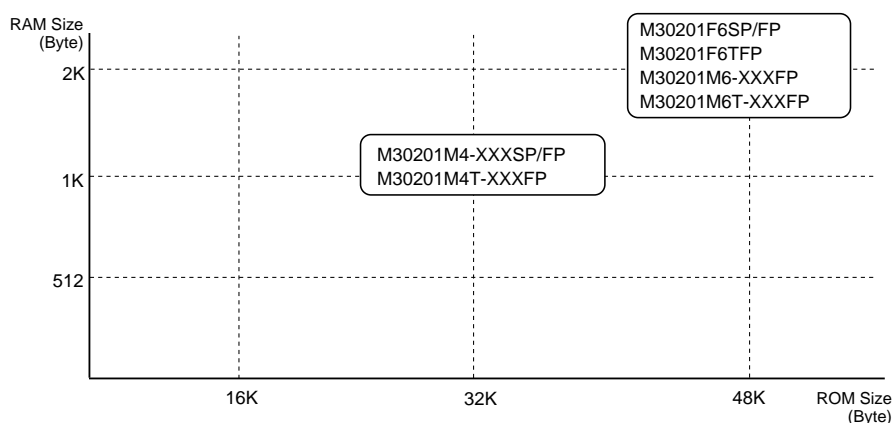

This manual comprises of eight chapters. Use the suggested chapters as a reference for the following topics:

- Bit attribute

R.....Read


W....Write

O.....Possible to read

O.....Possible to write

X.....Impossible to read

X.....Impossible to write

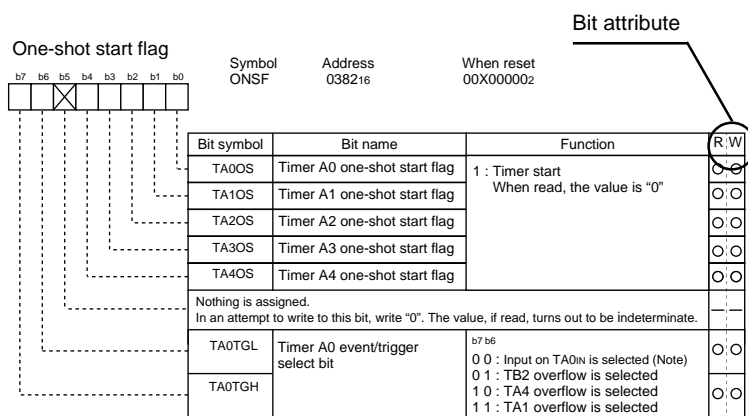

Note: Set the corresponding port direction register to "0".

This manual comprises of five chapters. Use the suggested chapters as a reference for the following topics:


- \* To understand hardware specifications ..... Chapter 1 Hardware
- \* To understand the basic way of using peripheral features and the operation timing ..... Chapter 2 Peripheral Functions Usage
- \* To observe applications of peripheral features ..... Chapter 3 Examples of Peripheral Functions Applications
- \* To understand interrupt timing in detail ..... Chapter 4 Interrupts
- \* To understand standard data ..... Chapter 5 Standard Characteristics

This manual includes a quick reference immediately following the Table of Contents, indicate the page of the topic to be pursued.


- \* To find a page describing a specific register by the register address ..... Quick Reference to Pages Classified by Address

# M16C Family-related document list

Usages  
(Microcomputer development flow)

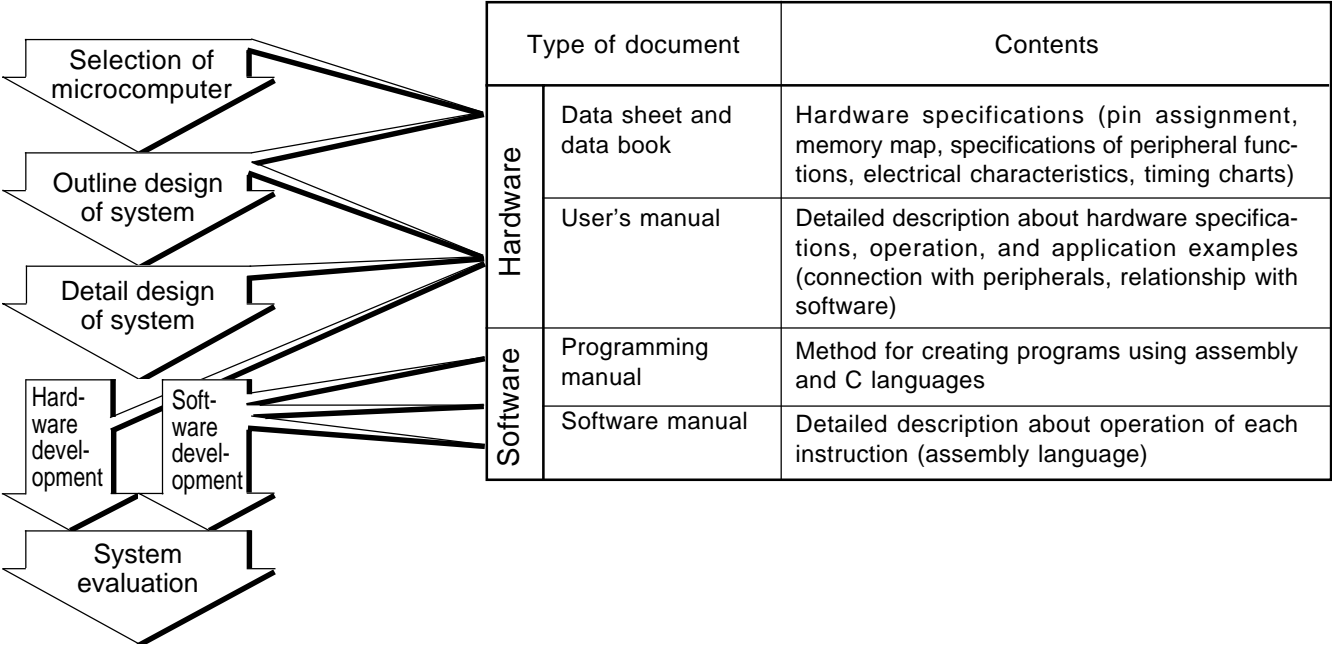

## M16C Family Line-up

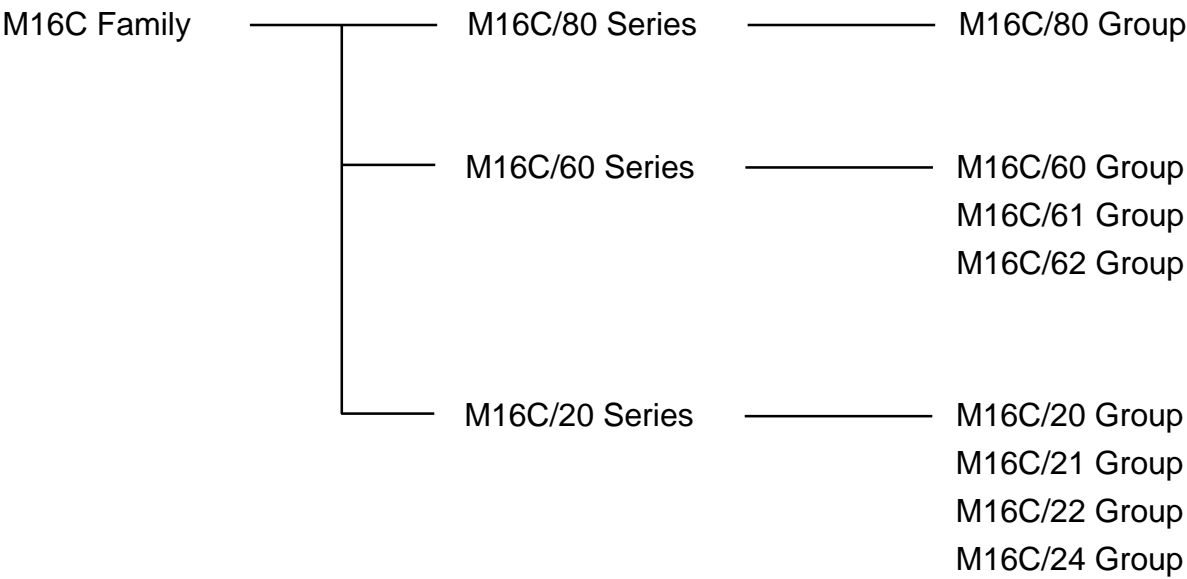



# Table of Contents

## Chapter 1 Hardware

---

Description .....	2
Memory .....	9
Central Processing Unit (CPU) .....	12
Reset .....	15
Software Reset .....	17
Clock Generating Circuit .....	18
Clock Control .....	19
Clock Output .....	22
Stop Mode .....	23
Wait Mode .....	23
Power Saving .....	25
Protection .....	27
Interrupt .....	28
Watchdog Timer .....	46
Timer .....	48
Timer A .....	49
Timer B .....	59
Timer X .....	65
Serial I/O .....	75
A-D Converter .....	89
Programmable I/O Ports .....	99
Usage Precaution .....	107
Electrical characteristics .....	111
Outline Performance (Flash Memory) .....	125
Flash Memory .....	126
CPU Rewrite Mode .....	127
Parallel I/O Mode .....	134
Standard Serial I/O Mode .....	146

## Chapter 2 Peripheral Functions Usage

---

2.1 Protect .....	172
2.1.1 Overview .....	172
2.1.2 Protect Operation .....	172
2.1.3 Precaution for Protect .....	173
2.2 Timer A .....	174
2.2.1 Overview .....	174
2.2.2 Operation of Timer A (timer mode) .....	180
2.2.3 Operation of Timer A (timer mode, gate function selected) .....	182
2.2.4 Operation of Timer A (timer mode, pulse output function selected) .....	184
2.2.5 Operation of Timer A (event counter mode, reload type selected) .....	186
2.2.6 Operation of Timer A (event counter mode, free run type selected) .....	188
2.2.7 Operation of timer A (2-phase pulse signal process in event counter mod normal mode selected) .....	190
2.2.8 Operation of timer A (2-phase pulse signal process in event counter mode,multiply-by-4 mode selected) .....	192
2.2.9 Operation of Timer A (one-shot timer mode) .....	194
2.2.10 Operation of Timer A (one-shot timer mode, external trigger selected) .....	196
2.2.11 Operation of Timer A (pulse width modulation mode, 16-bit PWM mode selected) .....	198
2.2.12 Operation of Timer A (pulse width modulation mode, 8-bit PWM mode selected) .....	200
2.2.13 Precautions for Timer A (timer mode) .....	202
2.2.14 Precautions for Timer A (event counter mode) .....	203
2.2.15 Precautions for Timer A (one-shot timer mode) .....	204
2.2.16 Precautions for Timer A (pulse width modulation mode) .....	205
2.3 Timer B .....	206
2.3.1 Overview .....	206
2.3.2 Operation of Timer B (timer mode) .....	210
2.3.3 Operation of Timer B (event counter mode) .....	212
2.3.4 Operation of Timer B (pulse period measurement mode) .....	214
2.3.5 Operation of Timer B (pulse width measurement mode) .....	216
2.3.6 Precautions for Timer B (timer mode, event counter mode) .....	218
2.3.7 Precautions for Timer B (pulse period/pulse width measurement mode) .....	219
2.4 Timer X .....	220
2.4.1 Overview .....	220
2.4.2 Operation of Timer X (timer mode) .....	224

2.4.3 Operation of Timer X (timer mode, gate function selected) .....	226
2.4.4 Operation of Timer X (timer mode, pulse output function selected) .....	228
2.4.5 Operation of Timer X (event counter mode, reload type selected) .....	230
2.4.6 Operation of Timer X (event counter mode, free run type selected) .....	232
2.4.7 Operation of Timer X (one-shot timer mode) .....	234
2.4.8 Operation of Timer X (pulse period measurement mode) .....	236
2.4.9 Operation of Timer X (pulse width measurement mode) .....	238
2.4.10 Operation of Timer X (pulse width modulation mode, 16-bit PWM mode selected) .....	240
2.4.11 Operation of Timer X (pulse width modulation mode, 8-bit PWM mode selected) .....	242
2.4.12 Precautions for Timer X (timer mode, event counter mode) .....	244
2.4.13 Precautions for Timer X (one-shot timer mode) .....	245
2.4.14 Precautions for Timer X (pulse period/pulse width measurement mode) .....	246
2.4.15 Precautions for Timer X (pulse width modulation mode) .....	247
2.5 Clock-Synchronous Serial I/O .....	248
2.5.1 Overview .....	248
2.5.2 Operation of Serial I/O (transmission in clock-synchronous serial I/O mode) .....	254
2.5.3 Operation of the Serial I/O (transmission in clock-synchronous serial I/O mode, transfer clock output from multiple pins function selected) .....	258
2.5.4 Operation of Serial I/O (reception in clock-synchronous serial I/O mode) .....	262
2.5.5 Precautions for Serial I/O (in clock-synchronous serial I/O) .....	266
2.6 Clock-Asynchronous Serial I/O (UART) .....	268
2.6.1 Overview .....	268
2.6.2 Operation of Serial I/O (transmission in UART mode) .....	276
2.6.3 Operation of Serial I/O (reception in UART mode) .....	280
2.7 A-D Converter .....	284
2.7.1 Overview .....	284
2.7.2 Operation of A-D converter (one-shot mode) .....	290
2.7.3 Operation of A-D Converter (in repeat mode) .....	292
2.7.4 Operation of A-D Converter (in single sweep mode) .....	294
2.7.5 Operation of A-D Converter (in repeat sweep mode 0) .....	296
2.7.6 Operation of A-D Converter (in repeat sweep mode 1) .....	298
2.7.7 Precautions for A-D Converter .....	300
2.7.8 Method of A-D Conversion (10-bit mode) .....	301
2.7.9 Method of A-D Conversion (8-bit mode) .....	303
2.7.10 Absolute Accuracy and Differential Non-Linearity Error .....	305

2.7.11 Internal Equivalent Circuit of Analog Input .....	307
2.7.12 Sensor's Output Impedance under A-D Conversion .....	308
2.8 Watchdog Timer .....	310
2.8.1 Overview .....	310
2.8.2 Operation of Watchdog Timer .....	312
2.9 Address Match Interrupt .....	314
2.9.1 Overview .....	314
2.9.2 Operation of Address Match Interrupt .....	316
2.10 Key-Input Interrupt .....	318
2.10.1 Overview .....	318
2.10.2 Operation of Key-Input Interrupt .....	320
2.11 Power Control .....	322
2.11.1 Overview .....	322
2.11.2 Stop Mode Set-Up .....	327
2.11.3 Wait Mode Set-Up .....	328
2.11.4 Precautions in Power Control .....	329
2.12 Programmable I/O Ports .....	330
2.12.1 Overview .....	330

## Chapter 3 Examples of Peripheral functions Applications \_\_\_\_\_

3.1 Long-Period Timers .....	338
3.2 Variable-Period Variable-Duty PWM Output .....	342
3.3 Delayed One-Shot Output .....	346
3.4 Buzzer Output .....	350
3.5 Solution for External Interrupt Pins Shortage .....	352
3.6 Controlling Power Using Stop Mode .....	354
3.7 Controlling Power Using Wait Mode .....	358

## Chapter 4 Interrupt \_\_\_\_\_

4.1 Overview of Interrupt .....	364
4.1.1 Type of Interrupts .....	364
4.1.2 Software Interrupts .....	365
4.1.3 Hardware Interrupts .....	366
4.1.4 Interrupts and Interrupt Vector Tables .....	367

4.2 Interrupt Control .....	369
4.2.1 Interrupt Enable Flag .....	371
4.2.2 Interrupt Request Bit .....	371
4.2.3 Interrupt Priority Level Select Bit and Processor Interrupt Priority Level (IPL) .....	372
4.2.4 Rewrite the interrupt control register .....	373
4.3 Interrupt Sequence .....	374
4.3.1 Interrupt Response Time .....	374
4.3.2 Variation of IPL when Interrupt Request is Accepted .....	375
4.3.3 Saving Registers .....	376
4.4 Returning from an Interrupt Routine .....	378
4.5 Interrupt Priority .....	378
4.6 Multiple Interrupts .....	380
4.7 Precautions for Interrupts .....	382

## Chapter 5 Standard Characteristics \_\_\_\_\_

5.1 Standard DC Characteristics .....	386
5.1.1 Standard Ports Characteristics .....	386
5.1.2 Standard Characteristics of ICC-f(XIN) .....	389
5.2 Standard Characteristics of Pull-Up Resistor .....	391
5.3 Standard DC Characteristics (Flash memory version) .....	392
5.3.1 Standard Ports Characteristics .....	392
5.3.2 Standard Characteristics of ICC-f(XIN) .....	394
5.4 Standard Characteristics of Pull-Up Resistor (Flash memory version) .....	395

## Quick Reference to Pages Classified by Address

Address	Register	Page	Address	Register	Page
0000 <sub>16</sub>			0040 <sub>16</sub>		
0001 <sub>16</sub>			0041 <sub>16</sub>		
0002 <sub>16</sub>			0042 <sub>16</sub>		
0003 <sub>16</sub>			0043 <sub>16</sub>		
0004 <sub>16</sub>	Processor mode register 0 (PM0)	17	0044 <sub>16</sub>		
0005 <sub>16</sub>	Processor mode register 1 (PM1)		0045 <sub>16</sub>		
0006 <sub>16</sub>	System clock control register 0 (CM0)	21	0046 <sub>16</sub>		
0007 <sub>16</sub>	System clock control register 1 (CM1)		0047 <sub>16</sub>		
0008 <sub>16</sub>			0048 <sub>16</sub>		
0009 <sub>16</sub>	Address match interrupt enable register (AIER)	44	0049 <sub>16</sub>		
000A <sub>16</sub>	Protect register (PRCR)	27	004A <sub>16</sub>		
000B <sub>16</sub>			004B <sub>16</sub>		
000C <sub>16</sub>			004C <sub>16</sub>		
000D <sub>16</sub>			004D <sub>16</sub>	Key input interrupt control register (KUPIC)	34
000E <sub>16</sub>	Watchdog timer start register (WDTS)	47	004E <sub>16</sub>	A-D conversion interrupt control register (ADIC)	
000F <sub>16</sub>	Watchdog timer control register (WDC)		004F <sub>16</sub>		
0010 <sub>16</sub>			0050 <sub>16</sub>		
0011 <sub>16</sub>	Address match interrupt register 0 (RMAD0)	44	0051 <sub>16</sub>	UART0 transmit interrupt control register (S0TIC)	34
0012 <sub>16</sub>			0052 <sub>16</sub>	UART0 receive interrupt control register (S0RIC)	
0013 <sub>16</sub>			0053 <sub>16</sub>	UART1 transmit interrupt control register (S1TIC)	
0014 <sub>16</sub>			0054 <sub>16</sub>	UART1 receive interrupt control register (S1RIC)	
0015 <sub>16</sub>	Address match interrupt register 1 (RMAD1)	44	0055 <sub>16</sub>	Timer A0 interrupt control register (TA0IC)	
0016 <sub>16</sub>			0056 <sub>16</sub>	Timer X0 interrupt control register (TX0IC)	
0017 <sub>16</sub>			0057 <sub>16</sub>	Timer X1 interrupt control register (TX1IC)	
0018 <sub>16</sub>			0058 <sub>16</sub>	Timer X2 interrupt control register (TX2IC)	
0019 <sub>16</sub>			0059 <sub>16</sub>		
001A <sub>16</sub>			005A <sub>16</sub>	Timer B0 interrupt control register (TB0IC)	34
001B <sub>16</sub>			005B <sub>16</sub>	Timer B1 interrupt control register (TB1IC)	
001C <sub>16</sub>			005C <sub>16</sub>		
001D <sub>16</sub>			005D <sub>16</sub>	INT0 interrupt control register (INT0IC)	34
001E <sub>16</sub>			005E <sub>16</sub>	INT1 interrupt control register (INT1IC)	
001F <sub>16</sub>			005F <sub>16</sub>		
0020 <sub>16</sub>					
0021 <sub>16</sub>					
0022 <sub>16</sub>					
0023 <sub>16</sub>					
0024 <sub>16</sub>					
0025 <sub>16</sub>					
0026 <sub>16</sub>					
0027 <sub>16</sub>					
0028 <sub>16</sub>					
0029 <sub>16</sub>					
002A <sub>16</sub>					
002B <sub>16</sub>					
002C <sub>16</sub>					
002D <sub>16</sub>					
002E <sub>16</sub>					
002F <sub>16</sub>					
0030 <sub>16</sub>					
0031 <sub>16</sub>					
0032 <sub>16</sub>					
0033 <sub>16</sub>					
0034 <sub>16</sub>					
0035 <sub>16</sub>					
0036 <sub>16</sub>					
0037 <sub>16</sub>					
0038 <sub>16</sub>					
0039 <sub>16</sub>					
003A <sub>16</sub>					
003B <sub>16</sub>					
003C <sub>16</sub>					
003D <sub>16</sub>					
003E <sub>16</sub>					
003F <sub>16</sub>					

## Quick Reference to Pages Classified by Address

Address	Register	Page	Address	Register	Page	
0380 <sub>16</sub>	Count start flag (TABSR)	50	03C0 <sub>16</sub>	A-D register 0 (AD0)	92	
0381 <sub>16</sub>	Clock prescaler reset flag (CPSRF)	51	03C1 <sub>16</sub>	A-D register 1 (AD1)		
0382 <sub>16</sub>	One-shot start flag (ONSF)		03C2 <sub>16</sub>			
0383 <sub>16</sub>	Trigger select register (TRGSR)		03C3 <sub>16</sub>			
0384 <sub>16</sub>	Up-down flag (UDF)	50	03C4 <sub>16</sub>	A-D register 2 (AD2)		
0385 <sub>16</sub>			03C5 <sub>16</sub>	A-D register 3 (AD3)		
0386 <sub>16</sub>	Timer A0 (TA0)	50	03C6 <sub>16</sub>			
0387 <sub>16</sub>			03C7 <sub>16</sub>			
0388 <sub>16</sub>	Timer X0 (TX0)	66	03C8 <sub>16</sub>	A-D register 4 (AD4)		
0389 <sub>16</sub>			03C9 <sub>16</sub>			
038A <sub>16</sub>	Timer X1 (TX1)		03CA <sub>16</sub>	A-D register 5 (AD5)		
038B <sub>16</sub>			03CB <sub>16</sub>			
038C <sub>16</sub>	Timer X2 (TX2)		03CC <sub>16</sub>	A-D register 6 (AD6)		
038D <sub>16</sub>			03CD <sub>16</sub>			
038E <sub>16</sub>	Clock divided counter (CDC)		03CE <sub>16</sub>	A-D register 7 (AD7)		
038F <sub>16</sub>			03CF <sub>16</sub>			
0390 <sub>16</sub>	Timer B0 (TB0)	60	03D0 <sub>16</sub>			
0391 <sub>16</sub>			03D1 <sub>16</sub>			
0392 <sub>16</sub>	Timer B1 (TB1)		03D2 <sub>16</sub>			
0393 <sub>16</sub>			03D3 <sub>16</sub>			
0394 <sub>16</sub>			03D4 <sub>16</sub>		A-D control register 2 (ADCON2)	92
0395 <sub>16</sub>			03D5 <sub>16</sub>	A-D control register 0 (ADCON0)	91	
0396 <sub>16</sub>	Timer A0 mode register (TA0MR)	49	03D6 <sub>16</sub>			
0397 <sub>16</sub>	Timer X0 mode register (TX0MR)	65	03D7 <sub>16</sub>			A-D control register 1 (ADCON1)
0398 <sub>16</sub>	Timer X1 mode register (TX1MR)		03D8 <sub>16</sub>			
0399 <sub>16</sub>	Timer X2 mode register (TX2MR)		03D9 <sub>16</sub>			
039A <sub>16</sub>		03DA <sub>16</sub>				
039B <sub>16</sub>	Timer B0 mode register (TB0MR)	59	03DB <sub>16</sub>			
039C <sub>16</sub>	Timer B1 mode register (TB1MR)		03DC <sub>16</sub>			
039D <sub>16</sub>			03DD <sub>16</sub>			
039E <sub>16</sub>			03DE <sub>16</sub>			
039F <sub>16</sub>			03DF <sub>16</sub>			
03A0 <sub>16</sub>	UART0 transmit/receive mode register (U0MR)	78	03E0 <sub>16</sub>		Port P0 (P0)	104
03A1 <sub>16</sub>	UART0 bit rate generator (U0BRG)	77	03E1 <sub>16</sub>		Port P1 (P1)	
03A2 <sub>16</sub>	UART0 transmit buffer register (U0TB)		03E2 <sub>16</sub>	Port P0 direction register (PD0)	103	
03A3 <sub>16</sub>		03E3 <sub>16</sub>	Port P1 direction register (PD1)			
03A4 <sub>16</sub>	UART0 transmit/receive control register 0 (U0C0)	78	03E4 <sub>16</sub>	Port P2 (P2)	104	
03A5 <sub>16</sub>	UART0 transmit/receive control register 1 (U0C1)	79	03E5 <sub>16</sub>	Port P3 (P3)		
03A6 <sub>16</sub>	UART0 receive buffer register (U0RB)	77	03E6 <sub>16</sub>	Port P2 direction register (PD2)	103	
03A7 <sub>16</sub>			03E7 <sub>16</sub>	Port P3 direction register (PD3)		
03A8 <sub>16</sub>	UART1 transmit/receive mode register (U1MR)	78	03E8 <sub>16</sub>	Port P4 (P4)	104	
03A9 <sub>16</sub>	UART1 bit rate generator (U1BRG)	77	03E9 <sub>16</sub>	Port P5 (P5)		
03AA <sub>16</sub>	UART1 transmit buffer register (U1TB)		03EA <sub>16</sub>	Port P4 direction register (PD4)	103	
03AB <sub>16</sub>		03EB <sub>16</sub>	Port P5 direction register (PD5)			
03AC <sub>16</sub>	UART1 transmit/receive control register 0 (U1C0)	78	03EC <sub>16</sub>	Port P6 (P6)	104	
03AD <sub>16</sub>	UART1 transmit/receive control register 1 (U1C1)	79	03ED <sub>16</sub>	Port P7 (P7)		
03AE <sub>16</sub>	UART1 receive buffer register (U1RB)	77	03EE <sub>16</sub>	Port P6 direction register (PD6)	103	
03AF <sub>16</sub>			03EF <sub>16</sub>	Port P7 direction register (PD7)		
03B0 <sub>16</sub>	UART transmit/receive control register 2 (UCON)	79	03F0 <sub>16</sub>			
03B1 <sub>16</sub>			03F1 <sub>16</sub>			
03B2 <sub>16</sub>			03F2 <sub>16</sub>			
03B3 <sub>16</sub>			03F3 <sub>16</sub>			
03B4 <sub>16</sub>	Flash memory control register 0 (FCON0) (Note)	127	03F4 <sub>16</sub>			
03B5 <sub>16</sub>	Flash memory control register 1 (FCON1) (Note)		03F5 <sub>16</sub>			
03B6 <sub>16</sub>	Flash command register (FCMD) (Note)		03F6 <sub>16</sub>			
03B7 <sub>16</sub>			03F7 <sub>16</sub>			
03B8 <sub>16</sub>			03F8 <sub>16</sub>			
03B9 <sub>16</sub>			03F9 <sub>16</sub>			
03BA <sub>16</sub>			03FA <sub>16</sub>			
03BB <sub>16</sub>			03FB <sub>16</sub>			
03BC <sub>16</sub>			03FC <sub>16</sub>	Pull-up control register 0 (PUR0)	105	
03BD <sub>16</sub>			03FD <sub>16</sub>	Pull-up control register 1 (PUR1)		
03BE <sub>16</sub>			03FE <sub>16</sub>	Pull-up control register 2 (PUR2)		
03BF <sub>16</sub>			03FF <sub>16</sub>			

Note: This register is only exist in flash memory version.

# Chapter 1

---

Hardware



## Description

### Description

The M30201 group of single-chip microcomputers are built using the high-performance silicon gate CMOS process using a M16C/60 Series CPU core. M30201 group is packaged in a 52-pin plastic molded SDIP, or 56-pin plastic molded QFP. These single-chip microcomputers operate using sophisticated instructions featuring a high level of instruction efficiency. With 1M bytes of address space, they are capable of executing instructions at high speed.

The M30201 group includes a wide range of products with different internal memory types and sizes and various package types.

### Features

- Basic machine instructions ..... Compatible with the M16C/60 series
- Memory capacity ..... ROM/RAM (See figure 1.4. ROM expansion.)
- Shortest instruction execution time ..... 100ns ( $f(X_{IN})=10\text{MHz}$ )
- Supply voltage ..... 4.0 to 5.5V ( $f(X_{IN})=10\text{MHz}$ ) :mask ROM version  
2.7 to 5.5V ( $f(X_{IN})=3.5\text{MHz}$ ) :mask ROM version  
4.0 to 5.5V ( $f(X_{IN})=10\text{MHz}$ ) :flash memory version
- Interrupts ..... 13 internal and 3 external interrupt sources, 4 software  
(including key input interrupt)
- Multifunction 16-bit timer ..... Timer A x 1, timer B x 2, timer X x 3
- Clock output
- Serial I/O ..... 1 channel for UART or clock synchronous, 1 for UART
- A-D converter ..... 10 bits X 8 channels (Expandable up to 13 channels)
- Watchdog timer ..... 1 line
- Programmable I/O ..... 43 lines
- LED drive ports ..... 8 ports
- Clock generating circuit ..... 2 built-in clock generation circuits  
(built-in feedback resistor, and external ceramic or quartz oscillator)

### Applications

Home appliances, Audio, office equipment, Automobiles

## -----Table of Contents-----

Central Processing Unit (CPU) .....	12	Timer .....	48
Reset .....	15	Serial I/O .....	75
Clock Generating Circuit .....	18	A-D Converter .....	89
Protection .....	27	Programmable I/O Ports .....	99
Interrupts .....	28	Electric Characteristics .....	111
Watchdog Timer .....	46	Flash Memory version .....	125

## Description

**Pin Configuration**

Figures 1.1 to 1.2 show the pin configurations (top view).

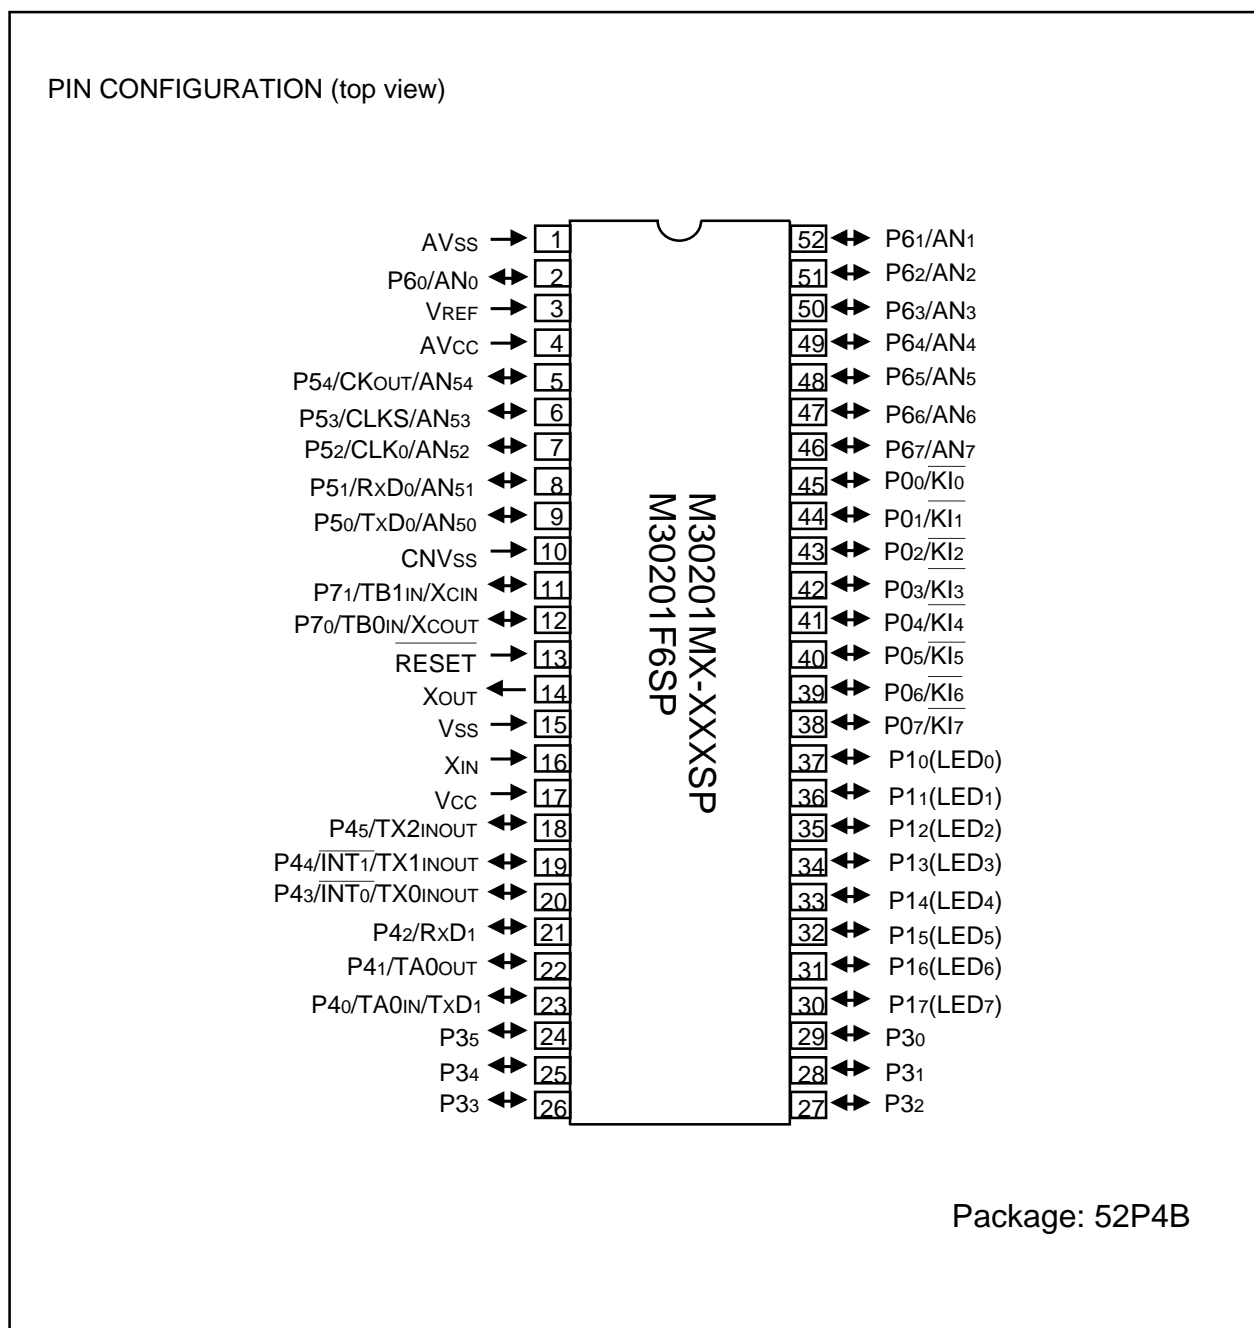


Figure 1.1. Pin configuration for the M30201 group (shrink DIP product) (top view)

## Description

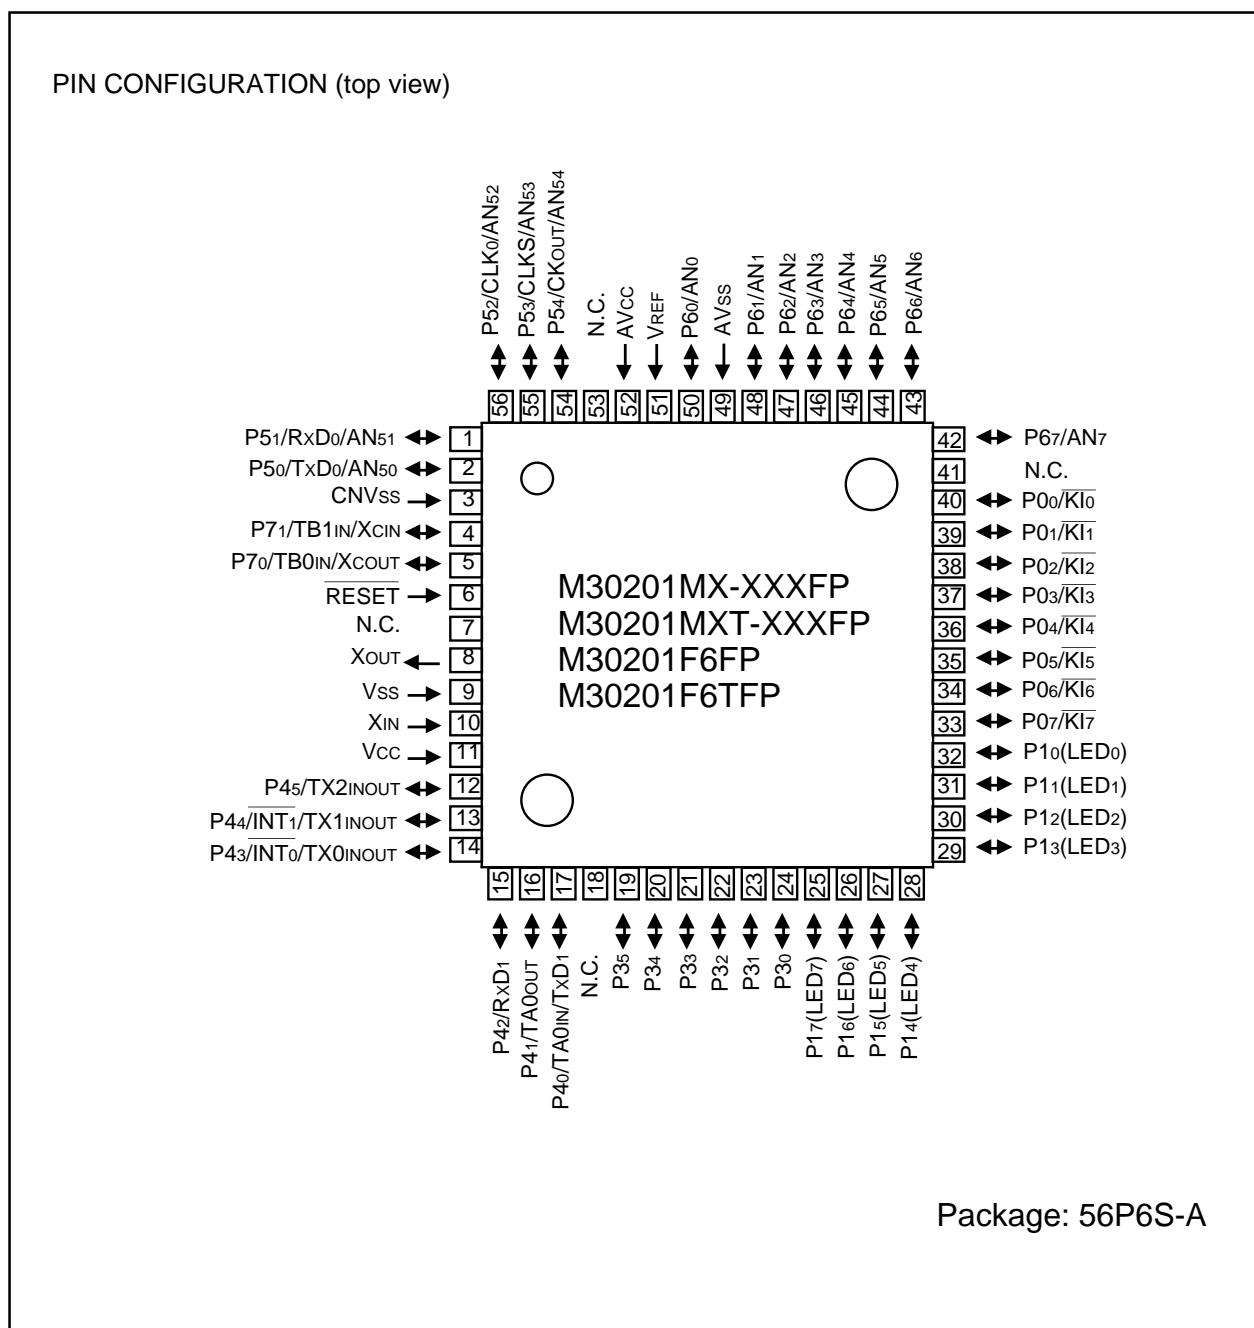


Figure 1.2. Pin configuration for the M30201 group (QFP product) (top view)

## Description

### Block Diagram

Figure 1.3 is a block diagram of the M30201 group.

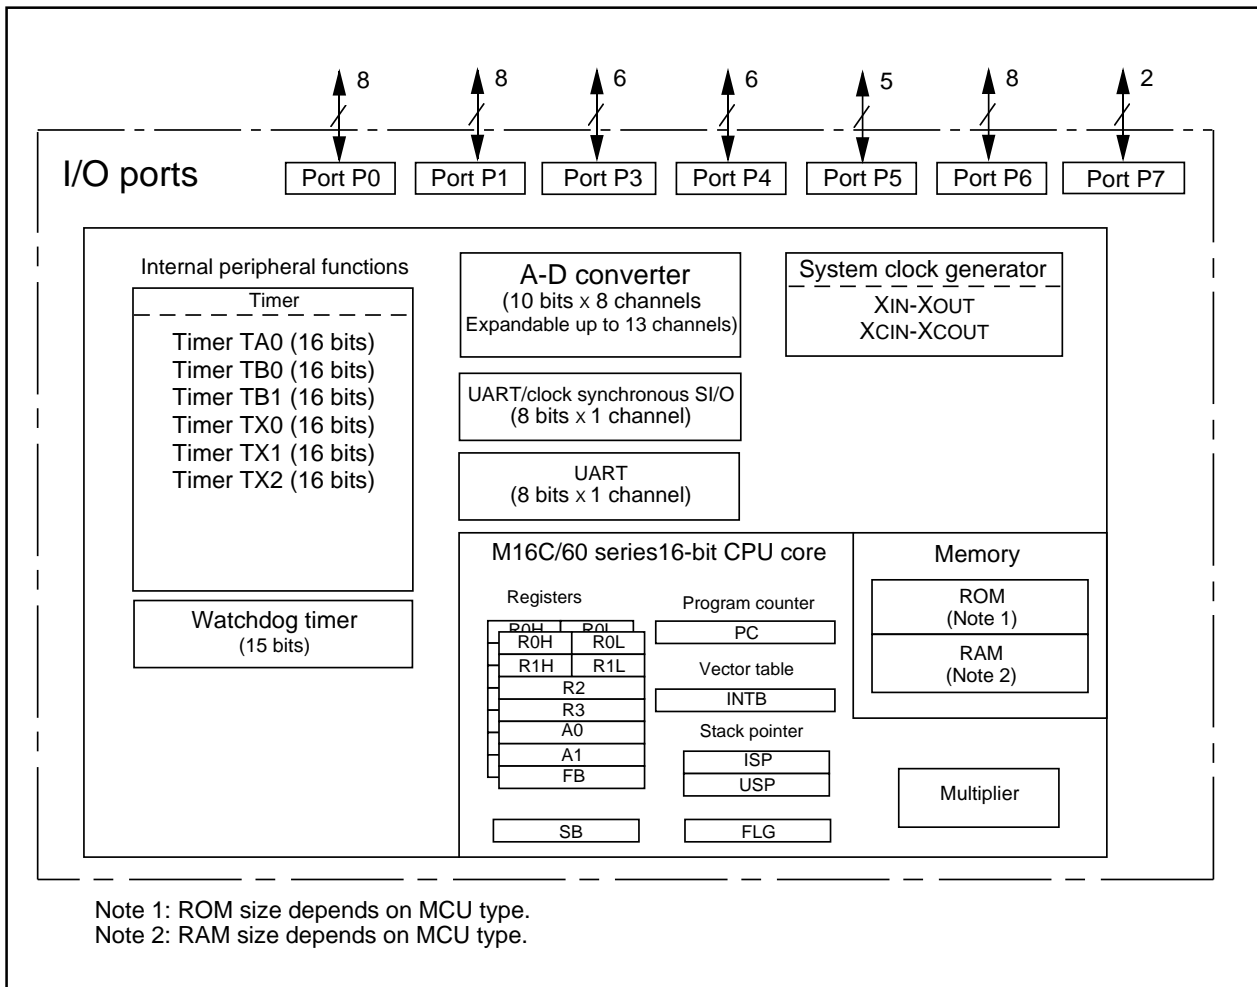


Figure 1.3. Block diagram for the M30201 group

## Description

## Performance Outline

Table 1.1 is performance outline of M30201 group.

**Table 1.1. Performance outline of M30201 group**

Item		Performance
Number of basic instructions		91 instructions
Shortest instruction execution time		100ns (f(XIN)=10MHz)
Memory capacity	ROM	(See figure 4. ROM expansion.)
	RAM	(See figure 4. ROM expansion.)
I/O port	P0 to P7	43 lines
Multifunction timer	TA0	16 bits x 1
	TB0, TB1	16 bits x 2
	TX0, TX1, TX2	16 bits x 3
Serial I/O	UART0	(UART or clock synchronous) x 1
	UART1	UART x 1
A-D converter		10 bits x 8 channels (Expandable up to 13 channels)
Watchdog timer		15 bits x 1 (with prescaler)
Interrupt		13 internal and 3 external sources, 4 software sources
Clock generating circuit		2 built-in clock generation circuits (built-in feedback resistor, and external ceramic or quartz oscillator)
Supply voltage		4.0 to 5.5V (f(XIN)=10MHz) :mask ROM version 2.7 to 5.5V (f(XIN)=3.5MHz) :mask ROM version 4.0 to 5.5V (f(XIN)=10MHz) :flash memory version
Power consumption		11mW (f(XIN)=3.5MHz , Vcc=3V) :mask ROM version 95mW (f(XIN)=10MHz, Vcc=5V) :flash memory version
I/O characteristics	I/O withstand voltage	5V
	Output current	5mA (15mA:LED drive port)
Device configuration		CMOS silicon gate
Package		52-pin plastic mold SDIP 56-pin plastic mold QFP

## Description

Mitsubishi plans to release the following products in the M30201 group:

(1) Support for mask ROM version and flash memory version

(2) ROM capacity

(3) Package

52P4B : Plastic molded SDIP (mask ROM version and flash memory version)

56P6S-A : Plastic molded QFP (mask ROM version and flash memory version)

Apr. 2001

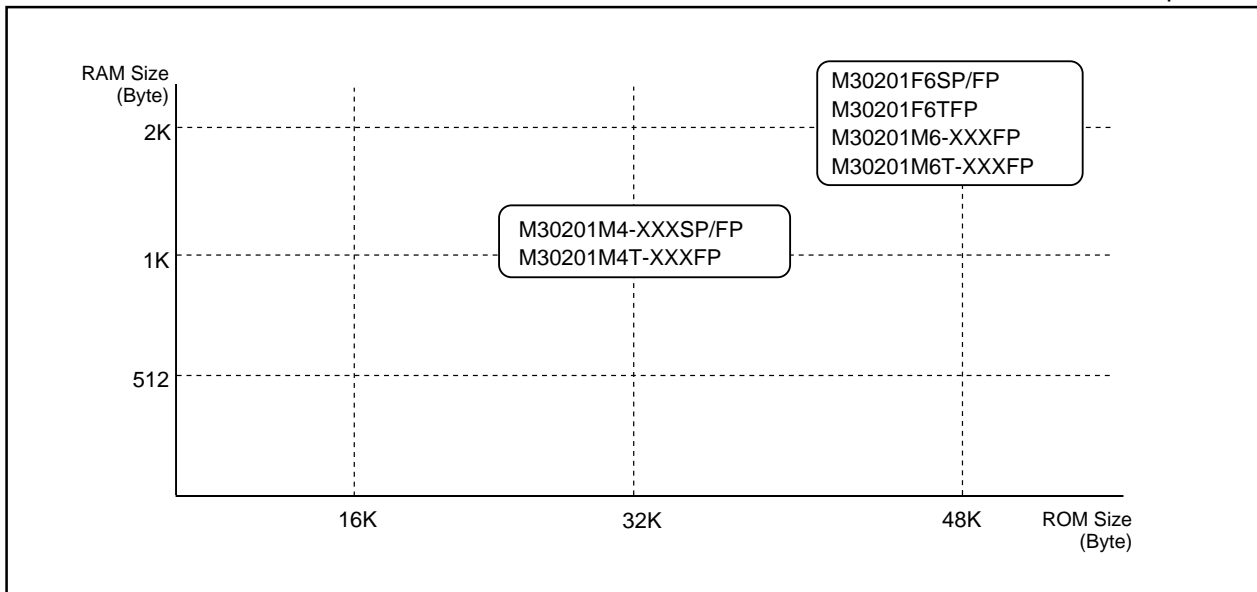


Figure 1.4. ROM expansion

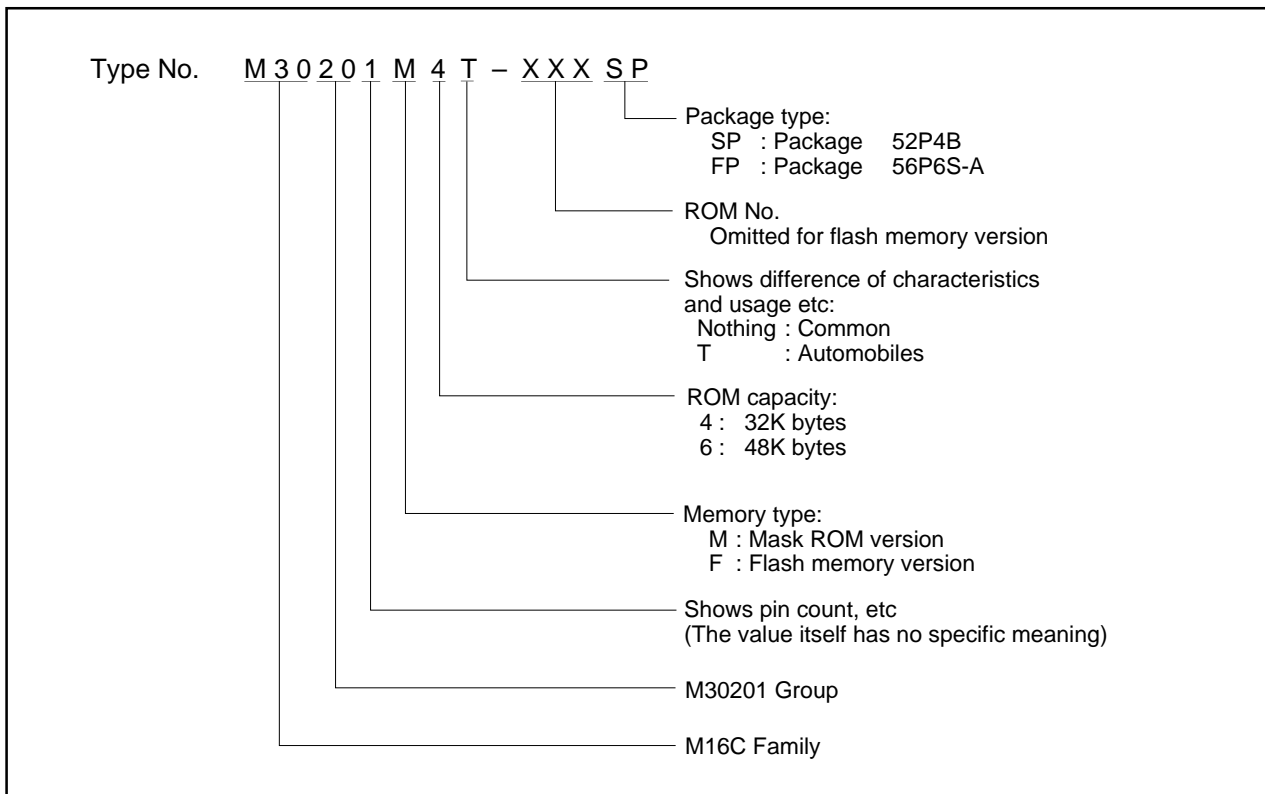


Figure 1.5. Type No., memory size, and package

**Pin Description****Pin Description**

Pin name	Signal name	I/O type	Function
Vcc, Vss	Power supply input		Supply 2.7 to 5.5 V to the Vcc pin. Supply 0 V to the Vss pin.
CNVss	CNVss	Input	Connect it to the Vss pin.
RESET	Reset input	Input	A "L" on this input resets the microcomputer.
XIN XOUT	Clock input Clock output	Input Output	These pins are provided for the main clock generating circuit. Connect a ceramic resonator or crystal between the XIN and the XOUT pins. To use an externally derived clock, input it to the XIN pin and leave the XOUT pin open.
AVCC	Analog power supply input		This pin is a power supply input for the A-D converter. Connect it to Vcc.
AVss	Analog power supply input		This pin is a power supply input for the A-D converter. Connect it to Vss.
VREF	Reference voltage input	Input	This pin is a reference voltage input for the A-D converter.
P00 to P07	I/O port P0	Input/output	This is an 8-bit CMOS I/O port. It has an input/output port direction register that allows the user to set each pin for input or output individually. When set for input, the user can specify in units of four bits via software whether or not they are tied to a pull-up resistor.
P10 to P17	I/O port P1	Input/output	This is an 8-bit I/O port equivalent to P0.
P30 to P35	I/O port P3	Input/output	This is a 6-bit I/O port equivalent to P0.
P40 to P45	I/O port P4	Input/output	This is a 6-bit I/O port equivalent to P0. The P40 pin is shared with timer A0 input and serial I/O output TxD1. The P41 pin is shared with timer A0 output. The P42 pin is shared with serial I/O input RxD1. The P43 pin is shared with external interrupt INT0 and timer X0 input/output TX0INOUT. The P44 pin is shared with external interrupt INT1 and timer X1 input/output TX1INOUT. The P45 pin is shared with timer X2 input/output TX2INOUT.
P50 to P54	I/O port P5	Input/output	This is a 5-bit I/O port equivalent to P0. The P50, P51, P52, and P53 pins are shared with serial I/O pins TxD0, RxD0, CLK0, and CLKS. The P54 pin is shared with clock output CLKOUT. Also, these pins are shared with analog input pins AN50 through AN54.
P60 to P67	I/O port P6	Input/output	This is an 8-bit I/O port equivalent to P0. These pins are shared with analog input pins AN0 through AN7.
P70 to P71	I/O port P7	Input/output	This is a 2-bit I/O port equivalent to P0. These pins are used for input/output to and from the oscillator circuit for the clock. Connect a crystal oscillator between the XCIN and the XCOUT pins.

## Memory

### Operation of Functional Blocks

The M30201 accommodates certain units in a single chip. These units include ROM and RAM to store instructions and data and the central processing unit (CPU) to execute arithmetic/logic operations. Also included are peripheral units such as timers, serial I/O, A-D converter, and I/O ports.

The following explains each unit.

### Memory

Figure 1.6 is a memory map of the M30201. The address space extends the 1M bytes from address  $00000_{16}$  to  $FFFFFF_{16}$ . From  $FFFFFF_{16}$  down is ROM. For example, in the M30201M4-XXXSP, there is 32K bytes of internal ROM from  $F8000_{16}$  to  $FFFFFF_{16}$ . The vector table for fixed interrupts such as the reset are mapped to  $FFFDC_{16}$  to  $FFFFFF_{16}$ . The starting address of the interrupt routine is stored here. The address of the vector table for timer interrupts, etc., can be set as desired using the internal register (INTB). See the section on interrupts for details.

From  $00400_{16}$  up is RAM. For example, in the M30201M4-XXXSP, there is 1K byte of internal RAM from  $00400_{16}$  to  $007FF_{16}$ . In addition to storing data, the RAM also stores the stack used when calling subroutines and when interrupts are generated.

The SFR area is mapped to  $00000_{16}$  to  $003FF_{16}$ . This area accommodates the control registers for peripheral devices such as I/O ports, A-D converter, serial I/O, and timers, etc. Any part of the SFR area that is not occupied is reserved and cannot be used for other purposes.

The special page vector table is mapped to  $FFE00_{16}$  to  $FFFD_{16}$ . If the starting addresses of subroutines or the destination addresses of jumps are stored here, subroutine call instructions and jump instructions can be used as 2-byte instructions, reducing the number of program steps.

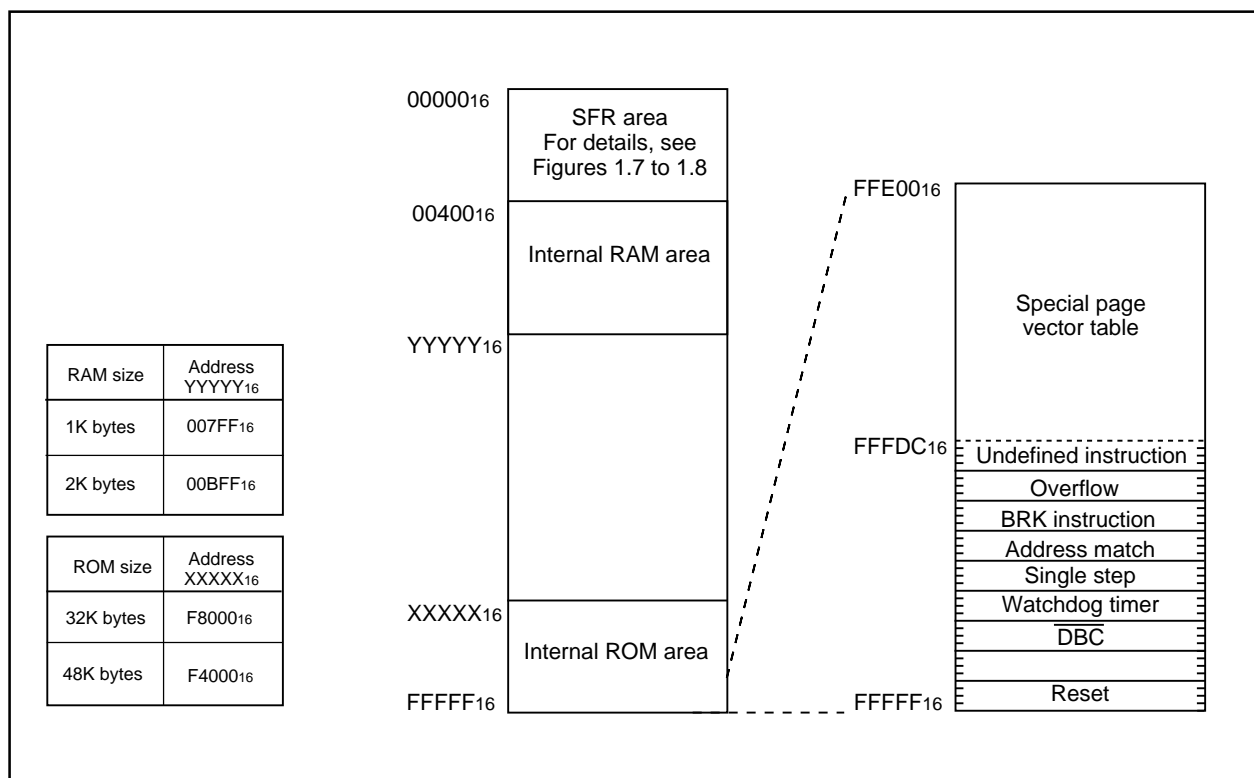


Figure 1.6. Memory map



## Memory

0000 <sub>16</sub>		0040 <sub>16</sub>	
0001 <sub>16</sub>		0041 <sub>16</sub>	
0002 <sub>16</sub>		0042 <sub>16</sub>	
0003 <sub>16</sub>		0043 <sub>16</sub>	
0004 <sub>16</sub>	Processor mode register 0 (PM0)	0044 <sub>16</sub>	
0005 <sub>16</sub>	Processor mode register 1 (PM1)	0045 <sub>16</sub>	
0006 <sub>16</sub>	System clock control register 0 (CM0)	0046 <sub>16</sub>	
0007 <sub>16</sub>	System clock control register 1 (CM1)	0047 <sub>16</sub>	
0008 <sub>16</sub>		0048 <sub>16</sub>	
0009 <sub>16</sub>	Address match interrupt enable register (AIER)	0049 <sub>16</sub>	
000A <sub>16</sub>	Protect register (PRCR)	004A <sub>16</sub>	
000B <sub>16</sub>		004B <sub>16</sub>	
000C <sub>16</sub>		004C <sub>16</sub>	
000D <sub>16</sub>		004D <sub>16</sub>	Key input interrupt control register (KUPIC)
000E <sub>16</sub>	Watchdog timer start register (WDTS)	004E <sub>16</sub>	A-D conversion interrupt control register (ADIC)
000F <sub>16</sub>	Watchdog timer control register (WDC)	004F <sub>16</sub>	
0010 <sub>16</sub>		0050 <sub>16</sub>	
0011 <sub>16</sub>	Address match interrupt register 0 (RMAD0)	0051 <sub>16</sub>	UART0 transmit interrupt control register (S0TIC)
0012 <sub>16</sub>		0052 <sub>16</sub>	UART0 receive interrupt control register (S0RIC)
0013 <sub>16</sub>		0053 <sub>16</sub>	UART1 transmit interrupt control register (S1TIC)
0014 <sub>16</sub>		0054 <sub>16</sub>	UART1 receive interrupt control register (S1RIC)
0015 <sub>16</sub>	Address match interrupt register 1 (RMAD1)	0055 <sub>16</sub>	Timer A0 interrupt control register (TA0IC)
0016 <sub>16</sub>		0056 <sub>16</sub>	Timer X0 interrupt control register (TX0IC)
0017 <sub>16</sub>		0057 <sub>16</sub>	Timer X1 interrupt control register (TX1IC)
0018 <sub>16</sub>		0058 <sub>16</sub>	Timer X2 interrupt control register (TX2IC)
0019 <sub>16</sub>		0059 <sub>16</sub>	
001A <sub>16</sub>		005A <sub>16</sub>	Timer B0 interrupt control register (TB0IC)
001B <sub>16</sub>		005B <sub>16</sub>	Timer B1 interrupt control register (TB1IC)
001C <sub>16</sub>		005C <sub>16</sub>	
001D <sub>16</sub>		005D <sub>16</sub>	INT0 interrupt control register (INT0IC)
001E <sub>16</sub>		005E <sub>16</sub>	INT1 interrupt control register (INT1IC)
001F <sub>16</sub>		005F <sub>16</sub>	
0020 <sub>16</sub>			
0021 <sub>16</sub>			
0022 <sub>16</sub>			
0023 <sub>16</sub>			
0024 <sub>16</sub>			
0025 <sub>16</sub>			
0026 <sub>16</sub>			
0027 <sub>16</sub>			
0028 <sub>16</sub>			
0029 <sub>16</sub>			
002A <sub>16</sub>			
002B <sub>16</sub>			
002C <sub>16</sub>			
002D <sub>16</sub>			
002E <sub>16</sub>			
002F <sub>16</sub>			
0030 <sub>16</sub>			
0031 <sub>16</sub>			
0032 <sub>16</sub>			
0033 <sub>16</sub>			
0034 <sub>16</sub>			
0035 <sub>16</sub>			
0036 <sub>16</sub>			
0037 <sub>16</sub>			
0038 <sub>16</sub>			
0039 <sub>16</sub>			
003A <sub>16</sub>			
003B <sub>16</sub>			
003C <sub>16</sub>			
003D <sub>16</sub>			
003E <sub>16</sub>			
003F <sub>16</sub>			

Note: Locations in the SFR area where nothing is allocated are reserved areas. Do not access these areas for read or write.

Figure 1.7. Location of peripheral unit control registers (1)

## Memory

0380 <sub>16</sub>	Count start flag (TABSR)	03C0 <sub>16</sub>	A-D register 0 (AD0)
0381 <sub>16</sub>	Clock prescaler reset flag (CPSRF)	03C1 <sub>16</sub>	
0382 <sub>16</sub>	One-shot start flag (ONSF)	03C2 <sub>16</sub>	A-D register 1 (AD1)
0383 <sub>16</sub>	Trigger select register (TRGSR)	03C3 <sub>16</sub>	
0384 <sub>16</sub>	Up-down flag (UDF)	03C4 <sub>16</sub>	A-D register 2 (AD2)
0385 <sub>16</sub>		03C5 <sub>16</sub>	
0386 <sub>16</sub>	Timer A0 (TA0)	03C6 <sub>16</sub>	A-D register 3 (AD3)
0387 <sub>16</sub>		03C7 <sub>16</sub>	
0388 <sub>16</sub>	Timer X0 (TX0)	03C8 <sub>16</sub>	A-D register 4 (AD4)
0389 <sub>16</sub>		03C9 <sub>16</sub>	
038A <sub>16</sub>	Timer X1 (TX1)	03CA <sub>16</sub>	A-D register 5 (AD5)
038B <sub>16</sub>		03CB <sub>16</sub>	
038C <sub>16</sub>	Timer X2 (TX2)	03CC <sub>16</sub>	A-D register 6 (AD6)
038D <sub>16</sub>		03CD <sub>16</sub>	
038E <sub>16</sub>	Clock divided counter (CDC)	03CE <sub>16</sub>	A-D register 7 (AD7)
038F <sub>16</sub>		03CF <sub>16</sub>	
0390 <sub>16</sub>	Timer B0 (TB0)	03D0 <sub>16</sub>	
0391 <sub>16</sub>		03D1 <sub>16</sub>	
0392 <sub>16</sub>	Timer B1 (TB1)	03D2 <sub>16</sub>	
0393 <sub>16</sub>		03D3 <sub>16</sub>	
0394 <sub>16</sub>		03D4 <sub>16</sub>	A-D control register 2 (ADCON2)
0395 <sub>16</sub>		03D5 <sub>16</sub>	
0396 <sub>16</sub>	Timer A0 mode register (TA0MR)	03D6 <sub>16</sub>	A-D control register 0 (ADCON0)
0397 <sub>16</sub>	Timer X0 mode register (TX0MR)	03D7 <sub>16</sub>	A-D control register 1 (ADCON1)
0398 <sub>16</sub>	Timer X1 mode register (TX1MR)	03D8 <sub>16</sub>	
0399 <sub>16</sub>	Timer X2 mode register (TX2MR)	03D9 <sub>16</sub>	
039A <sub>16</sub>		03DA <sub>16</sub>	
039B <sub>16</sub>	Timer B0 mode register (TB0MR)	03DB <sub>16</sub>	
039C <sub>16</sub>	Timer B1 mode register (TB1MR)	03DC <sub>16</sub>	
039D <sub>16</sub>		03DD <sub>16</sub>	
039E <sub>16</sub>		03DE <sub>16</sub>	
039F <sub>16</sub>		03DF <sub>16</sub>	
03A0 <sub>16</sub>	UART0 transmit/receive mode register (U0MR)	03E0 <sub>16</sub>	Port P0 (P0)
03A1 <sub>16</sub>	UART0 bit rate generator (U0BRG)	03E1 <sub>16</sub>	Port P1 (P1)
03A2 <sub>16</sub>	UART0 transmit buffer register (U0TB)	03E2 <sub>16</sub>	Port P0 direction register (PD0)
03A3 <sub>16</sub>		03E3 <sub>16</sub>	Port P1 direction register (PD1)
03A4 <sub>16</sub>	UART0 transmit/receive control register 0 (U0C0)	03E4 <sub>16</sub>	Port P2 (P2) (Reserved)
03A5 <sub>16</sub>	UART0 transmit/receive control register 1 (U0C1)	03E5 <sub>16</sub>	Port P3 (P3)
03A6 <sub>16</sub>	UART0 receive buffer register (U0RB)	03E6 <sub>16</sub>	Port P2 direction register (PD2) (Reserved)
03A7 <sub>16</sub>		03E7 <sub>16</sub>	Port P3 direction register (PD3)
03A8 <sub>16</sub>	UART1 transmit/receive mode register (U1MR)	03E8 <sub>16</sub>	Port P4 (P4)
03A9 <sub>16</sub>	UART1 bit rate generator (U1BRG)	03E9 <sub>16</sub>	Port P5 (P5)
03AA <sub>16</sub>	UART1 transmit buffer register (U1TB)	03EA <sub>16</sub>	Port P4 direction register (PD4)
03AB <sub>16</sub>		03EB <sub>16</sub>	Port P5 direction register (PD5)
03AC <sub>16</sub>	UART1 transmit/receive control register 0 (U1C0)	03EC <sub>16</sub>	Port P6 (P6)
03AD <sub>16</sub>	UART1 transmit/receive control register 1 (U1C1)	03ED <sub>16</sub>	Port P7 (P7)
03AE <sub>16</sub>	UART1 receive buffer register (U1RB)	03EE <sub>16</sub>	Port P6 direction register (PD6)
03AF <sub>16</sub>		03EF <sub>16</sub>	Port P7 direction register (PD7)
03B0 <sub>16</sub>	UART transmit/receive control register 2 (UCON)	03F0 <sub>16</sub>	
03B1 <sub>16</sub>		03F1 <sub>16</sub>	
03B2 <sub>16</sub>		03F2 <sub>16</sub>	
03B3 <sub>16</sub>		03F3 <sub>16</sub>	
03B4 <sub>16</sub>	Flash memory control register 0 (FCON0) (Note1)	03F4 <sub>16</sub>	
03B5 <sub>16</sub>	Flash memory control register 1 (FCON1) (Note1)	03F5 <sub>16</sub>	
03B6 <sub>16</sub>	Flash command register (FCMD) (Note)	03F6 <sub>16</sub>	
03B7 <sub>16</sub>		03F7 <sub>16</sub>	
03B8 <sub>16</sub>		03F8 <sub>16</sub>	
03B9 <sub>16</sub>		03F9 <sub>16</sub>	
03BA <sub>16</sub>		03FA <sub>16</sub>	
03BB <sub>16</sub>		03FB <sub>16</sub>	
03BC <sub>16</sub>		03FC <sub>16</sub>	Pull-up control register 0 (PUR0)
03BD <sub>16</sub>		03FD <sub>16</sub>	Pull-up control register 1 (PUR1)
03BE <sub>16</sub>		03FE <sub>16</sub>	Port P1 drive control register (DDR)
03BF <sub>16</sub>		03FF <sub>16</sub>	

Note 1: This register is only exist in flash memory version.  
Note 2: Locations in the SFR area where nothing is allocated are reserved areas. Do not access these areas for read or write.

Figure 1.8. Location of peripheral unit control registers (2)

## CPU

## Central Processing Unit (CPU)

The CPU has a total of 13 registers shown in Figure 1.9. Seven of these registers (R0, R1, R2, R3, A0, A1, and FB) come in two sets; therefore, these have two register banks.

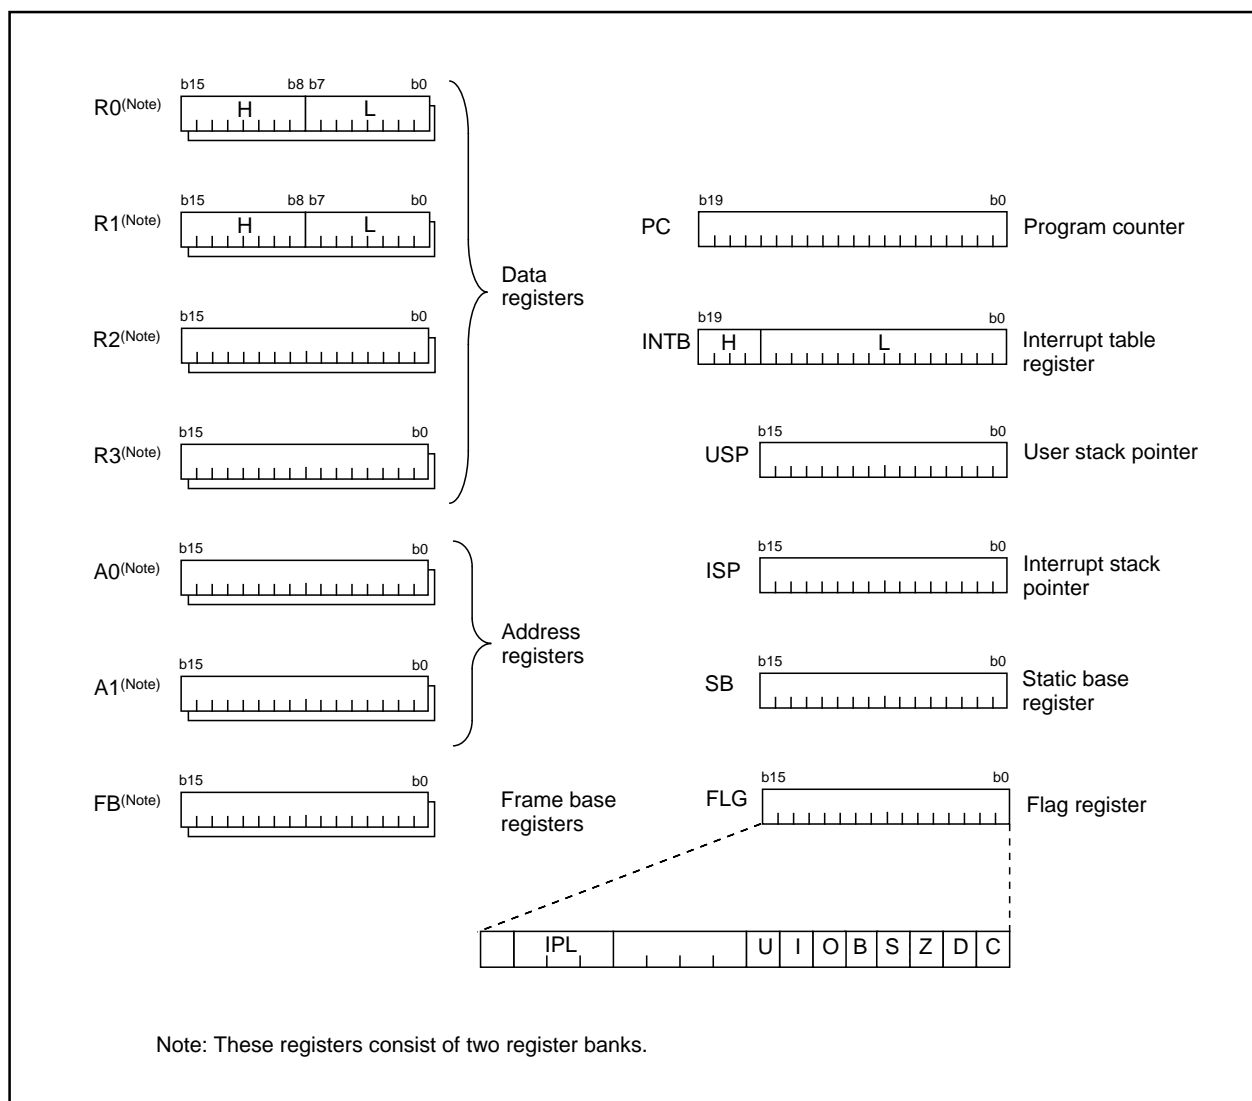


Figure 1.9. Central processing unit register

### (1) Data registers (R0, R0H, R0L, R1, R1H, R1L, R2, and R3)

Data registers (R0, R1, R2, and R3) are configured with 16 bits, and are used primarily for transfer and arithmetic/logic operations.

Registers R0 and R1 each can be used as separate 8-bit data registers, high-order bits as (R0H, R1H), and low-order bits as (R0L, R1L). In some instructions, registers R2 and R0, as well as R3 and R1 can use as 32-bit data registers (R2R0, R3R1).

### (2) Address registers (A0 and A1)

Address registers (A0 and A1) are configured with 16 bits, and have functions equivalent to those of data registers. These registers can also be used for address register indirect addressing and address register relative addressing.

In some instructions, registers A1 and A0 can be combined for use as a 32-bit address register (A1A0).

**(3) Frame base register (FB)**

Frame base register (FB) is configured with 16 bits, and is used for FB relative addressing.

**(4) Program counter (PC)**

Program counter (PC) is configured with 20 bits, indicating the address of an instruction to be executed.

**(5) Interrupt table register (INTB)**

Interrupt table register (INTB) is configured with 20 bits, indicating the start address of an interrupt vector table.

**(6) Stack pointer (USP/ISP)**

Stack pointer comes in two types: user stack pointer (USP) and interrupt stack pointer (ISP), each configured with 16 bits.

Your desired type of stack pointer (USP or ISP) can be selected by a stack pointer select flag (U flag).

This flag is located at the position of bit 7 in the flag register (FLG).

**(7) Static base register (SB)**

Static base register (SB) is configured with 16 bits, and is used for SB relative addressing.

**(8) Flag register (FLG)**

Flag register (FLG) is configured with 11 bits, each bit is used as a flag. Figure 1.10 shows the flag register (FLG). The following explains the function of each flag:

- **Bit 0: Carry flag (C flag)**

This flag retains a carry, borrow, or shift-out bit that has occurred in the arithmetic/logic unit.

- **Bit 1: Debug flag (D flag)**

This flag enables a single-step interrupt.

When this flag is "1", a single-step interrupt is generated after instruction execution. This flag is cleared to "0" when the interrupt is acknowledged.

- **Bit 2: Zero flag (Z flag)**

This flag is set to "1" when an arithmetic operation resulted in 0; otherwise, cleared to "0".

- **Bit 3: Sign flag (S flag)**

This flag is set to "1" when an arithmetic operation resulted in a negative value; otherwise, cleared to "0".

- **Bit 4: Register bank select flag (B flag)**

This flag chooses a register bank. Register bank 0 is selected when this flag is "0"; register bank 1 is selected when this flag is "1".

- **Bit 5: Overflow flag (O flag)**

This flag is set to "1" when an arithmetic operation resulted in overflow; otherwise, cleared to "0".

- **Bit 6: Interrupt enable flag (I flag)**

This flag enables a maskable interrupt.

An interrupt is disabled when this flag is "0", and is enabled when this flag is "1". This flag is cleared to "0" when the interrupt is acknowledged.

- **Bit 7: Stack pointer select flag (U flag)**

Interrupt stack pointer (ISP) is selected when this flag is “0” ; user stack pointer (USP) is selected when this flag is “1”.

This flag is cleared to “0” when a hardware interrupt is acknowledged or an INT instruction of software interrupt Nos. 0 to 31 is executed.

- **Bits 8 to 11: Reserved area**

- **Bits 12 to 14: Processor interrupt priority level (IPL)**

Processor interrupt priority level (IPL) is configured with three bits, for specification of up to eight processor interrupt priority levels from level 0 to level 7.

If a requested interrupt has priority greater than the processor interrupt priority level (IPL), the interrupt is enabled.

- **Bit 15: Reserved area**

The C, Z, S, and O flags are changed when instructions are executed. See the software manual for details.

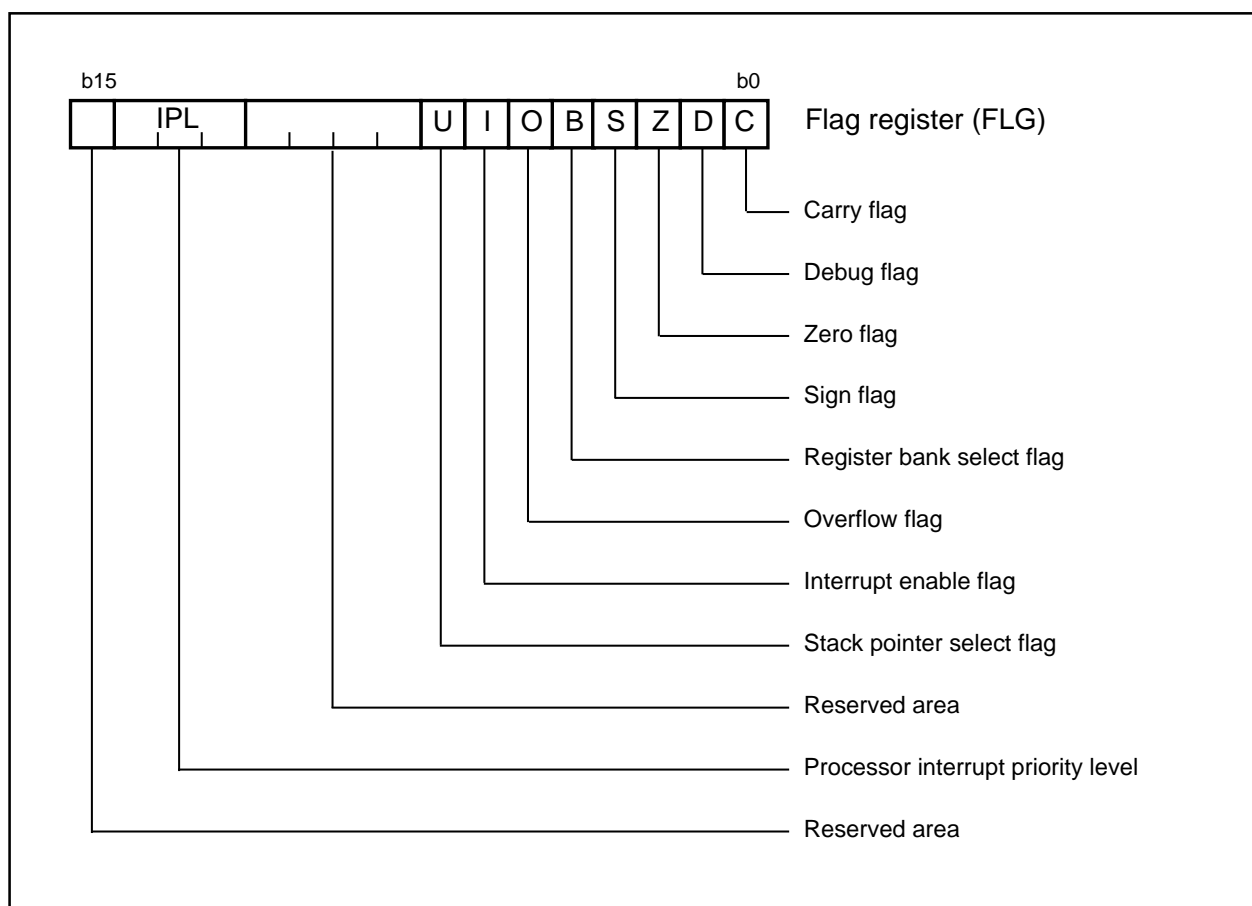


Figure 1.10. Flag register (FLG)

## Reset

### Reset

There are two kinds of resets; hardware and software. In both cases, operation is the same after the reset. (See "Software Reset" for details of software resets.) This section explains on hardware resets.

When the supply voltage is in the range where operation is guaranteed, a reset is effected by holding the reset pin level "L" (0.2V<sub>CC</sub> max.) for at least 20 cycles. When the reset pin level is then returned to the "H" level while main clock is stable, the reset status is cancelled and program execution resumes from the address in the reset vector table.

Figure 1.11 shows the example reset circuit. Figure 1.12 shows the reset sequence.

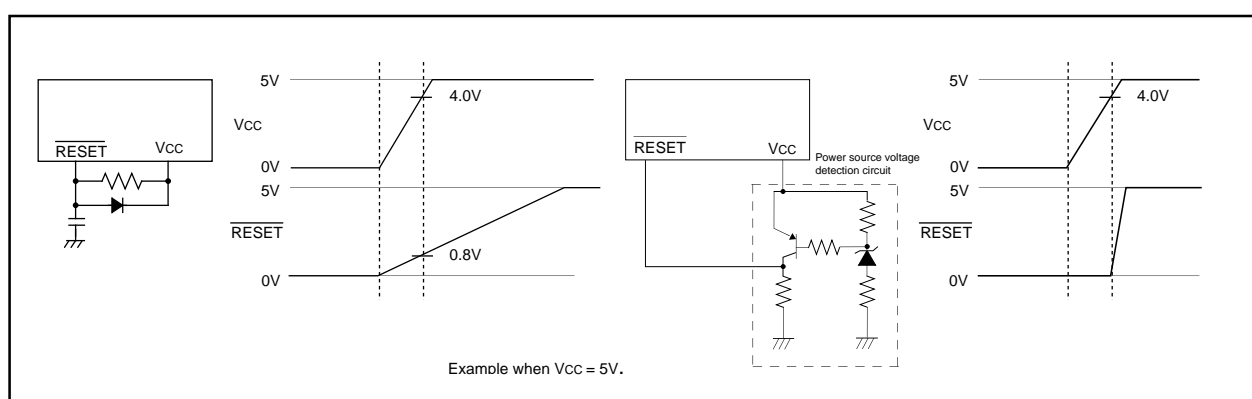


Figure 1.11. Example reset circuit

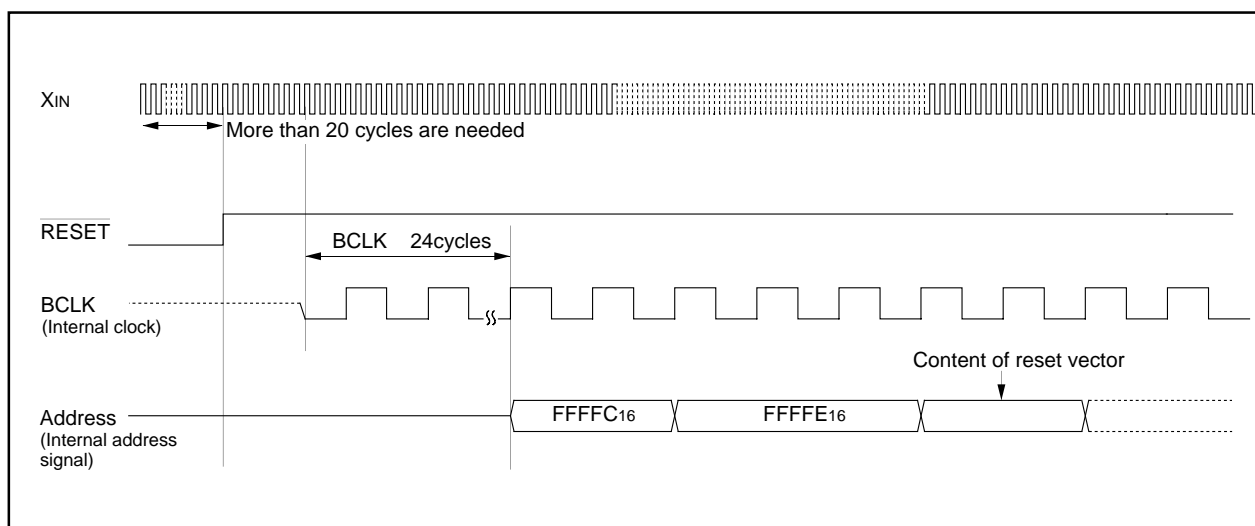


Figure 1.12. Reset sequence

## Reset

(1) Processor mode register 0	(0004 <sub>16</sub> )...		(33) Timer B0 mode register	(039B <sub>16</sub> )...	
(2) Processor mode register 1	(0005 <sub>16</sub> )...		(34) Timer B1 mode register	(039C <sub>16</sub> )...	
(3) System clock control register 0	(0006 <sub>16</sub> )...		(35) UART0 transmit/receive mode register	(03A0 <sub>16</sub> )...	
(4) System clock control register 1	(0007 <sub>16</sub> )...		(36) UART0 transmit/receive control register 0	(03A4 <sub>16</sub> )...	
(5) Address match interrupt enable register	(0009 <sub>16</sub> )...		(37) UART0 transmit/receive control register 1	(03A5 <sub>16</sub> )...	
(6) Protect register	(000A <sub>16</sub> )...		(38) UART1 transmit/receive mode register	(03A8 <sub>16</sub> )...	
(7) Watchdog timer control register	(000F <sub>16</sub> )...		(39) UART1 transmit/receive control register 0	(03AC <sub>16</sub> )...	
(8) Address match interrupt register 0	(0010 <sub>16</sub> )...		(40) UART1 transmit/receive control register 1	(03AD <sub>16</sub> )...	
	(0011 <sub>16</sub> )...		(41) UART transmit/receive control register 2	(03B0 <sub>16</sub> )...	
	(0012 <sub>16</sub> )...		(42) Flash memory control register 0 (Note)	(03B4 <sub>16</sub> )...	
(9) Address match interrupt register 1	(0014 <sub>16</sub> )...		(43) Flash memory control register 1 (Note)	(03B5 <sub>16</sub> )...	
	(0015 <sub>16</sub> )...		(44) Flash command register	(03B6 <sub>16</sub> )...	
	(0016 <sub>16</sub> )...		(45) A-D control register 2	(03D4 <sub>16</sub> )...	
(10) Key input interrupt control register	(004D <sub>16</sub> )...		(46) A-D control register 0	(03D6 <sub>16</sub> )...	
(11) A-D conversion interrupt control register	(004E <sub>16</sub> )...		(47) A-D control register 1	(03D7 <sub>16</sub> )...	
(12) UART0 transmit interrupt control register	(0051 <sub>16</sub> )...		(48) Port P0 direction register	(03E2 <sub>16</sub> )...	
(13) UART0 receive interrupt control register	(0052 <sub>16</sub> )...		(49) Port P1 direction register	(03E3 <sub>16</sub> )...	
(14) UART1 transmit interrupt control register	(0053 <sub>16</sub> )...		(50) Port P2 direction register	(03E6 <sub>16</sub> )...	
(15) UART1 receive interrupt control register	(0054 <sub>16</sub> )...		(51) Port P3 direction register	(03E7 <sub>16</sub> )...	
(16) Timer A0 interrupt control register	(0055 <sub>16</sub> )...		(52) Port P4 direction register	(03EA <sub>16</sub> )...	
(17) Timer X0 interrupt control register	(0056 <sub>16</sub> )...		(53) Port P5 direction register	(03EB <sub>16</sub> )...	
(18) Timer X1 interrupt control register	(0057 <sub>16</sub> )...		(54) Port P6 direction register	(03EE <sub>16</sub> )...	
(19) Timer X2 interrupt control register	(0058 <sub>16</sub> )...		(55) Port P7 direction register	(03EF <sub>16</sub> )...	
(20) Timer B0 interrupt control register	(005A <sub>16</sub> )...		(56) Pull-up control register 0	(03FC <sub>16</sub> )...	
(21) Timer B1 interrupt control register	(005B <sub>16</sub> )...		(57) Pull-up control register 1	(03FD <sub>16</sub> )...	
(22) INT0 interrupt control register	(005D <sub>16</sub> )...		(58) Port P1 drive capacity control register	(03FE <sub>16</sub> )...	
(23) INT1 interrupt control register	(005E <sub>16</sub> )...		(59) Data registers (R0/R1/R2/R3)		
(24) Count start flag	(0380 <sub>16</sub> )...		(60) Address registers (A0/A1)		
(25) Clock prescaler reset flag	(0381 <sub>16</sub> )...		(61) Frame base register (FB)		
(26) One-shot start flag	(0382 <sub>16</sub> )...		(62) Interrupt table register (INTB)		
(27) Trigger select flag	(0383 <sub>16</sub> )...		(63) User stack pointer (USP)		
(28) Up-down flag	(0384 <sub>16</sub> )...		(64) Interrupt stack pointer (ISP)		
(29) Timer A0 mode register	(0396 <sub>16</sub> )...		(65) Static base register (SB)		
(30) Timer X0 mode register	(0397 <sub>16</sub> )...		(66) Flag register (FLG)		
(31) Timer X1 mode register	(0398 <sub>16</sub> )...				
(32) Timer X2 mode register	(0399 <sub>16</sub> )...				

x : Nothing is mapped to this bit  
? : Undefined

The content of other registers and RAM is undefined when the microcomputer is reset. The initial values must therefore be set.

Note: This register is only exist in flash memory version.

Figure 1.13. Device's internal status after a reset is cleared

## Software Reset

### Software Reset

Writing “1” to bit 3 of the processor mode register 0 (address 0004<sub>16</sub>) applies a (software) reset to the microcomputer. A software reset has almost the same effect as a hardware reset. The contents of internal RAM are preserved.

Figure 1.14 shows the processor mode register 0 and 1.

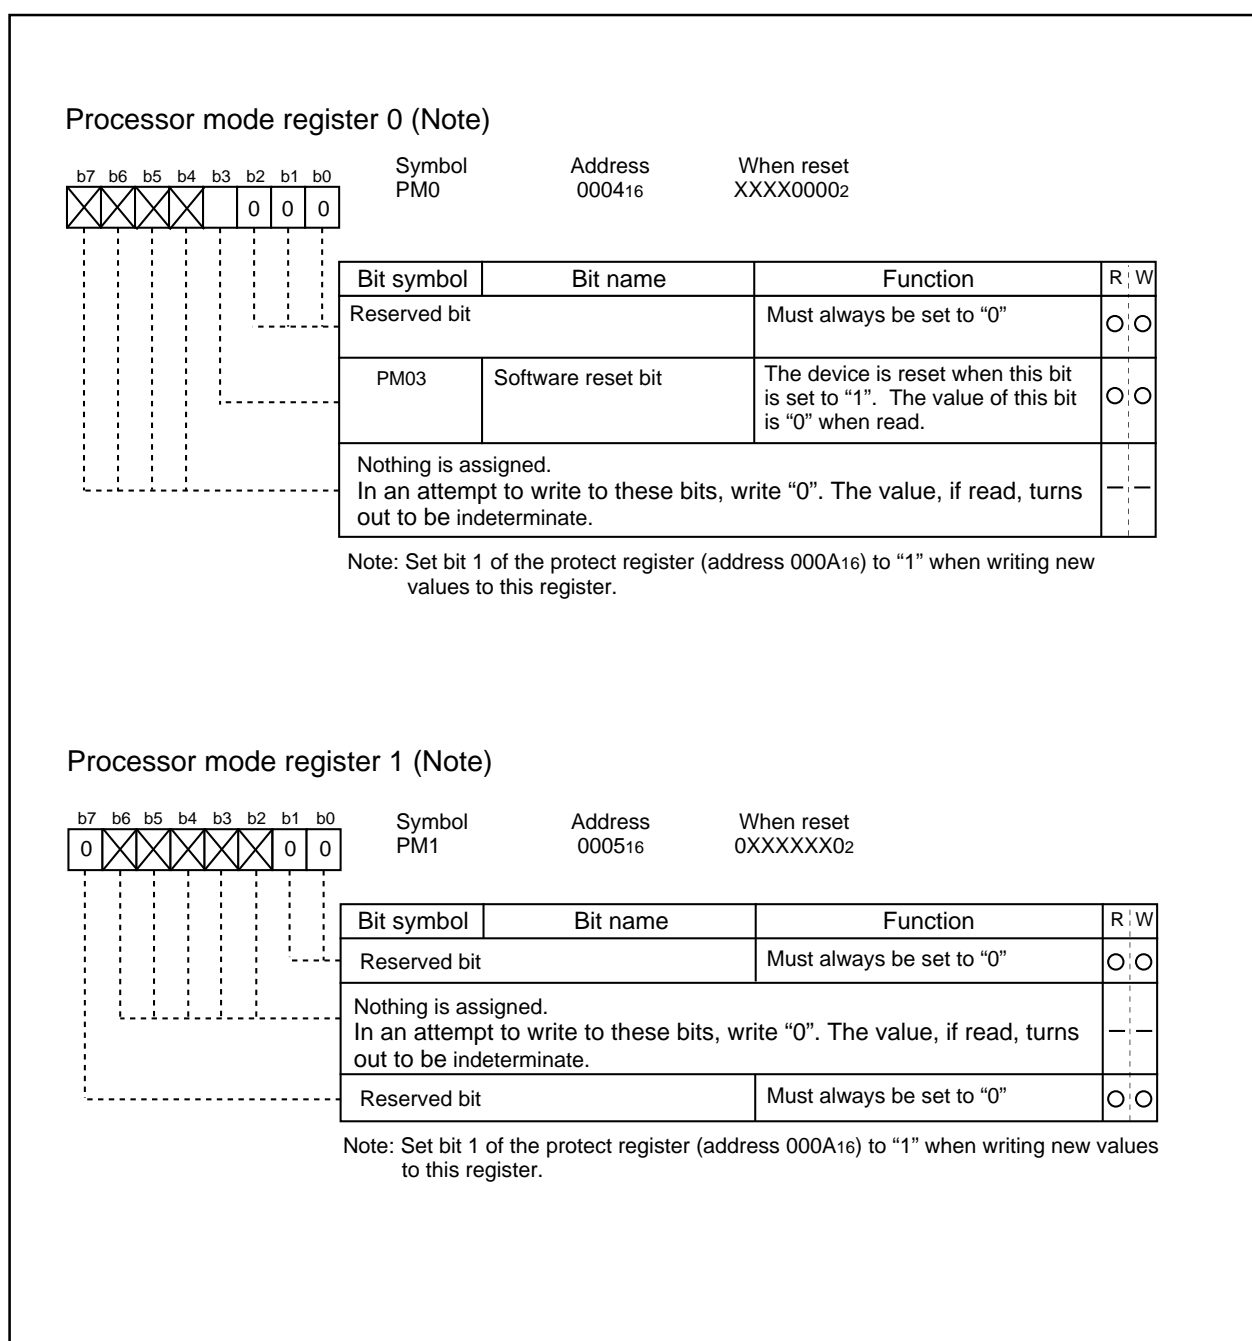


Figure 1.14. Processor mode register 0 and 1.



## Clock Generating Circuit

### Clock Generating Circuit


The clock generating circuit contains two oscillator circuits that supply the operating clock sources to the CPU and internal peripheral units.

**Table 1.2. Main clock and sub-clock generating circuits**


	Main clock generating circuit	Sub clock generating circuit
Use of clock	<ul style="list-style-type: none"> <li>• CPU's operating clock source</li> <li>• Internal peripheral units' operating clock source</li> </ul>	<ul style="list-style-type: none"> <li>• CPU's operating clock source</li> <li>• Timer A/B/X's count clock source</li> </ul>
Usable oscillator	Ceramic or crystal oscillator	Crystal oscillator
Pins to connect oscillator	XIN, XOUT	XCIN, XCOUT
Oscillation stop/restart function	Available	Available
Oscillator status immediately after reset	Oscillating	Stopped
Other	Externally derived clock can be input	

### Example of oscillator circuit

Figure 1.15 shows some examples of the main clock circuit, one using an oscillator connected to the circuit, and the other one using an externally derived clock for input. Figure 1.16 shows some examples of sub-clock circuits, one using an oscillator connected to the circuit, and the other one using an externally derived clock for input. Circuit constants in Figures 15 and 16 vary with each oscillator used. Use the values recommended by the manufacturer of your oscillator.

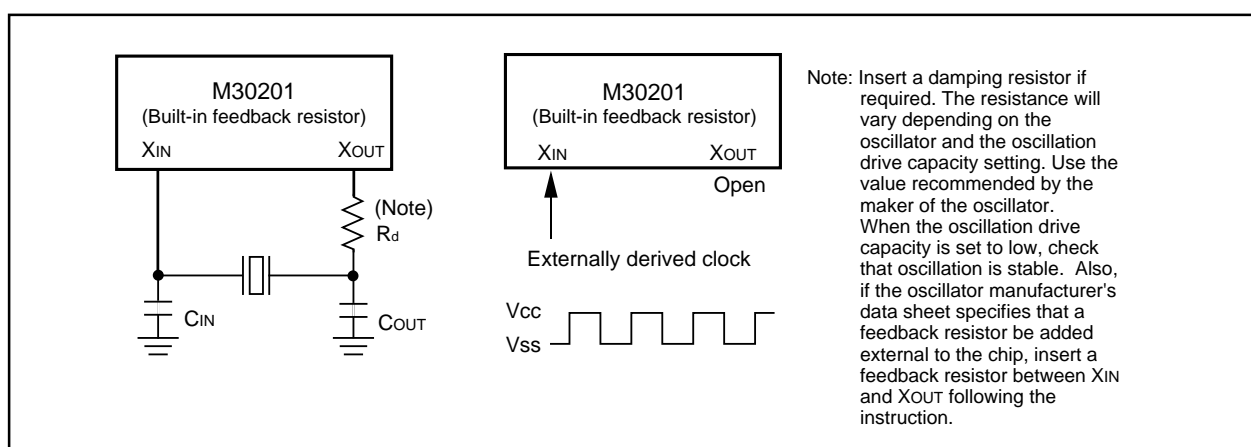


**Figure 1.15. Examples of main clock**

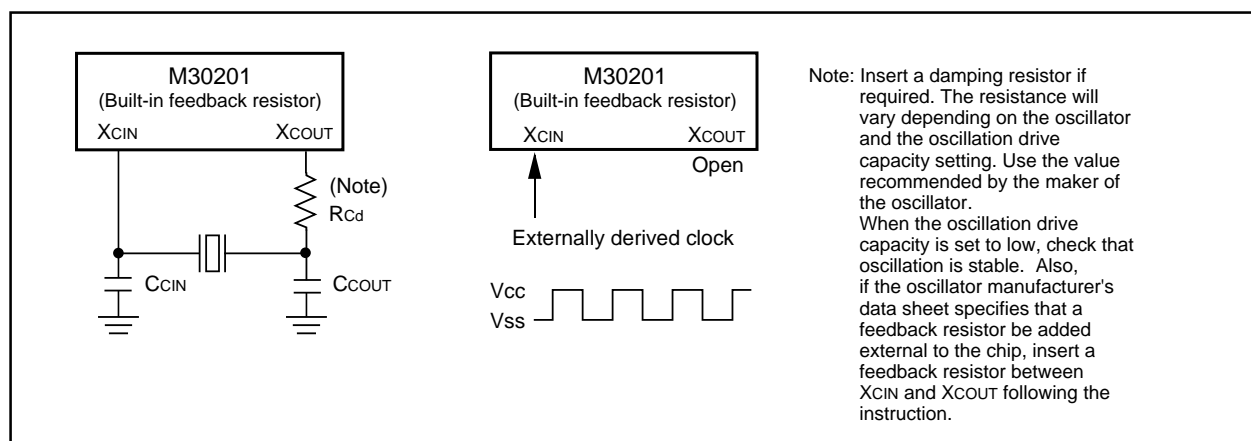

**Figure 1.16. Examples of sub-clock**

**Clock Generating Circuit****Clock Control**

Figure 1.17 shows the block diagram of the clock generating circuit.

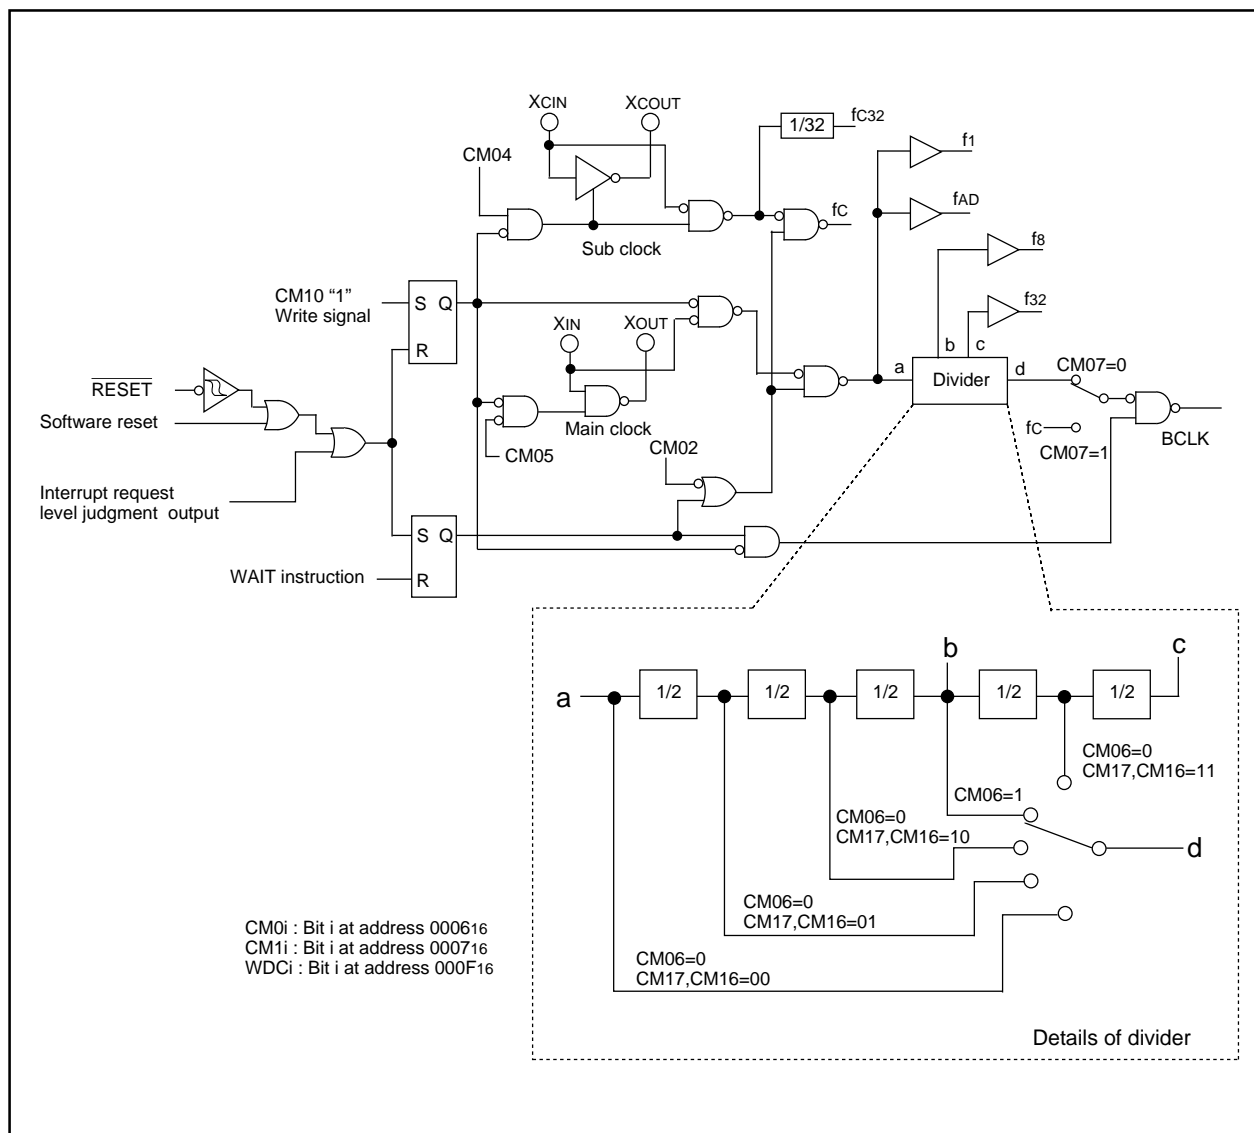

**Figure 1.17. Clock generating circuit**

## Clock Generating Circuit

---

The following paragraphs describes the clocks generated by the clock generating circuit.

### (1) Main clock

The main clock is generated by the main clock oscillation circuit. After a reset, the clock is divided by 8 to BCLK. The clock can be stopped using the main clock stop bit (bit 5 at address 0006<sub>16</sub>). Stopping the clock, after switching the operating clock source of CPU to the sub-clock, reduces the power dissipation. After the oscillation of the main clock oscillation circuit has stabilized, the drive capacity of the main clock oscillation circuit can be reduced using the XIN-XOUT drive capacity select bit (bit 5 at address 0007<sub>16</sub>). Reducing the drive capacity of the main clock oscillation circuit reduces the power dissipation. This bit changes to "1" when shifting from high-speed/medium-speed mode to stop mode and at a reset. When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained.

### (2) Sub-clock

The sub-clock is generated by the sub-clock oscillation circuit. No sub-clock is generated after a reset. After oscillation is started using the port Xc select bit (bit 4 at address 0006<sub>16</sub>), the sub-clock can be selected as BCLK by using the system clock select bit (bit 7 at address 0006<sub>16</sub>). However, be sure that the sub-clock oscillation has fully stabilized before switching.

After the oscillation of the sub-clock oscillation circuit has stabilized, the drive capacity of the sub-clock oscillation circuit can be reduced using the XCIN-XCOUT drive capacity select bit (bit 3 at address 0006<sub>16</sub>). Reducing the drive capacity of the sub-clock oscillation circuit reduces the power dissipation. This bit changes to "1" when shifting to stop mode and at a reset.

### (3) BCLK

The BCLK is the clock that drives the CPU, and is fc or the clock is derived by dividing the main clock by 1, 2, 4, 8, or 16. The BCLK is derived by dividing the main clock by 8 after a reset.

The main clock division select bit 0 (bit 6 at address 0006<sub>16</sub>) changes to "1" when shifting from high-speed/medium-speed to stop mode and at reset. When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained.

### (4) Peripheral function clock (f<sub>1</sub>, f<sub>8</sub>, f<sub>32</sub>, f<sub>AD</sub>)

The clock for the peripheral devices is derived from the main clock or by dividing it by 8 or 32. The peripheral function clock is stopped by stopping the main clock or by setting the WAIT peripheral function clock stop bit (bit 2 at 0006<sub>16</sub>) to "1" and then executing a WAIT instruction.

### (5) fc32

This clock is derived by dividing the sub-clock by 32. It is used for the timer A, timer B and timer X counts.

### (6) fc

This clock has the same frequency as the sub-clock. It is used for BCLK and for the watchdog timer.

## Clock Generating Circuit

Figure 1.18 shows the system clock control registers 0 and 1.

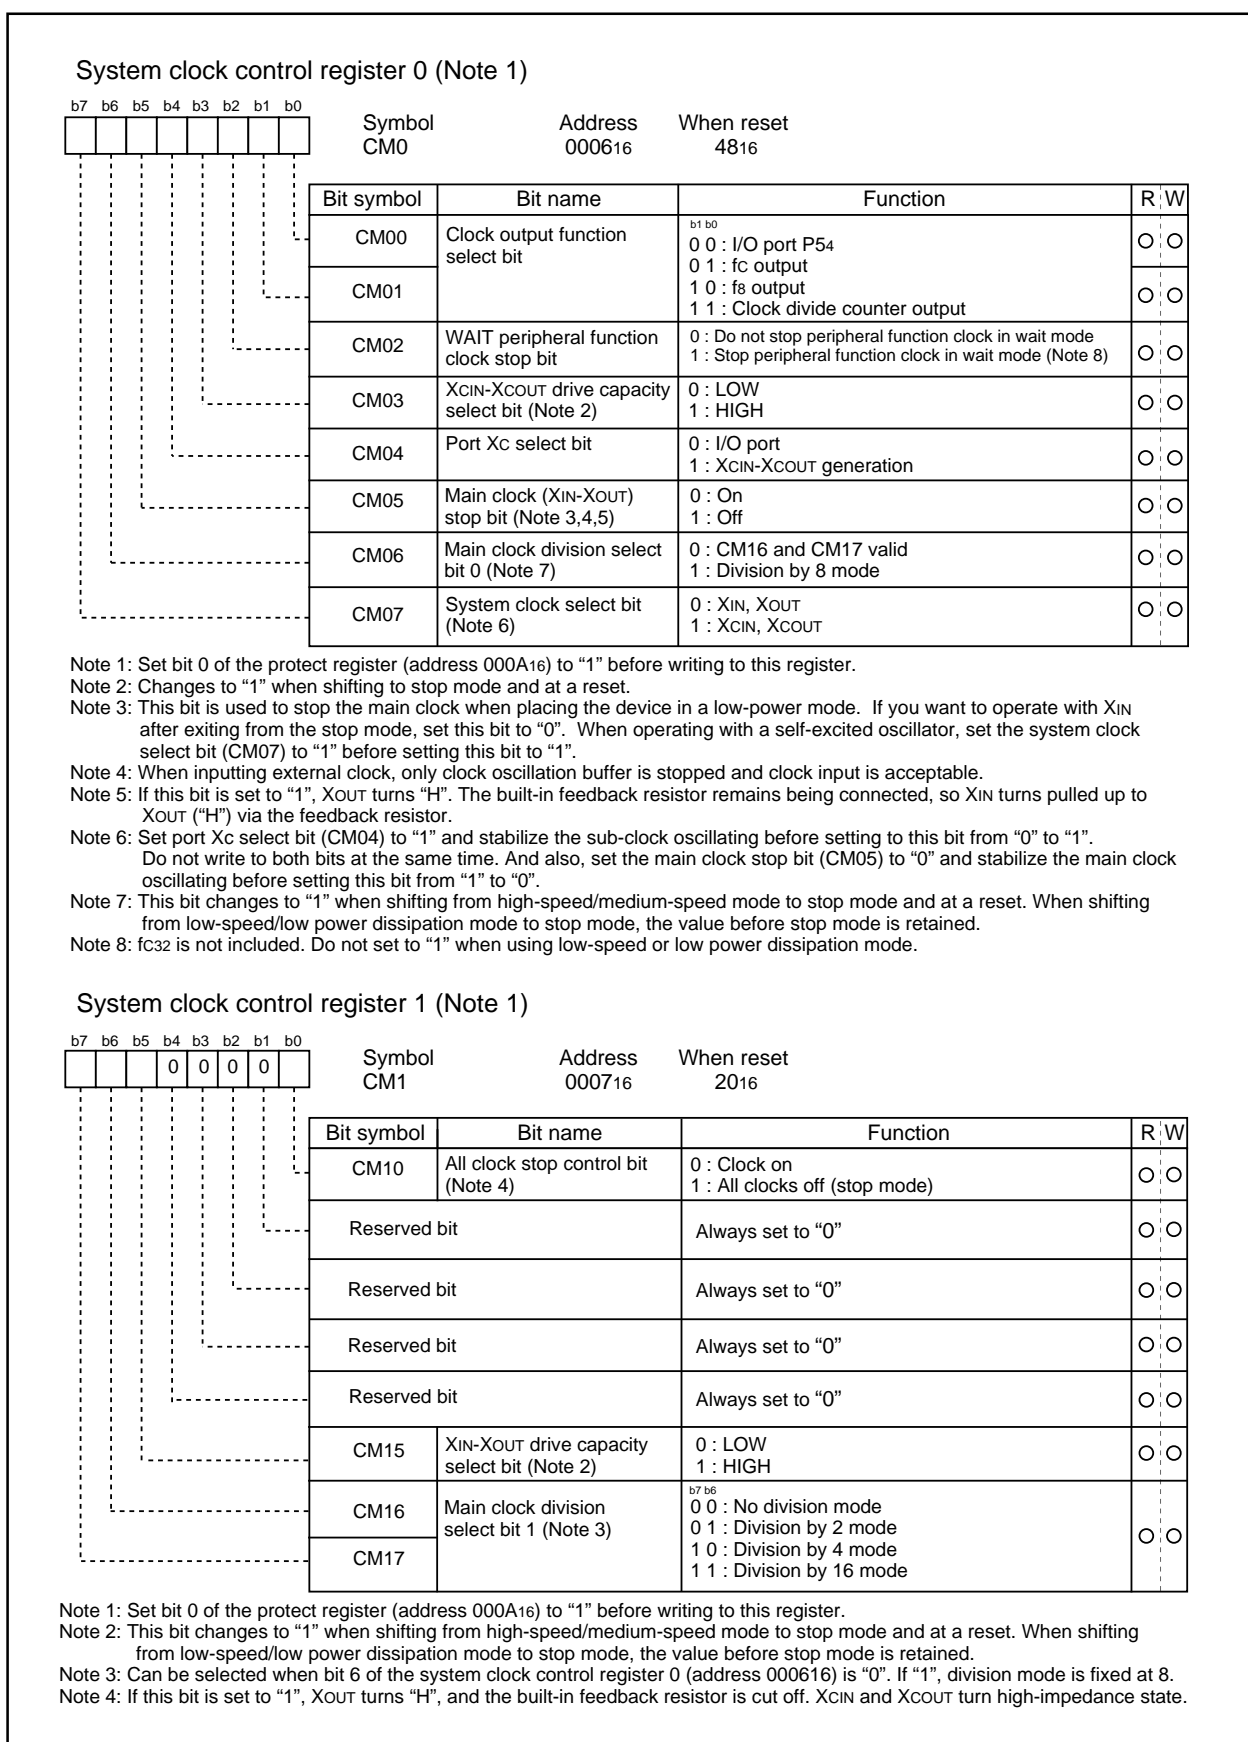


Figure 1.18. Clock control registers 0 and 1

## Clock Generating Circuit

### Clock Output

The clock output function select bit allows you to choose the clock from f8, fc, or a divide-by-n clock that is output from the P54/CKOUT pin. The clock divide counter is an 8-bit counter whose count source is f32, and its divide ratio can be set in the range of 0016 to FF16. Figure 1.19 shows a block diagram of clock output.

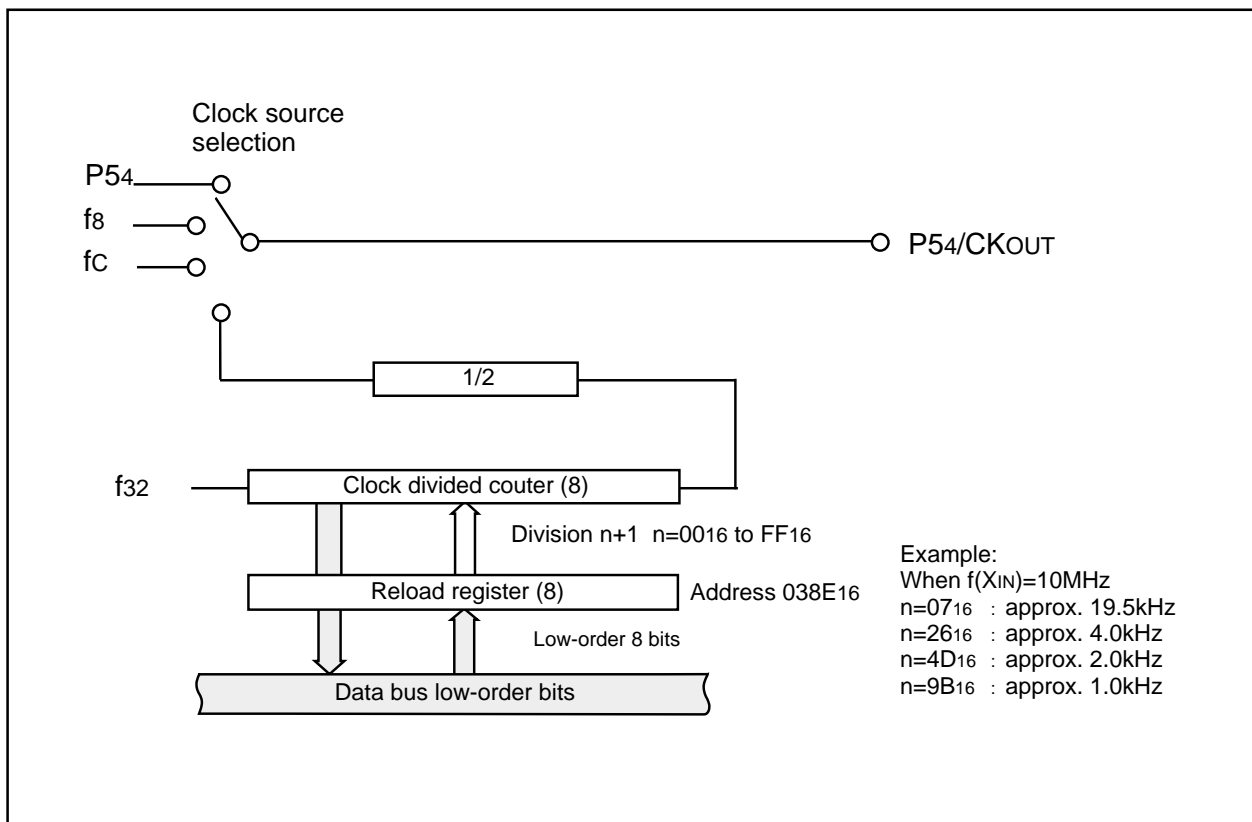


Figure 1.19. Block diagram of clock output

## Stop Mode, Wait Mode

### Stop Mode

Writing "1" to the all-clock stop control bit (bit 0 at address 0007<sub>16</sub>) stops all oscillation and the microcomputer enters stop mode. In stop mode, the content of the internal RAM is retained provided that VCC remains above 2V.

Because the oscillation of BCLK, f<sub>1</sub> to f<sub>32</sub>, f<sub>c</sub>, f<sub>c32</sub>, and f<sub>AD</sub> stops in stop mode, peripheral functions such as the A-D converter and watchdog timer do not function. However, timer A, timer B and timer X operate provided that the event counter mode is set to an external pulse, and UART0 functions provided an external clock is selected. Table 1.3 shows the status of the ports in stop mode.

Stop mode is cancelled by a hardware reset or an interrupt. If an interrupt is to be used to cancel stop mode, that interrupt must first have been enabled. If returning by an interrupt, that interrupt routine is executed.

When shifting from high-speed/medium-speed mode to stop mode and at a reset, the main clock division select bit 0 (bit 6 at address 0006<sub>16</sub>) is set to "1". When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained.

**Table 1.3. Port status during stop mode**

Pin		States
Port		Retains status before stop mode
CLKOUT	When f <sub>c</sub> selected	"H"
	When f <sub>8</sub> , clock divided counter output selected	Retains status before stop mode

### Wait Mode

When a WAIT instruction is executed, BCLK stops and the microcomputer enters the wait mode. In this mode, oscillation continues but BCLK and watchdog timer stop. Writing "1" to the WAIT peripheral function clock stop bit and executing a WAIT instruction stops the clock being supplied to the internal peripheral functions, allowing power dissipation to be reduced. However, peripheral function clock f<sub>c32</sub> does not stop so that the peripherals using f<sub>c32</sub> do not contribute to the power saving. When the MCU running in low-speed or low power dissipation mode, do not enter WAIT mode with this bit set to "1". Table 1.4 shows the status of the ports in wait mode.

Wait mode is cancelled by a hardware reset or interrupt. If an interrupt is used to cancel wait mode, the microcomputer restarts from the interrupt routine using as BCLK, the clock that had been selected when the WAIT instruction was executed.

**Table 1.4. Port status during wait mode**

Pin		States
Port		Retains status before wait mode
CLKOUT	When f <sub>c</sub> selected	Does not stop
	When f <sub>8</sub> , clock divided counter output selected	Does not stop when the WAIT peripheral function clock stop bit is "0". When the WAIT peripheral function clock stop bit is "1", the status immediately prior to entering wait mode is maintained.

## Status Transition of BCLK

### Status Transition of BCLK

Power dissipation can be reduced and low-voltage operation achieved by changing the count source for BCLK. Table 1.5 shows the operating modes corresponding to the settings of system clock control registers 0 and 1.

When reset, the device starts in division by 8 mode. The main clock division select bit 0(bit 6 at address 000616) changes to "1" when shifting from high-speed/medium-speed to stop mode and at a reset. When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained. The following shows the operational modes of BCLK.

#### (1) Division by 2 mode

The main clock is divided by 2 to obtain the BCLK.

#### (2) Division by 4 mode

The main clock is divided by 4 to obtain the BCLK.

#### (3) Division by 8 mode

The main clock is divided by 8 to obtain the BCLK. When reset, the device starts operating from this mode. Before the user can go from this mode to no division mode, division by 2 mode, or division by 4 mode, the main clock must be oscillating stably. When going to low-speed or lower power consumption mode, make sure the sub-clock is oscillating stably.

#### (4) Division by 16 mode

The main clock is divided by 16 to obtain the BCLK.

#### (5) No-division mode

The main clock is divided by 1 to obtain the BCLK.

#### (6) Low-speed mode

fc is used as BCLK. Note that oscillation of both the main and sub-clocks must have stabilized before transferring from this mode to another or vice versa. At least 2 to 3 seconds are required after the sub-clock starts. Therefore, the program must be written to wait until this clock has stabilized immediately after powering up and after stop mode is cancelled.

#### (7) Low power dissipation mode

fc is the BCLK and the main clock is stopped.

Note : Before the count source for BCLK can be changed from XIN to XCIN or vice versa, the clock to which the count source is going to be switched must be oscillating stably. Allow a wait time in software for the oscillation to stabilize before switching over the clock.

**Table 1.5. Operating modes dictated by settings of system clock control registers 0 and 1**

CM17	CM16	CM07	CM06	CM05	CM04	Operating mode of BCLK
0	1	0	0	0	Invalid	Division by 2 mode
1	0	0	0	0	Invalid	Division by 4 mode
Invalid	Invalid	0	1	0	Invalid	Division by 8 mode
1	1	0	0	0	Invalid	Division by 16 mode
0	0	0	0	0	Invalid	No-division mode
Invalid	Invalid	1	Invalid	0	1	Low-speed mode
Invalid	Invalid	1	Invalid	1	1	Low power dissipation mode

## Power Saving

There are three power save modes.

### (1) Normal operating mode

- **High-speed mode**

In this mode, one main clock cycle forms BCLK. The CPU operates on the BCLK. The peripheral functions operate on the clocks specified for each respective function.

- **Medium-speed mode**

In this mode, the main clock is divided into 2, 4, 8, or 16 to form BCLK. The CPU operates on the BCLK. The peripheral functions operated on the clocks specified for each respective function.

- **Low-speed mode**

In this mode, fc forms BCLK. The CPU operates on the fc clock. fc is the clock supplied by the subclock. The peripheral functions operate on the clocks specified for each respective function.

- **Low power-dissipation mode**

This mode is selected when the main clock is stopped from low-speed mode. The CPU operates on the fc clock. fc is the clock supplied by the subclock. Only the peripheral functions for which the subclock was selected as the count source continue to run.

### (2) Wait mode

CPU operation is halted in this mode. The oscillator continues to run.

### (3) Stop mode


All oscillators stop in this mode. The CPU and internal peripheral functions all stop. Of all 3 power saving modes, power savings are greatest in this mode.

Figure 1.20 shows the transition between each of the three modes, (1), (2), and (3).



## Power Saving

## Transition of stop mode, wait mode

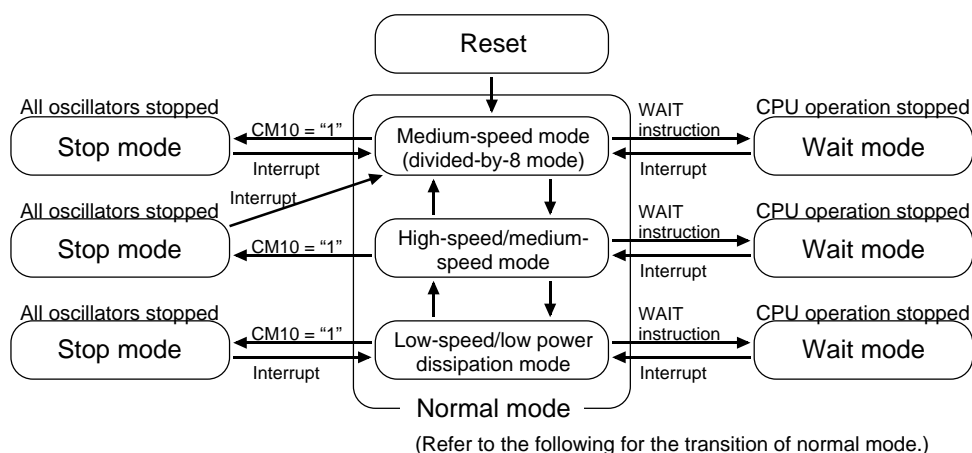

## Transition of normal mode

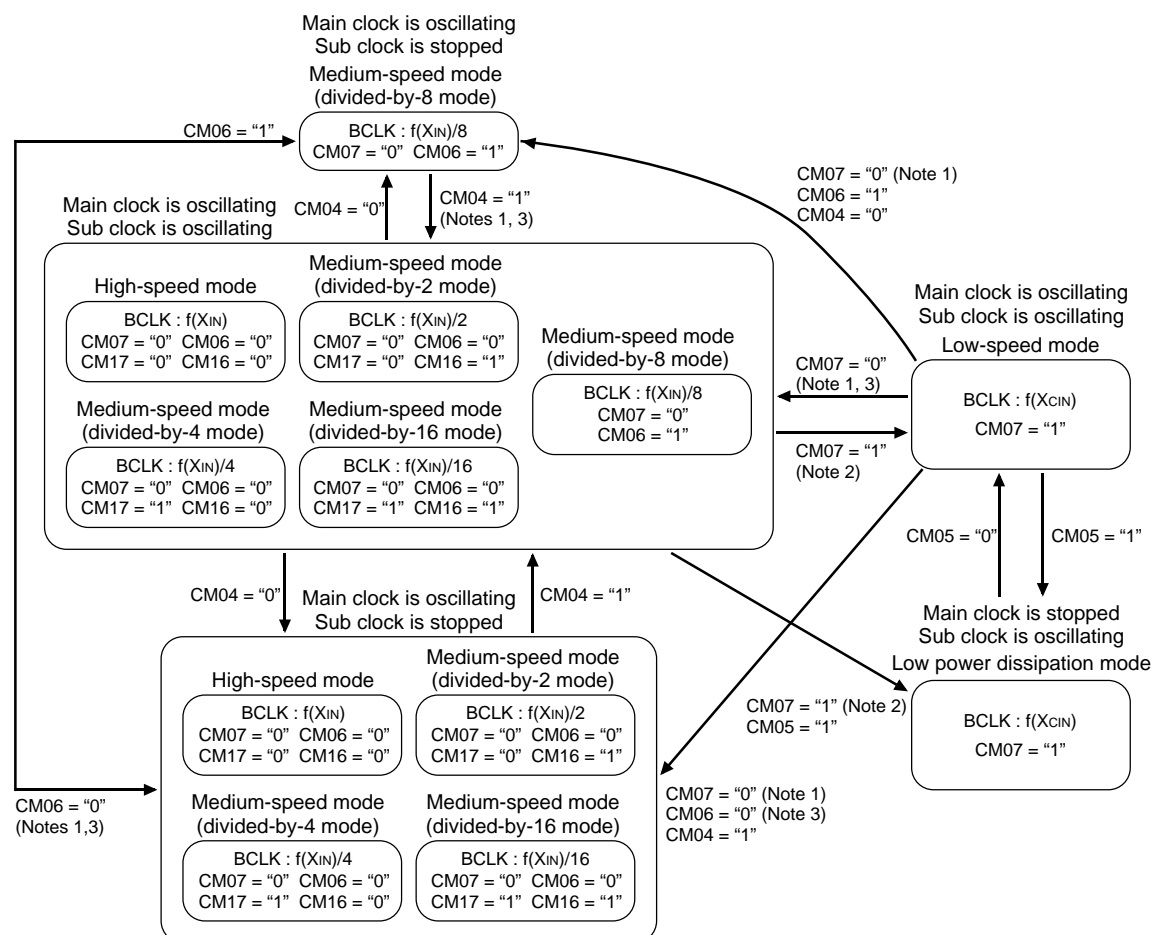


Figure 1.20. Clock transition

## Protection

## Protection

The protection function is provided so that the values in important registers cannot be changed in the event that the program runs out of control. Figure 1.21 shows the protect register. The values in the processor mode register 0 (address 0004<sub>16</sub>), processor mode register 1 (address 0005<sub>16</sub>), system clock control register 0 (address 0006<sub>16</sub>), system clock control register 1 (address 0007<sub>16</sub>) and port P4 direction register (address 03EA<sub>16</sub>) can only be changed when the respective bit in the protect register is set to "1". Therefore, important outputs can be allocated to port P4.

If, after "1" (write-enabled) has been written to the port P4 direction register write-enable bit (bit 2 at address 000A<sub>16</sub>), a value is written to any address, the bit automatically reverts to "0" (write-inhibited). However, the system clock control registers 0 and 1 write-enable bit (bit 0 at 000A<sub>16</sub>) and processor mode register 0 and 1 write-enable bit (bit 1 at 000A<sub>16</sub>) do not automatically return to "0" after a value has been written to an address. The program must therefore be written to return these bits to "0".

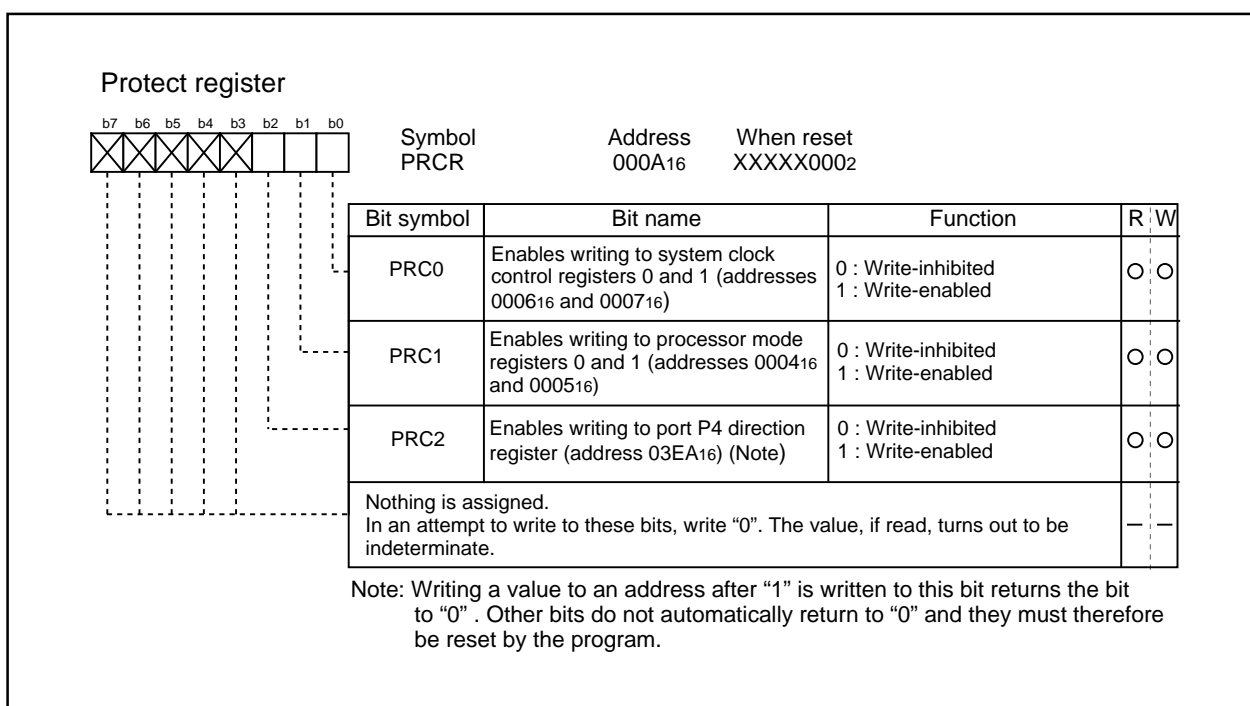



Figure 1.21. Protect register

## Interrupts

### Overview of Interrupt

#### Type of Interrupts

Figure 1.22 lists the types of interrupts.

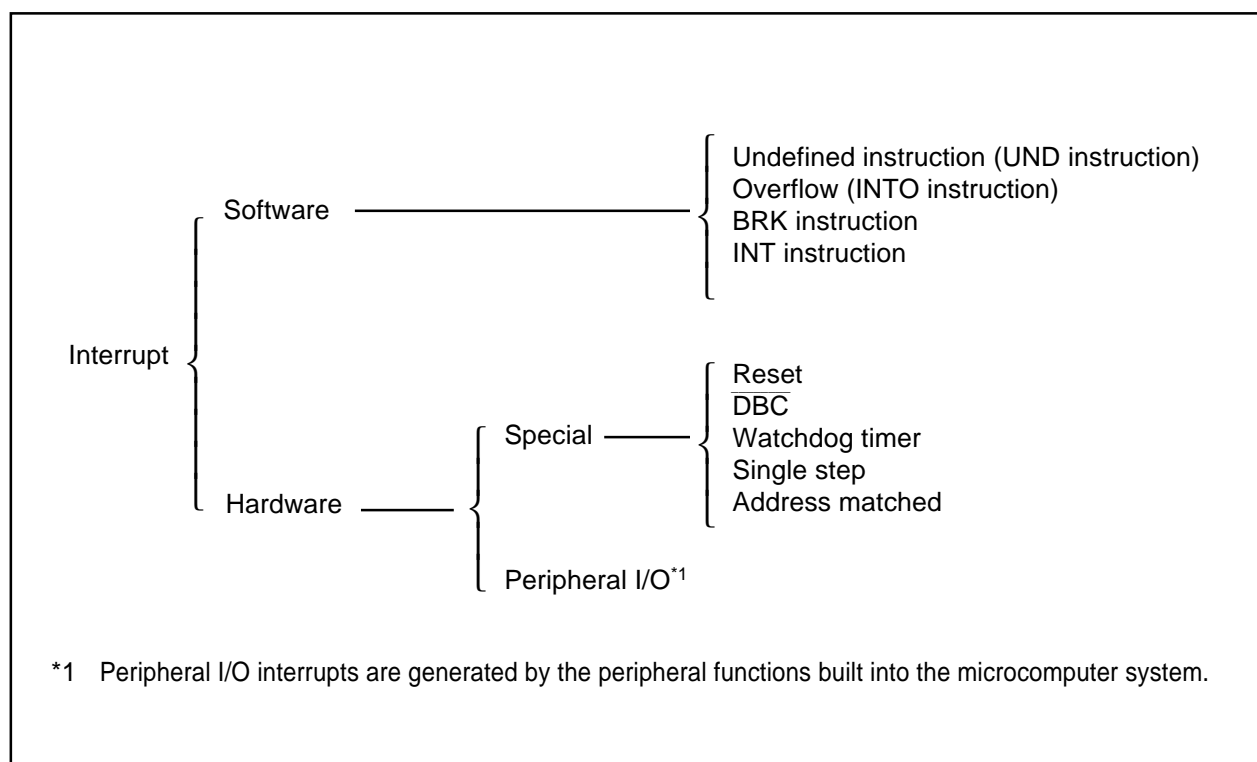

**Figure 1.22. Classification of interrupts**

- Maskable interrupt : An interrupt which can be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority can be changed by priority level.
- Non-maskable interrupt : An interrupt which cannot be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority cannot be changed by priority level.

## Interrupts

---

### Software Interrupts

A software interrupt occurs when executing certain instructions. Software interrupts are non-maskable interrupts.

- **Undefined instruction interrupt**

An undefined instruction interrupt occurs when executing the UND instruction.

- **Overflow interrupt**

An overflow interrupt occurs when executing the INTO instruction with the overflow flag (O flag) set to "1".

The following are instructions whose O flag changes by arithmetic:

ABS, ADC, ADCF, ADD, CMP, DIV, DIVU, DIVX, NEG, RMPA, SBB, SHA, SUB

- **BRK interrupt**

A BRK interrupt occurs when executing the BRK instruction.

- **INT interrupt**

An INT interrupt occurs when assigning one of software interrupt numbers 0 through 63 and executing the INT instruction. Software interrupt numbers 0 through 31 are assigned to peripheral I/O interrupts, so executing the INT instruction allows executing the same interrupt routine that a peripheral I/O interrupt does.

The stack pointer (SP) used for the INT interrupt is dependent on which software interrupt number is involved.

So far as software interrupt numbers 0 through 31 are concerned, the microcomputer saves the stack pointer assignment flag (U flag) when it accepts an interrupt request. It changes the U flag to "0" and selects the interrupt stack pointer (ISP), and then executes an interrupt sequence. When returning from the interrupt routine, the U flag is returned to the state it was before the acceptance of interrupt request. So far as software numbers 32 through 63 are concerned, the stack pointer does not make a shift.

## Interrupts

---

### Hardware Interrupts

Hardware interrupts are classified into two types — special interrupts and peripheral I/O interrupts.

#### (1) Special interrupts

Special interrupts are non-maskable interrupts.

- **Reset**

Reset occurs if an “L” is input to the RESET pin.

- **DBC interrupt**

This interrupt is exclusively for the debugger, do not use it in other circumstances.

- **Watchdog timer interrupt**

Generated by the watchdog timer.

- **Single-step interrupt**

This interrupt is exclusively for the debugger, do not use it in other circumstances. With the debug flag (D flag) set to “1”, a single-step interrupt occurs after one instruction is executed.

- **Address match interrupt**

An address match interrupt occurs immediately before the instruction held in the address indicated by the address match interrupt register is executed with the address match interrupt enable bit set to “1”. If an address other than the first address of the instruction in the address match interrupt register is set, no address match interrupt occurs.

#### (2) Peripheral I/O interrupts

A peripheral I/O interrupt is generated by one of built-in peripheral functions. The interrupt vector table is the same as the one for software interrupt numbers 0 through 31 the INT instruction uses. Peripheral I/O interrupts are maskable interrupts.

- **Key-input interrupt**

A key-input interrupt occurs if an “L” is input to the  $\overline{\text{KI}}$  pin.

- **A-D conversion interrupt**

This is an interrupt that the A-D converter generates.

- **UART0 and UART1 transmission interrupt**

These are interrupts that the serial I/O transmission generates.

- **UART0 and UART1 reception interrupt**

These are interrupts that the serial I/O reception generates.

- **Timer A0 interrupt**

This is an interrupts that timer A0 generates.

- **Timer B0 and timer B2 interrupt**

These are interrupts that timer B generates.

- **Timer X0 to timer X2 interrupt**

These are interrupts that timer X generates.

- **$\overline{\text{INT0}}$  and  $\overline{\text{INT1}}$  interrupt**

An  $\overline{\text{INT}}$  interrupt occurs if either a rising edge or a falling edge is input to the  $\overline{\text{INT}}$  pin.

## Interrupts

### Interrupts and Interrupt Vector Tables

If an interrupt request is accepted, a program branches to the interrupt routine set in the interrupt vector table. Set the first address of the interrupt routine in each vector table. Figure 1.23 shows format for specifying interrupt vector addresses.

Two types of interrupt vector tables are available — fixed vector table in which addresses are fixed and variable vector table in which addresses can be varied by the setting.

	MSB	LSB
Vector address + 0	Low address	
Vector address + 1	Mid address	
Vector address + 2	0 0 0 0	High address
Vector address + 3	0 0 0 0	0 0 0 0

Figure 1.23. Format for specifying interrupt vector addresses

#### • Fixed vector tables

The fixed vector table is a table in which addresses are fixed. The vector tables are located in an area extending from FFFDC<sub>16</sub> to FFFFF<sub>16</sub>. One vector table comprises four bytes. Set the first address of interrupt routine in each vector table. Table 1.6 shows the interrupts assigned to the fixed vector tables and addresses of vector tables.

Table 1.6. Interrupt and fixed vector address

Interrupt source	Vector table addresses Address (L) to address (H)	Remarks
Undefined instruction	FFFD <sub>C16</sub> to FFFD <sub>F16</sub>	Interrupt on UND instruction
Overflow	FFFE <sub>016</sub> to FFFE <sub>316</sub>	Interrupt on INTO instruction
BRK instruction	FFFE <sub>416</sub> to FFFE <sub>716</sub>	If the vector is filled with FF <sub>16</sub> , program execution starts from the address shown by the vector in the variable vector table
Address match	FFFE <sub>816</sub> to FFFE <sub>B16</sub>	There is an address-matching interrupt enable bit
Single step (Note)	FFFE <sub>C16</sub> to FFFE <sub>F16</sub>	Do not use
Watchdog timer	FFFF <sub>016</sub> to FFFF <sub>316</sub>	
DBC (Note)	FFFF <sub>416</sub> to FFFF <sub>716</sub>	Do not use
-	FFFF <sub>816</sub> to FFFF <sub>B16</sub>	-
Reset	FFFF <sub>C16</sub> to FFFF <sub>F16</sub>	

Note: Interrupts used for debugging purposes only.

## Interrupts

### • Variable vector tables

The addresses in the variable vector table can be modified, according to the user's settings. Indicate the first address using the interrupt table register (INTB). The 256-byte area subsequent to the address the INTB indicates becomes the area for the variable vector tables. One vector table comprises four bytes. Set the first address of the interrupt routine in each vector table. Table 1.7 shows the interrupts assigned to the variable vector tables and addresses of vector tables.

**Table 1.7. Interrupt causes (variable interrupt vector addresses)**

Software interrupt number	Vector table address Address (L) to address (H)	Interrupt source	Remarks
Software interrupt number 0	+0 to +3 (Note)	BRK instruction	Cannot be masked by I flag
—		—	
Software interrupt number 11	+44 to +47 (Note)	—	
Software interrupt number 12	+48 to +51 (Note)	—	
Software interrupt number 13	+52 to +55 (Note)	Key input interrupt	
Software interrupt number 14	+56 to +59 (Note)	A-D	
—		—	
Software interrupt number 17	+68 to +71 (Note)	UART0 transmit	
Software interrupt number 18	+72 to +75 (Note)	UART0 receive	
Software interrupt number 19	+76 to +79 (Note)	UART1 transmit	
Software interrupt number 20	+80 to +83 (Note)	UART1 receive	
Software interrupt number 21	+84 to +87 (Note)	Timer A0	
Software interrupt number 22	+88 to +91 (Note)	Timer X0	
Software interrupt number 23	+92 to +95 (Note)	Timer X1	
Software interrupt number 24	+96 to +99 (Note)	Timer X2	
Software interrupt number 25	+100 to +103 (Note)	—	
Software interrupt number 26	+104 to +107 (Note)	Timer B0	
Software interrupt number 27	+108 to +111 (Note)	Timer B1	
Software interrupt number 28	+112 to +115 (Note)	—	
Software interrupt number 29	+116 to +119 (Note)	$\overline{\text{INT0}}$	
Software interrupt number 30	+120 to +123 (Note)	$\overline{\text{INT1}}$	
Software interrupt number 31	+124 to +127 (Note)	—	
Software interrupt number 32 to Software interrupt number 63	+128 to +131 (Note) to +252 to +255 (Note)	Software interrupt	Cannot be masked by I flag

Note : Address relative to address in interrupt table register (INTB).

## Interrupts

---

### Interrupt Control

Descriptions are given here regarding how to enable or disable maskable interrupts and how to set the priority to be accepted. What is described here does not apply to non-maskable interrupts.

Enable or disable a maskable interrupt using the interrupt enable flag (I flag), interrupt priority level select bit, and processor interrupt priority level (IPL). Whether an interrupt request is present or absent is indicated by the interrupt request bit. The interrupt request bit and the interrupt priority level selection bit are located in the interrupt control register of each interrupt. Also, the interrupt enable flag (I flag) and the IPL are located in the flag register (FLG).

Figure 1.24 shows the interrupt control registers.



## Interrupts

## Interrupt control register (Note 2)

Symbol	Address	When reset
KUPIC	004D <sub>16</sub>	XXXXX0002
ADIC	004E <sub>16</sub>	XXXXX0002
SiTIC(i=0, 1)	0051 <sub>16</sub> , 0053 <sub>16</sub>	XXXXX0002
SiRIC(i=0, 1)	0052 <sub>16</sub> , 0054 <sub>16</sub>	XXXXX0002
TAiIC(i=0)	0055 <sub>16</sub>	XXXXX0002
TXiIC(i=0 to 2)	0056 <sub>16</sub> to 0058 <sub>16</sub>	XXXXX0002
TBiIC(i=0, 1)	005A <sub>16</sub> , 005B <sub>16</sub>	XXXXX0002

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0 : Interrupt not requested 1 : Interrupt requested	○	○ (Note 1)
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).

Note 2: To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. For details, see the precautions for interrupts.

Symbol	Address	When reset
INTiIC(i=0, 1)	005D <sub>16</sub> , 005E <sub>16</sub>	XX00X0002

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0 : Interrupt not requested 1 : Interrupt requested	○	○ (Note 1)
POL	Polarity select bit	0 : Selects falling edge 1 : Selects rising edge	○	○
Reserved bit			○	○
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).

Note 2: To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. For details, see the precautions for interrupts.

Figure 1.24. Interrupt control register

## Interrupts

### Interrupt Enable Flag

The interrupt enable flag (I flag) controls the enabling and disabling of maskable interrupts. Setting this flag to "1" enables all maskable interrupts; setting it to "0" disables all maskable interrupts. This flag is set to "0" after reset.

### Interrupt Request Bit

The interrupt request bit is set to "1" by hardware when an interrupt is requested. After the interrupt is accepted and jumps to the corresponding interrupt vector, the request bit is set to "0" by hardware. The interrupt request bit can also be set to "0" by software. (Do not set this bit to "1").

### Interrupt Priority Level Select Bit and Processor Interrupt Priority Level (IPL)

Set the interrupt priority level using the interrupt priority level select bit, which is one of the component bits of the interrupt control register. When an interrupt request occurs, the interrupt priority level is compared with the IPL. The interrupt is enabled only when the priority level of the interrupt is higher than the IPL. Therefore, setting the interrupt priority level to "0" disables the interrupt.

Table 1.8 shows the settings of interrupt priority levels and Table 1.9 shows the interrupt levels enabled, according to the contents of the IPL.

The following are conditions under which an interrupt is accepted:

- interrupt enable flag (I flag) = 1
- interrupt request bit = 1
- interrupt priority level > IPL

The interrupt enable flag (I flag), the interrupt request bit, the interrupt priority select bit, and the IPL are independent, and they are not affected by one another.

**Table 1.8. Settings of interrupt priority levels**

Interrupt priority level select bit	Interrupt priority level	Priority order
b2 b1 b0 0 0 0	Level 0 (interrupt disabled)	———
0 0 1	Level 1	<div style="text-align: center;"> Low  ↓  High </div>
0 1 0	Level 2	
0 1 1	Level 3	
1 0 0	Level 4	
1 0 1	Level 5	
1 1 0	Level 6	
1 1 1	Level 7	

**Table 1.9. Interrupt levels enabled according to the contents of the IPL**

IPL	Enabled interrupt priority levels
IPL <sub>2</sub> IPL <sub>1</sub> IPL <sub>0</sub> 0 0 0	Interrupt levels 1 and above are enabled
0 0 1	Interrupt levels 2 and above are enabled
0 1 0	Interrupt levels 3 and above are enabled
0 1 1	Interrupt levels 4 and above are enabled
1 0 0	Interrupt levels 5 and above are enabled
1 0 1	Interrupt levels 6 and above are enabled
1 1 0	Interrupt levels 7 and above are enabled
1 1 1	All maskable interrupts are disabled

## Interrupts

---

### Changing the Interrupt Control Register

#### < Program examples >

The program examples are described as follow:

Example 1:

```
INT_SWITCH1:
    FCLR    I                ; Disable interrupts.
    AND.B   #00h, 0055h     ; Clear TA0IC int. priority level and int. request bit.
    NOP                                ; Four NOP instructions are required when using HOLD function.
    NOP
    FSET    I                ; Enable interrupts.
```

Example 2:

```
INT_SWITCH2:
    FCLR    I                ; Disable interrupts.
    AND.B   #00h, 0055h     ; Clear TA0IC int. priority level and int. request bit.
    MOV.W   MEM, R0         ; Dummy read.
    FSET    I                ; Enable interrupts.
```

Example 3:

```
INT_SWITCH3:
    PUSHC   FLG             ; Push Flag register onto stack
    FCLR    I                ; Disable interrupts.
    AND.B   #00h, 0055h     ; Clear TA0IC int. priority level and int. request bit.
    POPC    FLG             ; Enable interrupts.
```

The reason why two NOP instructions or dummy read are inserted before FSET I in Examples 1 and 2 is to prevent the interrupt enable flag I from being set before the interrupt control register is rewritten due to effects of the instruction queue.

If changing the interrupt control register using an instruction other than the instructions listed here, and if an interrupt occurs associated with this register during execution of the instruction, there can be instances in which the interrupt request bit is not set. To avoid this problem, use one of the instructions given below to change the register.

Following instructions: AND, OR, BCLR or BSET

## Interrupts

### Interrupt Sequence

An interrupt sequence — what are performed over a period from the instant an interrupt is accepted to the instant the interrupt routine is executed — is described here.

If an interrupt occurs during execution of an instruction, the processor determines its priority when the execution of the instruction is completed, and transfers control to the interrupt sequence from the next cycle. If an interrupt occurs during execution of either the SMOVB, SMOVF, SSTR or RMPA instruction, the processor temporarily suspends the instruction being executed, and transfers control to the interrupt sequence.

In the interrupt sequence, the processor carries out the following in sequence given:

- (1) CPU gets the interrupt information (the interrupt number and interrupt request level) by reading address 0000016. After this, the corresponding interrupt request bit becomes "0".
- (2) Saves the content of the flag register (FLG) as it was immediately before the start of interrupt sequence in the temporary register (Note) within the CPU.
- (3) Sets the interrupt enable flag (I flag), the debug flag (D flag), and the stack pointer select flag (U flag) to "0" (the U flag, however, does not change if the INT instruction, in software interrupt numbers 32 through 63, is executed).
- (4) Saves the content of the temporary register (Note) within the CPU in the stack area.
- (5) Saves the content of the program counter (PC) in the stack area.
- (6) Sets the interrupt priority level of the accepted instruction in the IPL.

After the interrupt sequence is completed, the processor resumes executing instructions from the first address of the interrupt routine.

Note: This register cannot be utilized by the user.

### Interrupt Response Time

'Interrupt response time' is the period between the instant an interrupt occurs and the instant the first instruction within the interrupt routine has been executed. This time comprises the period from the occurrence of an interrupt to the completion of the instruction under execution at that moment (a) and the time required for executing the interrupt sequence (b). Figure 1.25 shows the interrupt response time.

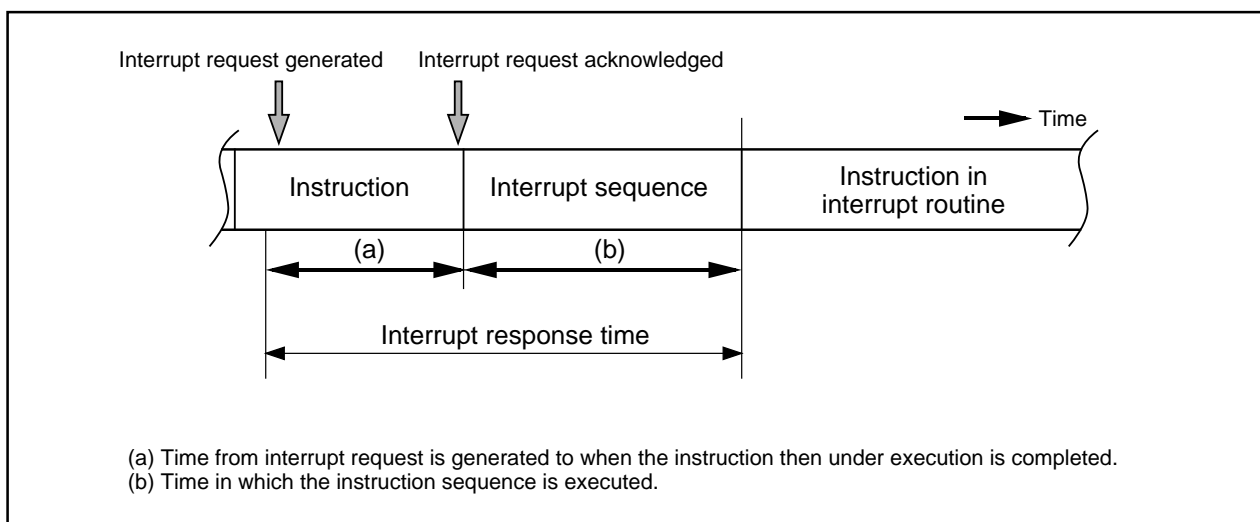


Figure 1.25. Interrupt response time

## Interrupts

Time (a) is dependent on the instruction under execution. Thirty cycles is the maximum required for the DIVX instruction (without wait).


Time (b) is as shown in Table 1.10.

**Table 1.10. Time required for executing the interrupt sequence**

Interrupt vector address	Stack pointer (SP) value	16-bit bus, without wait	8-bit bus, without wait
Even	Even	18 cycles (Note 1)	20 cycles (Note 1)
Even	Odd	19 cycles (Note 1)	20 cycles (Note 1)
Odd (Note 2)	Even	19 cycles (Note 1)	20 cycles (Note 1)
Odd (Note 2)	Odd	20 cycles (Note 1)	20 cycles (Note 1)

Note 1: Add 2 cycles in the case of a DBC interrupt; add 1 cycle in the case either of an address match interrupt or of a single-step interrupt.

Note 2: Locate an interrupt vector address in an even address, if possible.

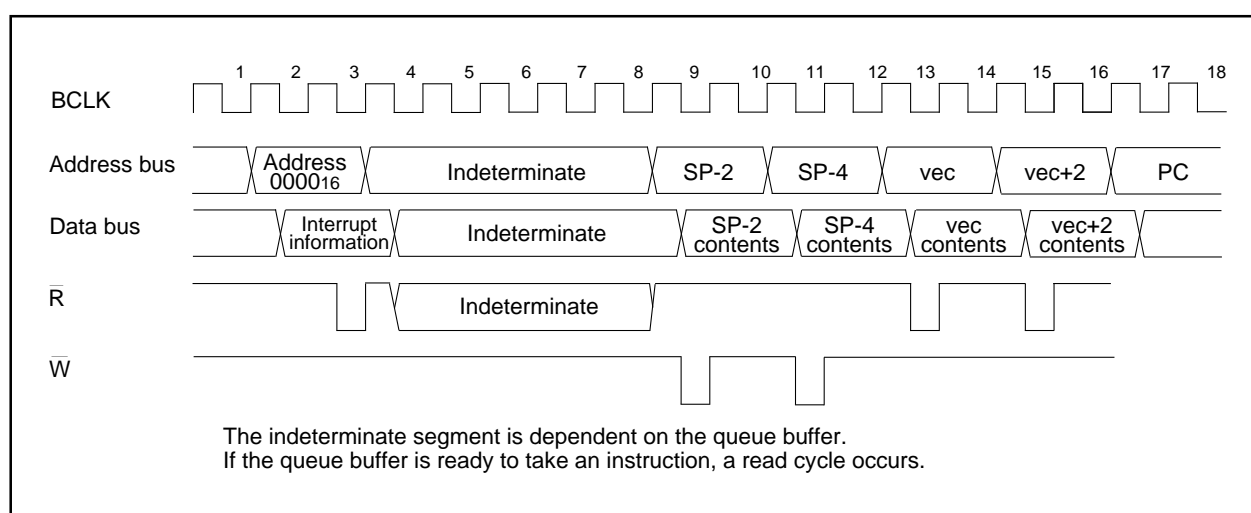

**Figure 1.26. Time required for executing the interrupt sequence**

### Variation of IPL when Interrupt Request is Accepted

If an interrupt request is accepted, the interrupt priority level of the accepted interrupt is set in the IPL.

If an interrupt request, that does not have an interrupt priority level, is accepted, one of the values shown in Table 1.11 is set in the IPL.

**Table 1.11. Relationship between interrupts without interrupt priority levels and IPL**

Interrupt sources without priority levels	Value set in the IPL
Watchdog timer	7
Reset	0
Other	Not changed

## Interrupts

### Saving Registers

In the interrupt sequence, only the contents of the flag register (FLG) and that of the program counter (PC) are saved in the stack area.

First, the processor saves the 4 high-order bits of the program counter, and 4 high-order bits and 8 low-order bits of the FLG register, 16 bits in total, in the stack area, then saves 16 low-order bits of the program counter. Figure 1.27 shows the state of the stack as it was before the acceptance of the interrupt request, and the state the stack after the acceptance of the interrupt request.

Save other necessary registers at the beginning of the interrupt routine using software. Using the PUSHM instruction alone can save all the registers except the stack pointer (SP).

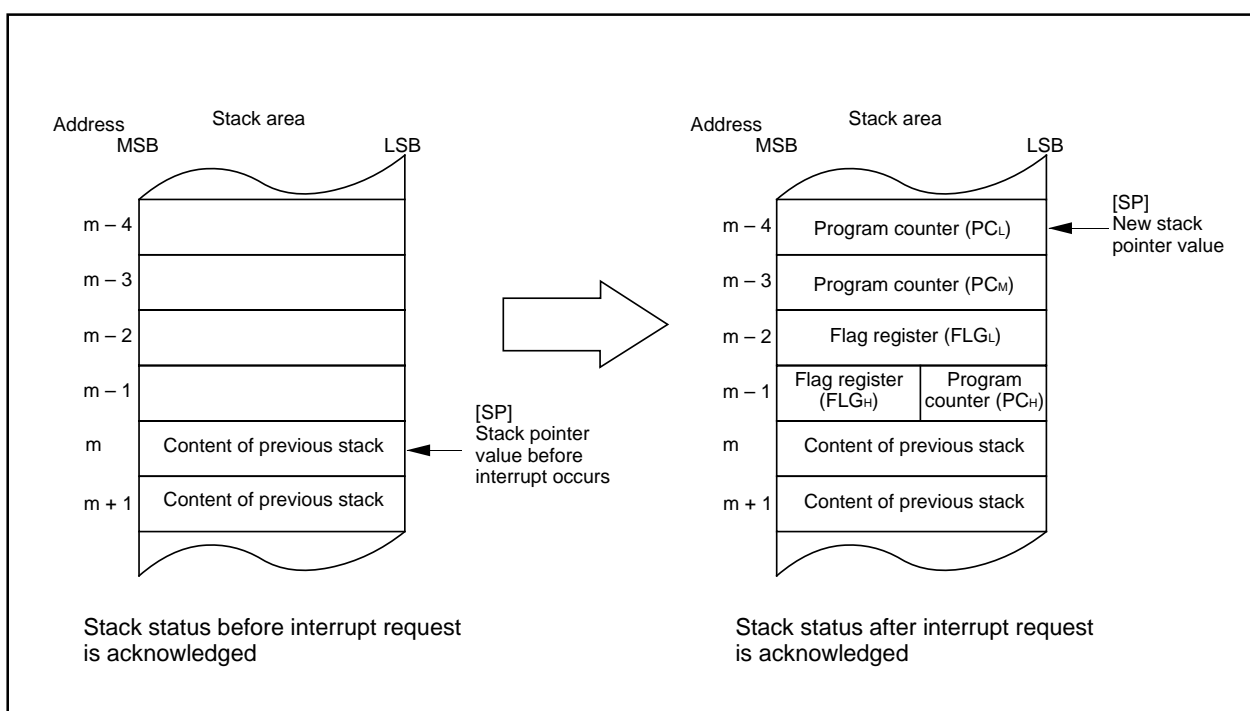


Figure 1.27. State of stack before and after acceptance of interrupt request

## Interrupts

The operation of saving registers carried out in the interrupt sequence is dependent on whether the content of the stack pointer (Note), at the time of acceptance of an interrupt request, is even or odd. If the content of the stack pointer (Note) is even, the content of the flag register (FLG) and the content of the program counter (PC) are saved, 16 bits at a time. If odd, their contents are saved in two steps, 8 bits at a time. Figure 1.28 shows the operation of the saving registers.

Note: When any INT instruction in software numbers 32 to 63 has been executed, this is the stack pointer indicated by the U flag. Otherwise, it is the interrupt stack pointer (ISP).

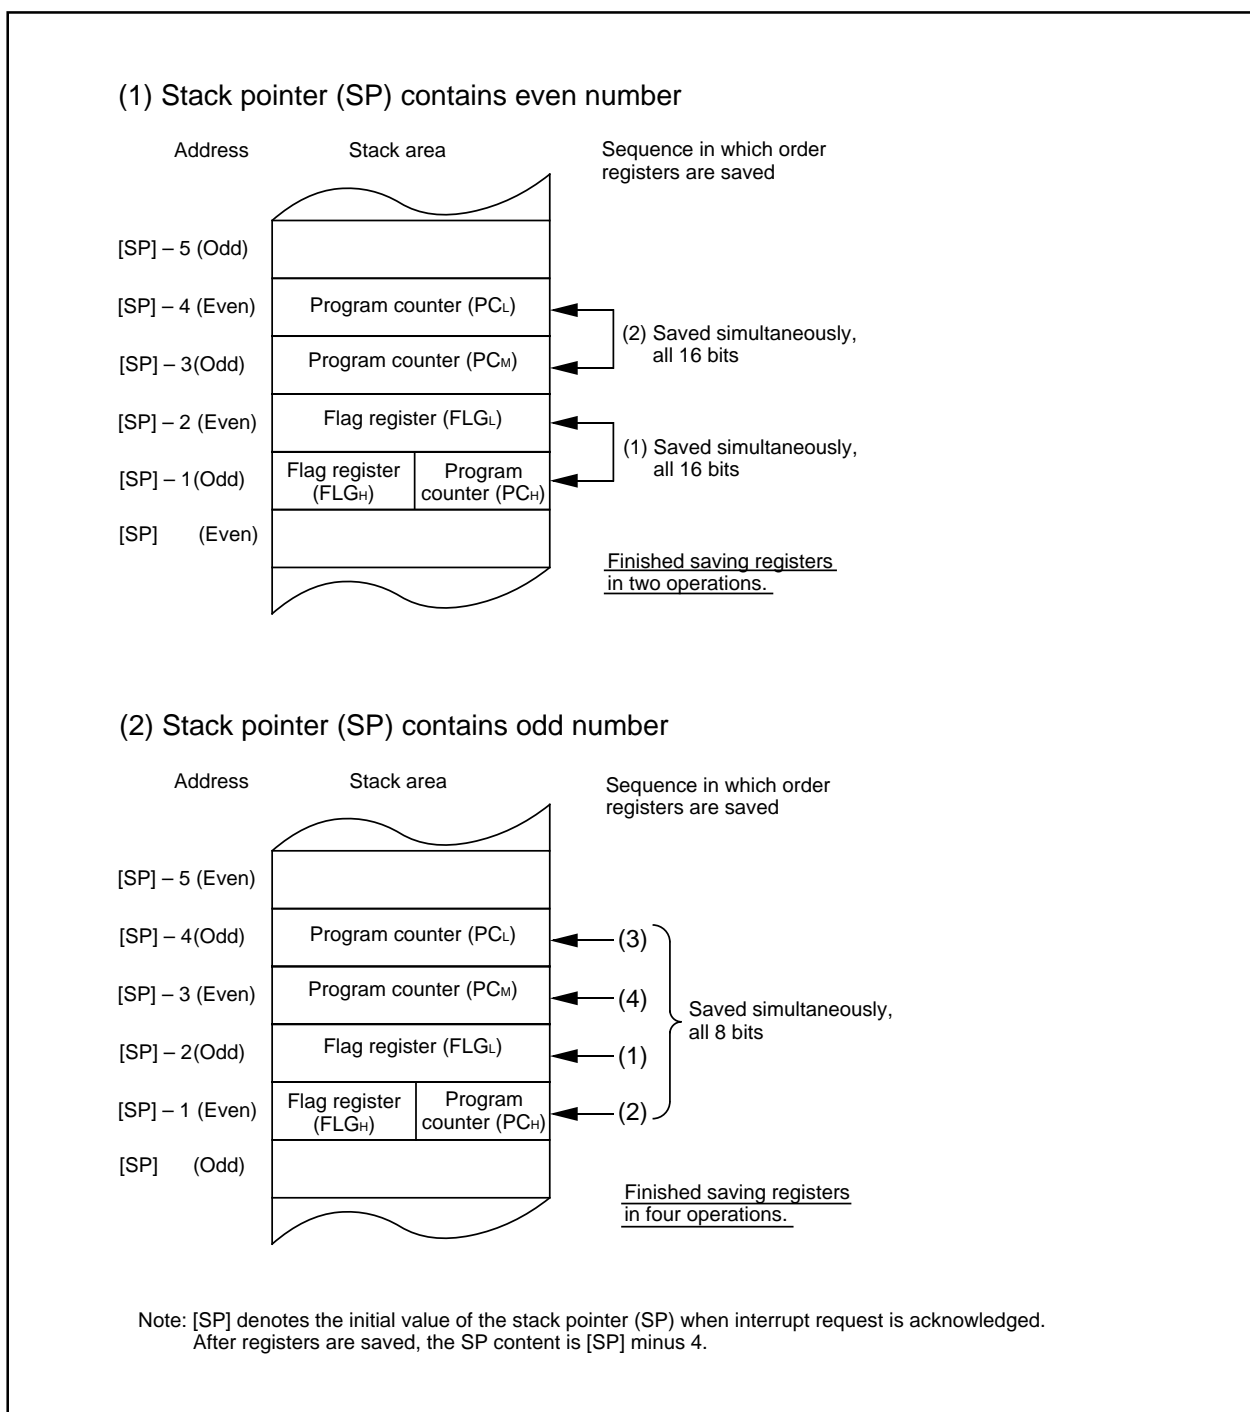


Figure 1.28. Operation of saving registers

## Interrupts

---

### Returning from an Interrupt Routine

Executing the REIT instruction at the end of an interrupt routine returns the contents of the flag register (FLG) as it was immediately before the start of interrupt sequence and the contents of the program counter (PC), both of which have been saved in the stack area. Then control returns to the program that was being executed before the acceptance of the interrupt request, so that the suspended process resumes.

Return the other registers saved by software within the interrupt routine using the POPM or similar instruction before executing the REIT instruction.

### Interrupt Priority

If there are two or more interrupt requests occurring at a point in time within a single sampling (checking whether interrupt requests are made), the interrupt assigned a higher priority is accepted.

Assign an arbitrary priority to maskable interrupts (peripheral I/O interrupts) using the interrupt priority level select bit. If the same interrupt priority level is assigned, however, the interrupt assigned a higher hardware priority is accepted.

Priorities of the special interrupts, such as Reset (dealt with as an interrupt assigned the highest priority), watchdog timer interrupt, etc. are regulated by hardware.

Figure 1.29 shows the priorities of hardware interrupts.

Software interrupts are not affected by the interrupt priority. If an instruction is executed, control branches invariably to the interrupt routine.

### Interrupt Priority Level Judge Circuit

This circuit selects the interrupt with the highest priority level when two or more interrupts are generated simultaneously.

Figure 1.30 shows the interrupt resolution circuit.



## Interrupts

Reset >  $\overline{\text{DBC}}$  > Watchdog timer > Peripheral I/O > Single step > Address match

Figure 1.29. Hardware interrupts priorities

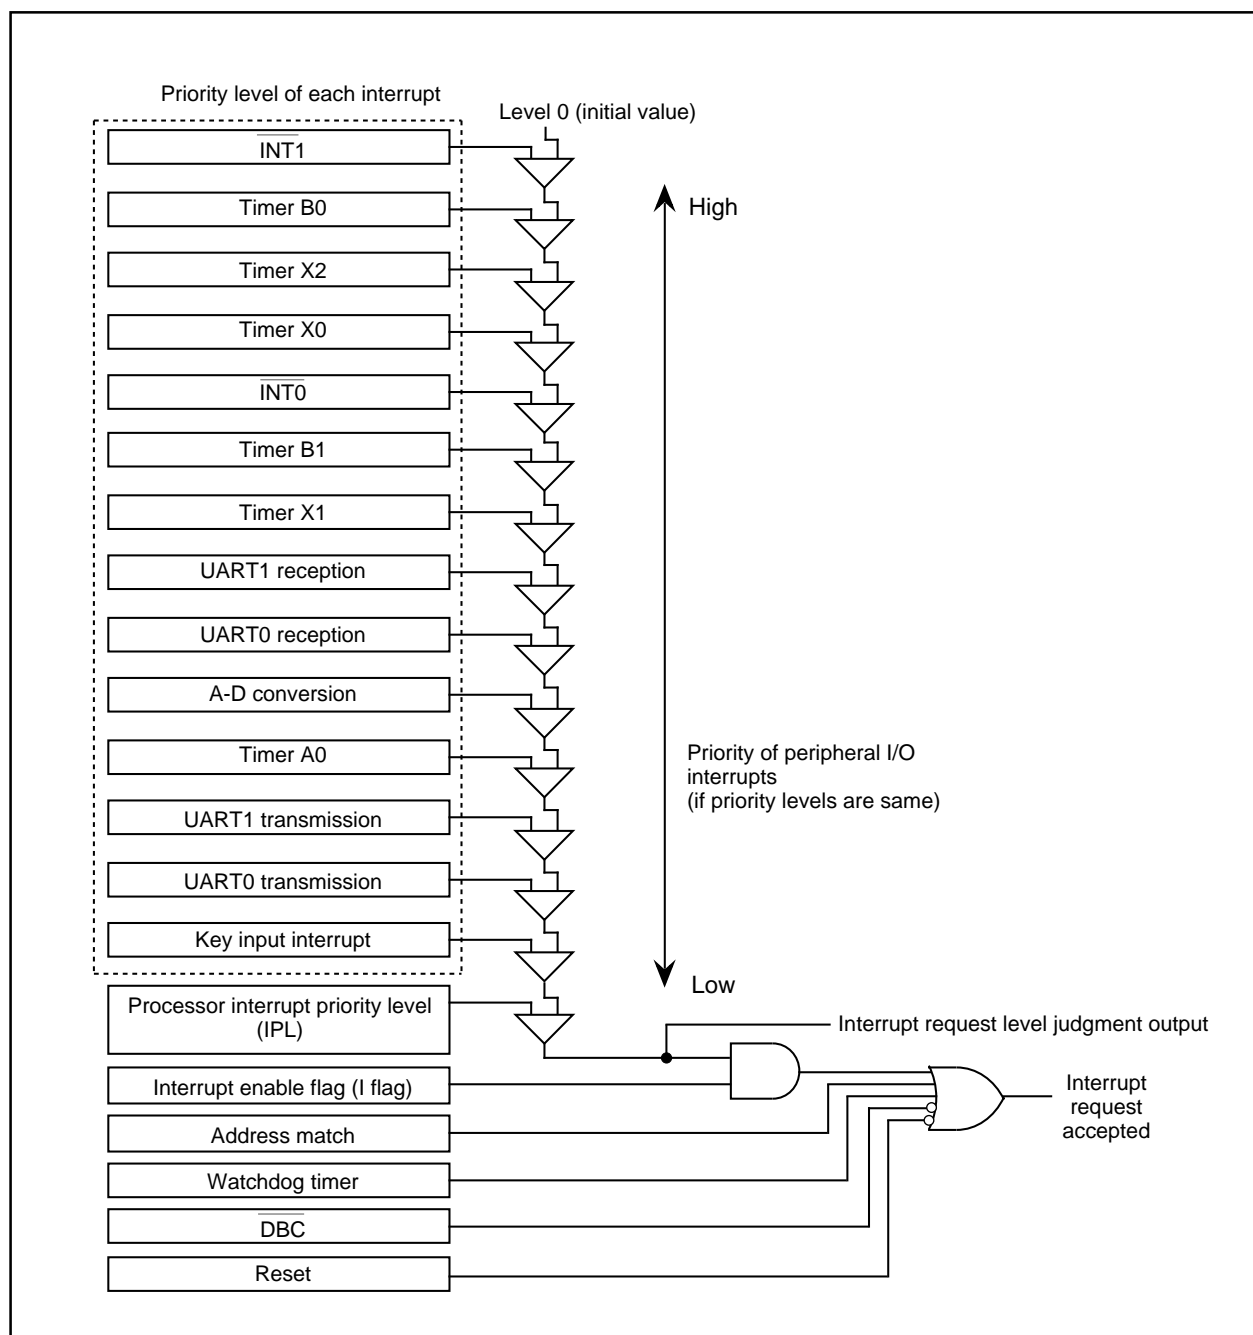


Figure 1.30. Interrupt resolution circuit

## Key Input Interrupt

### Key Input Interrupt

If the direction register of any of P00 to P07 is set for input and a falling edge is input to that port, a key input interrupt is generated. A key input interrupt can also be used as a key-on wakeup function for cancelling the wait mode or stop mode. Figure 1.31 shows the block diagram of the key input interrupt. Note that if an “L” level is input to any pin that has not been disabled for input, inputs to the other pins are not detected as an interrupt.

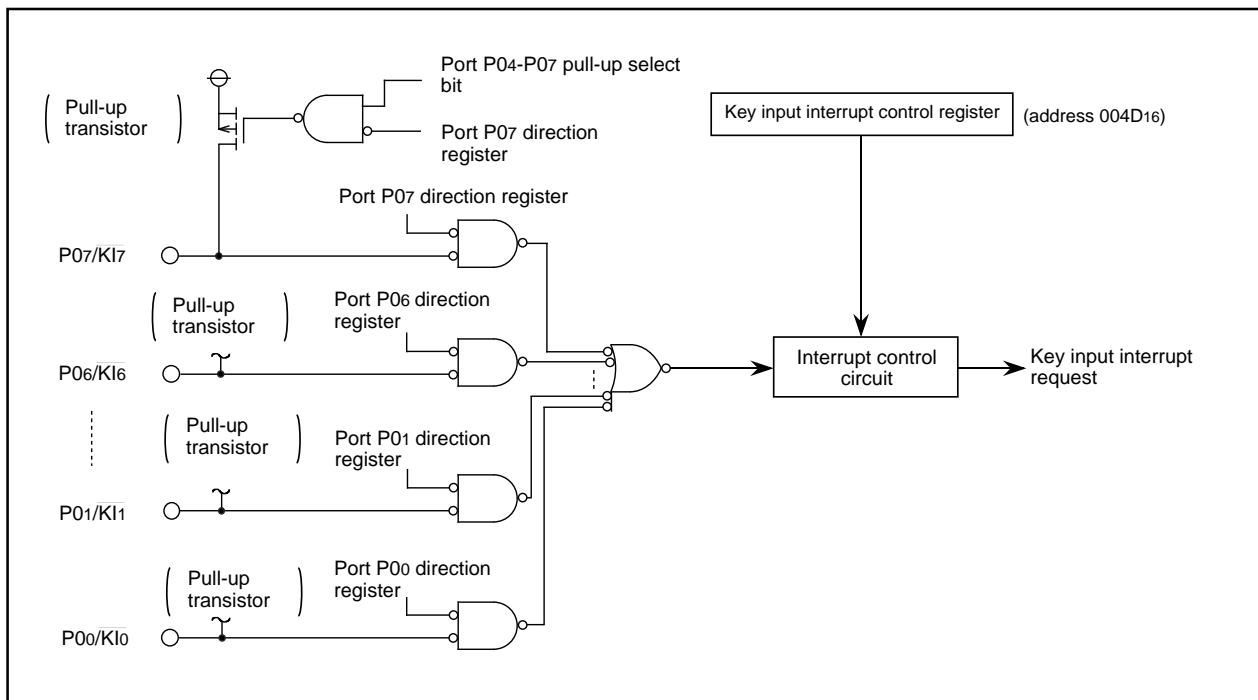


Figure 1.31. Block diagram of key input interrupt

## Address Match Interrupt

## Address Match Interrupt

An address match interrupt is generated when the address match interrupt address register contents match the program counter value. Two address match interrupts can be set, each of which can be enabled and disabled by an address match interrupt enable bit. Address match interrupts are not affected by the interrupt enable flag (I flag) and processor interrupt priority level (IPL). For an address match interrupt, the value of the program counter (PC) that is saved to the stack area varies depending on the instruction being executed.

Figure 1.32 shows the address match interrupt-related registers.

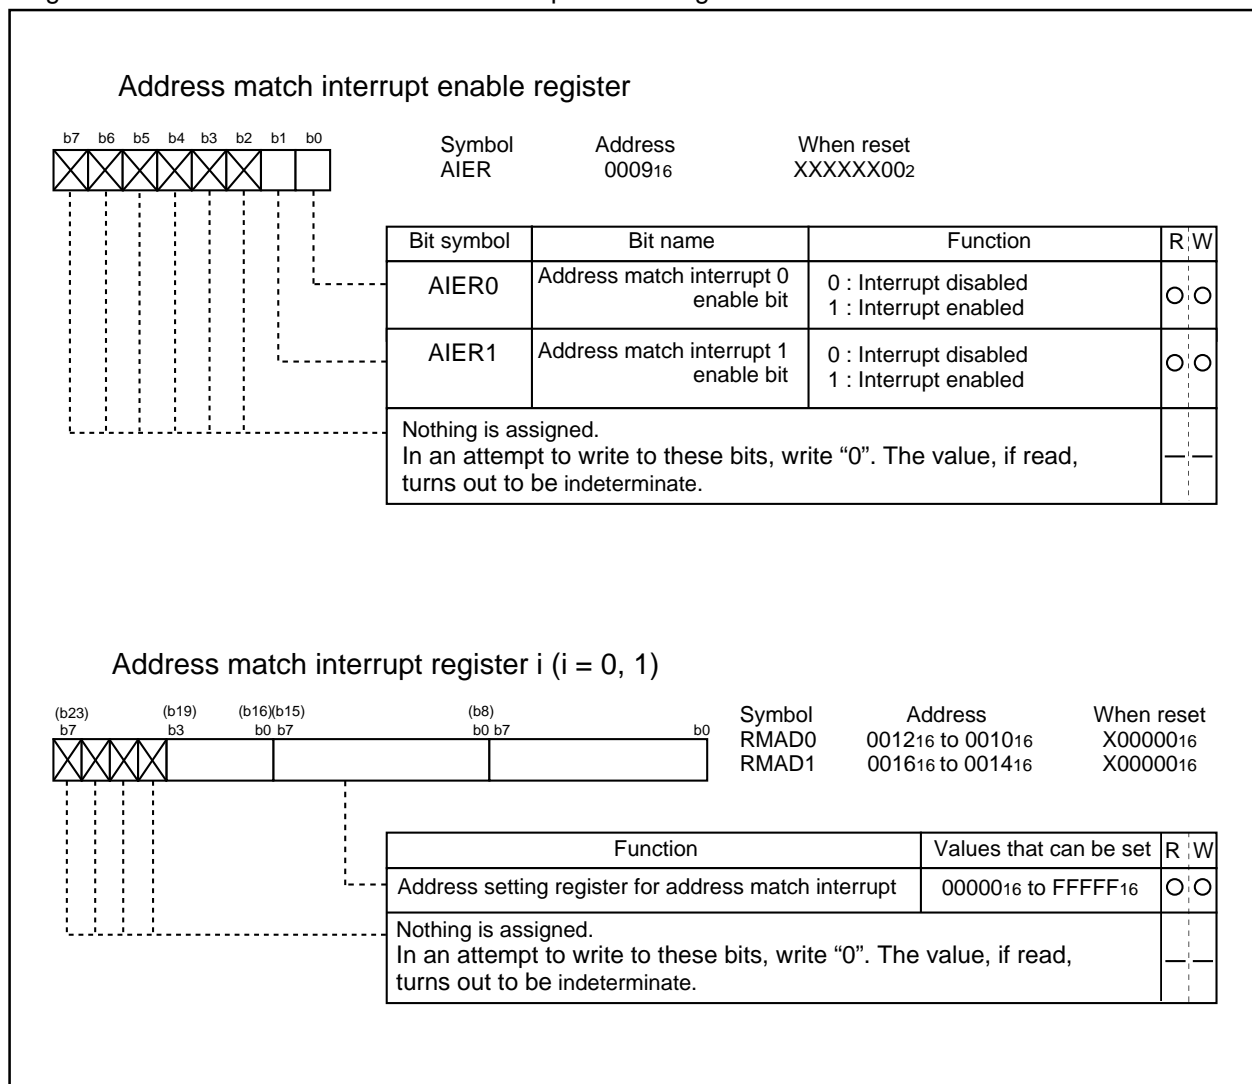


Figure 1.32. Address match interrupt-related registers

## Interrupts

### Precautions for Interrupts

#### (1) Reading address 00000<sub>16</sub>

- When maskable interrupt is occurred, CPU read the interrupt information (the interrupt number and interrupt request level) in the interrupt sequence.

The interrupt request bit of the certain interrupt written in address 00000<sub>16</sub> will then be set to "0".

Reading address 00000<sub>16</sub> by software sets enabled highest priority interrupt source request bit to "0".

Though the interrupt is generated, the interrupt routine may not be executed.

Do not read address 00000<sub>16</sub> by software.

#### (2) Setting the stack pointer

- The value of the stack pointer immediately after reset is initialized to 0000<sub>16</sub>. Accepting an interrupt before setting a value in the stack pointer may become a factor of runaway. Be sure to set a value in the stack pointer before accepting an interrupt. Concerning the first instruction immediately after reset, generating any interrupts is prohibited.

#### (3) External interrupt

- Either an "L" level or an "H" level of at least 250 ns width is necessary for the signal input to pins  $\overline{\text{INT0}}$  and  $\overline{\text{INT1}}$  regardless of the CPU operation clock.
- When changing a polarity of pins  $\overline{\text{INT0}}$  and  $\overline{\text{INT1}}$ , the interrupt request bit may become "1". Clear the interrupt request bit after changing the polarity. Figure 1.33 shows the switching condition of  $\overline{\text{INT}}$  interrupt request.

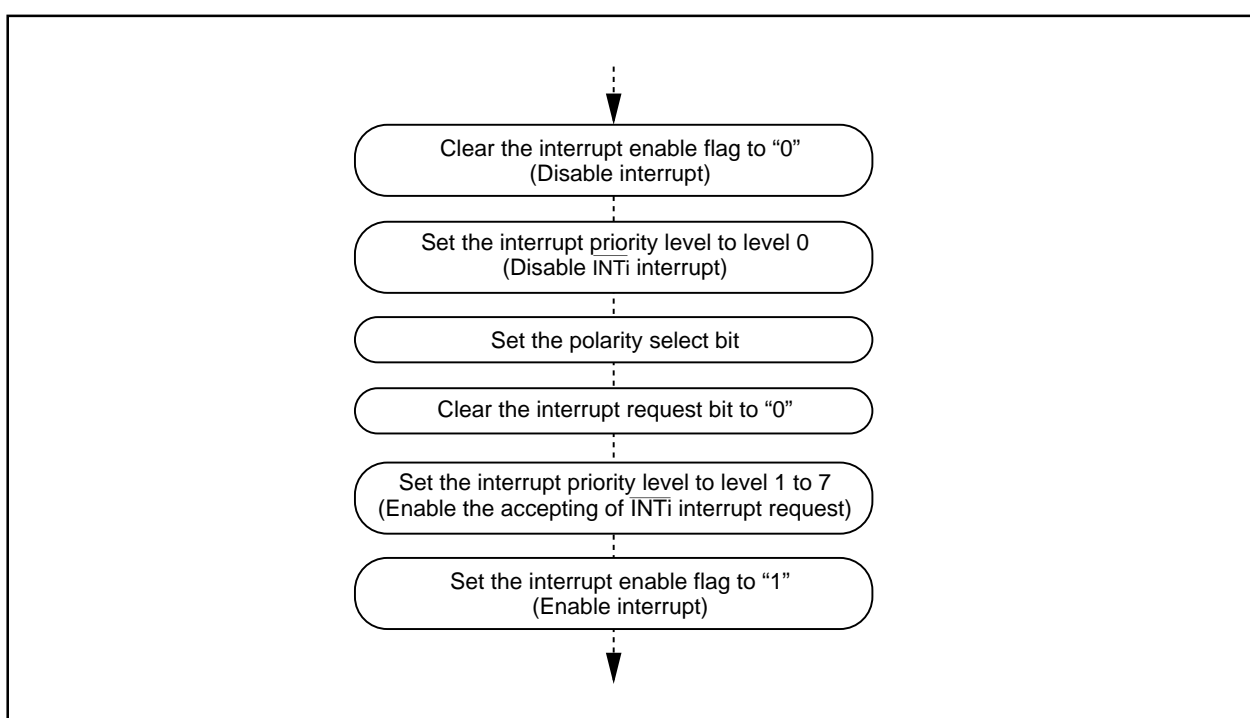


Figure 1.33. Switching condition of  $\overline{\text{INT}}$  interrupt request

#### (4) Changing interrupt control register

See "Changing Interrupt Control Register".

## Watchdog Timer

### Watchdog Timer

The watchdog timer has the function of detecting when the program is out of control. The watchdog timer is a 15-bit counter which down-counts the clock derived by dividing the BCLK using the prescaler. A watchdog timer interrupt is generated when an underflow occurs in the watchdog timer. When XIN is selected for the BCLK, bit 7 of the watchdog timer control register (address 000F<sub>16</sub>) selects the prescaler division ratio (by 16 or by 128). When XCIN is selected as the BCLK, the prescaler is set for division by 2 regardless of bit 7 of the watchdog timer control register (address 000F<sub>16</sub>).

When XIN is selected in BCLK

$$\text{Watchdog timer cycle} = \frac{\text{Prescaler division ratio (16 or 128)} \times \text{watchdog timer count (32768)}}{\text{BCLK}}$$

When XCIN is selected in BCLK

$$\text{Watchdog timer cycle} = \frac{\text{Prescaler division ratio (2)} \times \text{watchdog timer count (32768)}}{\text{BCLK}}$$

For example, when BCLK is 10MHz and the prescaler division ratio is set to 16, the watchdog timer cycle is approximately 52.4 ms.

The watchdog timer is initialized by writing to the watchdog timer start register (address 000E<sub>16</sub>) and when a watchdog timer interrupt request is generated. The prescaler is initialized only when the microcomputer is reset. After a reset is cancelled, the watchdog timer and prescaler are both stopped. The count is started by writing to the watchdog timer start register (address 000E<sub>16</sub>). In stop mode and wait mode the watchdog timer and prescaler are stopped. Counting is resumed from the held value when the modes are released. Figure 1.34 shows the block diagram of the watchdog timer. Figure 1.35 shows the watchdog timer-related registers.

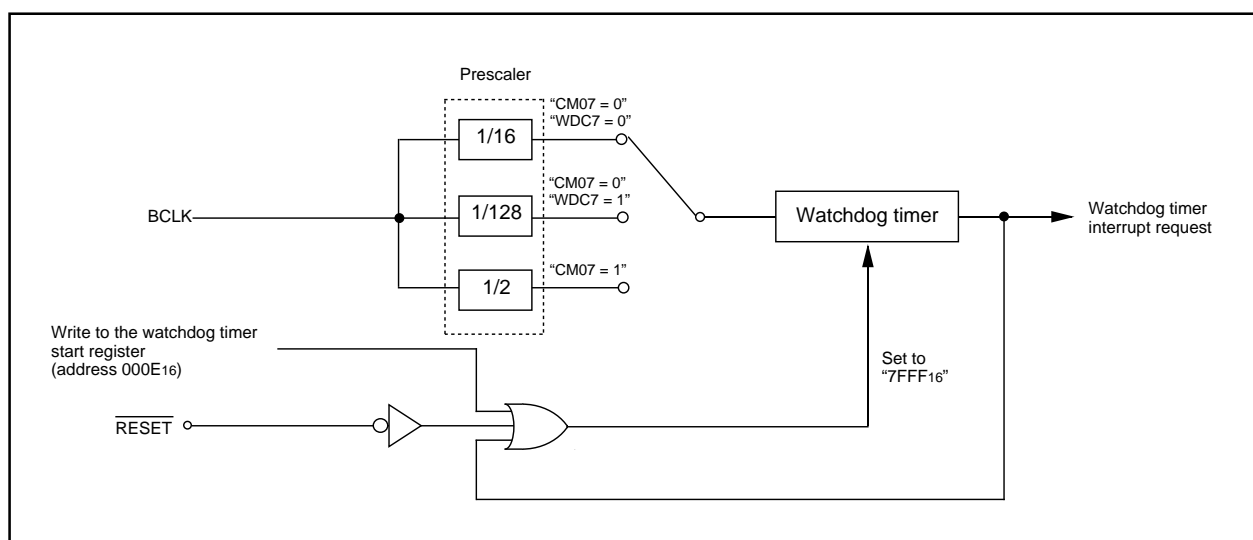


Figure 1.34. Block diagram of watchdog timer

## Watchdog Timer

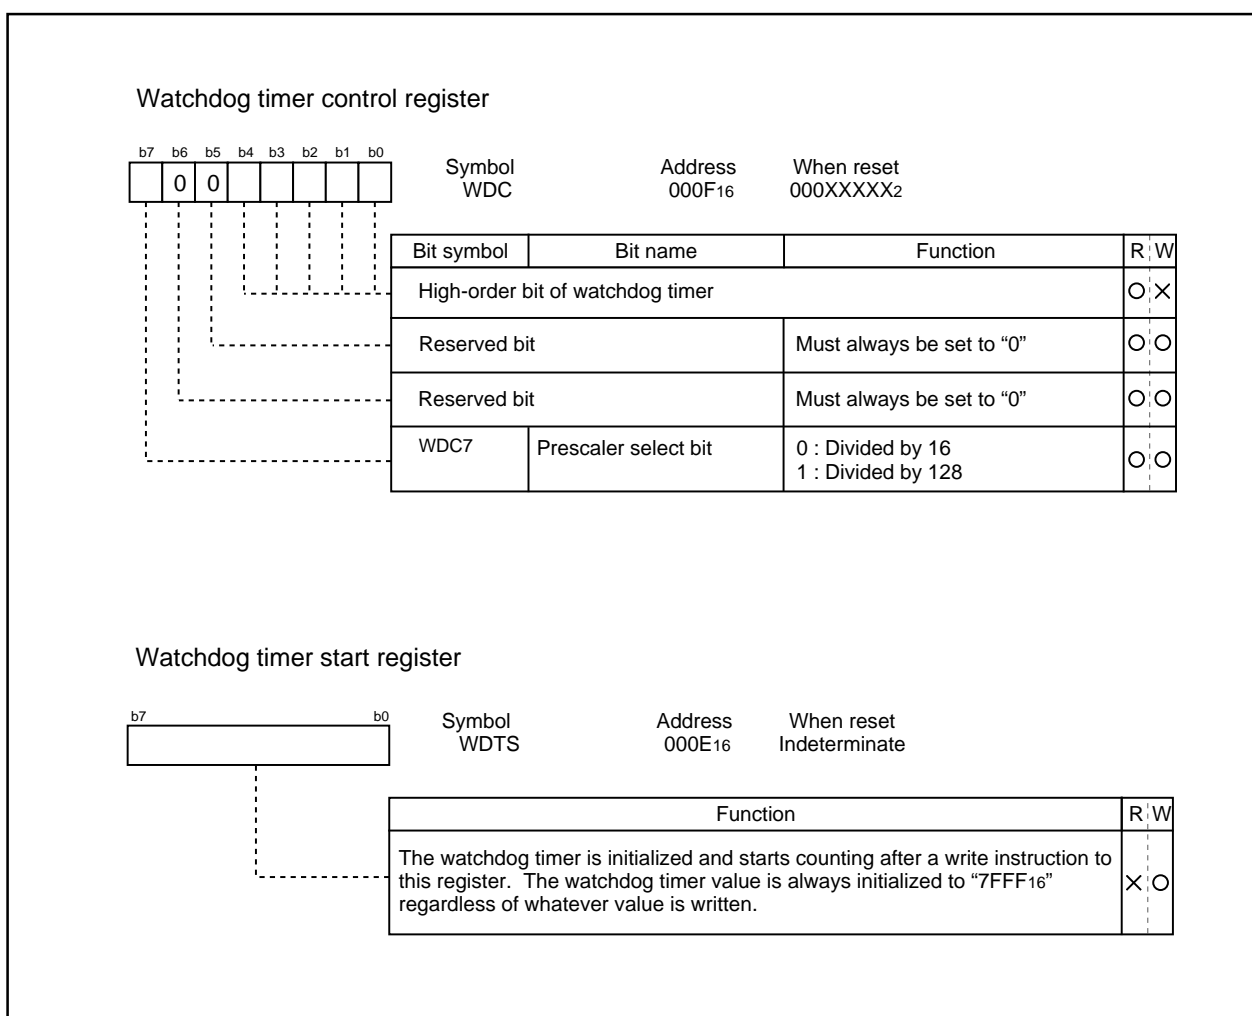


Figure 1.35. Watchdog timer control and start registers

## Timer

## Timer

There are six 16-bit timers. These timers can be classified by function into timer A (one), timers B (two) and timers X (three). All these timers function independently. Figure 1.36 show the block diagram of timers.

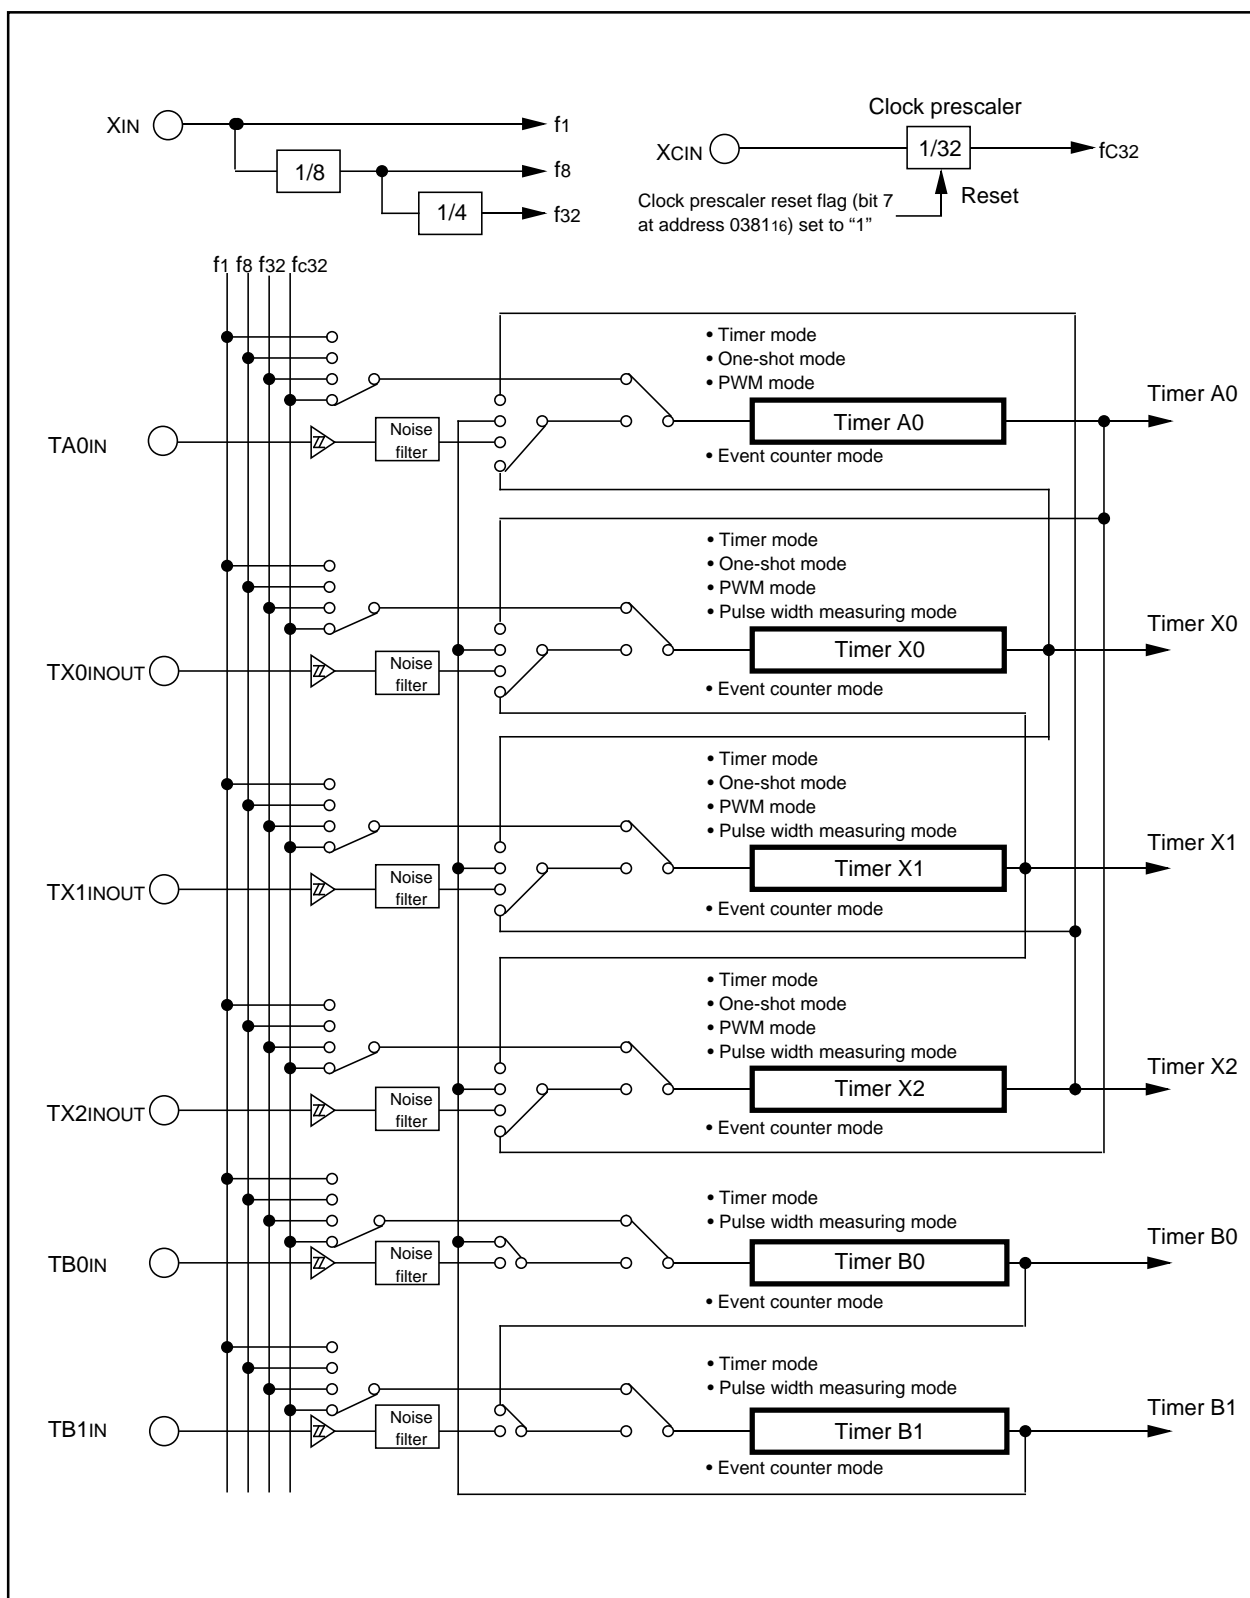


Figure 1.36. Timer block diagram

## Timer A

## Timer A

Figure 1.37 shows the block diagram of timer A. Figures 1.38 to 1.40 show the timer A-related registers. Use the timer A0 mode register bits 0 and 1 to choose the desired mode.

Timer A has the four operation modes listed as follows:

- Timer mode: The timer counts an internal count source.
- Event counter mode: The timer counts pulses from an external source or a timer over flow.
- One-shot timer mode: The timer stops counting when the count reaches "000016".
- Pulse width modulation (PWM) mode: The timer outputs pulses of a given width.

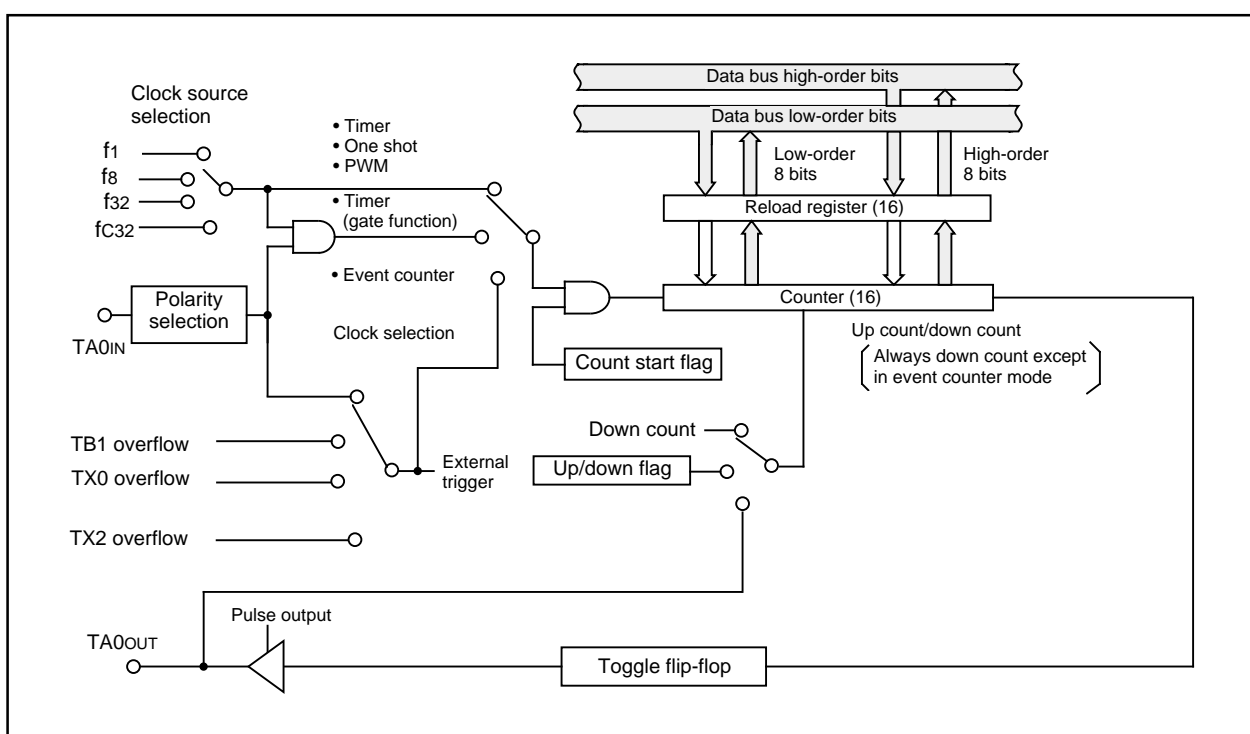


Figure 1.37. Block diagram of timer A

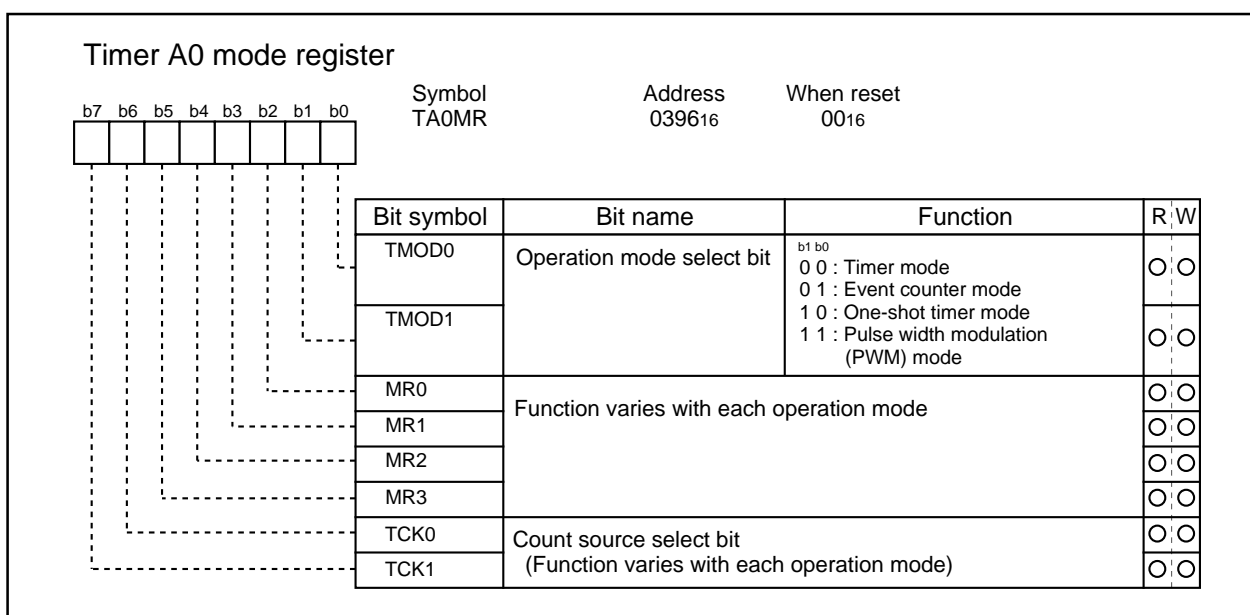


Figure 1.38. Timer A-related registers (1)



## Timer A

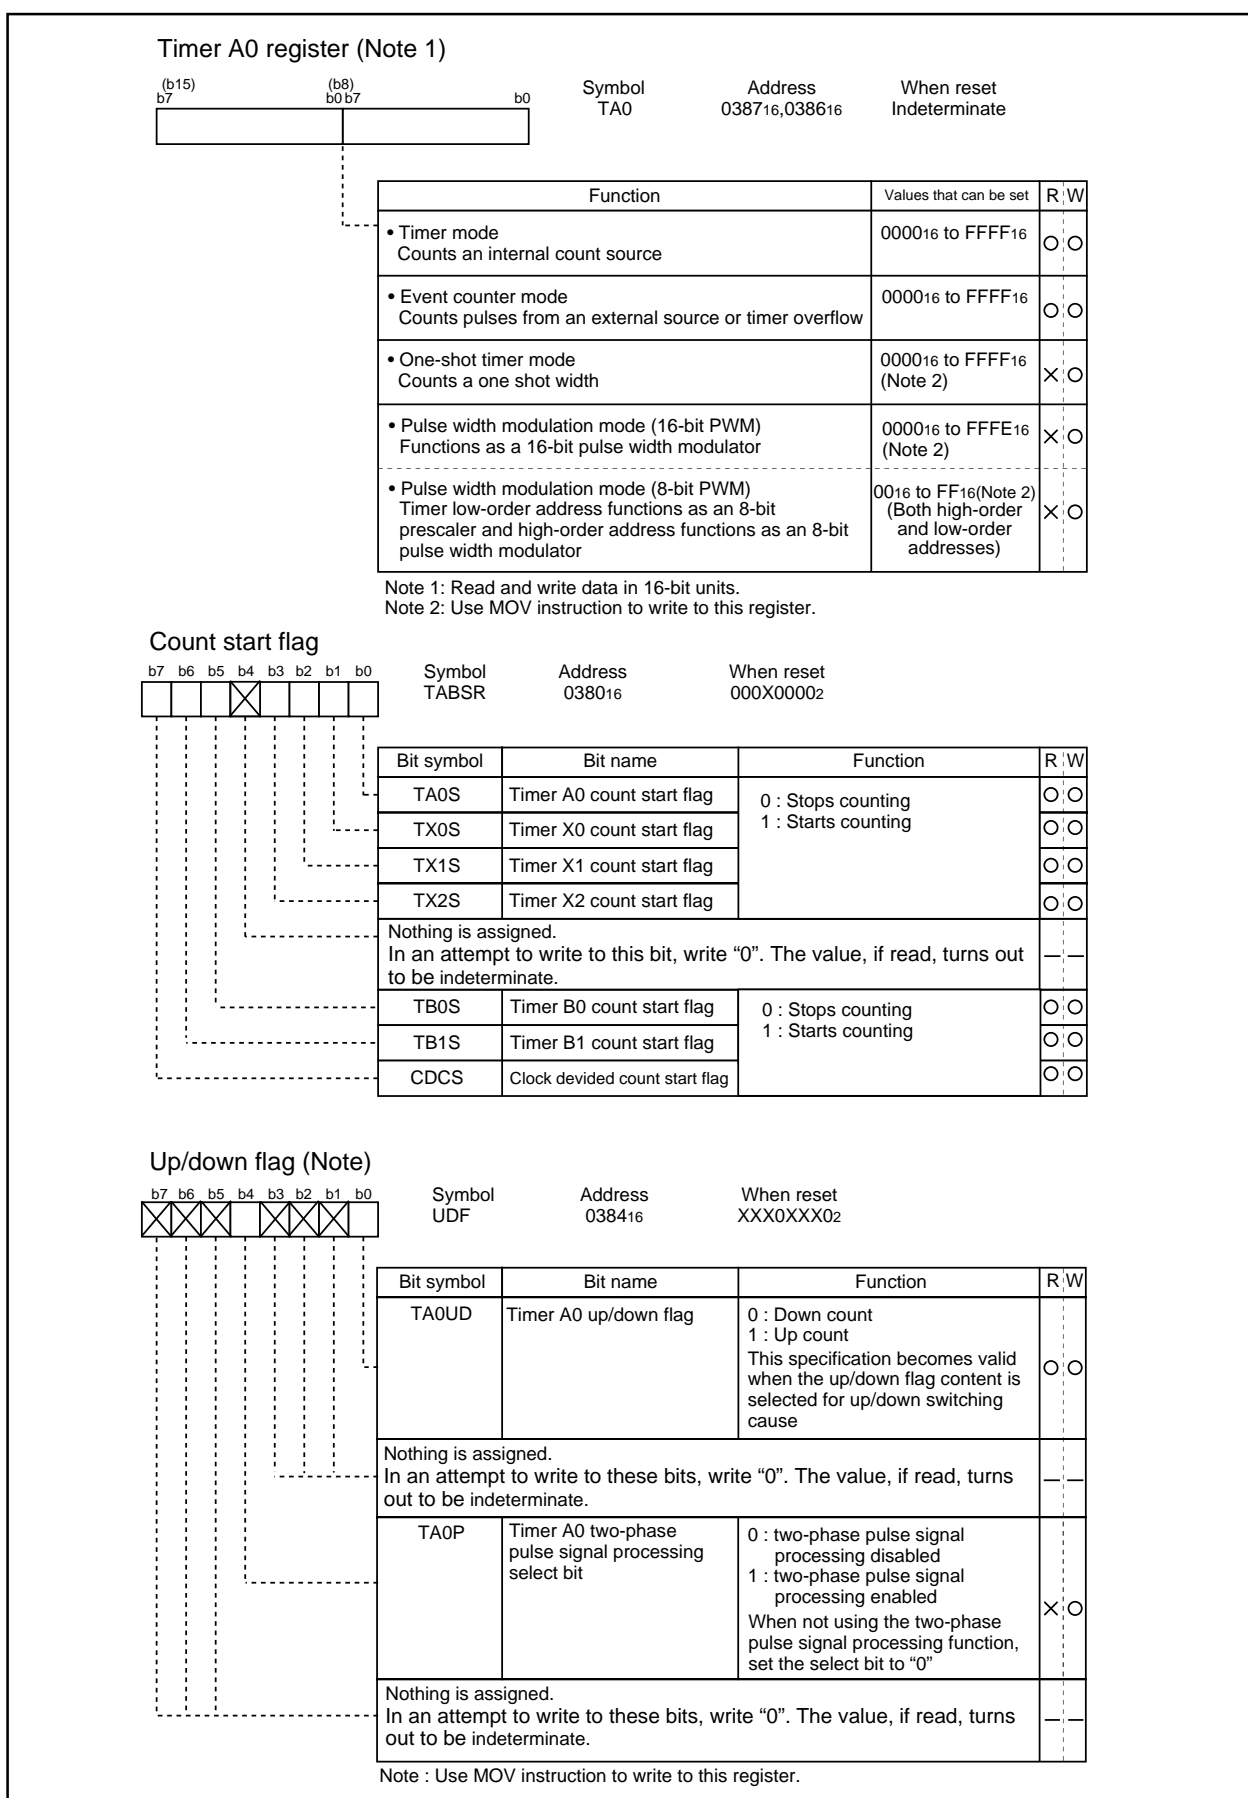


Figure 1.39. Timer A-related registers (2)

## Timer A

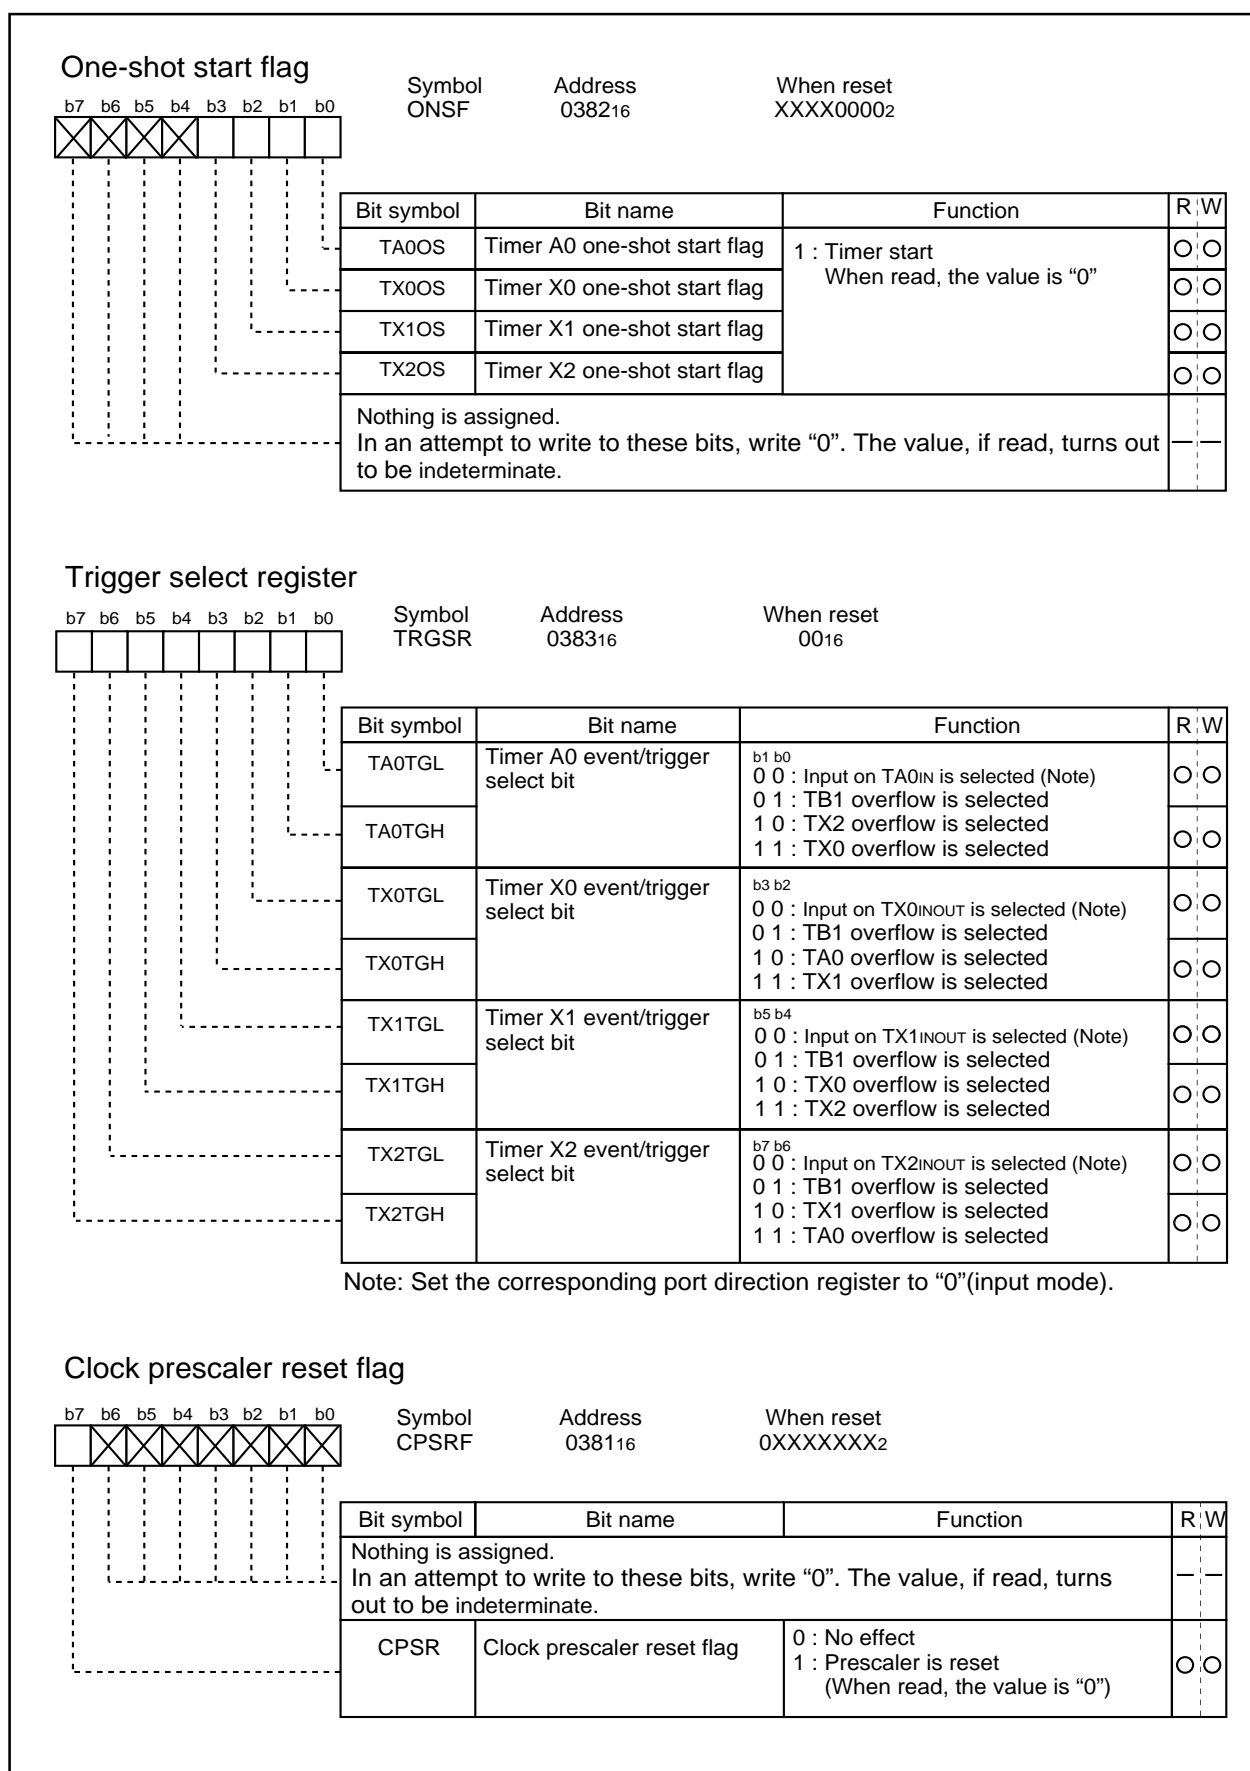


Figure 1.40. Timer A-related registers (3)


## Timer A

**(1) Timer mode**

In this mode, the timer counts an internally generated count source. (See Table 1.12.) Figure 1.41 shows the timer A0 mode register in timer mode.

**Table 1.12. Specifications of timer mode**

Item	Specification
Count source	f1, f8, f32, fc32
Count operation	<ul style="list-style-type: none"> <li>• Down count</li> <li>• When the timer underflows, it reloads the reload register contents before continuing counting</li> </ul>
Divide ratio	1/(n+1)    n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	When the timer underflows
TA0IN pin function	Programmable I/O port or gate input
TA0OUT pin function	Programmable I/O port or pulse output
Read from timer	Count value can be read out by reading timer A0 register
Write to timer	<ul style="list-style-type: none"> <li>• When counting stopped When a value is written to timer A0 register, it is written to both reload register and counter</li> <li>• When counting in progress When a value is written to timer A0 register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>
Select function	<ul style="list-style-type: none"> <li>• Gate function Counting can be started and stopped by the TA0IN pin's input signal</li> <li>• Pulse output function Each time the timer underflows, the TA0OUT pin's polarity is reversed</li> </ul>

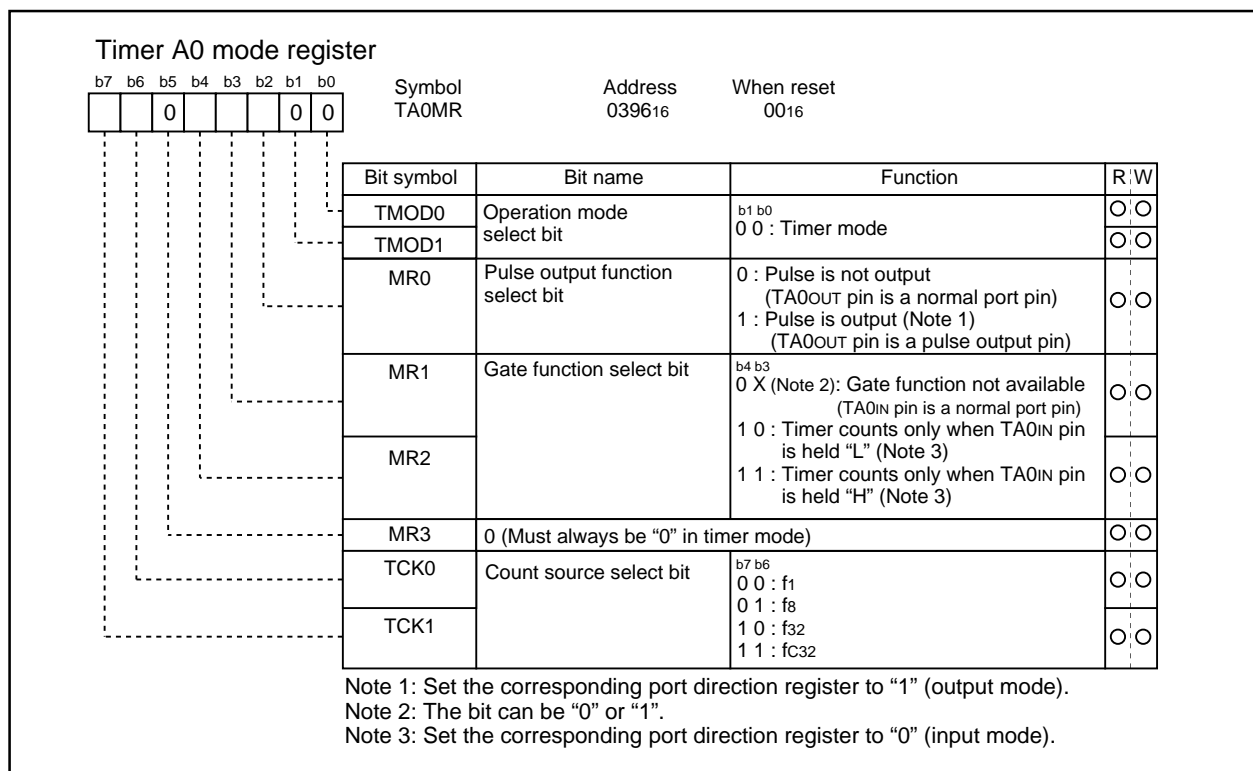**Figure 1.41. Timer A0 mode register in timer mode**

## Timer A

**(2) Event counter mode**

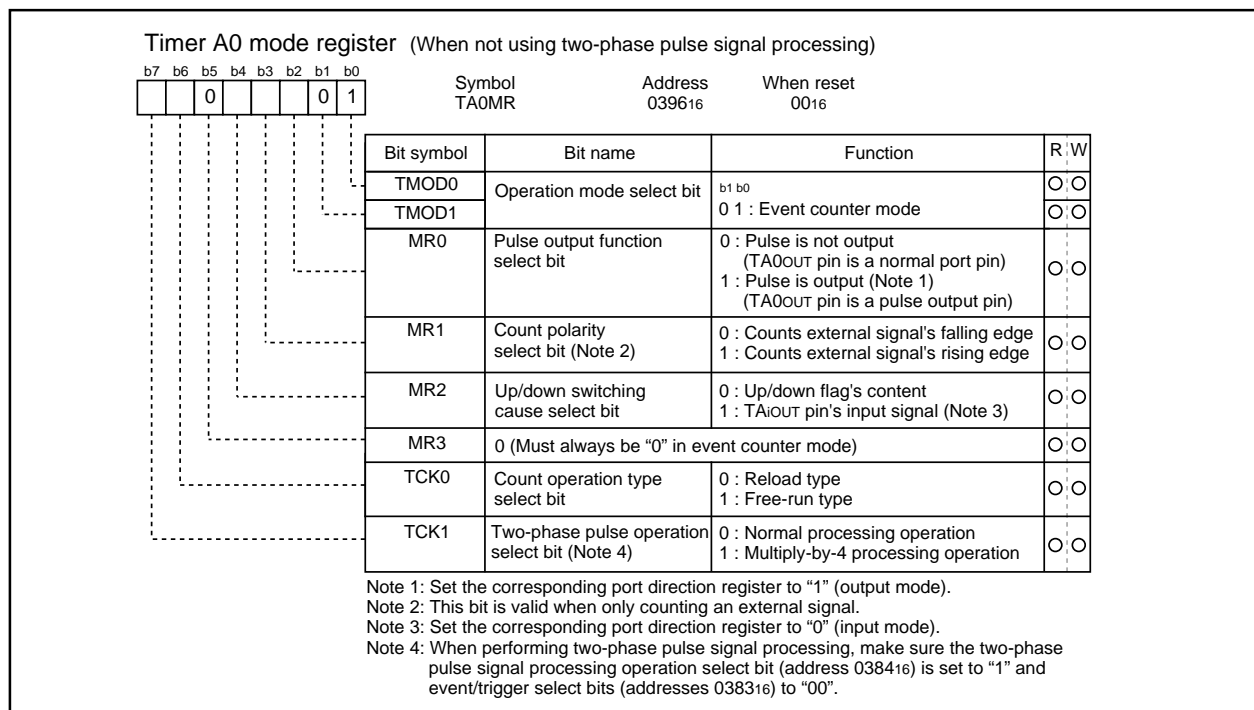
In this mode, the timer counts an external signal or an internal timer's overflow. Timer A0 can count a single-phase and a two-phase external signal. Table 1.13 lists timer specifications when counting a single-phase external signal. Figure 1.42 shows the timer A0 mode register in event counter mode.

Table 1.14 lists timer specifications when counting a two-phase external signal. Figure 1.43 shows the timer A0 mode register in event counter mode.

**Table 1.13. Timer specifications in event counter mode (when not processing two-phase pulse signal)**

Item	Specification
Count source	<ul style="list-style-type: none"> <li>External signals input to TA0IN pin (effective edge can be selected by software)</li> <li>TB1 overflow, TX0 overflow, TX2 overflow</li> </ul>
Count operation	<ul style="list-style-type: none"> <li>Up count or down count can be selected by external signal or software</li> <li>When the timer overflows or underflows, it reloads the reload register contents before continuing counting (Note)</li> </ul>
Divide ratio	$1/(FFFF_{16} - n + 1)$ for up count $1/(n + 1)$ for down count      n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer overflows or underflows
TA0IN pin function	Programmable I/O port or count source input
TA0OUT pin function	Programmable I/O port, pulse output, or up/down count select input
Read from timer	Count value can be read out by reading timer A0 register
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer A0 register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer A0 register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>
Select function	<ul style="list-style-type: none"> <li>Free-run count function Even when the timer overflows or underflows, the reload register content is not reloaded to it</li> <li>Pulse output function Each time the timer overflows or underflows, the TA0OUT pin's polarity is reversed</li> </ul>

Note: This does not apply when the free-run function is selected.


**Figure 1.42. Timer A0 mode register in event counter mode**

## Timer A

**Table 1.14. Timer specifications in event counter mode (when processing two-phase pulse signal)**

Item	Specification
Count source	<ul style="list-style-type: none"> <li>Two-phase pulse signals input to TA0IN or TA0OUT pin</li> </ul>
Count operation	<ul style="list-style-type: none"> <li>Up count or down count can be selected by two-phase pulse signal</li> <li>When the timer overflows or underflows, the reload register content is reloaded and the timer starts over again (Note)</li> </ul>
Divide ratio	<ul style="list-style-type: none"> <li><math>1 / (FFFF_{16} - n + 1)</math> for up count</li> <li><math>1 / (n + 1)</math> for down count</li> </ul> <p style="text-align: right;">n : Set value</p>
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	Timer overflows or underflows
TA0IN pin function	Two-phase pulse input
TA0OUT pin function	Two-phase pulse input
Read from timer	Count value can be read out by reading timer A0 register
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer A0 register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer A0 register, it is written to only reload register. (Transferred to counter at next reload time.)</li> </ul>
Select function	<ul style="list-style-type: none"> <li>Normal processing operation The timer counts up rising edges or counts down falling edges on the TA0IN pin when input signal on the TA0OUT pin is "H"</li> </ul> <div style="text-align: center;"> <p>TA0OUT</p> <p>TA0IN</p> <p>Up count   Up count   Up count   Down count   Down count   Down count</p> </div> <ul style="list-style-type: none"> <li>Multiply-by-4 processing operation If the phase relationship is such that the TA0IN pin goes "H" when the input signal on the TA0OUT pin is "H", the timer counts up rising and falling edges on the TA0OUT and TA0IN pins. If the phase relationship is such that the TA0IN pin goes "L" when the input signal on the TA0OUT pin is "H", the timer counts down rising and falling edges on the TA0OUT and TA0IN pins.</li> </ul> <div style="text-align: center;"> <p>TA0OUT</p> <p>TA0IN</p> <p>Count up all edges   Count down all edges</p> <p>Count up all edges   Count down all edges</p> </div>

Note: This does not apply when the free-run function is selected.




## Timer A

**(3) One-shot timer mode**

In this mode, the timer operates only once. (See Table 1.15.) When a trigger occurs, the timer starts up and continues operating for a given period. Figure 1.44 shows the timer A0 mode register in one-shot timer mode.

**Table 1.15. Timer specifications in one-shot timer mode**

Item	Specification
Count source	f1, f8, f32, fc32
Count operation	<ul style="list-style-type: none"> <li>The timer counts down</li> <li>When the count reaches 0000<sub>16</sub>, the timer stops counting after reloading a new count</li> <li>If a trigger occurs when counting, the timer reloads a new count and restarts counting</li> </ul>
Divide ratio	1/n    n : Set value
Count start condition	<ul style="list-style-type: none"> <li>An external trigger is input</li> <li>The timer overflows</li> <li>The one-shot start flag is set (= 1)</li> </ul>
Count stop condition	<ul style="list-style-type: none"> <li>A new count is reloaded after the count has reached 0000<sub>16</sub></li> <li>The count start flag is reset (= 0)</li> </ul>
Interrupt request generation timing	The count reaches 0000 <sub>16</sub>
TA0IN pin function	Programmable I/O port or trigger input
TA0OUT pin function	Programmable I/O port or pulse output
Read from timer	When timer A0 register is read, it indicates an indeterminate value
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer A0 register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer A0 register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

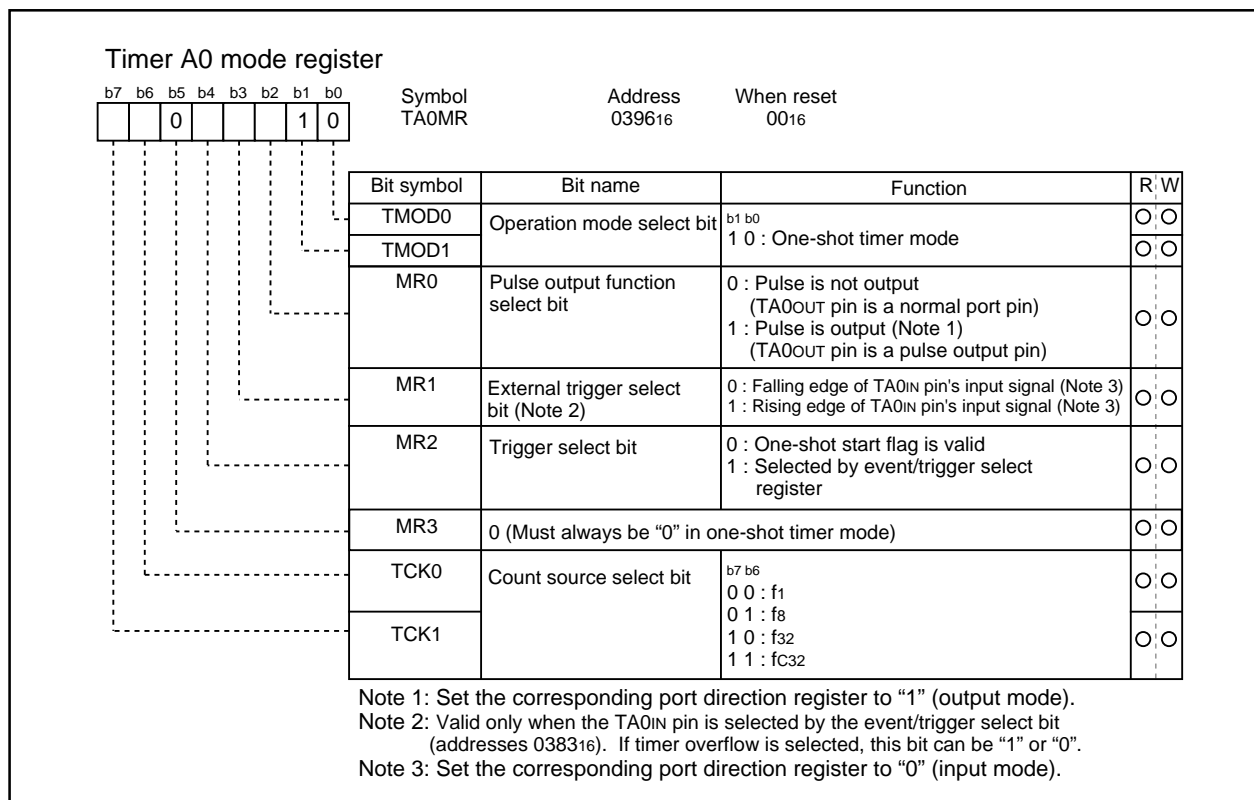**Figure 1.44. Timer A0 mode register in one-shot timer mode**

## Timer A


**(4) Pulse width modulation (PWM) mode**

In this mode, the timer outputs pulses of a given width in succession. (See Table 1.16.) In this mode, the counter functions as either a 16-bit pulse width modulator or an 8-bit pulse width modulator. Figure 1.45 shows the timer A0 mode register in pulse width modulation mode. Figure 1.46 shows the example of how a 16-bit pulse width modulator operates. Figure 1.47 shows the example of how an 8-bit pulse width modulator operates.

**Table 1.16. Timer specifications in pulse width modulation mode**

Item		Specification
Count source		f <sub>1</sub> , f <sub>8</sub> , f <sub>32</sub> , f <sub>c32</sub>
Count operation		<ul style="list-style-type: none"> <li>The timer counts down (operating as an 8-bit or a 16-bit pulse width modulator)</li> <li>The timer reloads a new count at a rising edge of PWM pulse and continues counting</li> <li>The timer is not affected by a trigger that occurs when counting</li> </ul>
16-bit PWM		<ul style="list-style-type: none"> <li>High level width <math>n / f_i</math> <math>n</math>: Set value</li> <li>Cycle time <math>(2^{16}-1) / f_i</math> fixed</li> </ul>
8-bit PWM		<ul style="list-style-type: none"> <li>High level width <math>n \times (m+1) / f_i</math> <math>n</math>: values set to timer A0 register's high-order address</li> <li>Cycle time <math>(2^8-1) \times (m+1) / f_i</math> <math>m</math>: values set to timer A0 register's low-order address</li> </ul>
Count start condition		<ul style="list-style-type: none"> <li>External trigger is input</li> <li>The timer overflows</li> <li>The count start flag is set (= 1)</li> </ul>
Count stop condition		The count start flag is reset (= 0)
Interrupt request generation timing	8 bits PWM	<ul style="list-style-type: none"> <li>Set value of "H" level width is except FF<sub>16</sub>, 00<sub>16</sub>: PWM pulse goes "L"</li> <li>Set value of "H" level width is FF<sub>16</sub>, 00<sub>16</sub>: Timing that count value goes to 01<sub>16</sub></li> </ul>
	16 bits PWM	<ul style="list-style-type: none"> <li>Set value of "H" level width is except FFFF<sub>16</sub>, 0000<sub>16</sub>: PWM pulse goes "L"</li> <li>Set value of "H" level width is FFFF<sub>16</sub>, 0000<sub>16</sub>: Timing that count value goes to 0001<sub>16</sub></li> </ul>
TA0IN pin function		Programmable I/O port or trigger input
TA0OUT pin function		Pulse output
Read from timer		When timer A0 register is read, it indicates an indeterminate value
Write to timer		<ul style="list-style-type: none"> <li>When counting stopped: When a value is written to timer A0 register, it is written to both reload register and counter</li> <li>When counting in progress: When a value is written to timer A0 register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

Note: When set value of "H" level width is 00<sub>16</sub> or 0000<sub>16</sub>, pulse outputs "L" level and inversion value, FF<sub>16</sub> or FFFF<sub>16</sub> is set to timer.

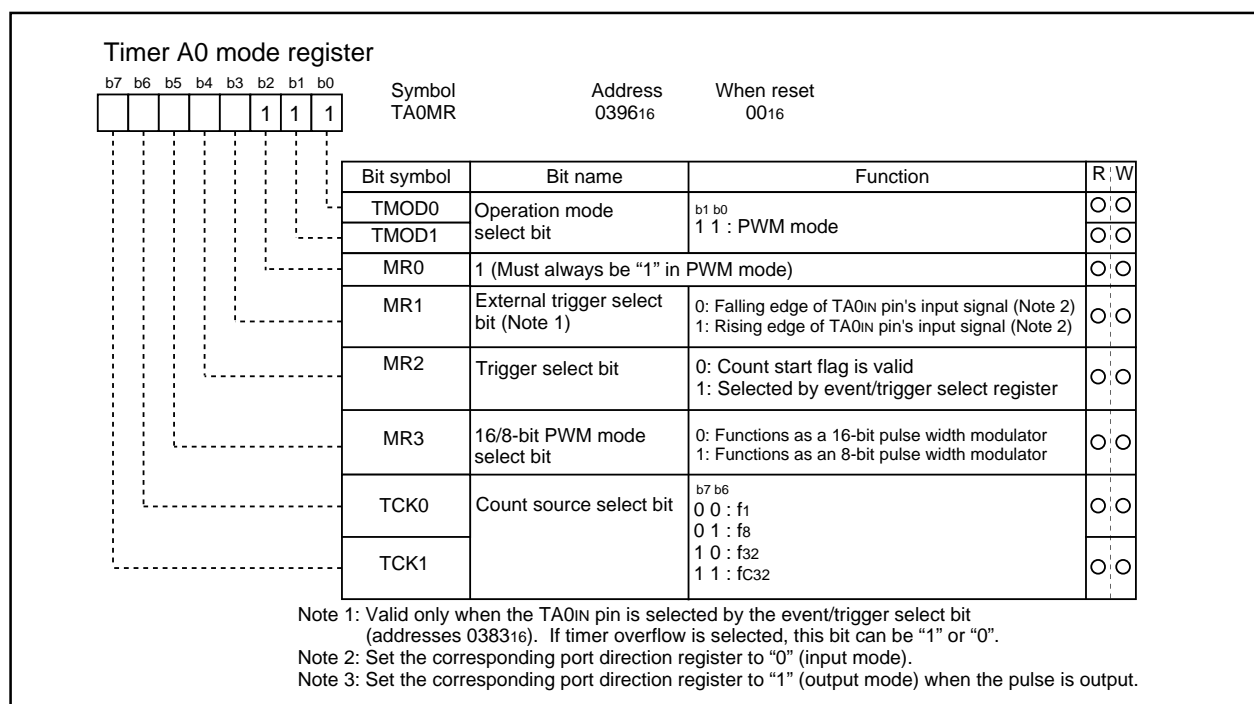**Figure 1.45. Timer A0 mode register in pulse width modulation mode**



## Timer A

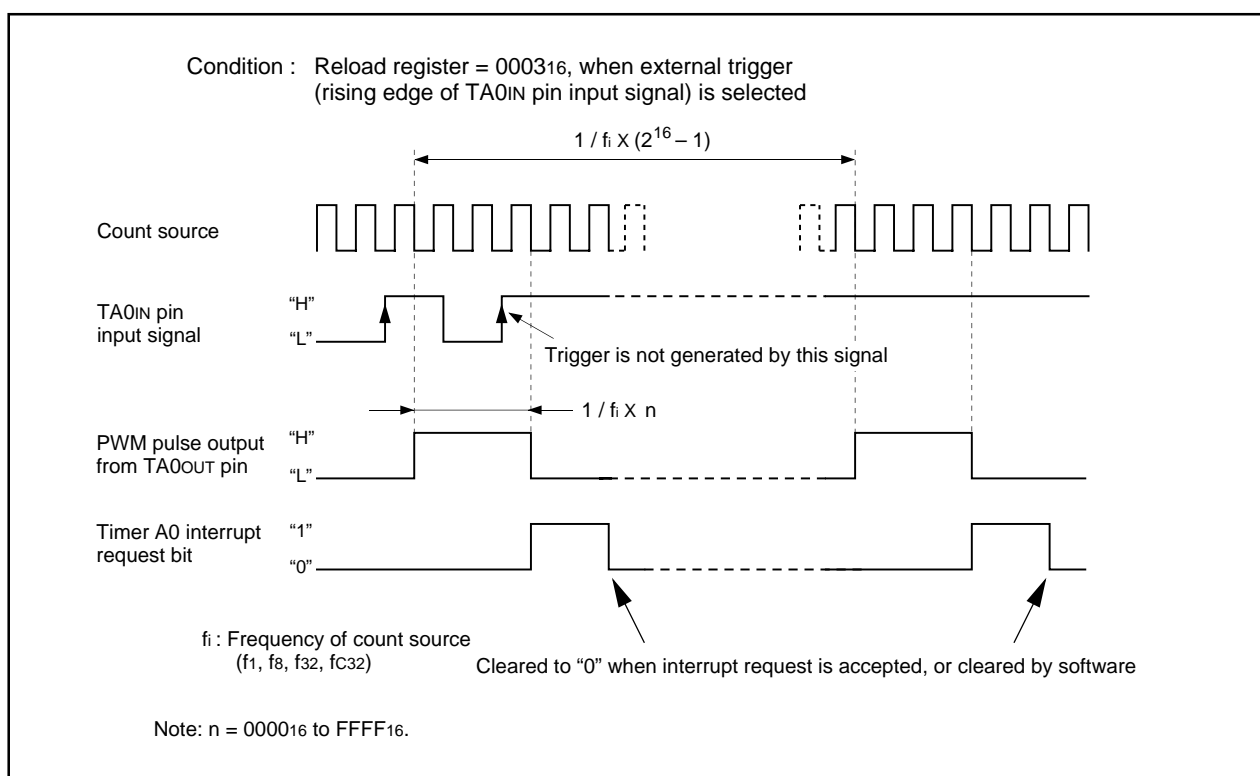


Figure 1.46. Example of how a 16-bit pulse width modulator operates


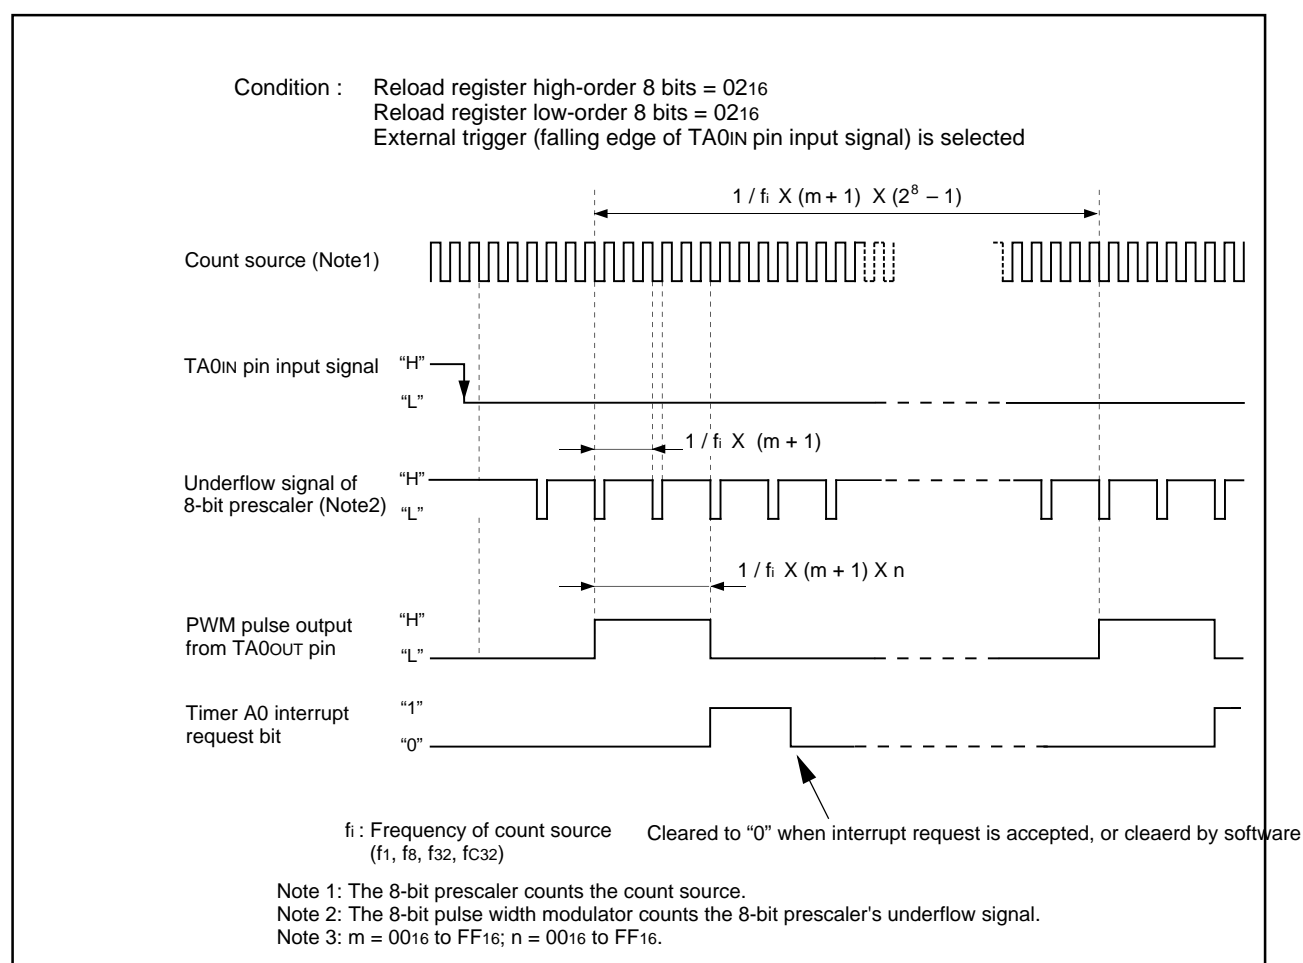


Figure 1.47. Example of how an 8-bit pulse width modulator operates

Figure 1.48 shows the block diagram of timer B. Figures 1.49 and 1.50 show the timer B-related registers. Use the timer Bi mode register (i = 0, 1) bits 0 and 1 to choose the desired mode.

- Timer mode : The timer counts an internal count source.
- Event counter mode : The timer counts pulses from an external source or a timer overflow.
- Pulse period/pulse width measuring mode : The timer measures an external signal's pulse period or pulse width.

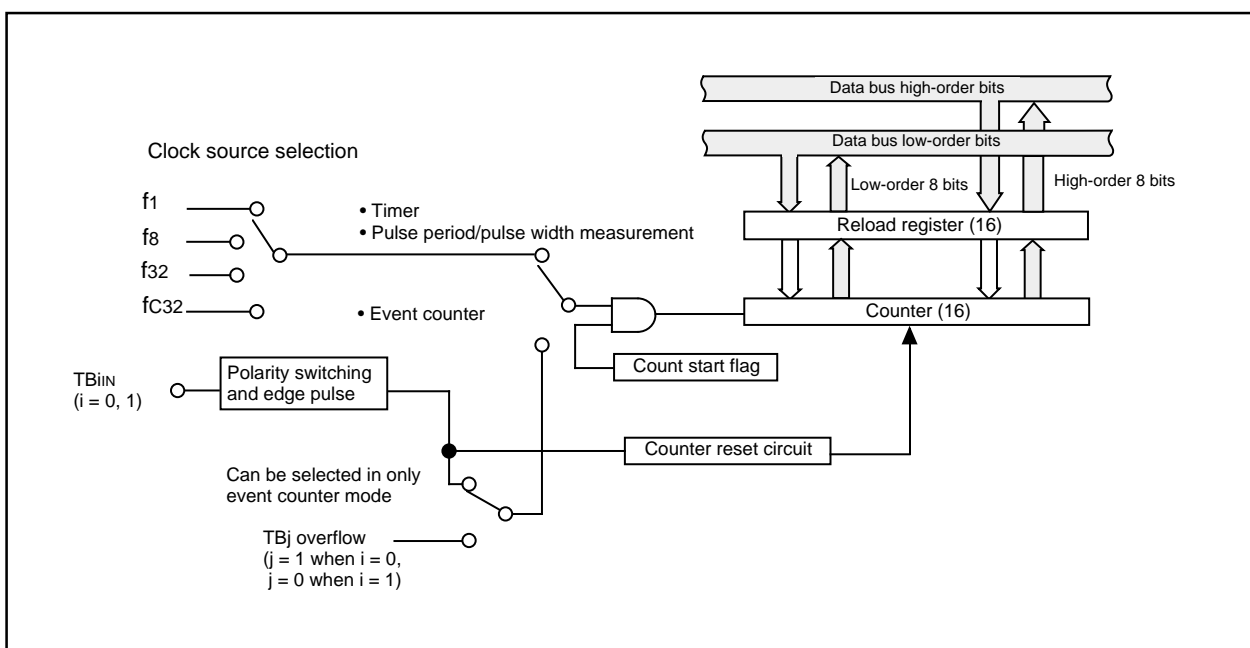

### Timer Bi mode register

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
								TBiMR(i = 0, 1)	039B <sub>16</sub> , 039C <sub>16</sub>	00XX0000 <sub>2</sub>

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b1 b0 0 0 : Timer mode 0 1 : Event counter mode 1 0 : Pulse period/pulse width measurement mode 1 1 : Inhibited	○	○
TMOD1			○	○
MR0	Function varies with each operation mode		○	○
MR1			○	○
MR2			○	○
			(Note 1) ×	(Note 2) ×
MR3			○	×
TCK0	Count source select bit (Function varies with each operation mode)		○	○
TCK1			○	○

Note 1: Timer B0.  
Note 2: Timer B1.

Figure 1.49. Timer B-related registers (1)

## Timer B

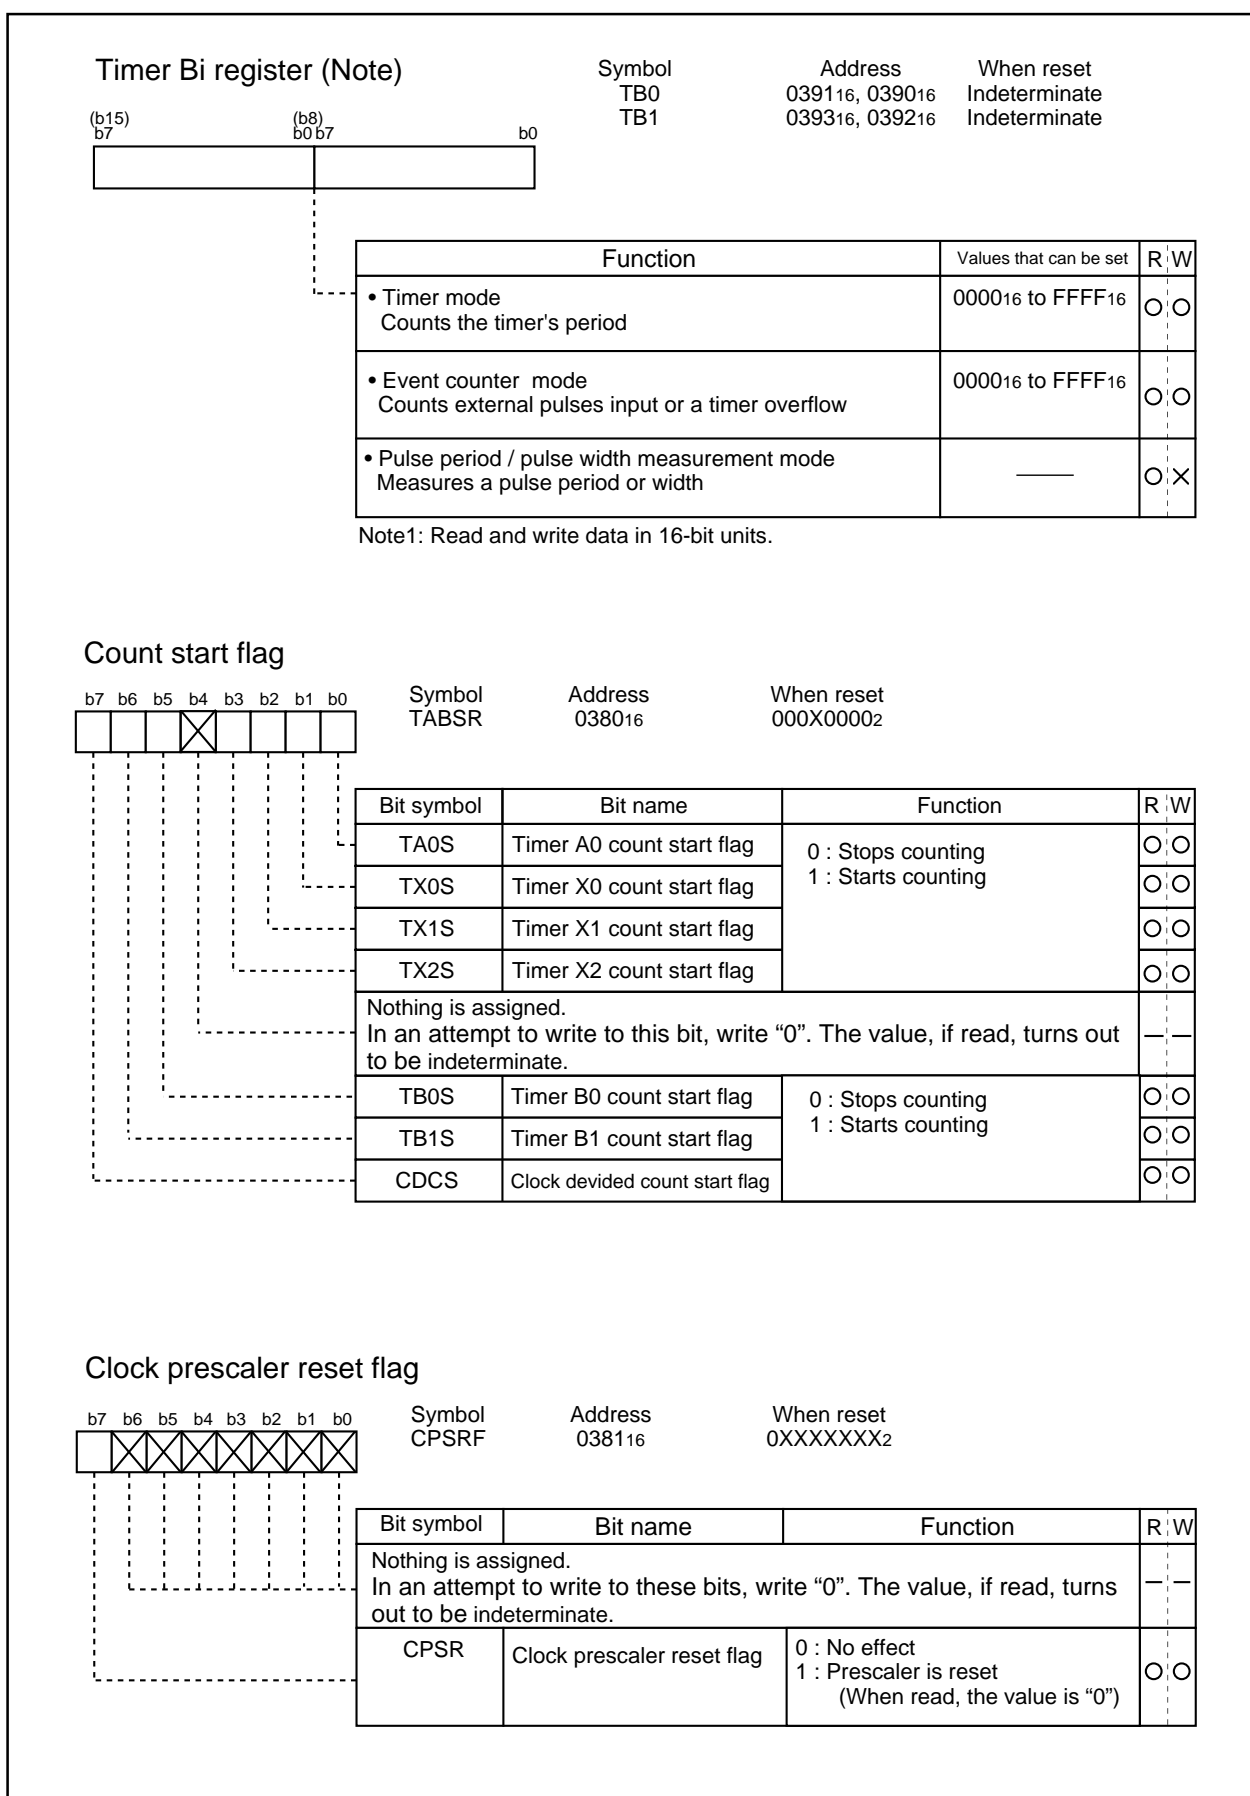


Figure 1.50. Timer B-related registers (2)


## Timer B

**(1) Timer mode**

In this mode, the timer counts an internally generated count source. (See Table 1.17.) Figure 1.51 shows the timer Bi mode register in timer mode.

**Table 1.17. Timer specifications in timer mode**

Item	Specification
Count source	f1, f8, f32, fC32
Count operation	<ul style="list-style-type: none"> <li>Counts down</li> <li>When the timer underflows, it reloads the reload register contents before continuing counting</li> </ul>
Divide ratio	1/(n+1)    n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer underflows
TBiIN pin function	Programmable I/O port
Read from timer	Count value is read out by reading timer Bi register
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer Bi register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer Bi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

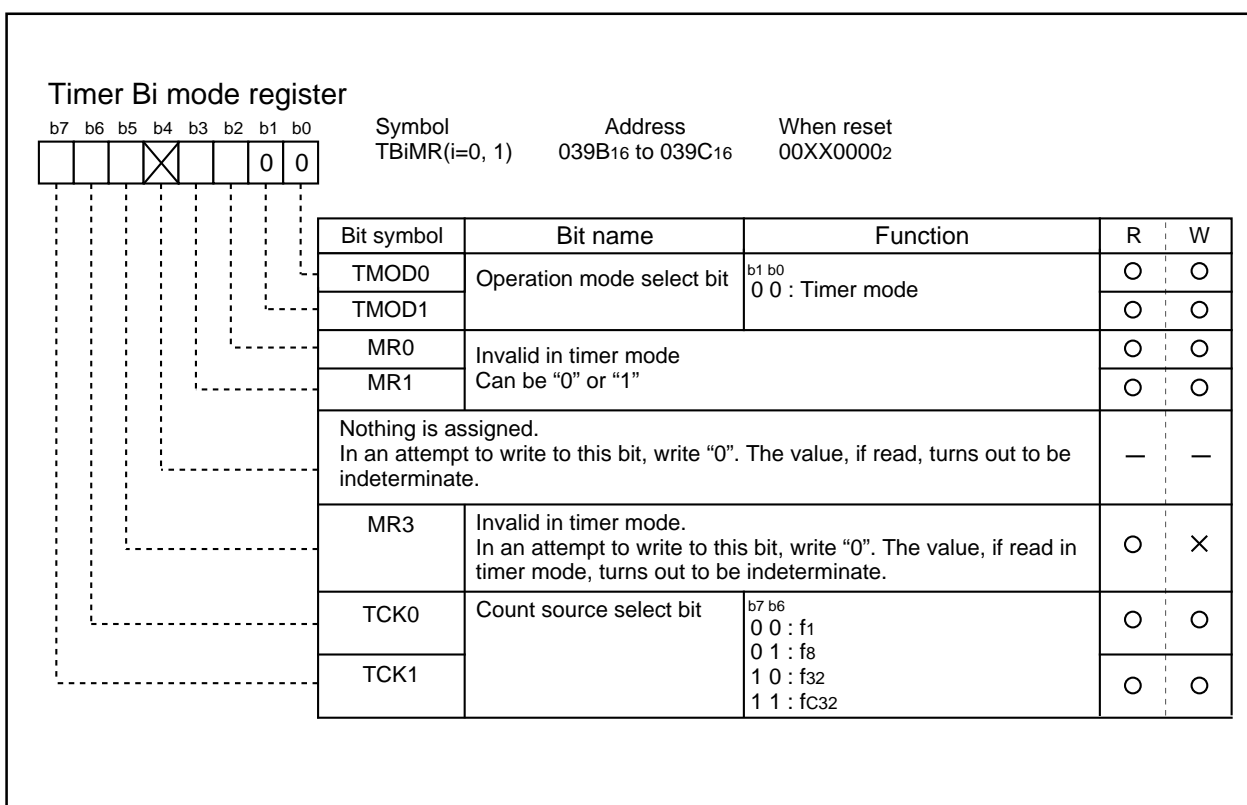**Figure 1.51. Timer Bi mode register in timer mode**


## Timer B

**(2) Event counter mode**

In this mode, the timer counts an external signal or an internal timer's overflow. (See Table 1.18.) Figure 1.52 shows the timer Bi mode register in event counter mode.

**Table 1.18. Timer specifications in event counter mode**

Item	Specification
Count source	<ul style="list-style-type: none"> <li>External signals input to TBiIn pin</li> <li>Effective edge of count source can be a rising edge, a falling edge, or falling and rising edges as selected by software</li> </ul>
Count operation	<ul style="list-style-type: none"> <li>Counts down</li> <li>When the timer underflows, it reloads the reload register contents before continuing counting</li> </ul>
Divide ratio	$1/(n+1)$ $n$ : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer underflows
TBiIn pin function	Count source input
Read from timer	Count value can be read out by reading timer Bi register
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer Bi register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer Bi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

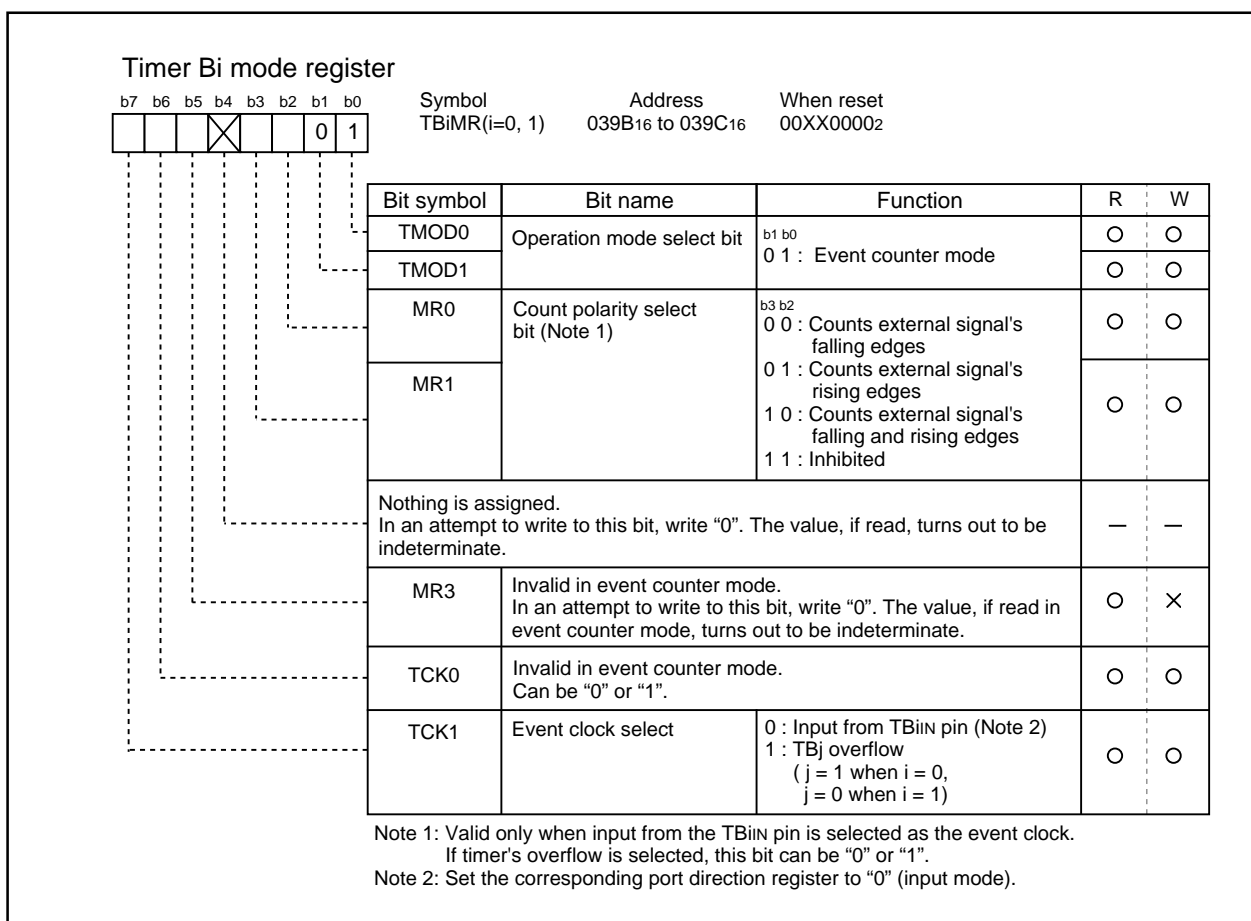**Figure 1.52. Timer Bi mode register in event counter mode**

## Timer B

**(3) Pulse period/pulse width measurement mode**

In this mode, the timer measures the pulse period or pulse width of an external signal. (See Table 1.19.)

Figure 1.53 shows the timer Bi mode register in pulse period/pulse width measurement mode. Figure

1.54 shows the operation timing when measuring a pulse period. Figure 1.55 shows the operation timing


when measuring a pulse width.

**Table 1.19. Timer specifications in pulse period/pulse width measurement mode**

Item	Specification
Count source	f1, f8, f32, fc32
Count operation	<ul style="list-style-type: none"> <li>• Up count</li> <li>• Counter value "000016" is transferred to reload register at measurement pulse's effective edge and the timer continues counting</li> </ul>
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	<ul style="list-style-type: none"> <li>• When measurement pulse's effective edge is input (Note 1)</li> <li>• When an overflow occurs. (Simultaneously, the timer Bi overflow flag changes to "1". The timer Bi overflow flag changes to "0" when the count start flag is "1" and a value is written to the timer Bi mode register.)</li> </ul>
TBiIN pin function	Measurement pulse input
Read from timer	When timer Bi register is read, it indicates the reload register's content (measurement result) (Note 2)
Write to timer	Cannot be written to

Note 1: An interrupt request is not generated when the first effective edge is input after the timer has started counting.

Note 2: The value read out from the timer Bi register is indeterminate until the second effective edge is input after the timer.

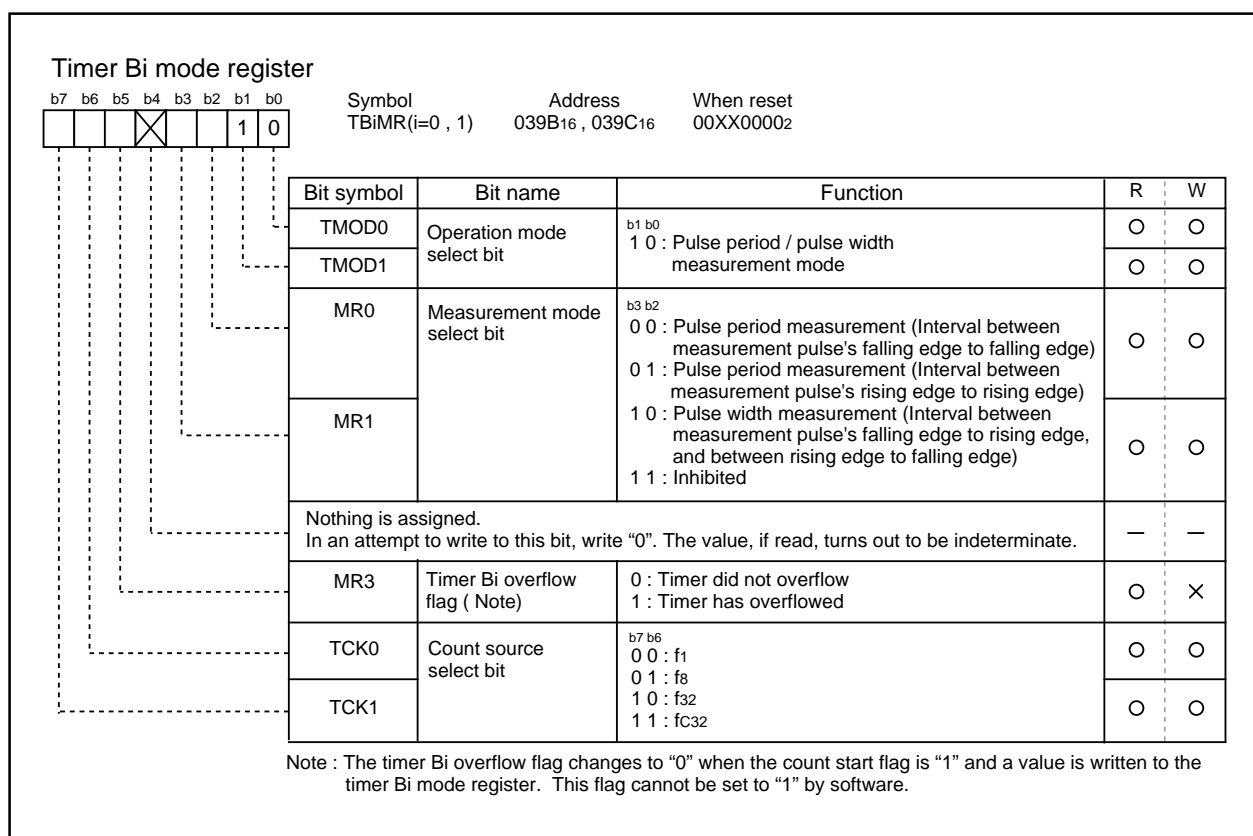

**Figure 1.53. Timer Bi mode register in pulse period/pulse width measurement mode**

## Timer B

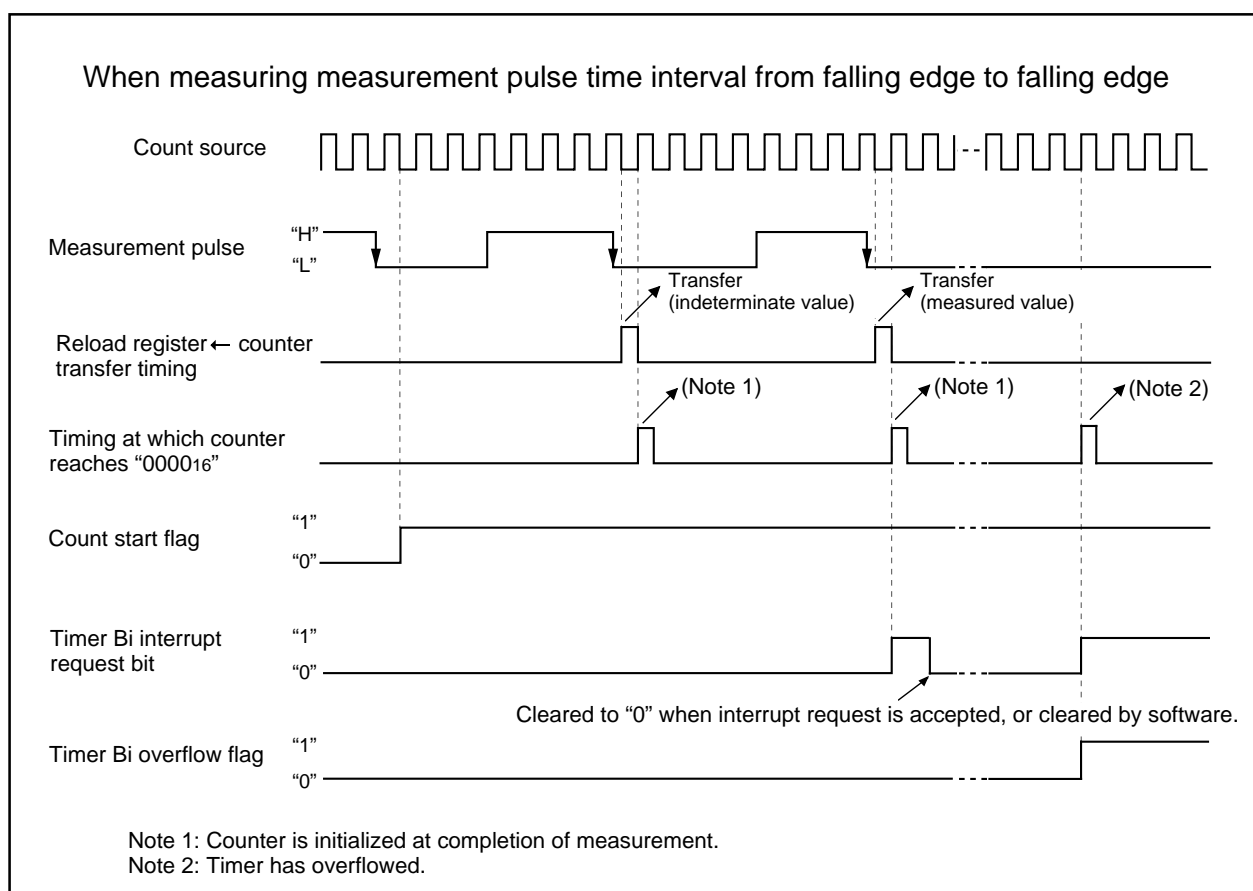


Figure 1.54. Operation timing when measuring a pulse period

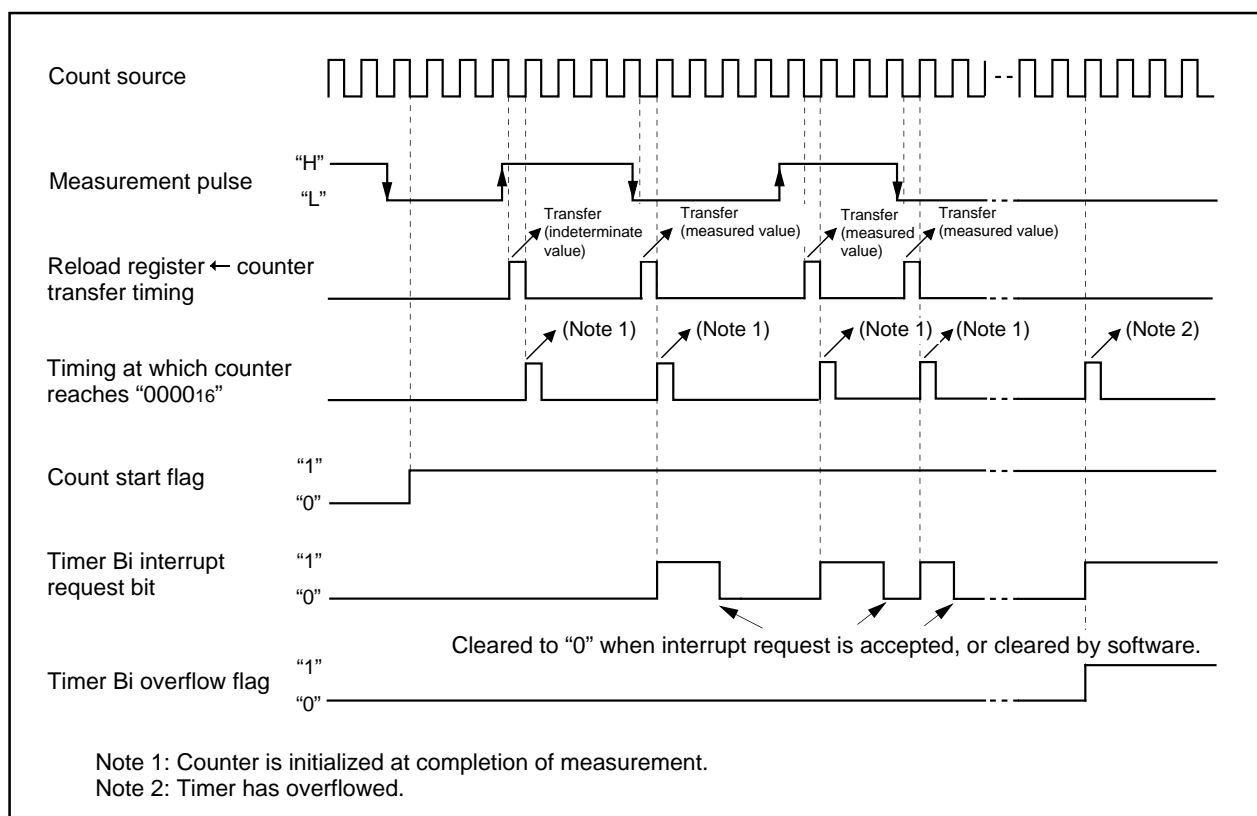


Figure 1.55. Operation timing when measuring a pulse width

## Timer X

## Timer X

Figure 1.56 shows the block diagram of timer X. Figures 1.57 to 1.59 show the timer X-related registers. Use the timer Xi mode register bits 0 and 1 to choose the desired mode.

Timer X has the five operation modes listed as follows:

- Timer mode : The timer counts an internal count source.
- Event counter mode : The timer counts pulses from an external source or a timer overflow.
- One-shot timer mode : The timer stops counting when the count reaches "0000<sub>16</sub>".
- Pulse period/pulse width measuring mode : The timer measures an external signal's pulse period or pulse width.
- Pulse width modulation (PWM) mode : The timer outputs pulses of a given width.

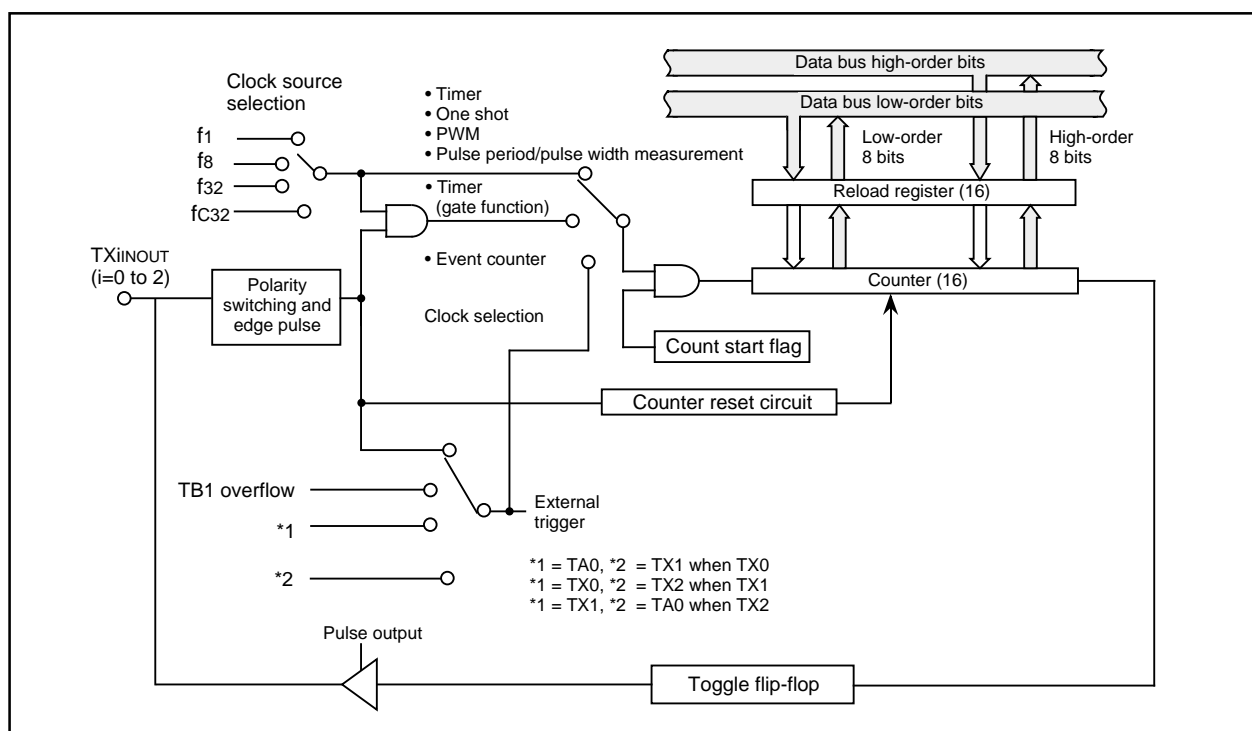


Figure 1.56. Block diagram of timer X


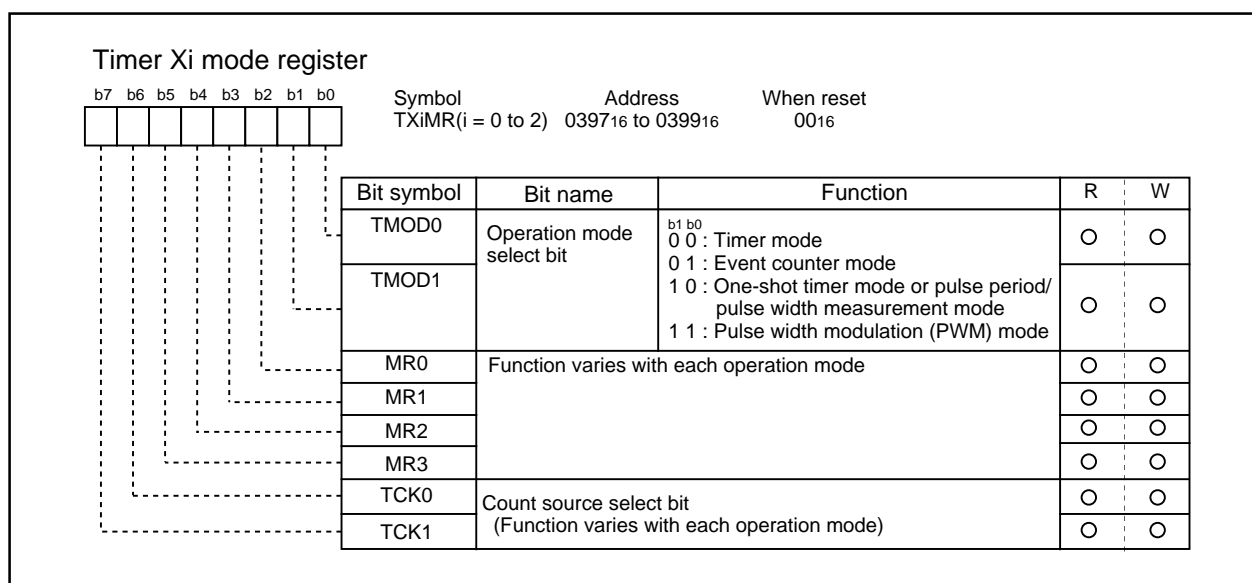


Figure 1.57. Timer X-related registers (1)



## Timer X

## Timer Xi register (Note 1)




Symbol	Address	When reset
TX0	0389 <sub>16</sub> , 0388 <sub>16</sub>	Indeterminate
TX1	038B <sub>16</sub> , 038A <sub>16</sub>	Indeterminate
TX2	038D <sub>16</sub> , 038C <sub>16</sub>	Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts an internal count source	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• Event counter mode Counts pulses from an external source or timer overflow	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• One-shot timer mode Counts a one shot width	0000 <sub>16</sub> to FFFF <sub>16</sub> (Note 2)	×	○
• Pulse period / pulse width measurement mode Measures a pulse period or width	—	○	×
• Pulse width modulation mode (16-bit PWM) Functions as a 16-bit pulse width modulator	0000 <sub>16</sub> to FFFE <sub>16</sub> (Note 2)	×	○
• Pulse width modulation mode (8-bit PWM) Timer low-order address functions as an 8-bit prescaler and high-order address functions as an 8-bit pulse width modulator	00 <sub>16</sub> to FF <sub>16</sub> (Note 2) (High-order addresses) 00 <sub>16</sub> to FF <sub>16</sub> (Note 2) (Low-order addresses)	×	○

Note 1: Read and write data in 16-bit units.

Note 2: Use MOV instruction to write to this register.

## Count start flag



Symbol	Address	When reset
TABSR	0380 <sub>16</sub>	000X0000 <sub>2</sub>

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TX0S	Timer X0 count start flag		○	○
TX1S	Timer X1 count start flag		○	○
TX2S	Timer X2 count start flag		○	○
Nothing is assigned. In an attempt to write to this bit, write “0”. The value, if read, turns out to be indeterminate.			—	—
TB0S	Timer B0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TB1S	Timer B1 count start flag		○	○
CDCS	Clock divided count start flag		○	○

Figure 1.58. Timer X-related registers (2)

## Timer X

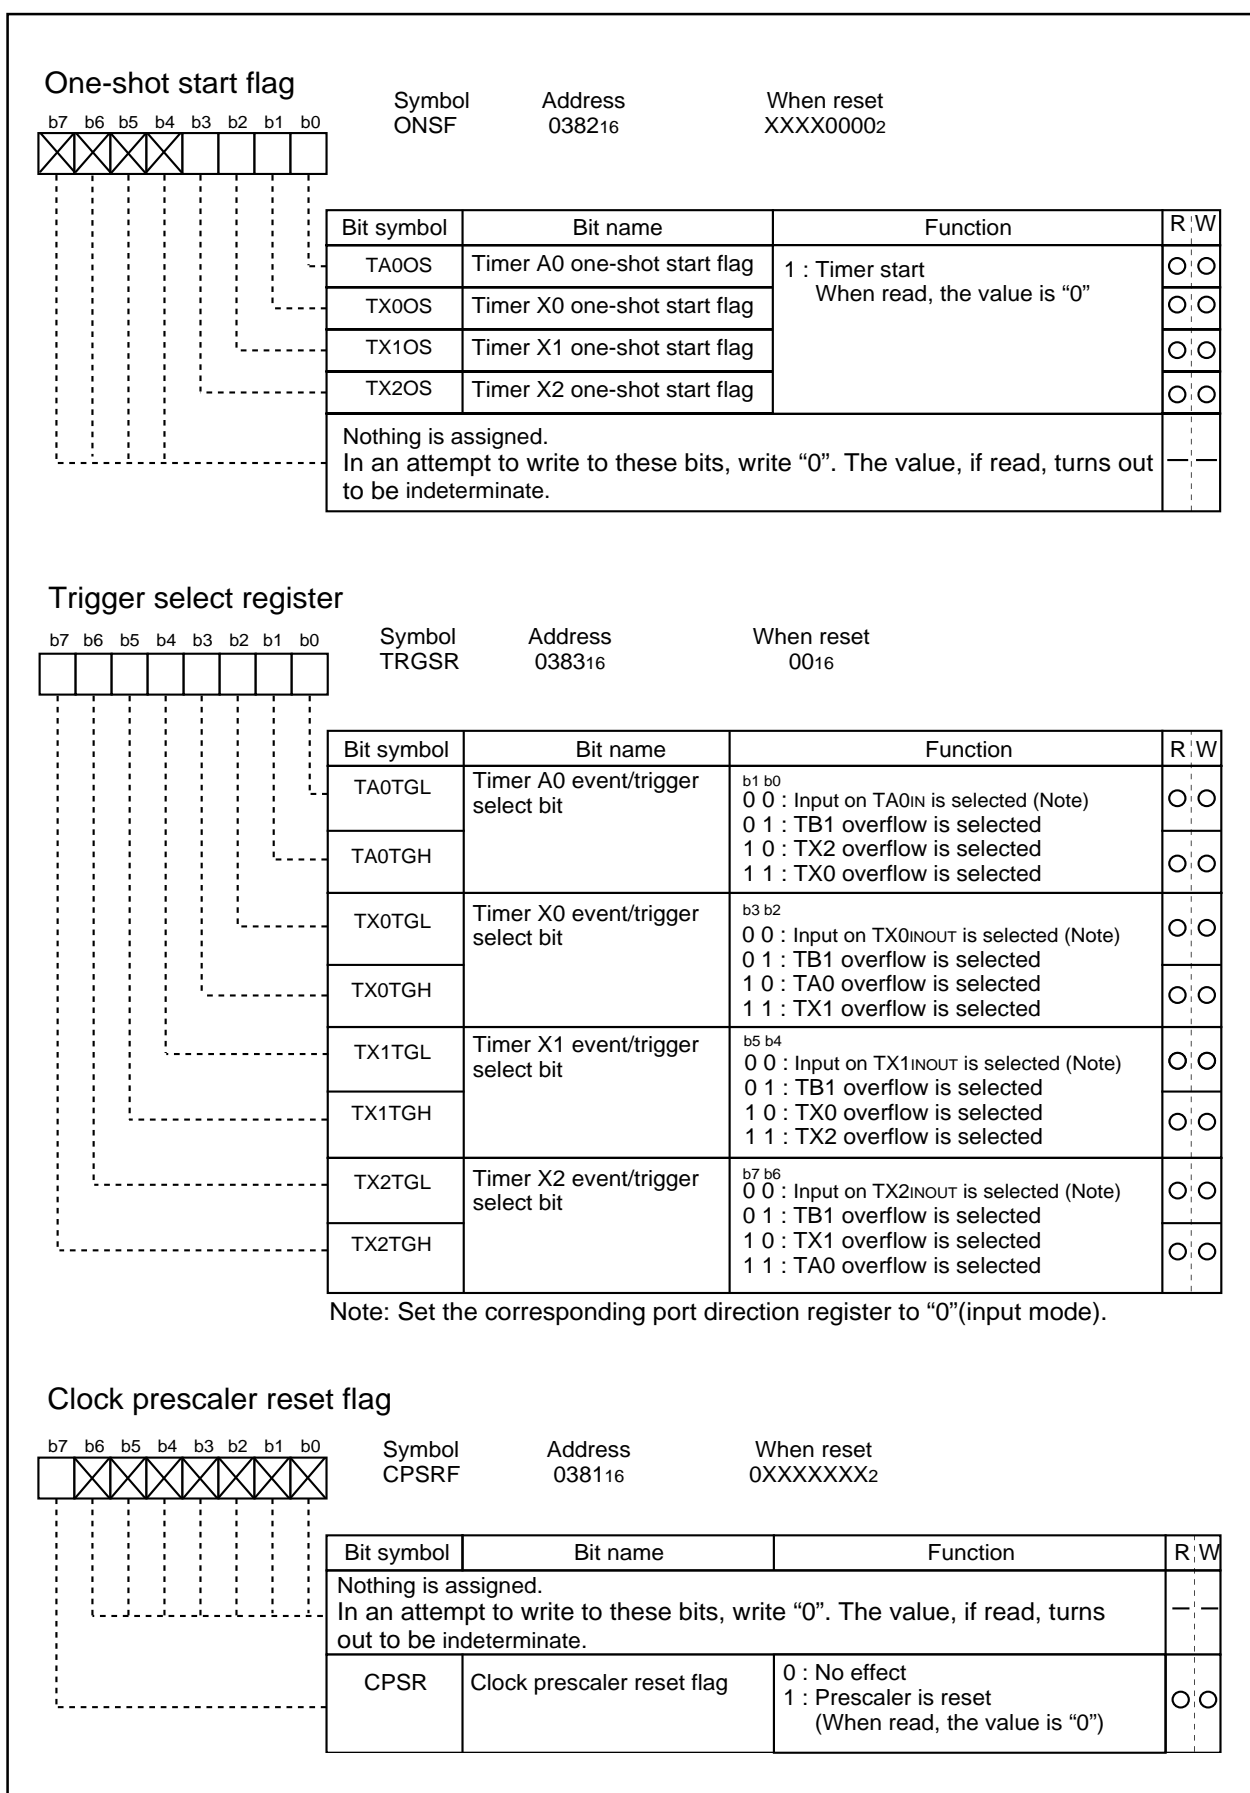


Figure 1.59. Timer X-related registers (3)

## Timer X

**(1) Timer mode**

In this mode, the timer counts an internally generated count source. (See Table 1.20.) Figure 1.60 shows the timer Xi mode register in timer mode.

**Table 1.20. Specifications of timer mode**

Item	Specification
Count source	f <sub>1</sub> , f <sub>8</sub> , f <sub>32</sub> , f <sub>C32</sub>
Count operation	<ul style="list-style-type: none"> <li>• Down count</li> <li>• When the timer underflows, it reloads the reload register contents before continuing counting</li> </ul>
Divide ratio	1/(n+1)    n : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	When the timer underflows
TXiINOUT pin function	Programmable I/O port, gate input or pulse output
Read from timer	Count value can be read out by reading timer Xi register
Write to timer	<ul style="list-style-type: none"> <li>• When counting stopped When a value is written to timer Xi register, it is written to both reload register and counter</li> <li>• When counting in progress When a value is written to timer Xi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>
Select function	<ul style="list-style-type: none"> <li>• Gate function Counting can be started and stopped by the TXiINOUT pin's input signal</li> <li>• Pulse output function Each time the timer underflows, the TXiINOUT pin's polarity is reversed</li> </ul>

**Timer Xi mode register**

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
		0				0	0	TXiMR(i = 0 to 2)	0397 <sub>16</sub> to 0399 <sub>16</sub>	00 <sub>16</sub>
									Bit symbol	Bit name
									Function	
									R	W
									TMOD0	Operation mode select bit
									b1 b0	0 0 : Timer mode
									TMOD1	
									MR0	Pulse output function select bit
									0	0 : Pulse is not output (TXiINOUT pin is a normal port pin)
									1	1 : Pulse is output (Note 1) (TXiINOUT pin is a pulse output pin)
									MR1	Gate function select bit
									b4 b3	0 X (Note 2): Gate function not available (TXiINOUT pin is a normal port pin)
									1 0	1 0 : Timer counts only when TXiINOUT pin is held "L" (Note 3)
									1 1	1 1 : Timer counts only when TXiINOUT pin is held "H" (Note 3)
									MR2	
									MR3	0 (Must always be fixed to "0" in timer mode)
									TCK0	Count source select bit
									b7 b6	0 0 : f <sub>1</sub>
									0 1	0 1 : f <sub>8</sub>
									1 0	1 0 : f <sub>32</sub>
									1 1	1 1 : f <sub>C32</sub>
									TCK1	

Note 1: Set the corresponding port direction register to "1" (output mode). Gate function cannot be selected when pulse output function is selected.

Note 2: The bit can be "0" or "1".

Note 3: Set the corresponding port direction register to "0" (input mode). Pulse output function cannot be selected when gate function is selected.

**Figure 1.60. Timer Xi mode register in timer mode**

## Timer X


**(2) Event counter mode**

In this mode, the timer counts an external signal or an internal timer's overflow. (See Table 1.21.) Figure 1.61 shows the timer Xi mode register in event counter mode.

**Table 1.21. Timer specifications in event counter mode (when not processing two-phase pulse signal)**

Item	Specification
Count source	<ul style="list-style-type: none"> <li>External signals input to TXiINOUT pin (effective edge can be selected by software)</li> <li>TB1 overflow, TA0 overflow, TXi overflow</li> </ul>
Count operation	<ul style="list-style-type: none"> <li>Down count</li> <li>When the timer underflows, it reloads the reload register contents before continuing counting (Note)</li> </ul>
Divide ratio	$1/(n + 1)$ $n$ : Set value
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	The timer underflows
TXiINOUT pin function	Programmable I/O port, count source input or pulse output
Read from timer	Count value can be read out by reading timer Xi register
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer Xi register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer Xi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>
Select function	<ul style="list-style-type: none"> <li>Free-run count function Even when the timer underflows, the reload register content is not reloaded to it</li> <li>Pulse output function Each time the timer underflows, the TXiINOUT pin's polarity is reversed</li> </ul>

Note: This does not apply when the free-run function is selected.

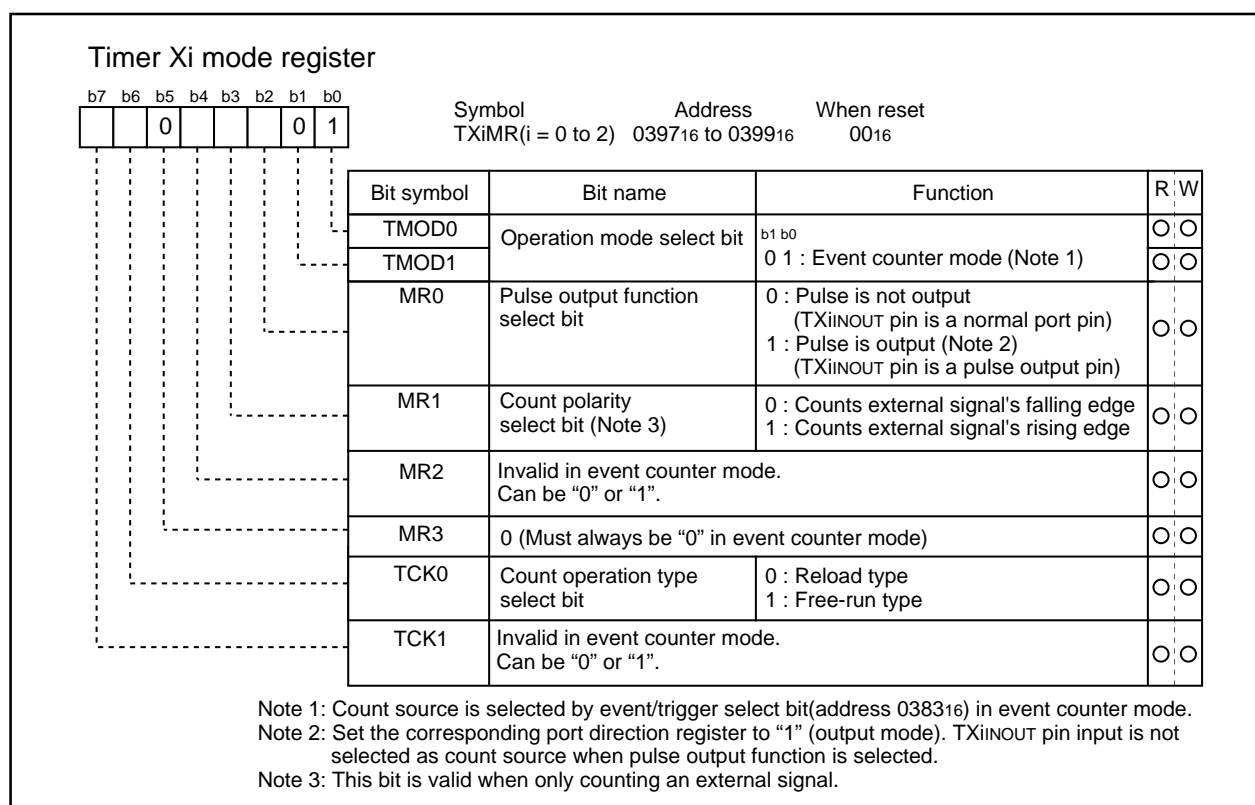**Figure 1.61. Timer Xi mode register in event counter mode**


## Timer X

**(3) One-shot timer mode**

In this mode, the timer operates only once. (See Table 1.22.) When a trigger occurs, the timer starts up and continues operating for a given period. Figure 1.62 shows the timer Xi mode register in one-shot timer mode.

**Table 1.22. Timer specifications in one-shot timer mode**

Item	Specification
Count source	f <sub>1</sub> , f <sub>8</sub> , f <sub>32</sub> , f <sub>C32</sub>
Count operation	<ul style="list-style-type: none"> <li>The timer counts down</li> <li>When the count reaches 0000<sub>16</sub>, the timer stops counting after reloading a new count</li> <li>If a trigger occurs when counting, the timer reloads a new count and restarts counting</li> </ul>
Divide ratio	1/n    n : Set value
Count start condition	<ul style="list-style-type: none"> <li>An external trigger is input</li> <li>The timer overflows</li> <li>The one-shot start flag is set (= 1)</li> </ul>
Count stop condition	<ul style="list-style-type: none"> <li>A new count is reloaded after the count has reached 0000<sub>16</sub></li> <li>The count start flag is reset (= 0)</li> </ul>
Interrupt request generation timing	The count reaches 0000 <sub>16</sub>
TXiINOUT pin function	Programmable I/O port, trigger input or pulse output
Read from timer	When timer Xi register is read, it indicates an indeterminate value
Write to timer	<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer Xi register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer Xi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

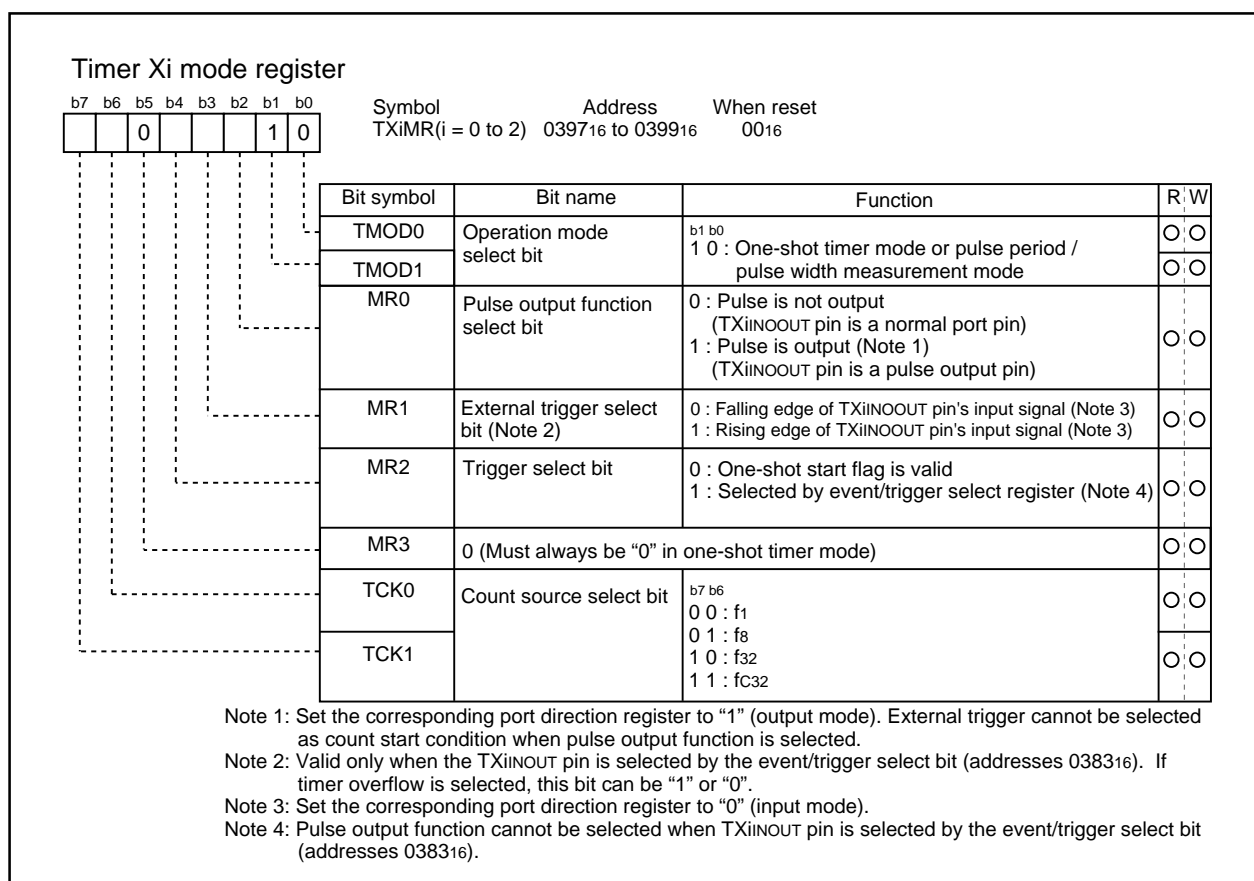**Figure 1.62. Timer Xi mode register in one-shot timer mode**

## Timer X

**(4) Pulse period/pulse width measurement mode**

In this mode, the timer measures the pulse period or pulse width of an external signal. (See Table 1.23.)

Figure 1.63 shows the timer Xi mode register in pulse period/pulse width measurement mode. Figure

1.64 shows the operation timing when measuring a pulse period. Figure 1.65 shows the operation timing


when measuring a pulse width.

**Table 1.23. Timer specifications in pulse period/pulse width measurement mode**

Item	Specification
Count source	f1, f8, f32, fc32
Count operation	<ul style="list-style-type: none"> <li>• Up count</li> <li>• Counter value "000016" is transferred to reload register at measurement pulse's effective edge and the timer continues counting</li> </ul>
Count start condition	Count start flag is set (= 1)
Count stop condition	Count start flag is reset (= 0)
Interrupt request generation timing	<ul style="list-style-type: none"> <li>• When measurement pulse's effective edge is input (Note 1)</li> <li>• When an overflow occurs. (Simultaneously, the timer Xi overflow flag changes to "1". The timer Xi overflow flag changes to "0" when the count start flag is "1" and a value is written to the timer Xi mode register.)</li> </ul>
TXiINOUT pin function	Measurement pulse input
Read from timer	When timer Xi register is read, it indicates the reload register's content (measurement result) (Note 2)
Write to timer	Cannot be written to

Note 1: An interrupt request is not generated when the first effective edge is input after the timer has started counting.

Note 2: The value read out from the timer Xi register is indeterminate until the second effective edge is input after the timer.

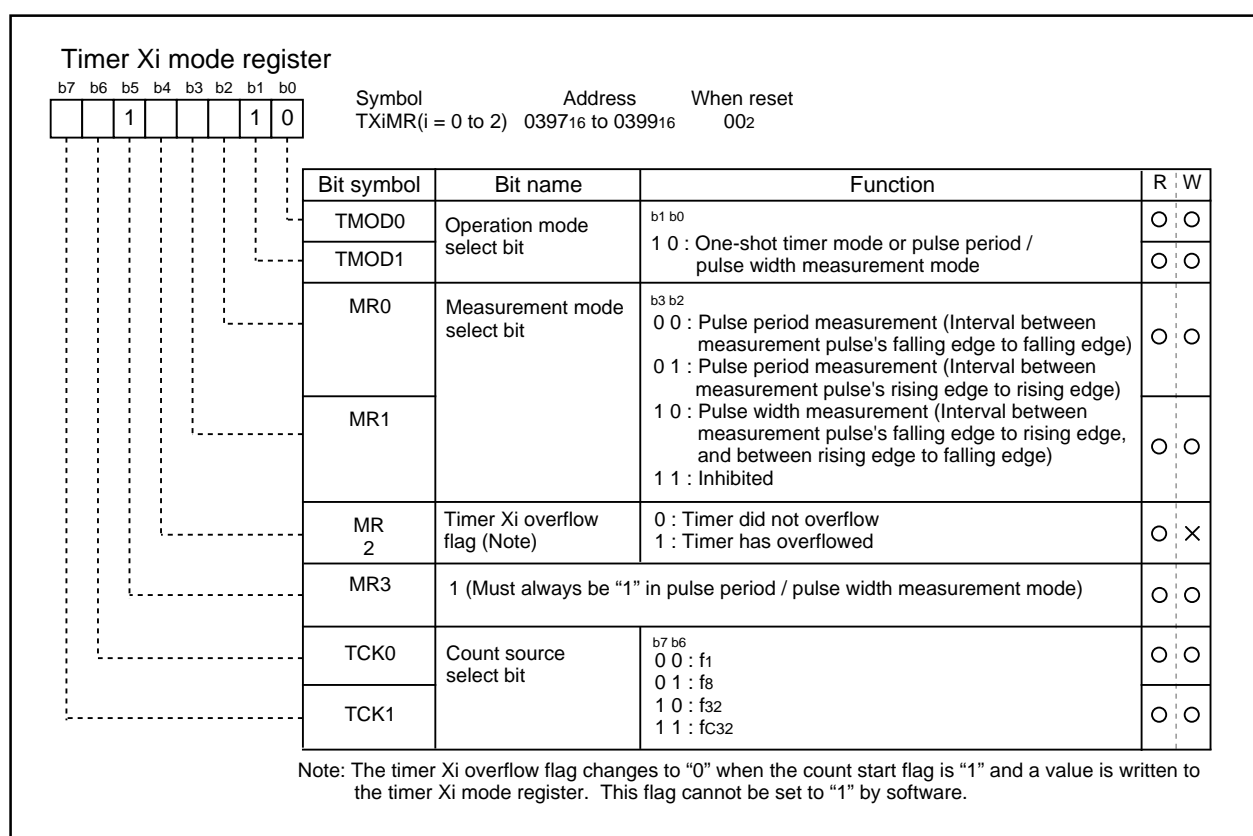

**Figure 1.63. Timer Xi mode register in pulse period/pulse width measurement mode**

## Timer X

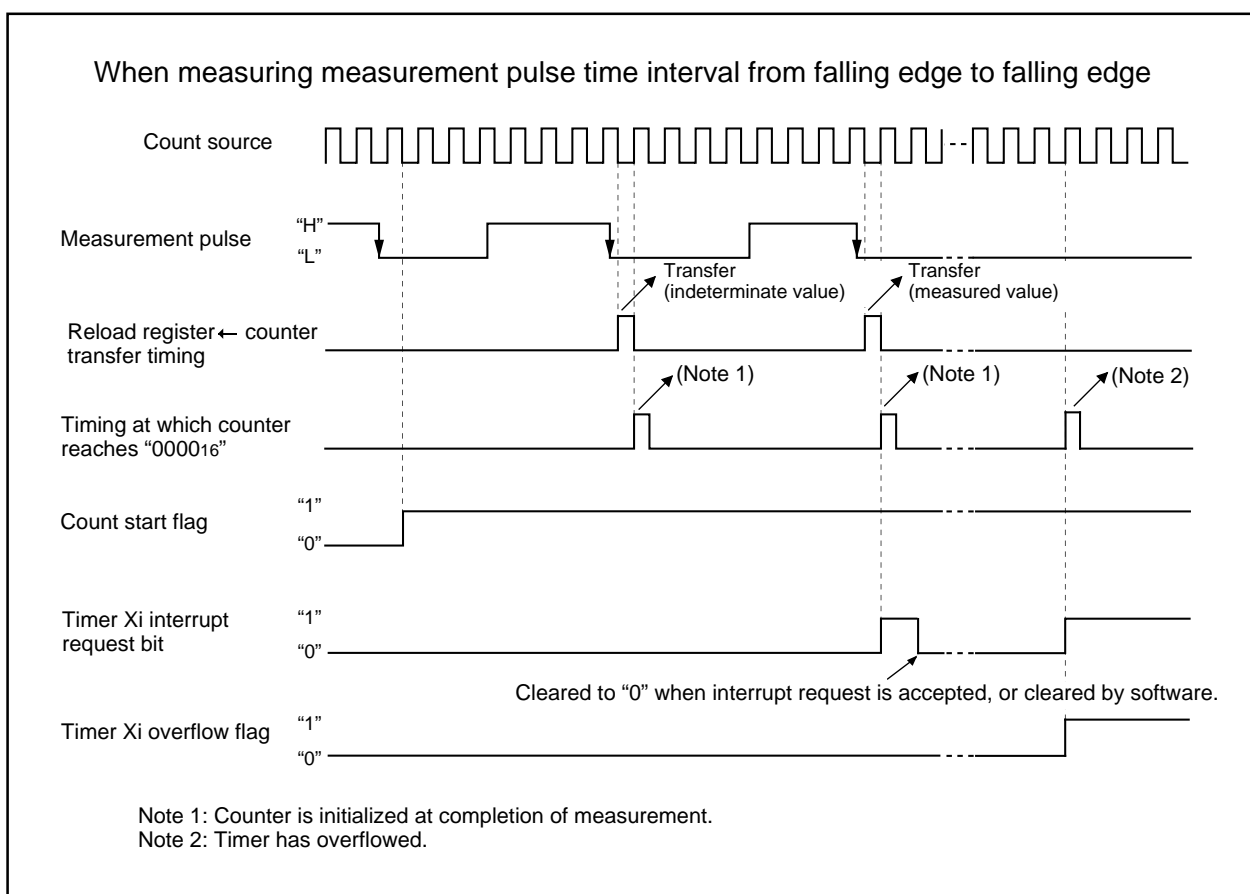


Figure 1.64. Operation timing when measuring a pulse period

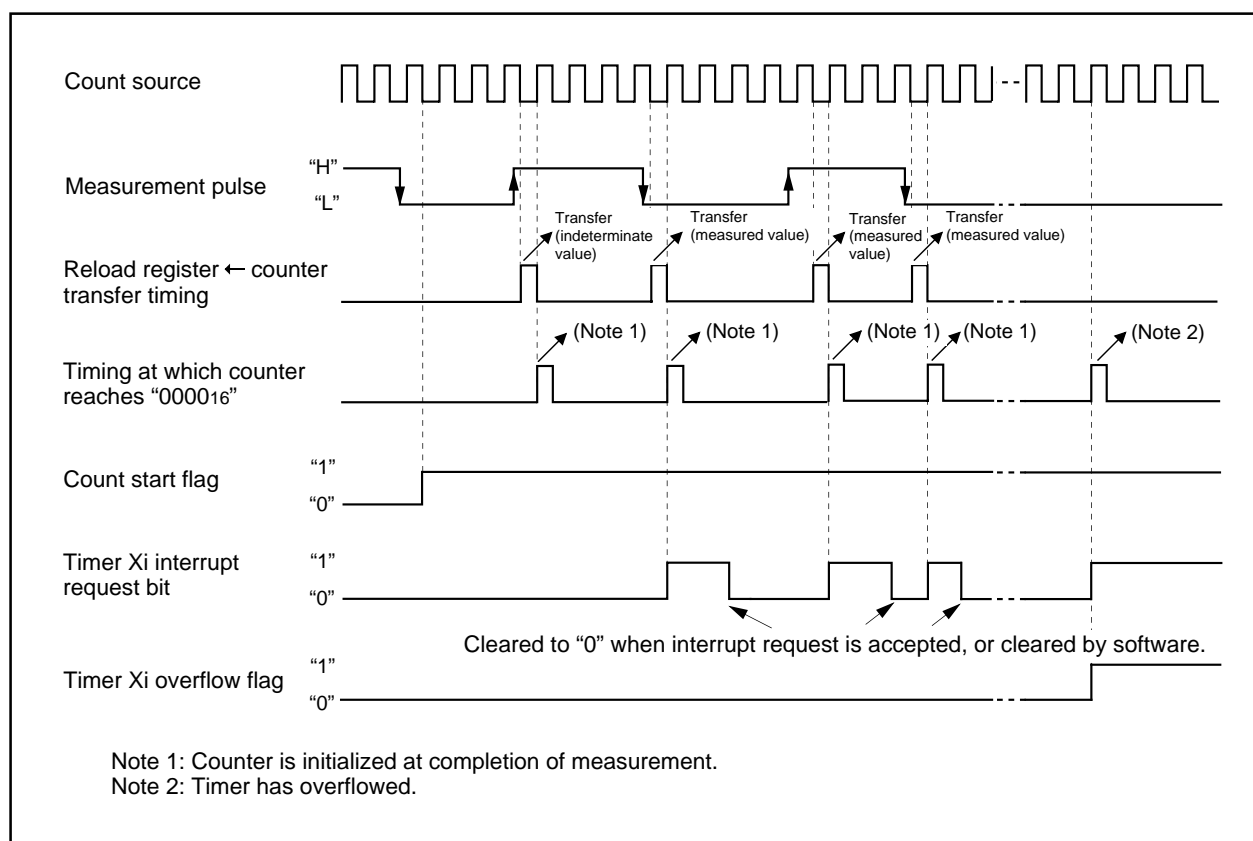


Figure 1.65. Operation timing when measuring a pulse width

## Timer X


**(5) Pulse width modulation (PWM) mode**

In this mode, the timer outputs pulses of a given width in succession. (See Table 1.24.) In this mode, the counter functions as either a 16-bit pulse width modulator or an 8-bit pulse width modulator. Figure 1.66 shows the timer Xi mode register in pulse width modulation mode. Figure 1.67 shows the example of how a 16-bit pulse width modulator operates. Figure 1.68 shows the example of how an 8-bit pulse width modulator operates.

**Table 1.24. Timer specifications in pulse width modulation mode**

Item		Specification
Count source		f1, f8, f32, fc32
Count operation		<ul style="list-style-type: none"> <li>Down counts (operating as an 8-bit or a 16-bit pulse width modulator)</li> <li>The timer reloads a new count at a rising edge of PWM pulse and continues counting</li> <li>The timer is not affected by a trigger that occurs when counting</li> </ul>
16-bit PWM		<ul style="list-style-type: none"> <li>"H" level width <math>n / f_i</math> <span style="float: right;">n : Set value</span></li> <li>Cycle time <math>(2^{16}-1) / f_i</math> fixed</li> </ul>
8-bit PWM		<ul style="list-style-type: none"> <li>"H" level width <math>n \times (m+1) / f_i</math> n: values set to timer Xi register's high-order address</li> <li>Cycle time <math>(2^8-1) \times (m+1) / f_i</math> m : values set to timer Xi register's low-order address</li> </ul>
Count start condition		<ul style="list-style-type: none"> <li>The timer overflows</li> <li>The count start flag is set (= 1)</li> </ul>
Count stop condition		<ul style="list-style-type: none"> <li>The count start flag is reset (= 0)</li> </ul>
Interrupt request generation timing	8 bits PWM	<ul style="list-style-type: none"> <li>Set value of "H" level width is except FF<sub>16</sub>, 00<sub>16</sub> : PWM pulse goes "L"</li> <li>Set value of "H" level width is FF<sub>16</sub>, 00<sub>16</sub> : Timing that count value goes to 01<sub>16</sub></li> </ul>
	16 bits PWM	<ul style="list-style-type: none"> <li>Set value of "H" level width is except FFFF<sub>16</sub>, 0000<sub>16</sub> : PWM pulse goes "L"</li> <li>Set value of "H" level width is FFFF<sub>16</sub>, 0000<sub>16</sub> : Timing that count value goes to 0001<sub>16</sub></li> </ul>
TXiINOUT pin function		Pulse output
Read from timer		When timer Xi register is read, it indicates an indeterminate value
Write to timer		<ul style="list-style-type: none"> <li>When counting stopped When a value is written to timer Xi register, it is written to both reload register and counter</li> <li>When counting in progress When a value is written to timer Xi register, it is written to only reload register (Transferred to counter at next reload time)</li> </ul>

Note: When set value of "H" level width is 00<sub>16</sub> or 0000<sub>16</sub>, pulse outputs "L" level and inversion value, FF<sub>16</sub> or FFFF<sub>16</sub> is set to timer.

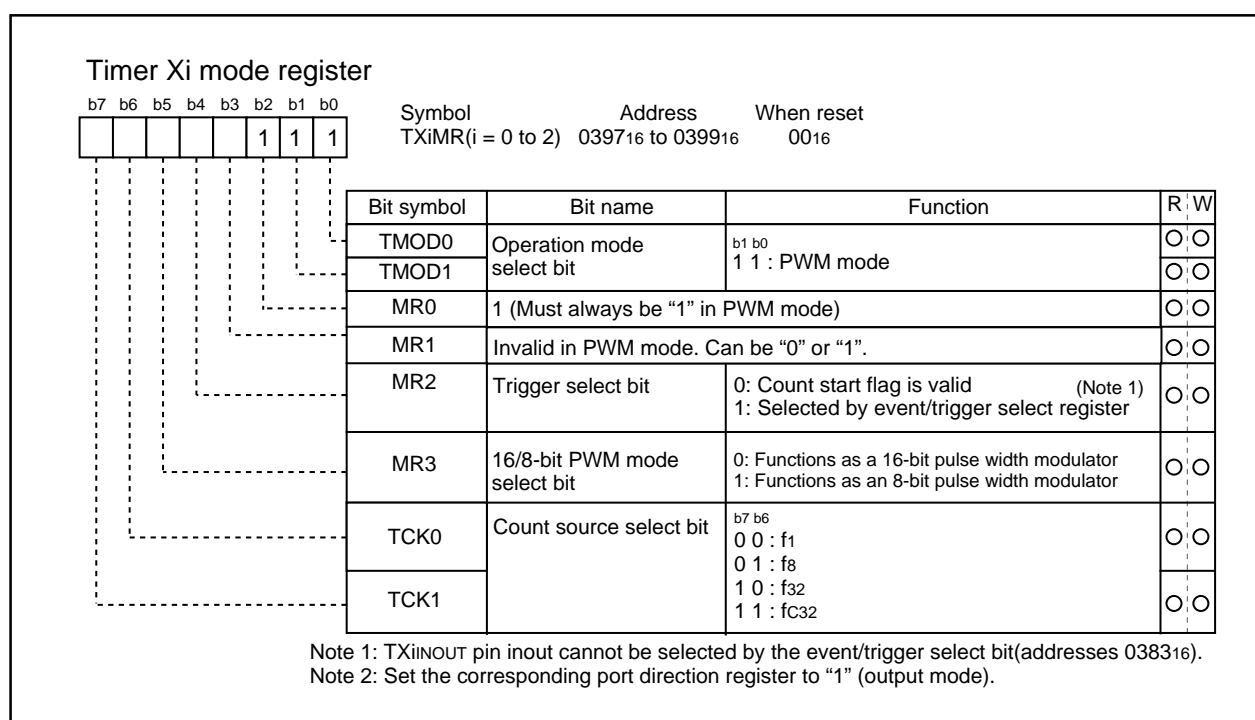**Figure 1.66. Timer Xi mode register in pulse width modulation mode**



## Timer X

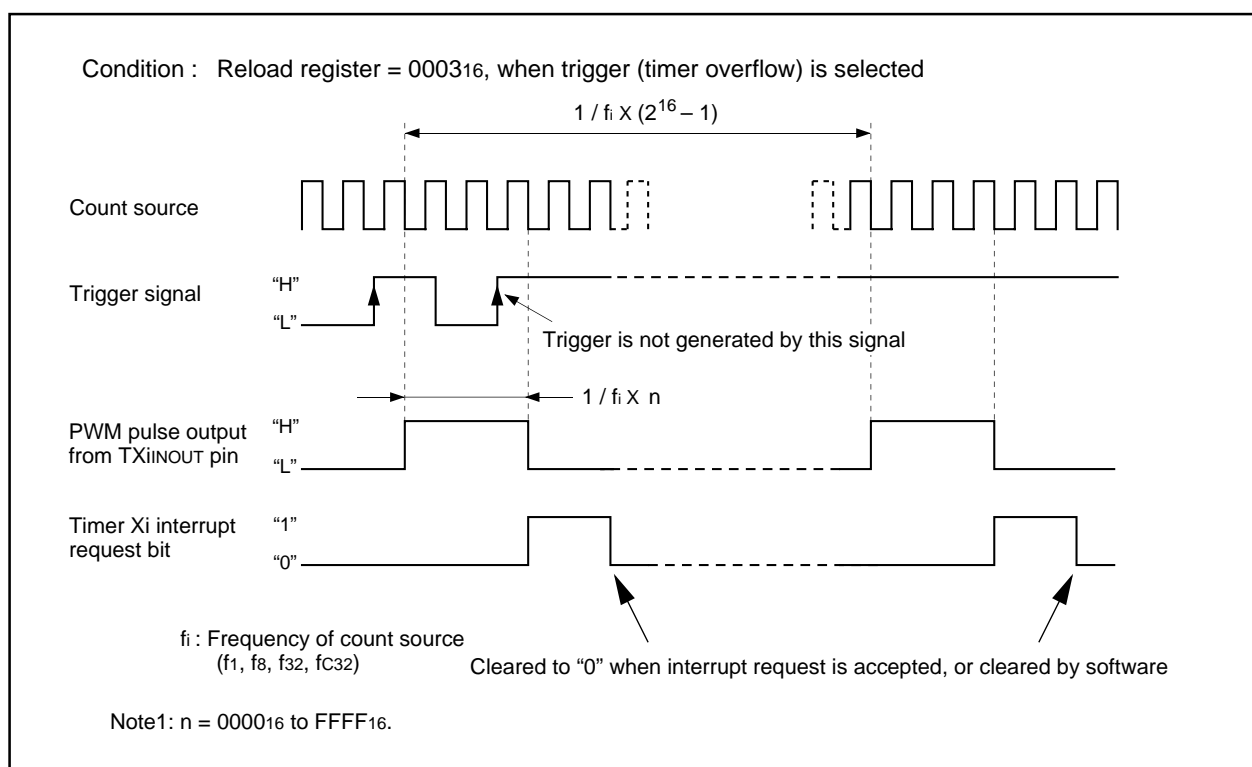


Figure 1.67. Example of how a 16-bit pulse width modulator operates

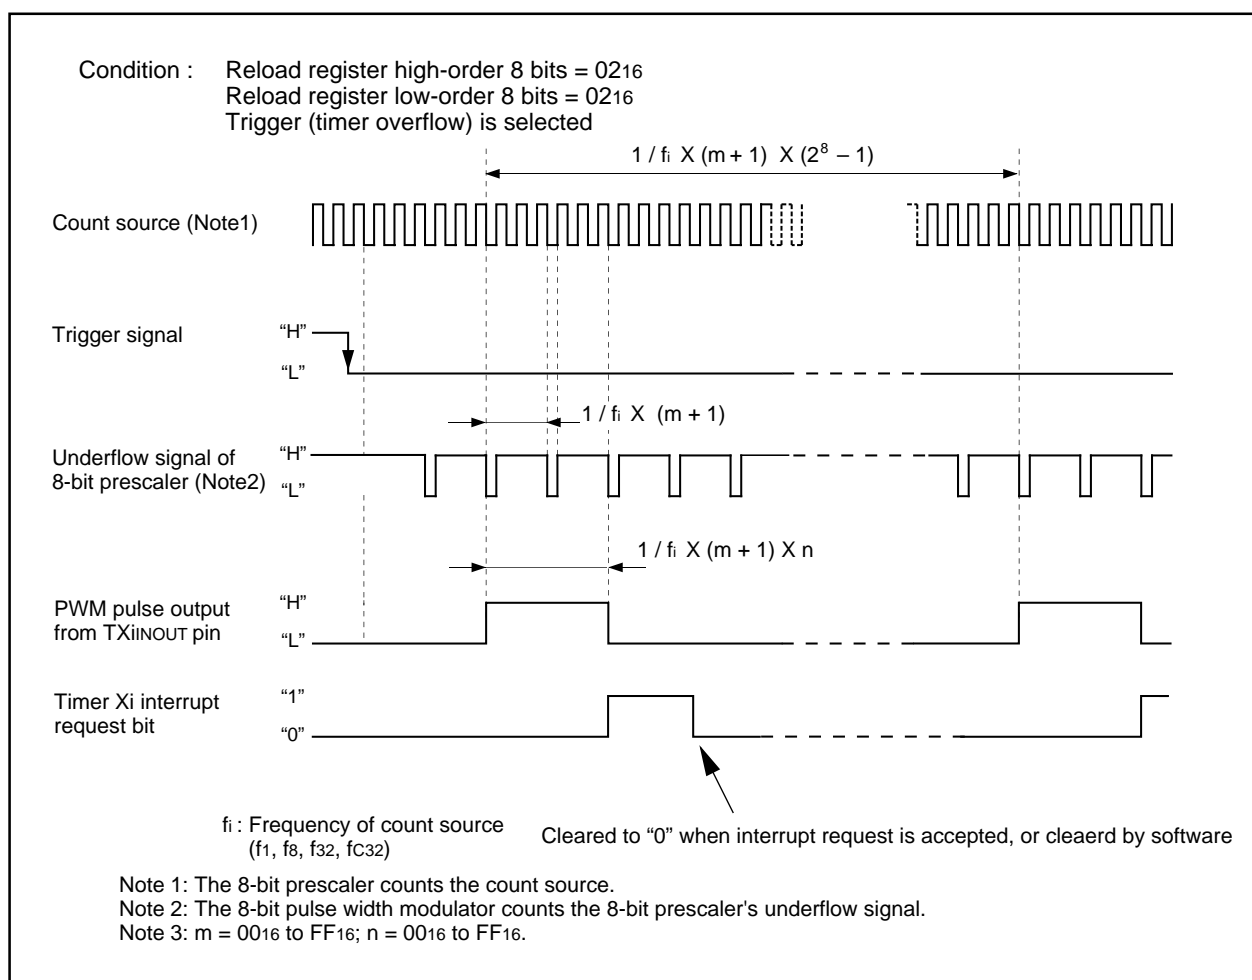


Figure 1.68. Example of how an 8-bit pulse width modulator operates

## Serial I/O

## Serial I/O

Serial I/O is configured as two channels: UART0 and UART1.

UART0 and UART1 each have an exclusive timer to generate a transfer clock, so they operate independently of each other.

Figure 1.69 shows the block diagram of UART0 and UART1. Figure 1.70 shows the block diagram of the transmit/receive unit.

UART0 has two operation modes: a clock synchronous serial I/O mode and a clock asynchronous serial I/O mode (UART mode). The contents of the serial I/O mode select bits (bits 0 to 2 at addresses 03A0<sub>16</sub> and 03A8<sub>16</sub>) determine whether UART0 is used as a clock synchronous serial I/O or as a UART.

UART1 is used as a UART only.

Figures 1.71 through 1.73 show the registers related to UARTi.

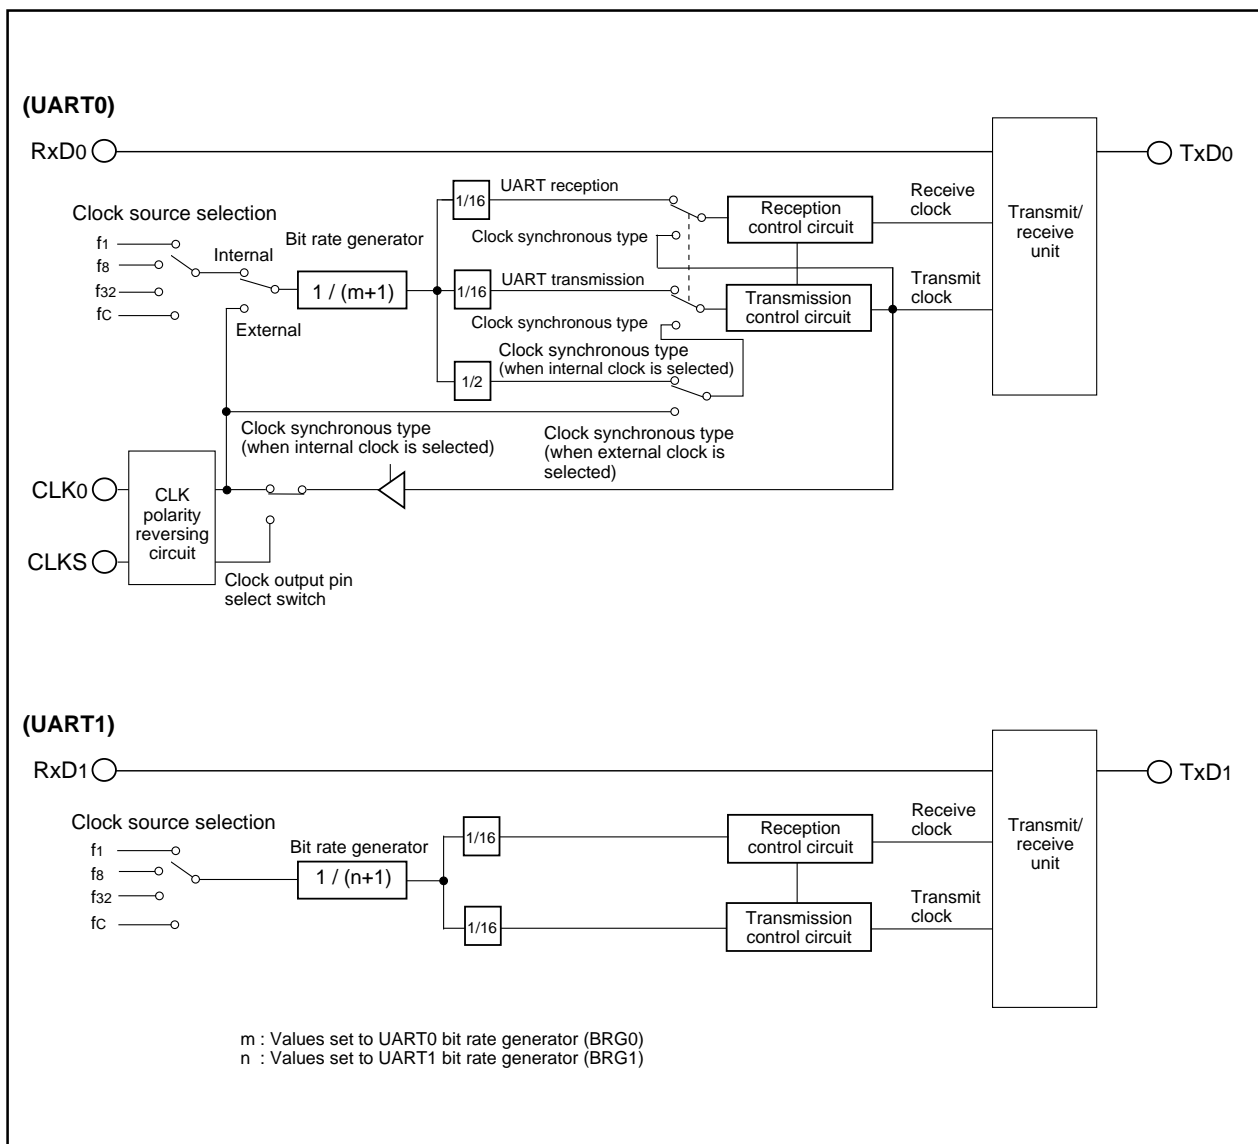


Figure 1.69. Block diagram of UARTi (i = 0, 1)

## Serial I/O

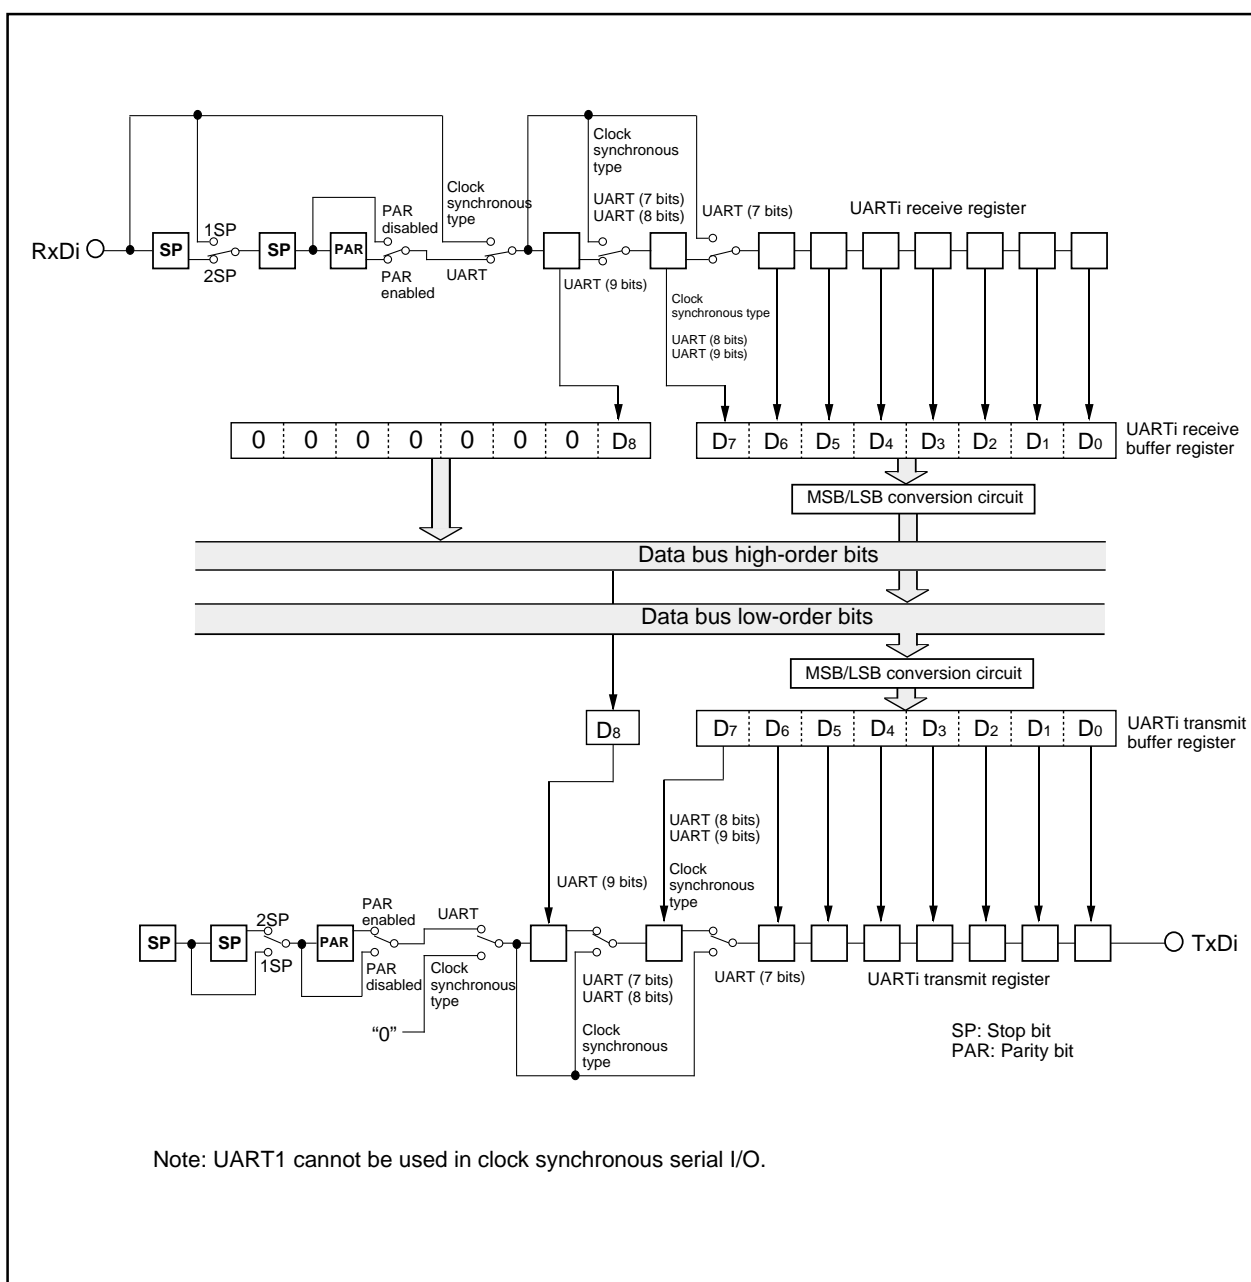


Figure 1.70. Block diagram of transmit/receive unit

## Serial I/O


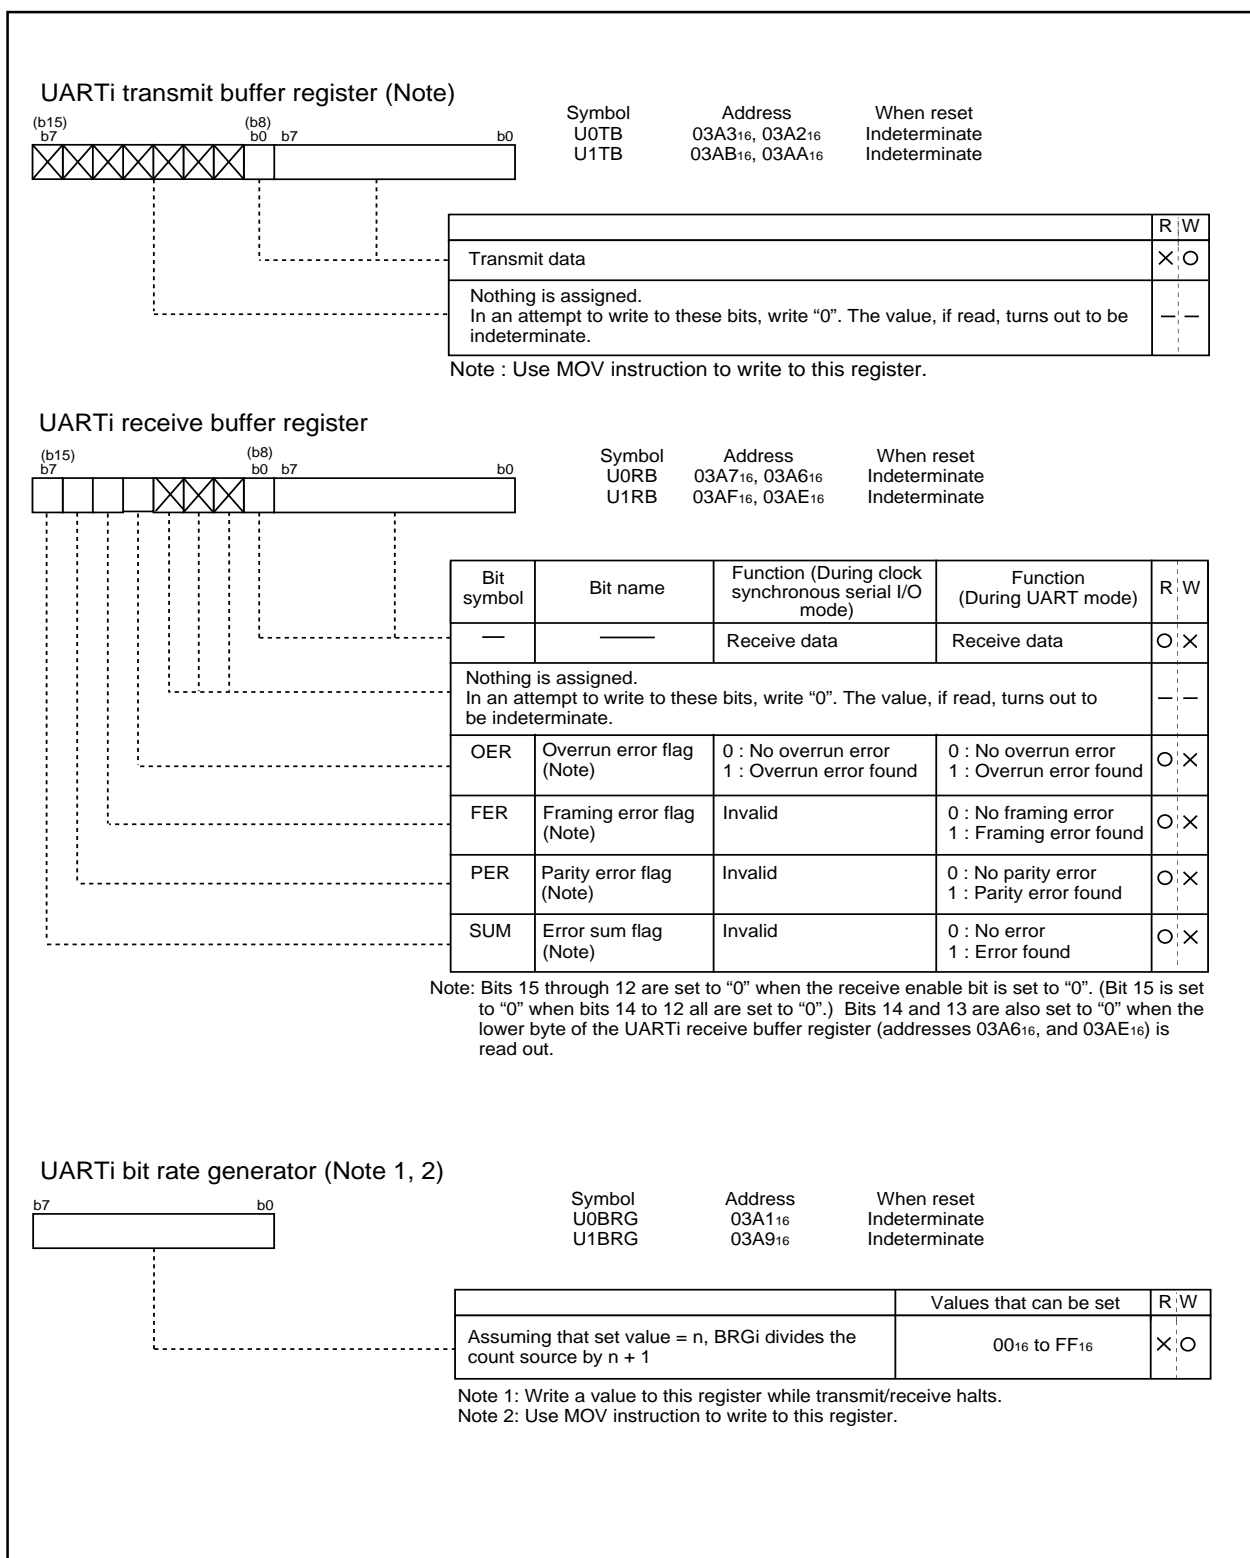


Figure 1.71. Serial I/O-related registers (1)





## Clock synchronous serial I/O mode

### (1) Clock synchronous serial I/O mode

The clock synchronous serial I/O mode uses a transfer clock to transmit and receive data. (See Table 1.25.) Figure 1.65 shows the UART0 transmit/receive mode register.

**Table 1.25. Specifications of clock synchronous serial I/O mode**

Item	Specification
Transfer data format	<ul style="list-style-type: none"> <li>Transfer data length: 8 bits</li> </ul>
Transfer clock	<ul style="list-style-type: none"> <li>When internal clock is selected (bit 3 at address 03A0<sub>16</sub> = "0") : <math>f_i / 2(n+1)</math> (Note 1)  <math>f_i = f_1, f_8, f_{32}, f_c</math></li> <li>When external clock is selected (bit 3 at address 03A0<sub>16</sub> = "1") : Input from CLK0 pin</li> </ul>
Transmission start condition	<ul style="list-style-type: none"> <li>To start transmission, the following requirements must be met: <ul style="list-style-type: none"> <li>Transmit enable bit (bit 0 at address 03A5<sub>16</sub>) = "1"</li> <li>Transmit buffer empty flag (bit 1 at addresses 03A5<sub>16</sub>) = "0"</li> </ul> </li> <li>Furthermore, if external clock is selected, the following requirements must also be met: <ul style="list-style-type: none"> <li>CLK0 polarity select bit (bit 6 at address 03A4<sub>16</sub>) = "0": CLK0 input level = "H"</li> <li>CLK0 polarity select bit (bit 6 at address 03A4<sub>16</sub>) = "1": CLK0 input level = "L"</li> </ul> </li> </ul>
Reception start condition	<ul style="list-style-type: none"> <li>To start reception, the following requirements must be met: <ul style="list-style-type: none"> <li>Receive enable bit (bit 2 at address 03A5<sub>16</sub>) = "1"</li> <li>Transmit enable bit (bit 0 at address 03A5<sub>16</sub>) = "1"</li> <li>Transmit buffer empty flag (bit 1 at address 03A5<sub>16</sub>) = "0"</li> </ul> </li> <li>Furthermore, if external clock is selected, the following requirements must also be met: <ul style="list-style-type: none"> <li>CLK0 polarity select bit (bit 6 at address 03A4<sub>16</sub>) = "0": CLK0 input level = "H"</li> <li>CLK0 polarity select bit (bit 6 at address 03A4<sub>16</sub>) = "1": CLK0 input level = "L"</li> </ul> </li> </ul>
Interrupt request generation timing	<ul style="list-style-type: none"> <li>When transmitting <ul style="list-style-type: none"> <li>Transmit interrupt cause select bit (bit 0 at address 03B0<sub>16</sub>) = "0": Interrupts requested when data transfer from UART0 transfer buffer register to UART0 transmit register is completed</li> <li>Transmit interrupt cause select bit (bit 0 at address 03B0<sub>16</sub>) = "1": Interrupts requested when data transmission from UART0 transfer register is completed</li> </ul> </li> <li>When receiving <ul style="list-style-type: none"> <li>Interrupts requested when data transfer from UART0 receive register to UART0 receive buffer register is completed</li> </ul> </li> </ul>
Error detection	<ul style="list-style-type: none"> <li>Overrun error (Note 2)  This error occurs when the next data is ready before contents of UART0 receive buffer register are read out</li> </ul>
Select function	<ul style="list-style-type: none"> <li>CLK polarity selection  Whether transmit data is output/input at the rising edge or falling edge of the transfer clock can be selected</li> <li>LSB first/MSB first selection  Whether transmission/reception begins with bit 0 or bit 7 can be selected</li> <li>Continuous receive mode selection  Reception is enabled simultaneously by a read from the receive buffer register</li> <li>Transfer clock output from multiple pins selection  UART0 transfer clock can be chosen by software to be output from one of the two pins set</li> </ul>

Note 1: "n" denotes the value 00<sub>16</sub> to FF<sub>16</sub> that is set to the UART bit rate generator.

Note 2: If an overrun error occurs, the UART0 receive buffer will have the next data written in. Note also that the UART0 receive interrupt request bit does not change.

## Clock synchronous serial I/O mode

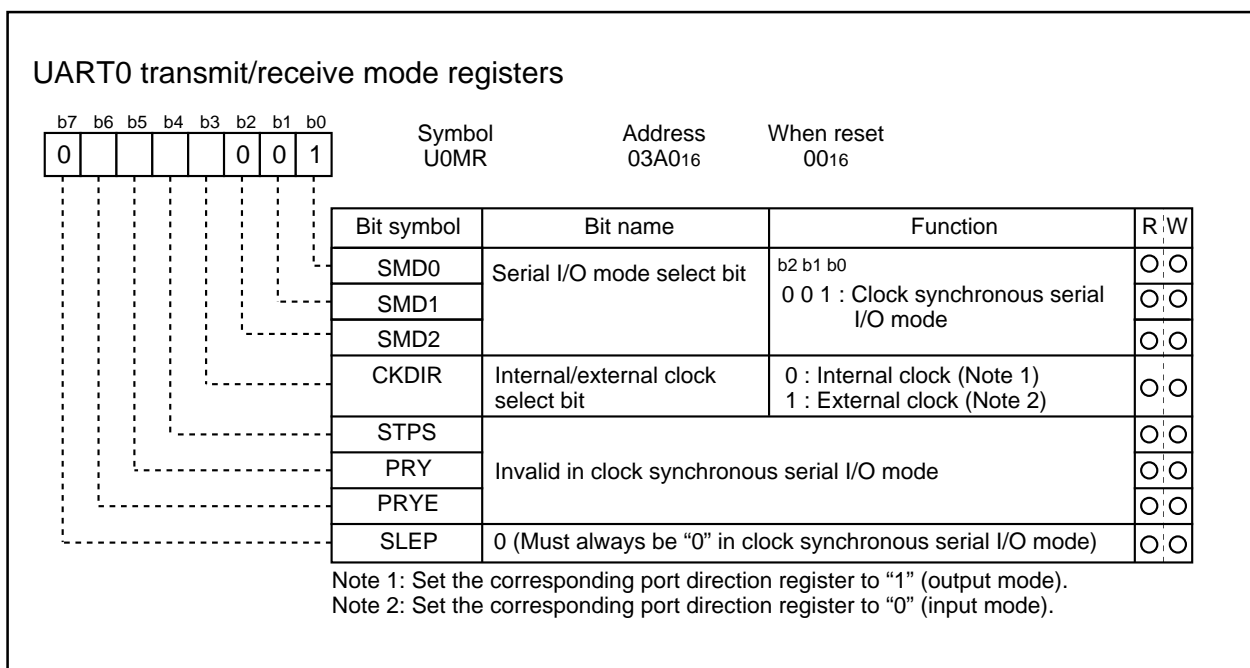


Figure 1.74. UART0 transmit/receive mode register in clock synchronous serial I/O mode

Table 1.26 lists the functions of the input/output pins during clock synchronous serial I/O mode. Note that for a period from when the UART0 operation mode is selected to when transfer starts, the TxD0 pin outputs a "H". (If the N-channel open-drain is selected, this pin is in floating state.)


Table 1.26. Input/output pin functions in clock synchronous serial I/O mode

Pin name	Function	Method of selection
TxD0 (P50)	Serial data output	Port P50 direction register (bit 0 at address 03EB <sub>16</sub> ) = "1" (Outputs dummy data when performing reception only)
RxD0 (P51)	Serial data input	Port P51 direction register (bit 1 at address 03EB <sub>16</sub> ) = "0" (Can be used as an input port when performing transmission only)
CLK0 (P52)	Transfer clock output	Internal/external clock select bit (bit 3 at address 03A0 <sub>16</sub> ) = "0"
	Transfer clock input	Internal/external clock select bit (bit 3 at address 03A0 <sub>16</sub> ) = "1" Port P52 direction register (bit 2 at address 03EB <sub>16</sub> ) = "0"



## Clock synchronous serial I/O mode

## • Example of transmit timing (when internal clock is selected)

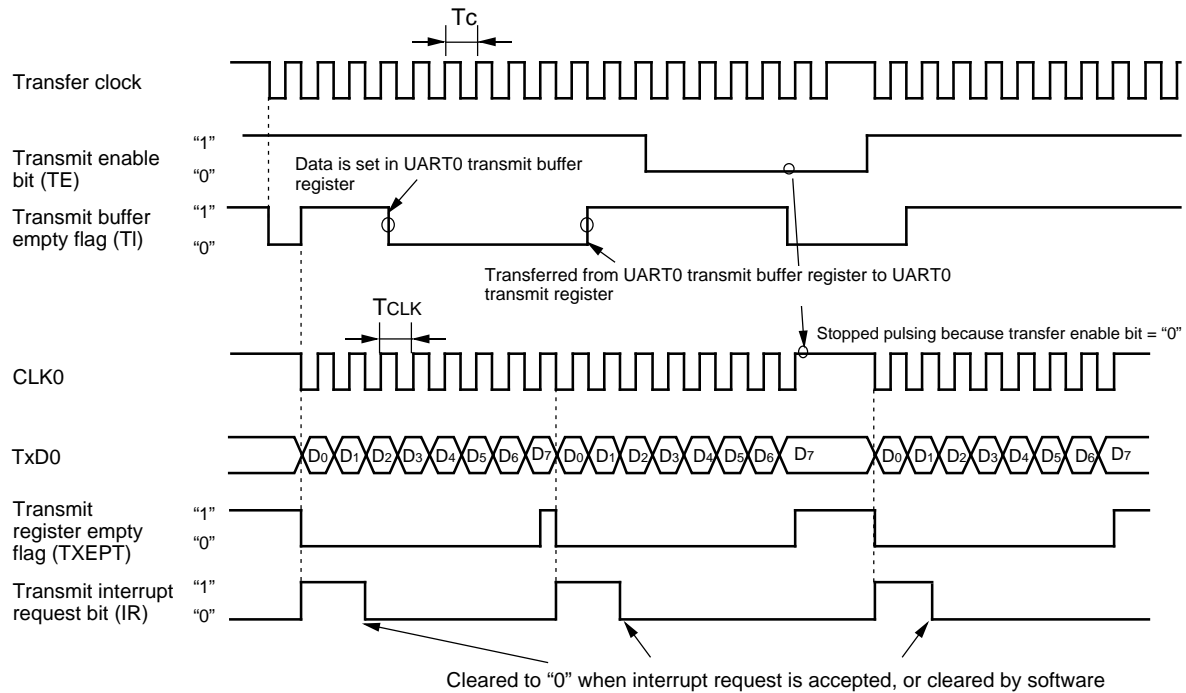

Shown in ( ) are bit symbols.


The above timing applies to the following settings:

- Internal clock is selected.
- CLK polarity select bit = "0".
- Transmit interrupt cause select bit = "0".

$$T_c = T_{CLK} = 2(n + 1) / f_i$$

$f_i$ : frequency of BRG0 count source ( $f_1, f_8, f_{32}, f_c$ )  
 $n$ : value set to BRG0

## • Example of receive timing (when external clock is selected)

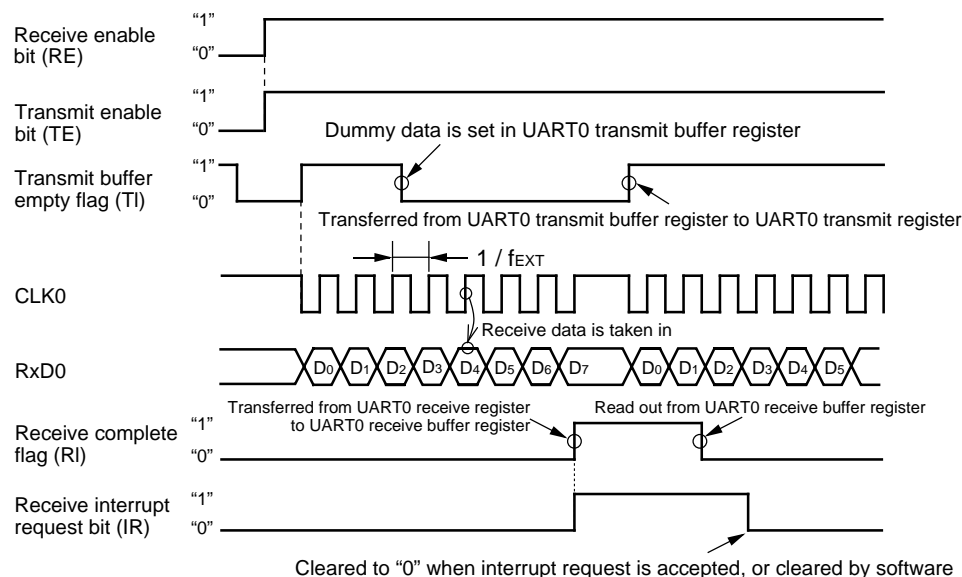

Shown in ( ) are bit symbols.

The above timing applies to the following settings:

- External clock is selected.
- CLK polarity select bit = "0".

$f_{EXT}$ : frequency of external clock

Meet the following conditions are met when the CLK input before data reception = "H"


- Transmit enable bit → "1"
- Receive enable bit → "1"
- Dummy data write to UART0 transmit buffer register

Figure 1.75. Typical transmit/receive timings in clock synchronous serial I/O mode

## Clock synchronous serial I/O mode

**(a) Polarity select function**


As shown in Figure 1.76, the CLK polarity select bit (bit 6 at addresses 03A4<sub>16</sub>) allows selection of the polarity of the transfer clock.

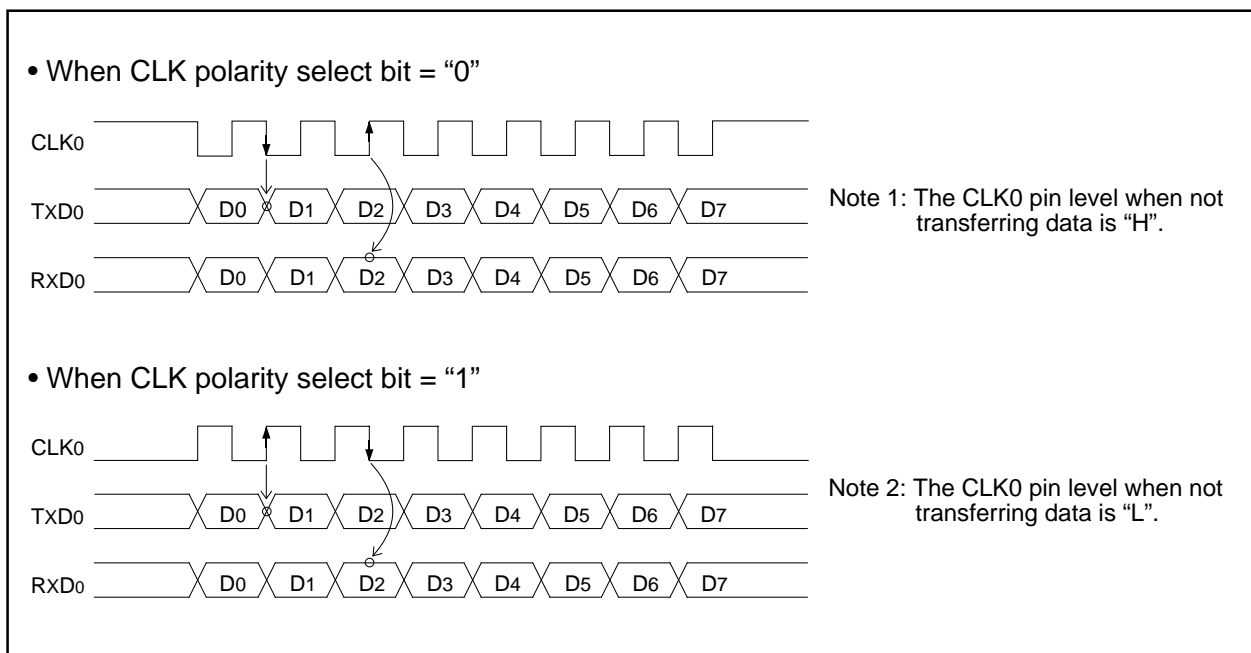

**Figure 1.76. Polarity of transfer clock**

**(b) LSB first/MSB first select function**

As shown in Figure 1.77, when the transfer format select bit (bit 7 at addresses 03A4<sub>16</sub>) = "0", the transfer format is "LSB first"; when the bit = "1", the transfer format is "MSB first".

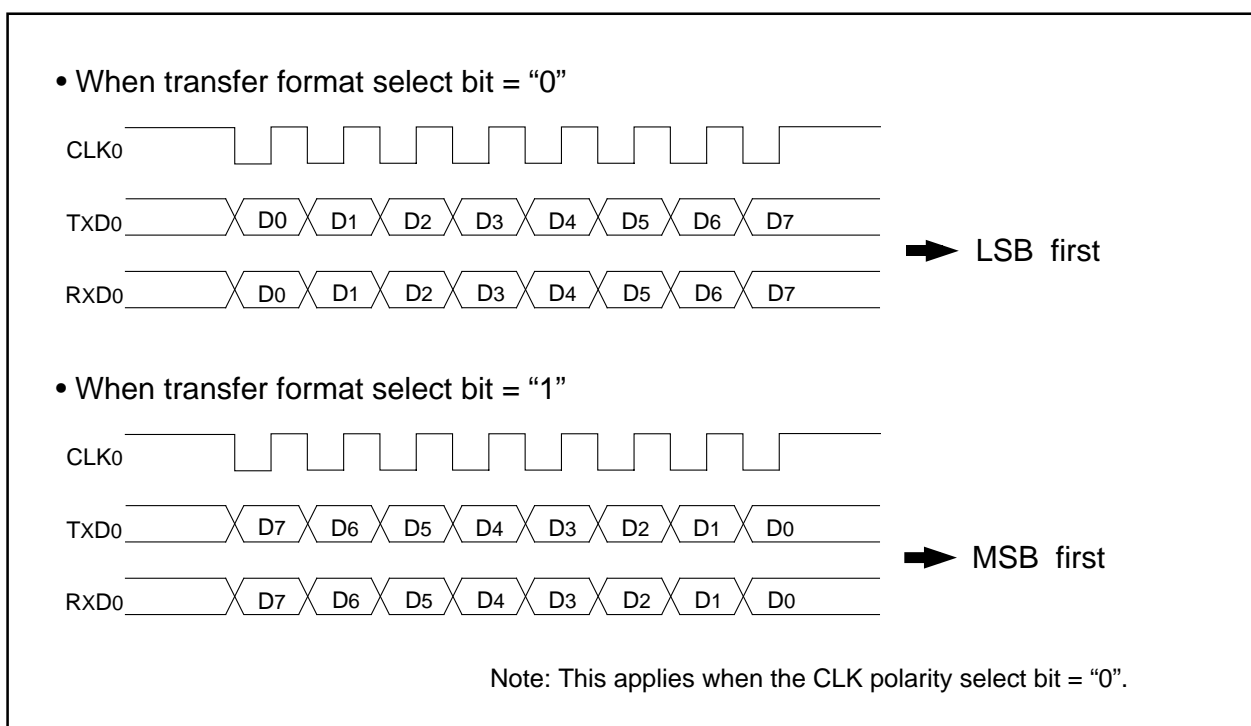


**Figure 1.77. Transfer format**

## Clock synchronous serial I/O mode

### (c) Transfer clock output from multiple pins function

This function allows the setting two transfer clock output pins and choosing one of the two to output a clock by using the CLK and CLKS select bit (bits 4 and 5 at address 03B016). (See Figure 1.78.) The multiple pins function is valid only when the internal clock is selected for UART0.

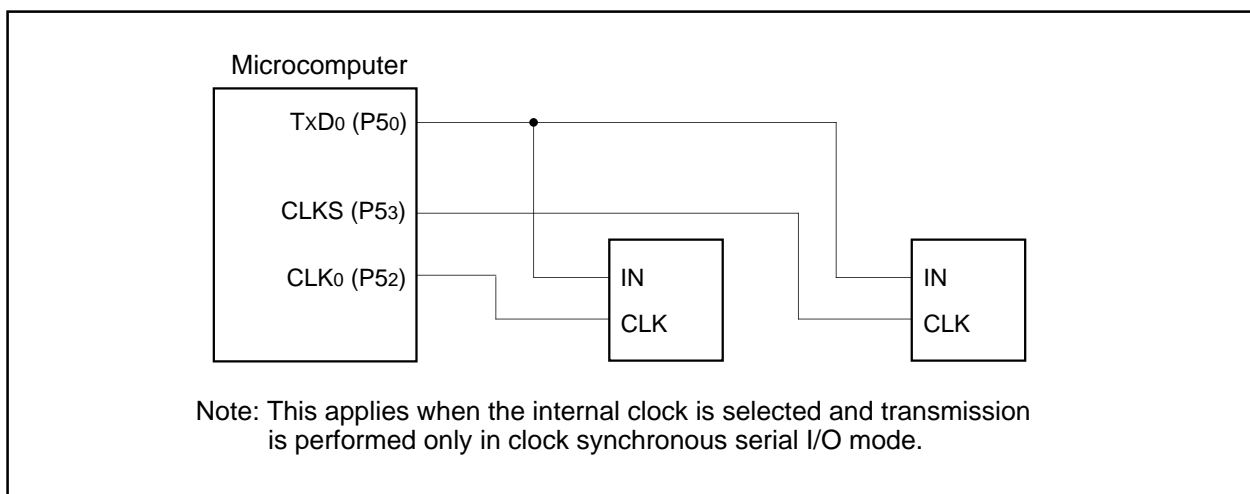

**Figure 1.78. The transfer clock output from the multiple pins function usage**

### (d) Continuous receive mode

If the continuous receive mode enable bit (bits 2 and 3 at address 03B016) is set to “1”, the unit is placed in continuous receive mode. In this mode, when the receive buffer register is read out, the unit simultaneously goes to a receive enable state without having to set dummy data to the transmit buffer register back again.

## Clock asynchronous serial I/O (UART) mode

### (2) Clock asynchronous serial I/O (UART) mode

The UART mode allows transmitting and receiving data after setting the desired transfer rate and transfer data format. (See Table 1.27.) Figure 1.79 shows the UARTi transmit/receive mode register.

**Table 1.27. Specifications of UART Mode**

Item	Specification
Transfer data format	<ul style="list-style-type: none"> <li>• Character bit (transfer data): 7 bits, 8 bits, or 9 bits as selected</li> <li>• Start bit: 1 bit</li> <li>• Parity bit: Odd, even, or nothing as selected</li> <li>• Stop bit: 1 bit or 2 bits as selected</li> </ul>
Transfer clock	<ul style="list-style-type: none"> <li>• When internal clock is selected (bit 3 at addresses 03A0<sub>16</sub>, 03A8<sub>16</sub> = "0") :  <math>f_{i/16(n+1)}</math> (Note 1) <math>f_i = f_1, f_8, f_{32}, f_c</math></li> <li>• When external clock is selected (bit 3 at addresses 03A0<sub>16</sub> = "1") :  <math>f_{EXT/16(n+1)}</math> (Note 1) (Note 2)</li> </ul>
Transmission start condition	<ul style="list-style-type: none"> <li>• To start transmission, the following requirements must be met: <ul style="list-style-type: none"> <li>- Transmit enable bit (bit 0 at addresses 03A5<sub>16</sub>, 03AD<sub>16</sub>) = "1"</li> <li>- Transmit buffer empty flag (bit 1 at addresses 03A5<sub>16</sub>, 03AD<sub>16</sub>) = "0"</li> </ul> </li> </ul>
Reception start condition	<ul style="list-style-type: none"> <li>• To start reception, the following requirements must be met: <ul style="list-style-type: none"> <li>- Receive enable bit (bit 2 at addresses 03A5<sub>16</sub>, 03AD<sub>16</sub>) = "1"</li> <li>- Start bit detection</li> </ul> </li> </ul>
Interrupt request generation timing	<ul style="list-style-type: none"> <li>• When transmitting <ul style="list-style-type: none"> <li>- Transmit interrupt cause select bits (bits 0,1 at address 03B0<sub>16</sub>) = "0":  Interrupts requested when data transfer from UARTi transfer buffer register to UARTi transmit register is completed</li> <li>- Transmit interrupt cause select bits (bits 0, 1 at address 03B0<sub>16</sub>) = "1":  Interrupts requested when data transmission from UARTi transfer register is completed</li> </ul> </li> <li>• When receiving <ul style="list-style-type: none"> <li>- Interrupts requested when data transfer from UARTi receive register to UARTi receive buffer register is completed</li> </ul> </li> </ul>
Error detection	<ul style="list-style-type: none"> <li>• Overrun error (Note 3)  This error occurs when the next data is ready before contents of UARTi receive buffer register are read out</li> <li>• Framing error  This error occurs when the number of stop bits set is not detected</li> <li>• Parity error  This error occurs when if parity is enabled, the number of 1's in parity and character bits does not match the number of 1's set</li> <li>• Error sum flag  This flag is set (= 1) when any of the overrun, framing, and parity errors is encountered</li> </ul>
Select function	<ul style="list-style-type: none"> <li>• Sleep mode selection  This mode is used to transfer data to and from one of multiple slave micro-computers</li> </ul>

Note 1: 'n' denotes the value 00<sub>16</sub> to FF<sub>16</sub> that is set to the UART bit rate generator.

Note 2: f<sub>EXT</sub> is input from the CLK0 pin. Since UART1 does not have this pin, cannot select external clock.

Note 3: If an overrun error occurs, the UARTi receive buffer will have the next data written in. Note also that the UARTi receive interrupt request bit does not change.

## Clock asynchronous serial I/O (UART) mode

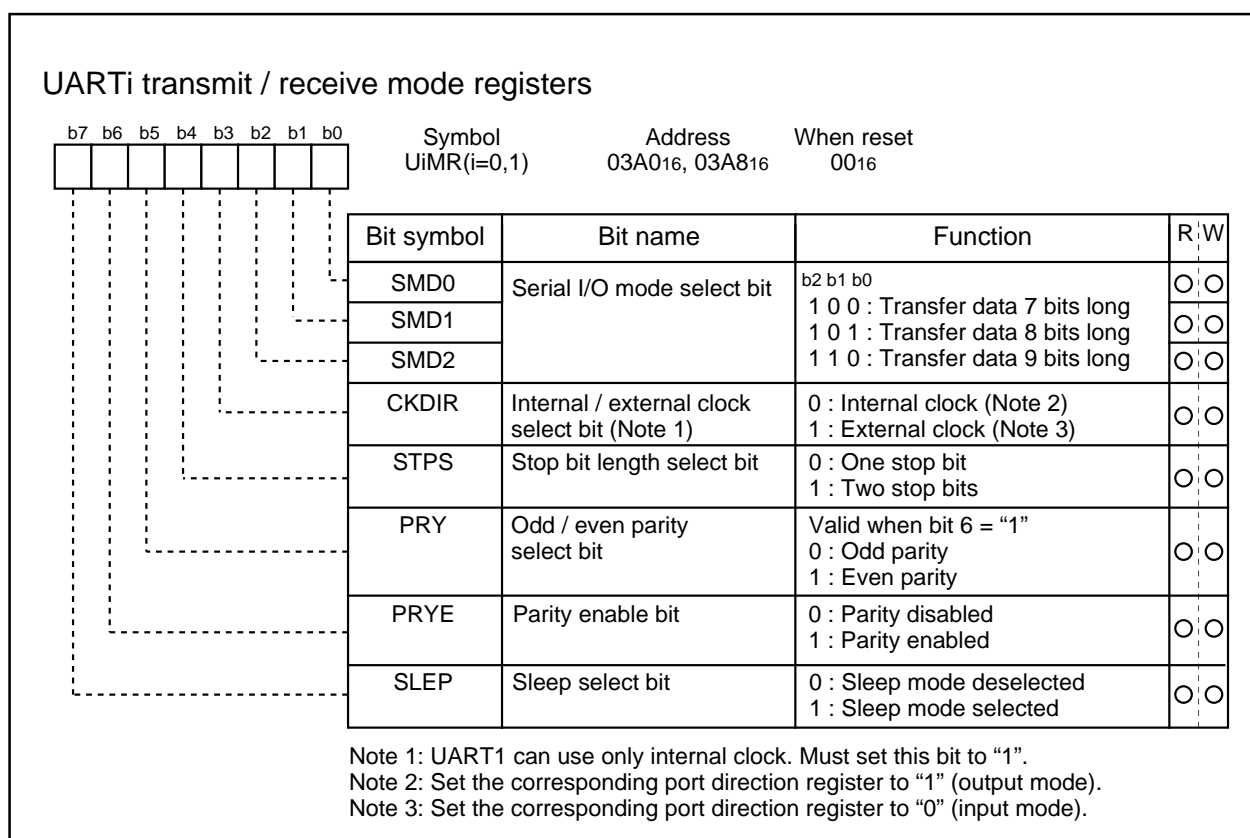


Figure 1.79. UARTi transmit/receive mode register in UART mode


Table 1.28 lists the functions of the input/output pins during UART mode. Note that for a period from when the UARTi operation mode is selected to when transfer starts, the TxDi pin outputs a "H". (If the N-channel open-drain is selected, this pin is in floating state.)

Table 1.28. Input/output pin functions in UART mode

Pin name	Function	Method of selection
TxDi (P50, P40)	Serial data output	Port P51 and P42 direction register (bit 0 at address 03EB <sub>16</sub> , bit 0 at address 03EA <sub>16</sub> ) = "1" (Can be used as an input port when performing reception only)
RxDi (P51, P42)	Serial data input	Port P51 and P42 direction register (bit 1 at address 03EB <sub>16</sub> , bit 2 at address 03EA <sub>16</sub> ) = "0" (Can be used as an input port when performing transmission only)
CLK0 (P52)	Programmable I/O port	Internal/external clock select bit (bit 3 at address 03A0 <sub>16</sub> ) = "0"
	Transfer clock input	Internal/external clock select bit (bit 3 at address 03A0 <sub>16</sub> ) = "1"

## Clock asynchronous serial I/O (UART) mode

- Example of transmit timing when transfer data is 8 bits long (parity enabled, one stop bit)

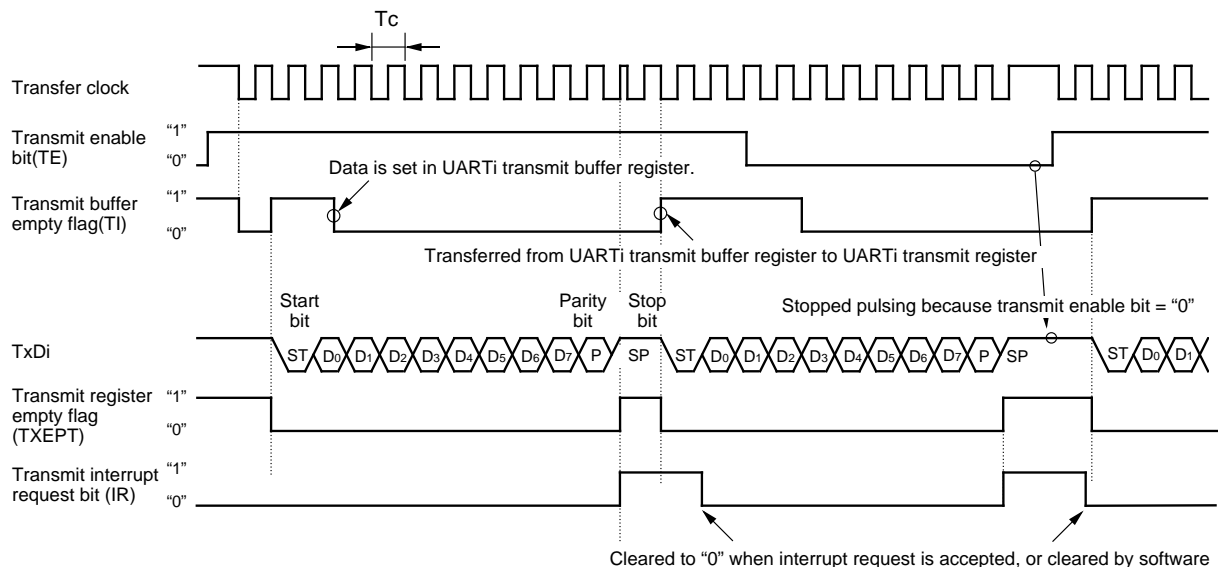

Shown in ( ) are bit symbols.

The above timing applies to the following settings :

- Parity is enabled.
- One stop bit.
- Transmit interrupt cause select bit = "1".


$$T_c = 16(n+1)/f_i \text{ or } 16(n+1)/f_{EXT}$$

$f_i$  : frequency of BRGi count source ( $f_1, f_8, f_{32}, f_c$ )

$f_{EXT}$  : frequency of BRGi count source (external clock)

$n$  : value set to BRGi

- Example of transmit timing when transfer data is 9 bits long (parity disabled, two stop bits)

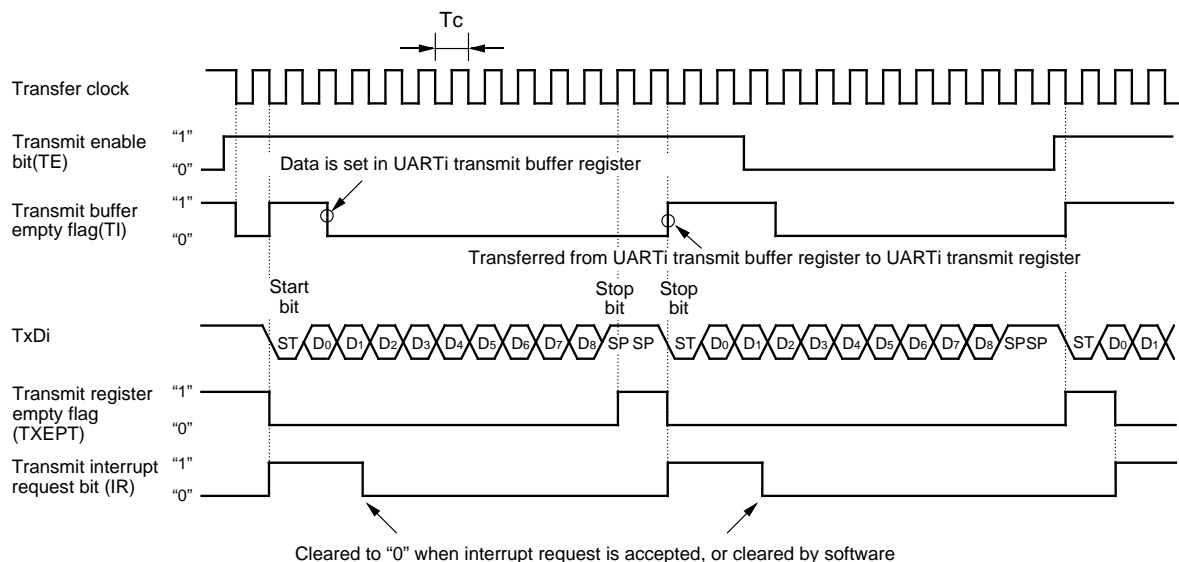

Shown in ( ) are bit symbols.

The above timing applies to the following settings :

- Parity is disabled.
- Two stop bits.
- Transmit interrupt cause select bit = "0".

$$T_c = 16(n+1)/f_i \text{ or } 16(n+1)/f_{EXT}$$

$f_i$  : frequency of BRGi count source ( $f_1, f_8, f_{32}$ )

$f_{EXT}$  : frequency of BRGi count source (external clock)

$n$  : value set to BRGi

Figure 1.80. Typical transmit timings in UART mode

## Clock asynchronous serial I/O (UART) mode

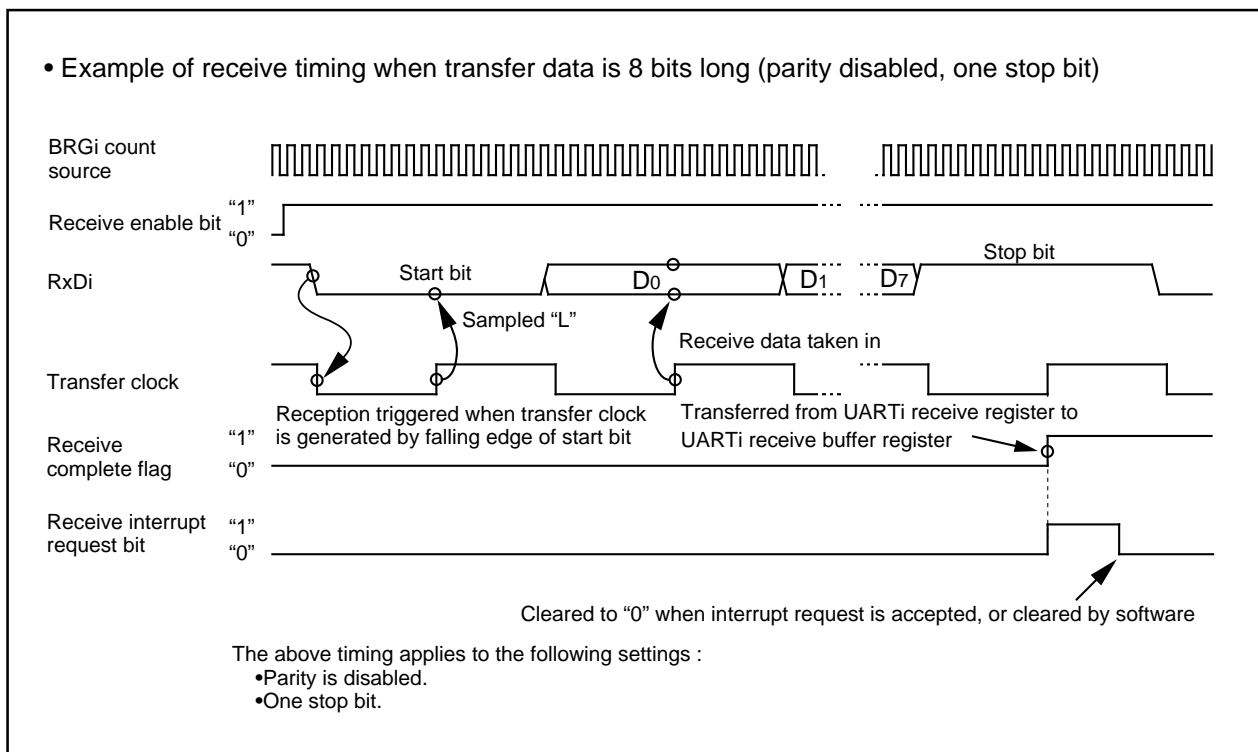


Figure 1.81. Typical receive timing in UART mode

## (a) Sleep mode

This mode is used to transfer data between specific microcomputers among multiple microcomputers connected using UARTi. The sleep mode is selected when the sleep select bit (bit 7 at addresses 03A016, 03A816) is set to "1" during reception. In this mode, the unit performs receive operation when the MSB of the received data = "1" and does not perform receive operation when the MSB = "0".

## A-D Converter

### A-D Converter

The A-D converter consists of one 10-bit successive approximation A-D converter circuit with a capacitive coupling amplifier. Pins P60 to P67, and P50 to P54 also function as the analog signal input pins. The direction registers of these pins for A-D conversion must therefore be set to input. The Vref connect bit (bit 5 at address 03D716) can be used to isolate the resistance ladder of the A-D converter from the reference voltage input pin (VREF) when the A-D converter is not used. Doing so stops any current flowing into the resistance ladder from VREF, reducing the power dissipation. When using the A-D converter, start A-D conversion only after setting bit 5 of 03D716 to connect VREF.

The result of A-D conversion is stored in the A-D registers of the selected pins. When set to 10-bit precision, the low 8 bits are stored in the even addresses and the high 2 bits in the odd addresses. When set to 8-bit precision, the low 8 bits are stored in the even addresses.

Table 1.29 shows the performance of the A-D converter. Figure 1.82 shows the block diagram of the A-D converter, and Figures 1.83 and 1.84 show the A-D converter-related registers.

**Table 1.29. Performance of A-D converter**

Item	Performance
Method of A-D conversion	Successive approximation (capacitive coupling amplifier)
Analog input voltage (Note 1)	0V to AVCC (VCC)
Operating clock $\phi_{AD}$ (Note 2)	VCC = 5V $f_{AD}$ , divide-by-2 of $f_{AD}$ , divide-by-4 of $f_{AD}$ , $f_{AD}=f(XIN)$ VCC = 3V    divide-by-2 of $f_{AD}$ , divide-by-4 of $f_{AD}$ , $f_{AD}=f(XIN)$
Resolution	8-bit or 10-bit (selectable)
Absolute precision	VCC = 5V    • Without sample and hold function $\pm 3\text{LSB}$ • With sample and hold function (8-bit resolution) $\pm 2\text{LSB}$ • With sample and hold function (10-bit resolution) $\pm 3\text{LSB}$ VCC = 3V    • Without sample and hold function (8-bit resolution) $\pm 2\text{LSB}$
Operating modes	One-shot mode, repeat mode, single sweep mode, repeat sweep mode 0, and repeat sweep mode 1
Analog input pins	8 pins (AN0 to AN7) + 5 pins (AN50 to AN54)
A-D conversion start condition	• Software trigger A-D conversion starts when the A-D conversion start flag changes to "1"
Conversion speed per pin	• Without sample and hold function 8-bit resolution: 49 $\phi_{AD}$ cycles, 10-bit resolution: 59 $\phi_{AD}$ cycles • With sample and hold function 8-bit resolution: 28 $\phi_{AD}$ cycles, 10-bit resolution: 33 $\phi_{AD}$ cycles

Note 1: Does not depend on use of sample and hold function.

Note 2: Without sample and hold function, set the  $\phi_{AD}$  frequency to 250kHz min.

With the sample and hold function, set the  $\phi_{AD}$  frequency to 1MHz min.



## A-D Converter

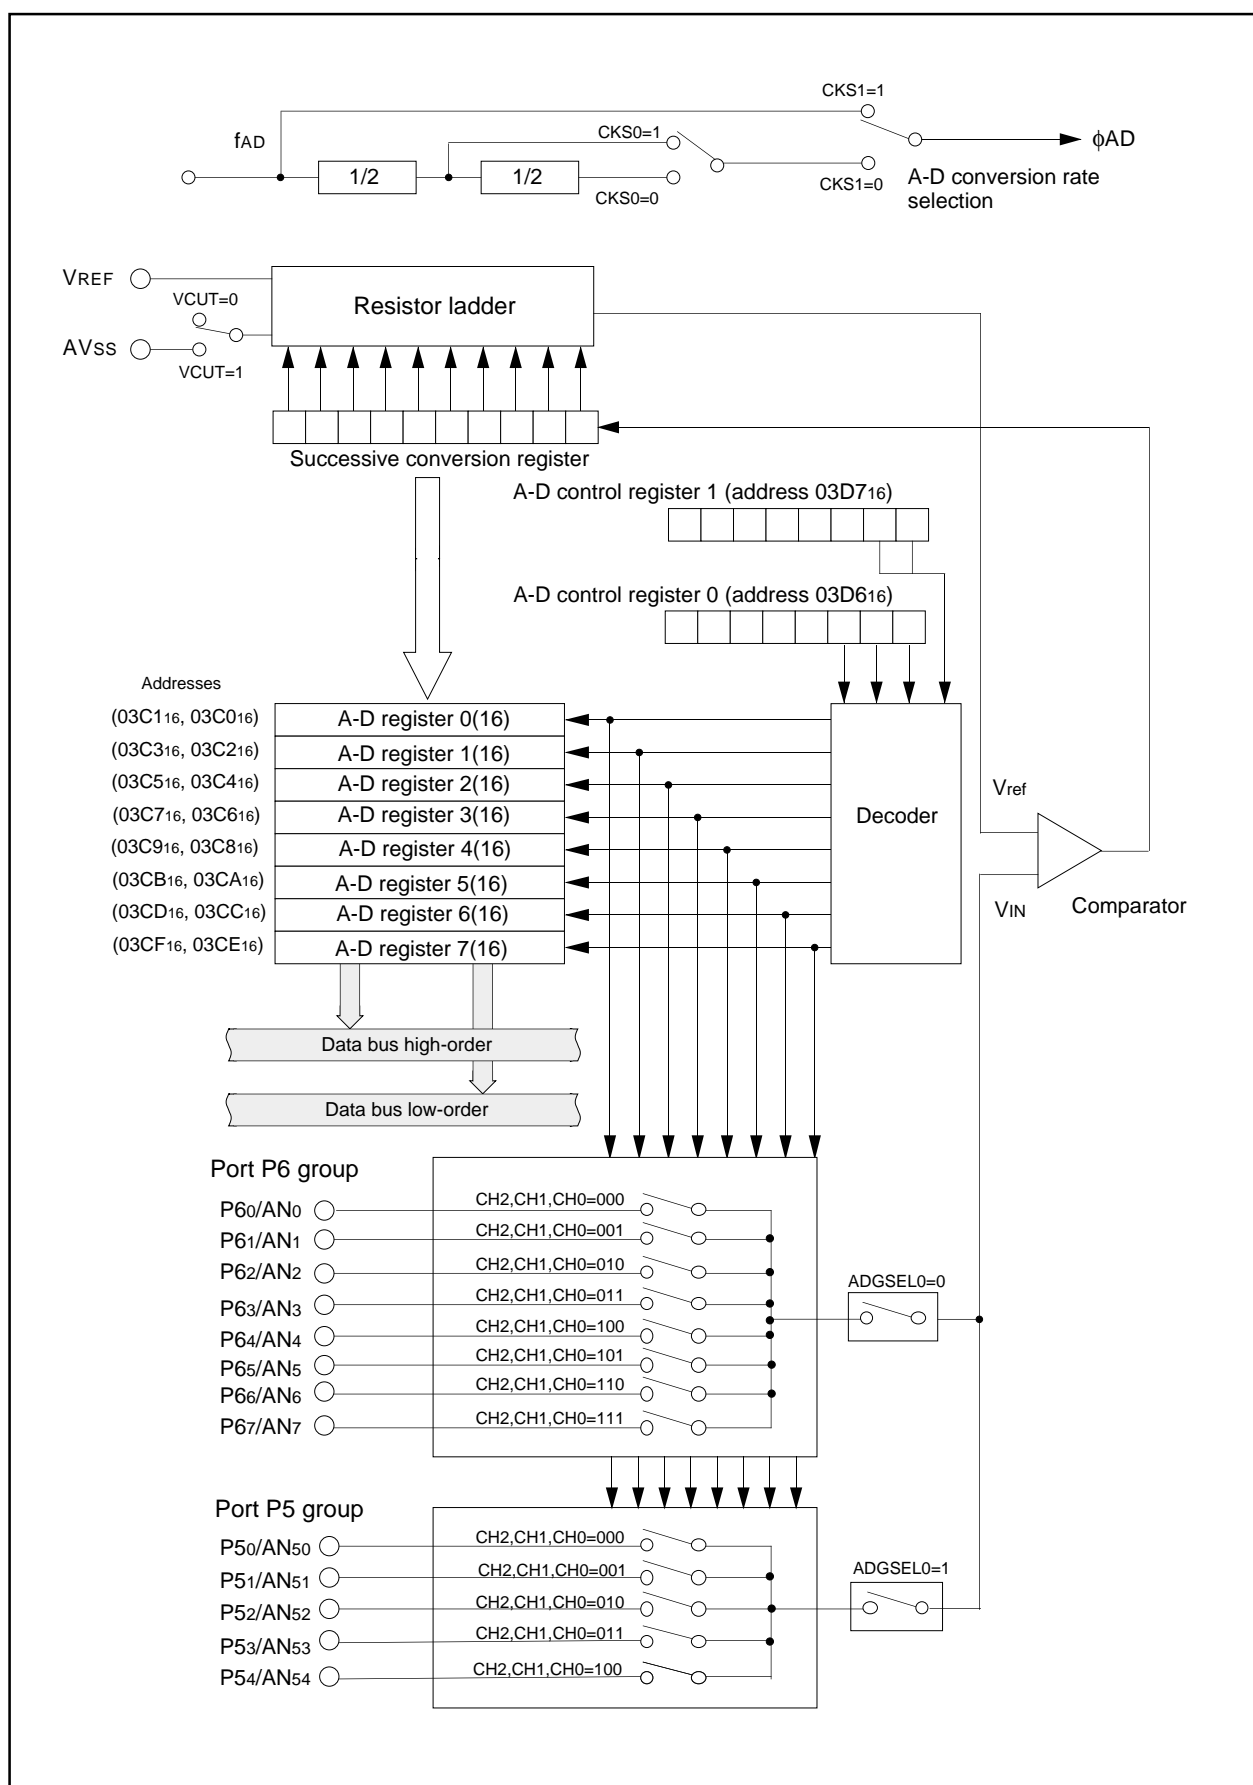


Figure 1.82. Block diagram of A-D converter

## A-D Converter

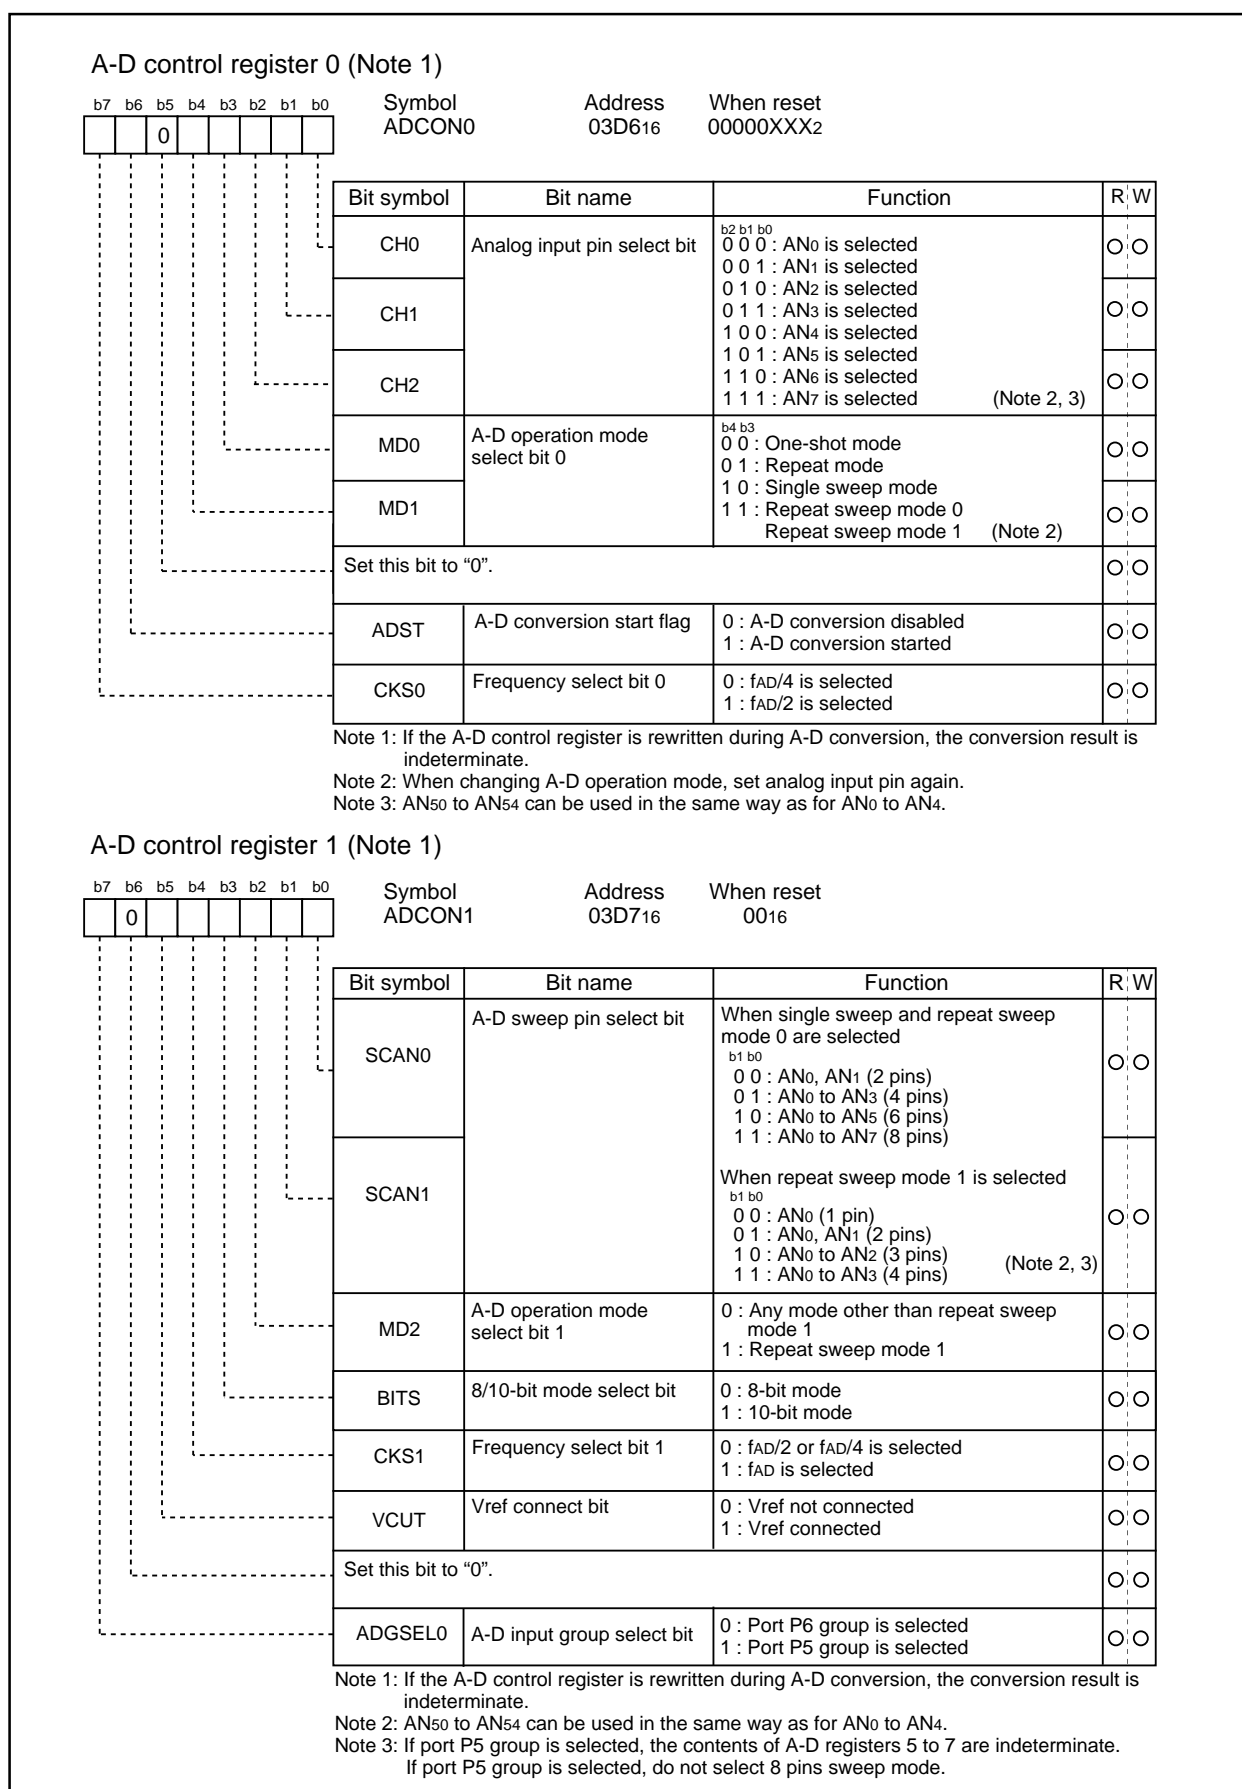


Figure 1.83. A-D converter-related registers (1)

## A-D Converter

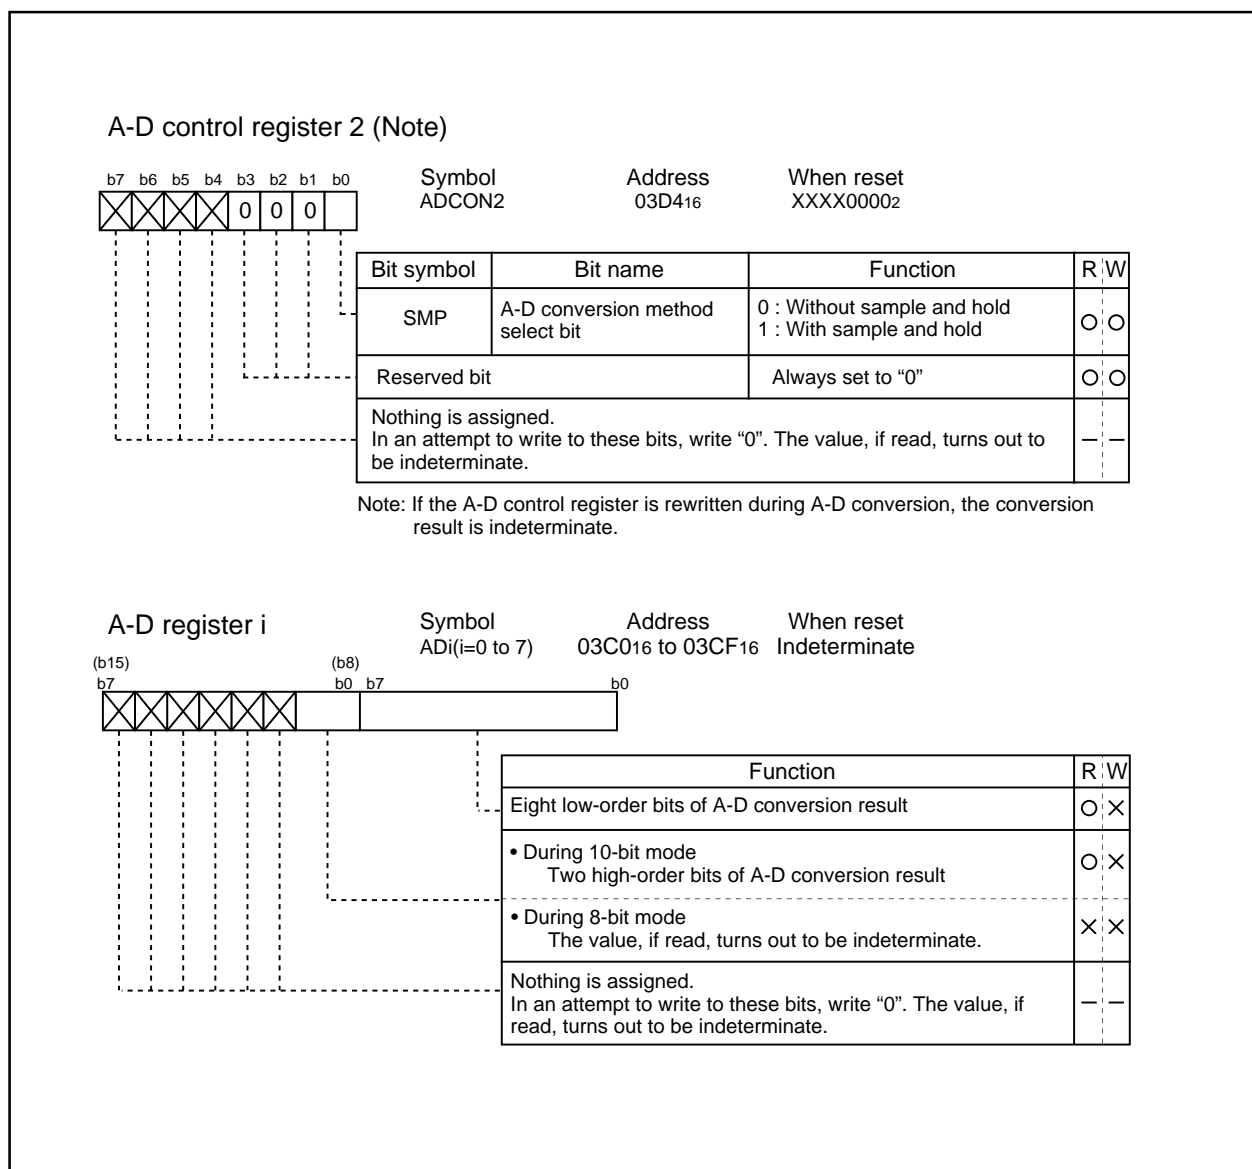


Figure 1.84. A-D converter-related registers (2)

## A-D Converter


**(1) One-shot mode**

In one-shot mode, the pin selected using the analog input pin select bit is used for one-shot A-D conversion. (See Table 1.30.) Figure 1.85 shows the A-D control register in one-shot mode.

**Table 1.30. One-shot mode specifications**

Item	Specification
Function	The pin selected by the analog input pin select bit is used for one A-D conversion
Start condition	Writing "1" to A-D conversion start flag
Stop condition	<ul style="list-style-type: none"> <li>End of A-D conversion (A-D conversion start flag changes to "0")</li> <li>Writing "0" to A-D conversion start flag</li> </ul>
Interrupt request generation timing	End of A-D conversion
Input pin	One of AN <sub>0</sub> to AN <sub>7</sub> , as selected (Note)
Reading of result of A-D converter	Read A-D register corresponding to selected pin

Note : AN<sub>50</sub> to AN<sub>54</sub> can be used in the same way as for AN<sub>0</sub> to AN<sub>4</sub>.

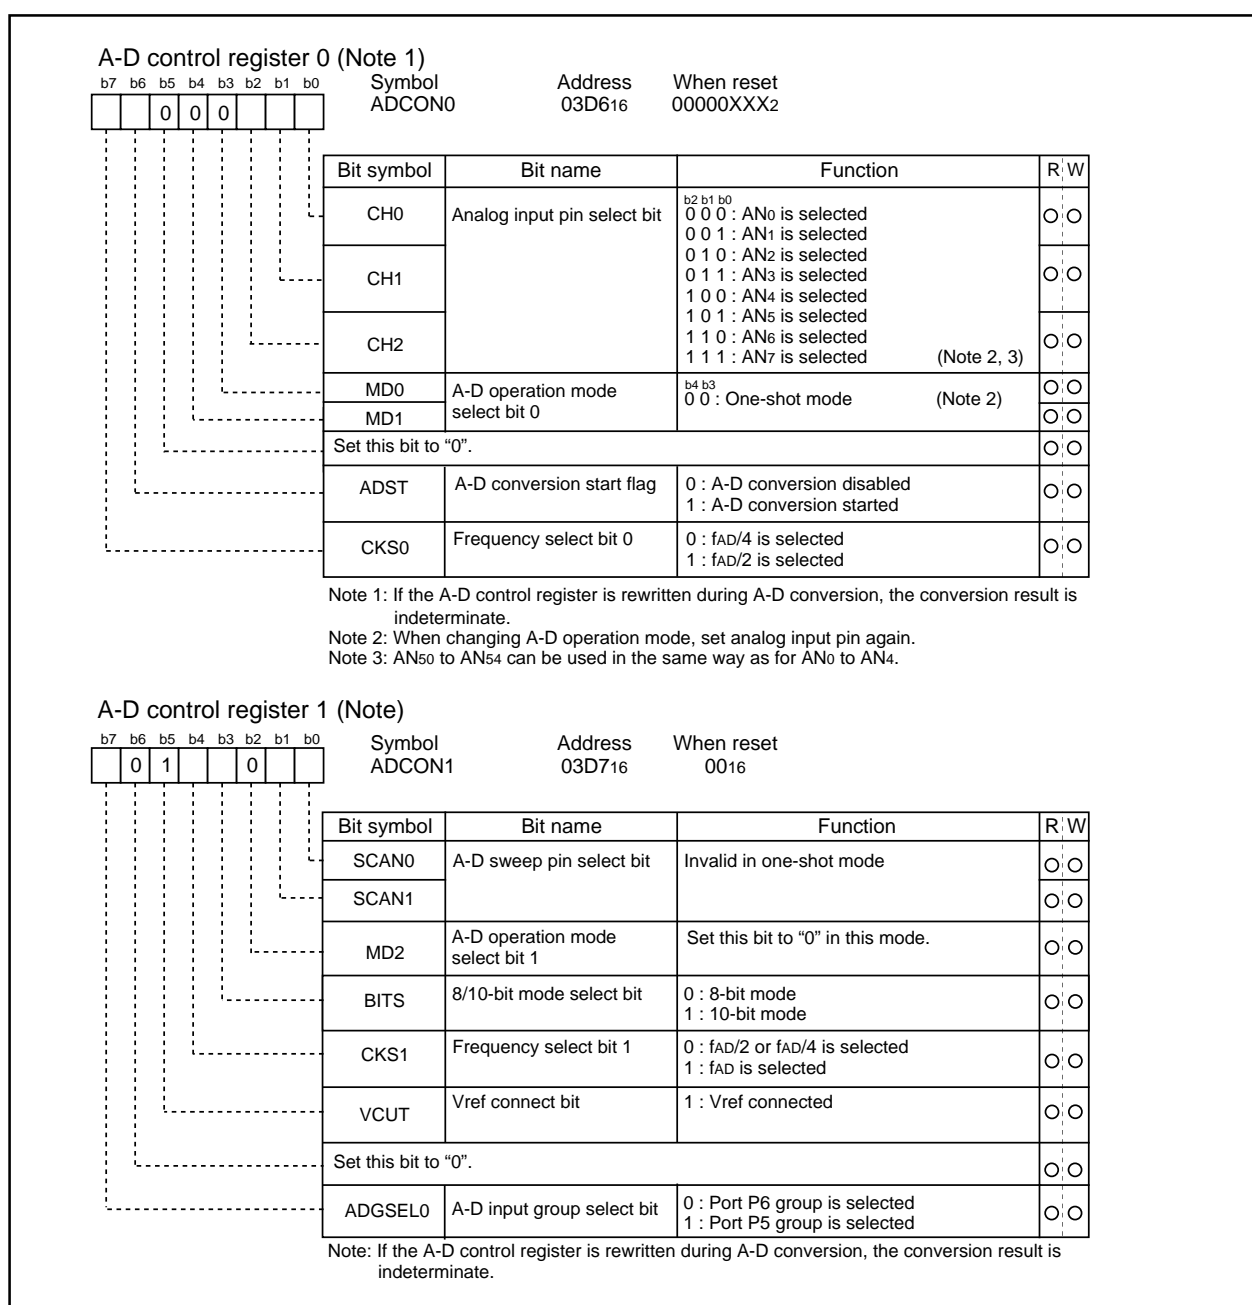**Figure 1.85. A-D conversion register in one-shot mode**

## A-D Converter


**(2) Repeat mode**

In repeat mode, the pin selected using the analog input pin select bit is used for repeated A-D conversion. (See Table 1.31.) Figure 1.86 shows the A-D control register in repeat mode.

**Table 1.31. Repeat mode specifications**

Item	Specification
Function	The pin selected by the analog input pin select bit is used for repeated A-D conversion
Start condition	Writing "1" to A-D conversion start flag
Stop condition	Writing "0" to A-D conversion start flag
Interrupt request generation timing	None generated
Input pin	One of AN0 to AN7, as selected (Note)
Reading of result of A-D converter	Read A-D register corresponding to selected pin (at any time)

Note : AN50 to AN54 can be used in the same way as for AN0 to AN4.

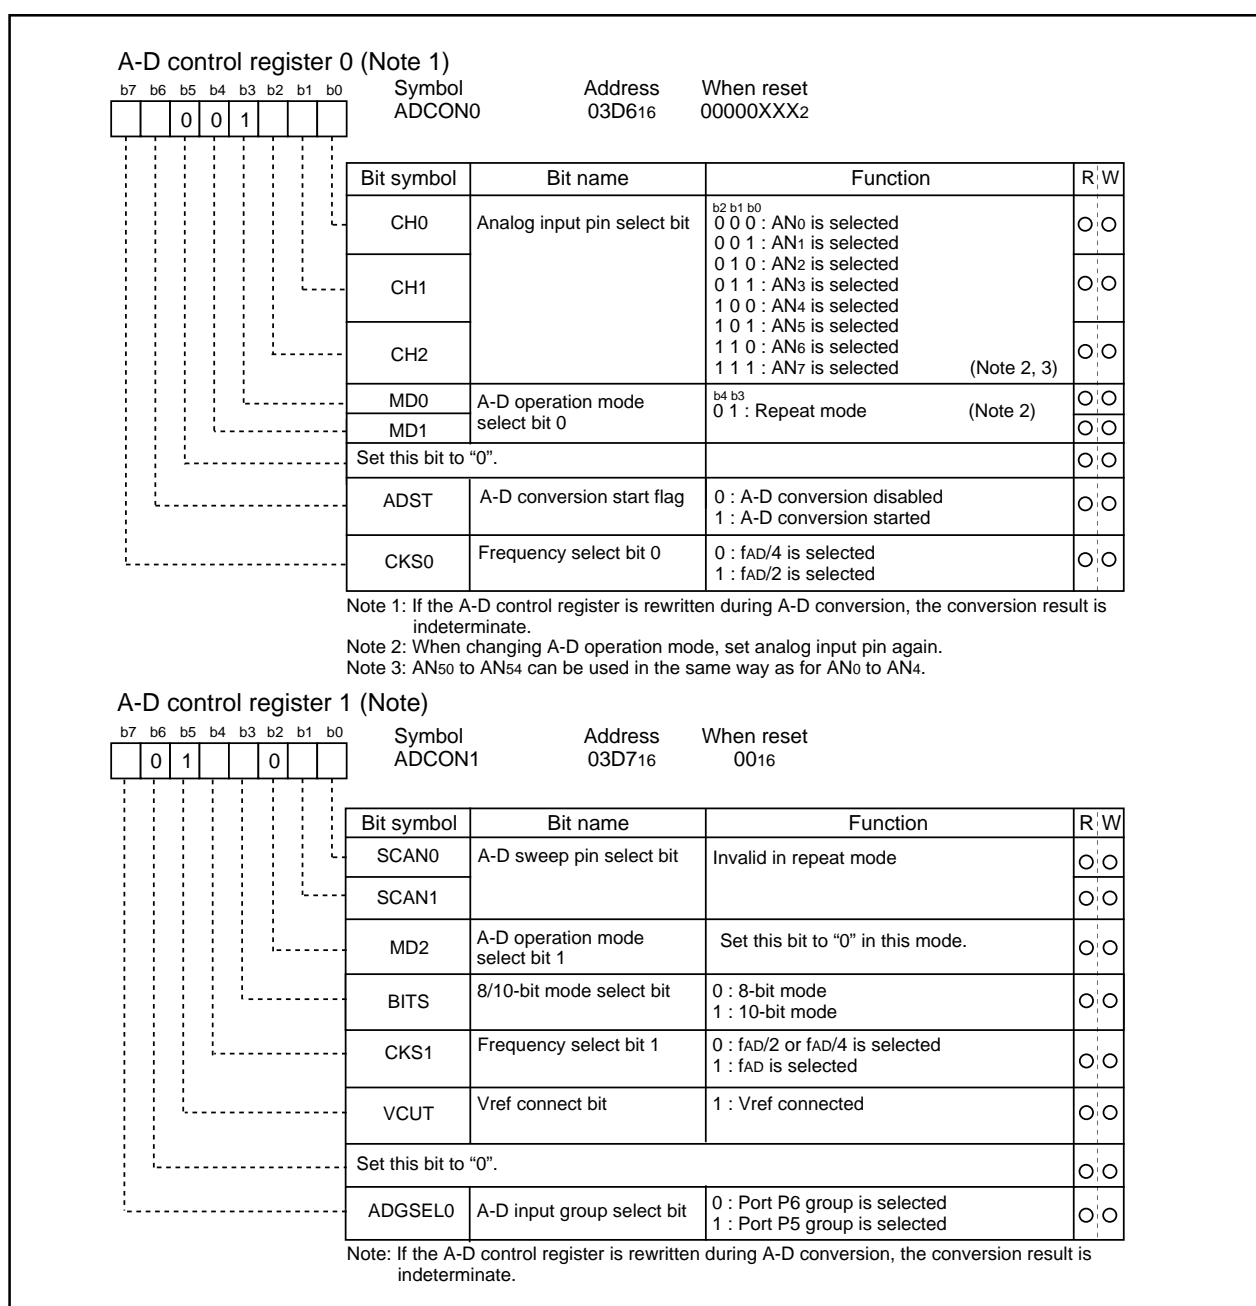**Figure 1.86. A-D conversion register in repeat mode**

## A-D Converter


**(3) Single sweep mode**

In single sweep mode, the pins selected using the A-D sweep pin select bit are used for one-by-one A-D conversion. (See Table 1.32.) Figure 1.87 shows the A-D control register in single sweep mode.

**Table 1.32. Single sweep mode specifications**

Item	Specification
Function	The pins selected by the A-D sweep pin select bit are used for one-by-one A-D conversion
Start condition	Writing "1" to A-D converter start flag
Stop condition	<ul style="list-style-type: none"> <li>End of A-D conversion (A-D conversion start flag changes to "0".)</li> <li>Writing "0" to A-D conversion start flag</li> </ul>
Interrupt request generation timing	End of A-D conversion
Input pin	AN <sub>0</sub> and AN <sub>1</sub> (2 pins), AN <sub>0</sub> to AN <sub>3</sub> (4 pins), AN <sub>0</sub> to AN <sub>5</sub> (6 pins), or AN <sub>0</sub> to AN <sub>7</sub> (8 pins)(Note)
Reading of result of A-D converter	Read A-D register corresponding to selected pin

Note : AN<sub>50</sub> to AN<sub>54</sub> can be used in the same way as for AN<sub>0</sub> to AN<sub>4</sub>.

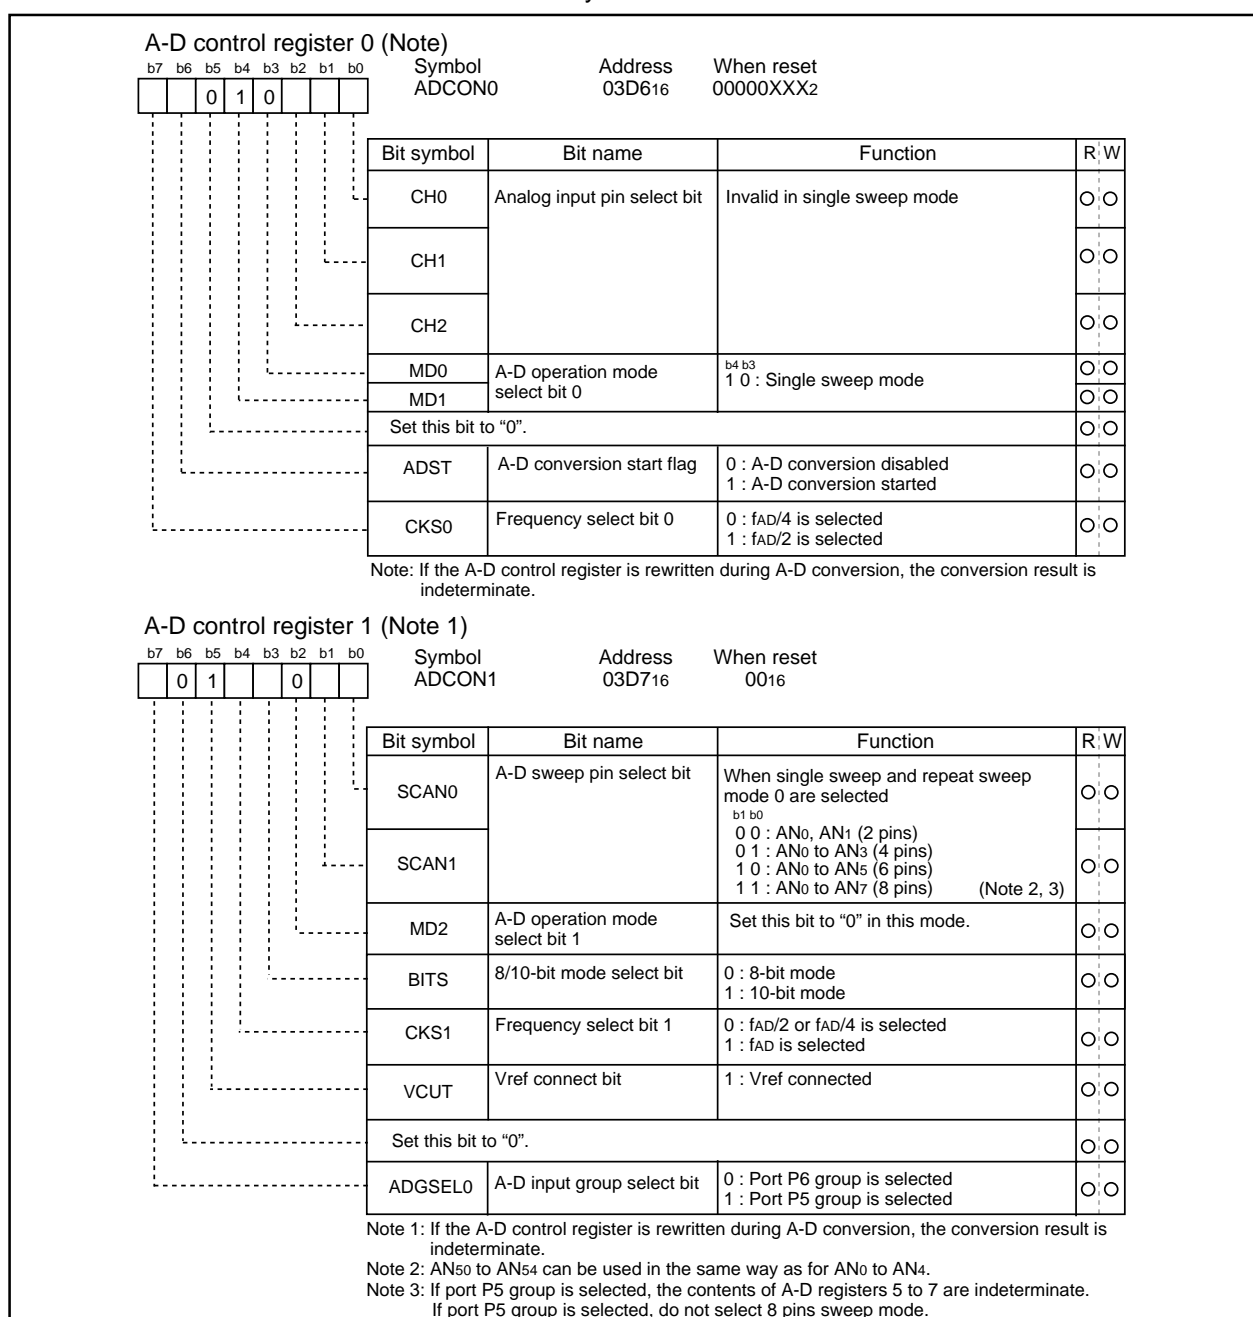**Figure 1.87. A-D conversion register in single sweep mode**

## A-D Converter


**(4) Repeat sweep mode 0**

In repeat sweep mode 0, the pins selected using the A-D sweep pin select bit are used for repeat sweep A-D conversion. (See Table 1.33.) Figure 1.88 shows the A-D control register in repeat sweep mode 0.

**Table 1.33. Repeat sweep mode 0 specifications**

Item	Specification
Function	The pins selected by the A-D sweep pin select bit are used for repeat sweep A-D conversion
Start condition	Writing "1" to A-D conversion start flag
Stop condition	Writing "0" to A-D conversion start flag
Interrupt request generation timing	None generated
Input pin	AN <sub>0</sub> and AN <sub>1</sub> (2 pins), AN <sub>0</sub> to AN <sub>3</sub> (4 pins), AN <sub>0</sub> to AN <sub>5</sub> (6 pins), or AN <sub>0</sub> to AN <sub>7</sub> (8 pins)(Note)
Reading of result of A-D converter	Read A-D register corresponding to selected pin (at any time)

Note : AN<sub>50</sub> to AN<sub>54</sub> can be used in the same way as for AN<sub>0</sub> to AN<sub>4</sub>.

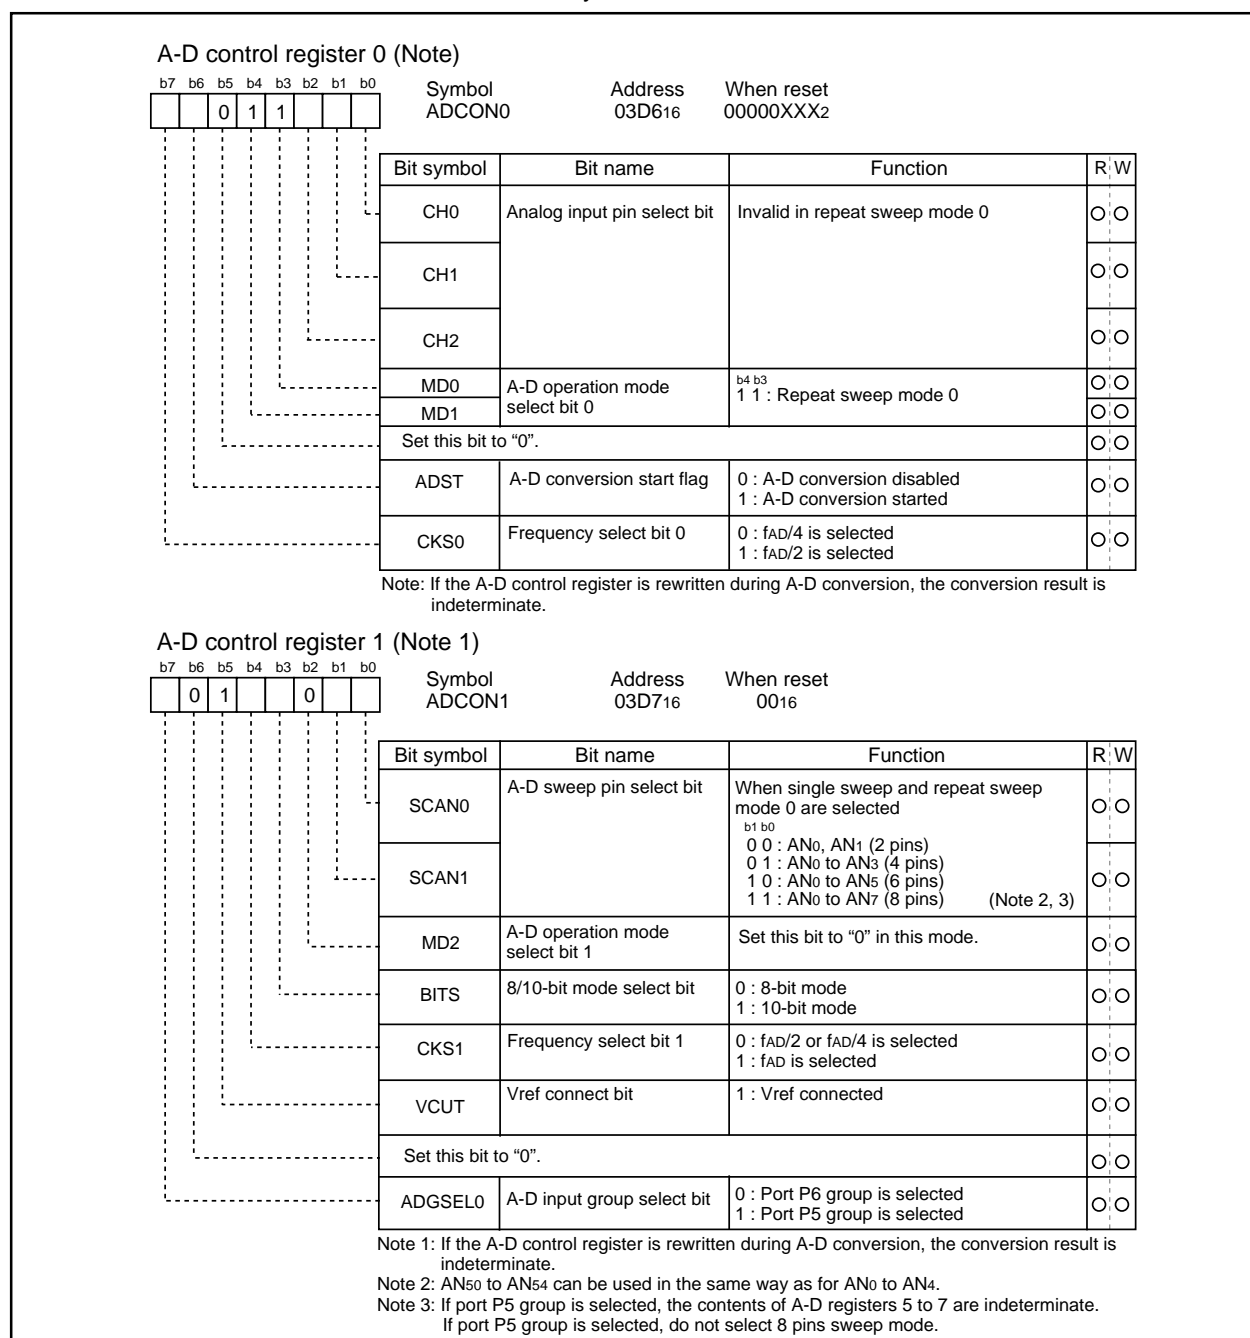**Figure 1.88. A-D conversion register in repeat sweep mode 0**

## A-D Converter


**(5) Repeat sweep mode 1**

In repeat sweep mode 1, all pins are used for A-D conversion with emphasis on the pin or pins selected using the A-D sweep pin select bit. (See Table 1.34.) Figure 1.89 shows the A-D control register in repeat sweep mode 1.

**Table 1.34. Repeat sweep mode 1 specifications**

Item	Specification
Function	All pins perform repeat sweep A-D conversion, with emphasis on the pin or pins selected by the A-D sweep pin select bit Example : AN <sub>0</sub> selected AN <sub>0</sub> → AN <sub>1</sub> → AN <sub>0</sub> → AN <sub>2</sub> → AN <sub>0</sub> → AN <sub>3</sub> , etc
Start condition	Writing "1" to A-D conversion start flag
Stop condition	Writing "0" to A-D conversion start flag
Interrupt request generation timing	None generated
Input pin	AN <sub>0</sub> (1 pin), AN <sub>0</sub> and AN <sub>1</sub> (2 pins), AN <sub>0</sub> to AN <sub>2</sub> (3 pins), AN <sub>0</sub> to AN <sub>3</sub> (4 pins) (Note)
Reading of result of A-D converter	Read A-D register corresponding to selected pin (at any time)

Note : AN<sub>50</sub> to AN<sub>54</sub> can be used in the same way as for AN<sub>0</sub> to AN<sub>4</sub>.

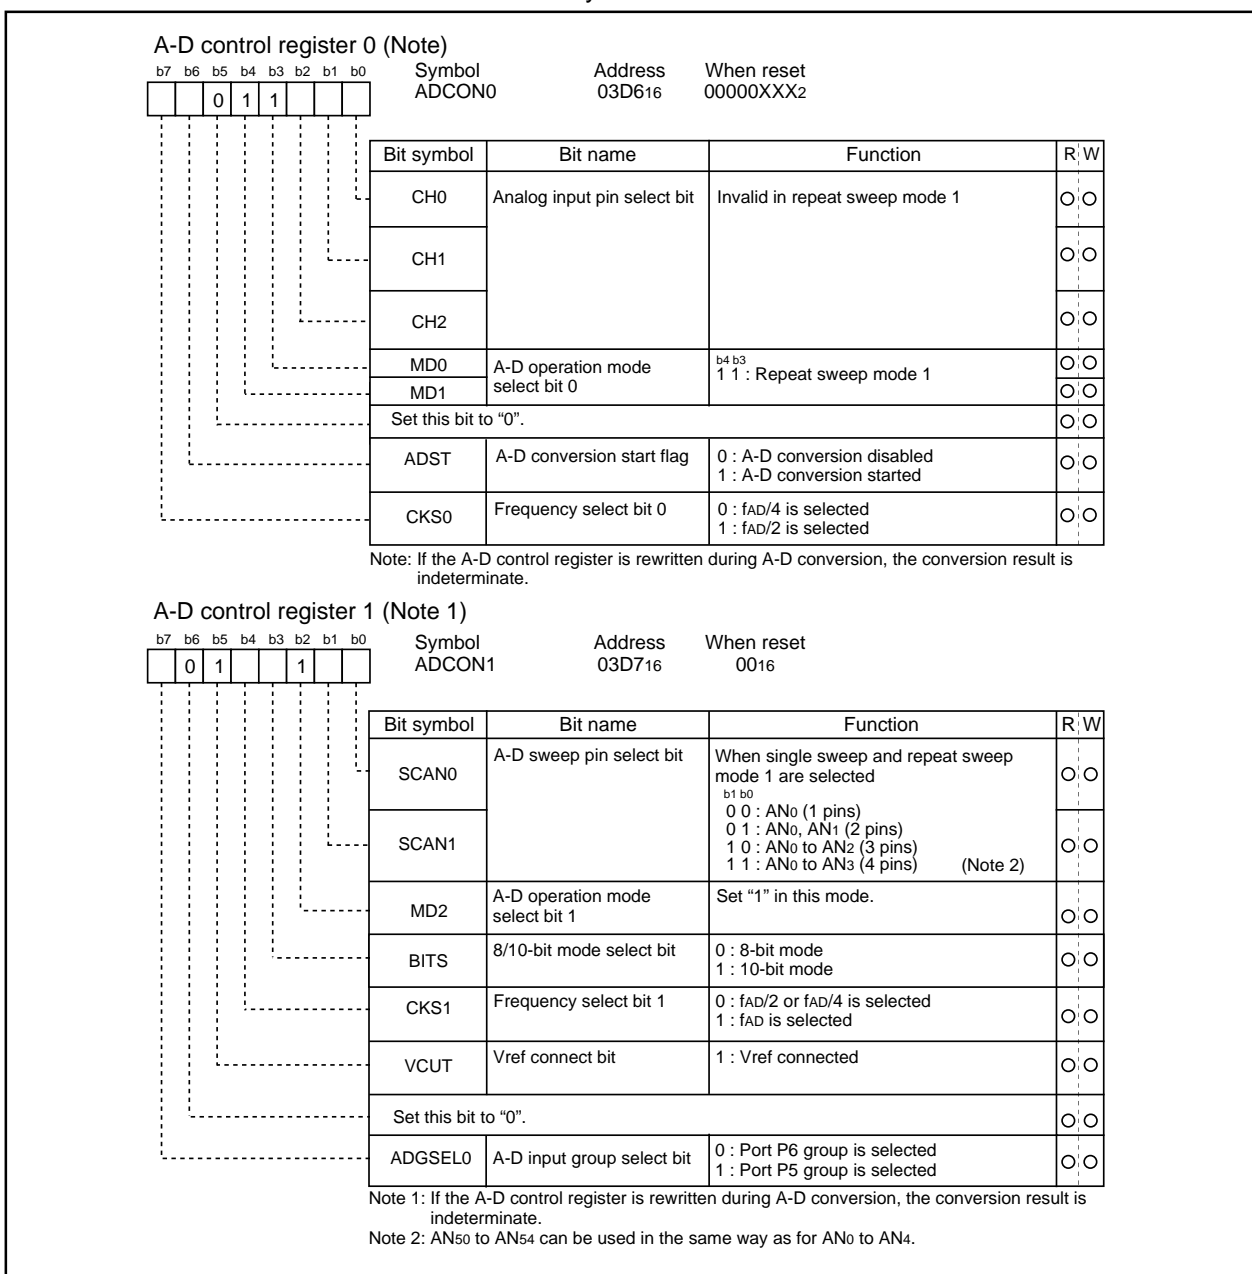**Figure 1.89. A-D conversion register in repeat sweep mode 1**



## A-D Converter

---

- **Sample and hold**

Sample and hold is selected by setting bit 0 of the A-D control register 2 (address 03D4<sub>16</sub>) to “1”. When sample and hold is selected, the rate of conversion of each pin increases. As a result, a 28  $\phi_{AD}$  cycle is achieved with 8-bit resolution and 33  $\phi_{AD}$  with 10-bit resolution. Sample and hold can be selected in all modes. However, in all modes, be sure to specify before starting A-D conversion whether sample and hold is to be used.

## Programmable I/O Port

---

### Programmable I/O Ports

There are 43 programmable I/O ports: P0 to P7. Each port can be set independently for input or output using the direction register. A pull-up resistance for each block of 4 ports can be set. The port P1 allows the drive capacity of its N-channel output transistor to be set as necessary.

Figures 1.90 to 1.92 show the programmable I/O ports.

Each pin functions as a programmable I/O port and as the I/O for the built-in peripheral devices.

To use the pins as the inputs for the built-in peripheral devices, set the direction register of each pin to input mode. When the pins are used as the outputs for the built-in peripheral devices, they function as outputs regardless of the contents of the direction registers. See the descriptions of the respective functions for how to set up the built-in peripheral devices.

#### (1) Direction registers

Figure 1.93 shows the direction registers.

These registers are used to choose the direction of the programmable I/O ports. Each bit in these registers corresponds one for one to each I/O pin.

#### (2) Port registers

Figure 1.94 shows the port registers.

These registers are used to write and read data for input and output to and from an external device. A port register consists of a port latch to hold output data and a circuit to read the status of a pin. Each bit in port registers corresponds one for one to each I/O pin.

#### (3) Pull-up control registers

Figure 1.95 shows the pull-up control registers.

The pull-up control register can be set to apply a pull-up resistance to each block of 4 ports. When ports are set to have a pull-up resistance, the pull-up resistance is connected only when the direction register is set for input.

#### (4) Port P1 drive capacity control register

Figure 1.95 shows a structure of the port P1 drive capacity control register.

This register is used to control the drive capacity of the port P1's N-channel output transistor. Each bit in this register corresponds one for one to the port pins.

## Programmable I/O Port

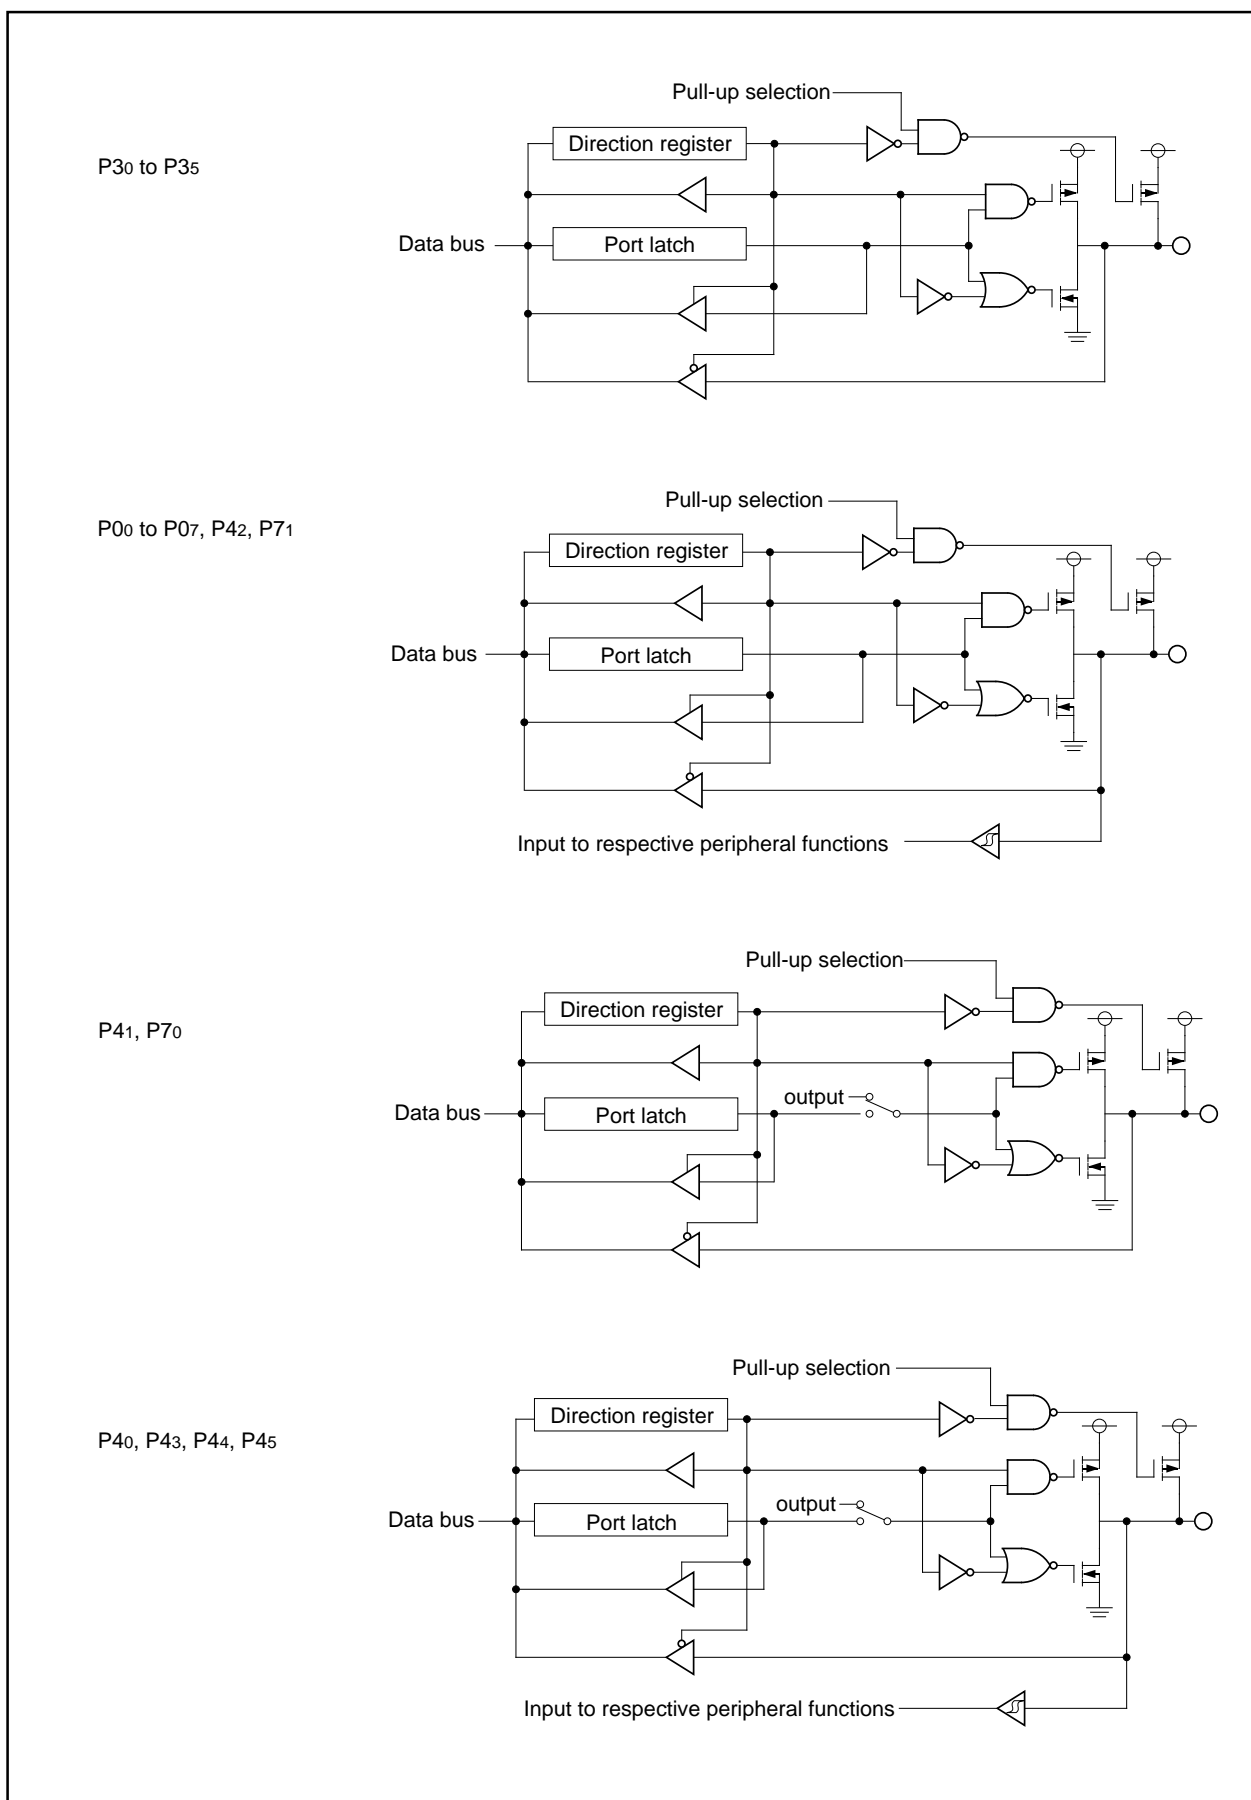


Figure 1.90. Programmable I/O ports (1)

## Programmable I/O Port

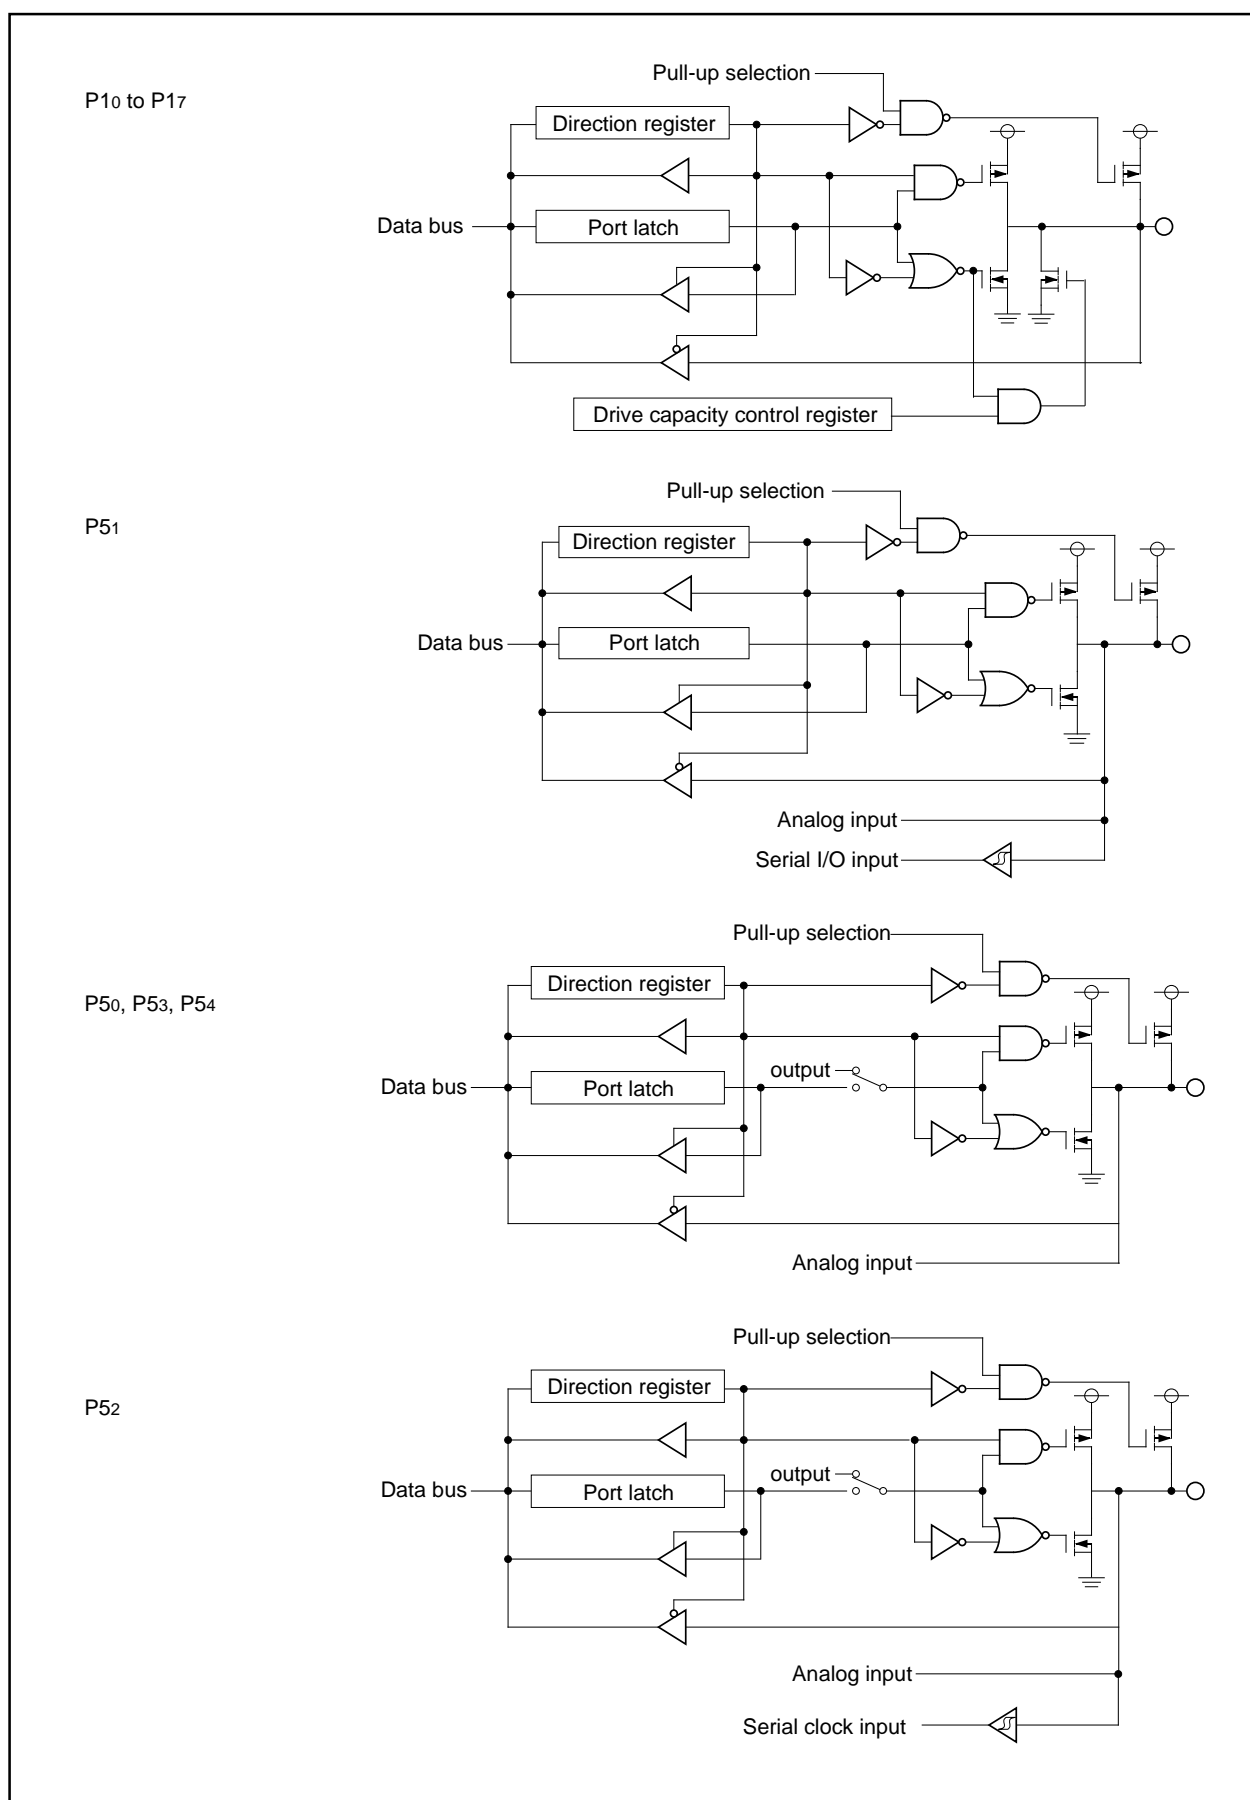


Figure 1.91. Programmable I/O ports (2)

## Programmable I/O Port

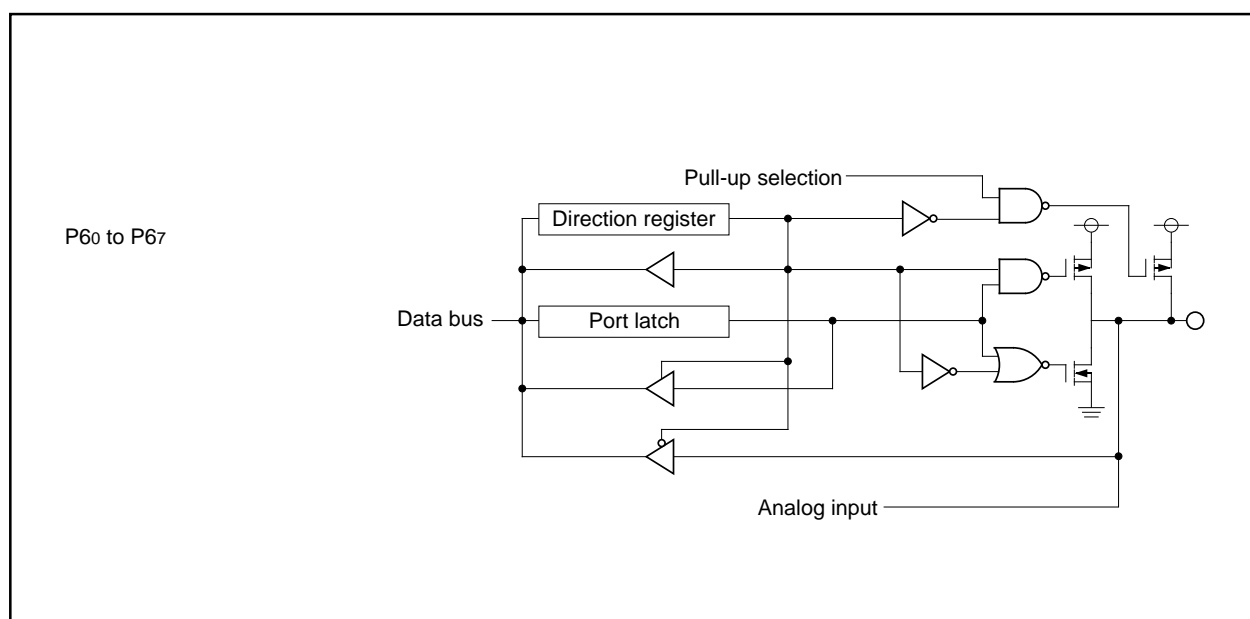


Figure 1.92. Programmable I/O ports (3)

## Programmable I/O Port

## Port Pi direction register (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset	
								PDi (i = 0 to 7)	03E2 <sub>16</sub> , 03E3 <sub>16</sub> , 03E7 <sub>16</sub> , 03EA <sub>16</sub> , 03EB <sub>16</sub> , 03EE <sub>16</sub> , 03EF <sub>16</sub>	00 <sub>16</sub> 00 <sub>16</sub>	
								Bit symbol	Bit name	Function	R/W
								PDi_0	Port Pi0 direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port) (i = 0 to 7 except 2)	○/○
								PDi_1	Port Pi1 direction register		○/○
								PDi_2	Port Pi2 direction register		○/○
								PDi_3	Port Pi3 direction register		○/○
								PDi_4	Port Pi4 direction register		○/○
								PDi_5	Port Pi5 direction register		○/○
								PDi_6	Port Pi6 direction register		○/○
								PDi_7	Port Pi7 direction register		○/○

Note 1: Set bit 2 of protect register (address 000A<sub>16</sub>) to "1" before rewriting to the port P4 direction register.

Note 2: Nothing is assigned in direction register of P3<sub>6</sub>, P3<sub>7</sub>, P4<sub>6</sub>, P4<sub>7</sub>, P5<sub>5</sub> to p5<sub>7</sub>, P7<sub>2</sub> to P7<sub>7</sub>. These bits can either be set nor reset. When read, its contents are indeterminate.

Figure 1.93. Direction register

## Programmable I/O Port

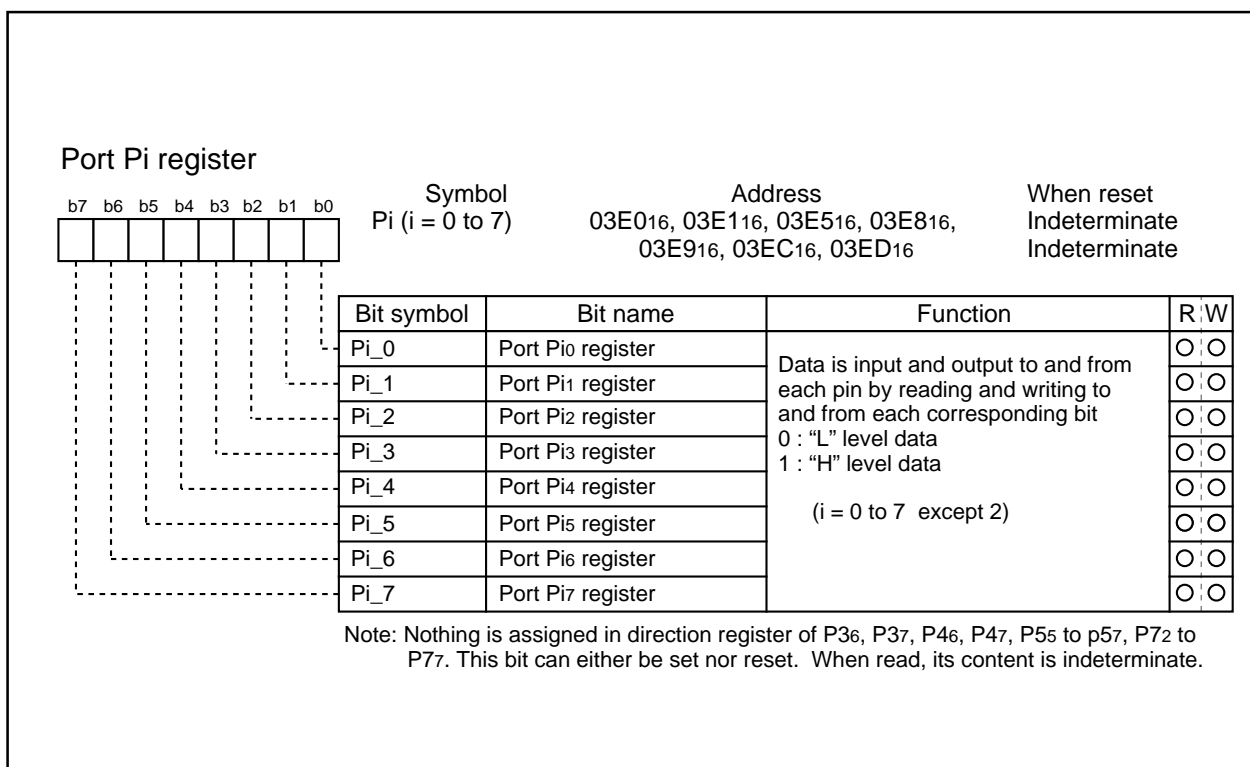



Figure 1.94. Port register


## Programmable I/O Port

## Pull-up control register 0

Symbol  
PUR0Address  
03FC<sub>16</sub>When reset  
00<sub>16</sub>


Bit symbol	Bit name	Function	R	W
PU00	P00 to P03 pull-up	The corresponding port is pulled high with a pull-up resistor 0 : Not pulled high 1 : Pulled high	○	○
PU01	P04 to P07 pull-up		○	○
PU02	P10 to P13 pull-up		○	○
PU03	P14 to P17 pull-up		○	○
—	—		○	○
—	—		○	○
PU06	P30 to P33 pull-up		○	○
PU07	P34 to P35 pull-up		○	○

## Pull-up control register 1

Symbol  
PUR1Address  
03FD<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
PU10	P40 to P43 pull-up	The corresponding port is pulled high with a pull-up resistor 0 : Not pulled high 1 : Pulled high	○	○
PU11	P44 to P47 pull-up		○	○
PU12	P50 to P53 pull-up		○	○
PU13	P54 pull-up		○	○
PU14	P60 to P63 pull-up		○	○
PU15	P64 to P67 pull-up		○	○
PU16	P70 to P71 pull-up		○	○
—	—		○	○

## Port P1 drive capacity control register

Symbol  
DRRAddress  
03FE<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
DRR0	Port P10 drive capacity	Set P1 N-channel output transistor drive capacity 0 : LOW 1 : HIGH	○	○
DRR1	Port P11 drive capacity		○	○
DRR2	Port P12 drive capacity		○	○
DRR3	Port P13 drive capacity		○	○
DRR4	Port P14 drive capacity		○	○
DRR5	Port P15 drive capacity		○	○
DRR6	Port P16 drive capacity		○	○
DRR7	Port P17 drive capacity		○	○

Figure 1.95. Pull-up control register



## Programmable I/O Port

**Example connection of unused pins****Table 1.36. Example connection of unused pins**

Pin name	Connection
Ports P0, P1, P3 to P7	After setting for input mode, connect every pin to Vss (pull-down); or after setting for output mode, leave these pins open.
XOUT (Note)	Open
AVCC	Connect to VCC
AVSS, VREF	Connect to VSS

Note: With external clock input to XIN pin.

## Usage precaution

**Usage Precaution****Timer A (timer mode)**

- (1) Reading the timer A0 register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer A0 register with the reload timing gets "FFFF<sub>16</sub>". Reading the timer A0 register after setting a value in the timer A0 register with a count halted but before the counter starts counting gets a proper value.

**Timer A (event counter mode)**

- (1) Reading the timer A0 register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer A0 register with the reload timing gets "FFFF<sub>16</sub>" by under-flow or "0000<sub>16</sub>" by overflow. Reading the timer A0 register after setting a value in the timer A0 register with a count halted but before the counter starts counting gets a proper value.
- (2) When stop counting in free run type, set timer again.

**Timer A (one-shot timer mode)**

- (1) Setting the count start flag to "0" while a count is in progress causes as follows:
- The counter stops counting and a content of reload register is reloaded.
  - The TA0OUT pin outputs "L" level.
  - The interrupt request generated and the timer A0 interrupt request bit goes to "1".
- (2) The timer A0 interrupt request bit goes to "1" if the timer's operation mode is set using any of the following procedures:
- Selecting one-shot timer mode after reset.
  - Changing operation mode from timer mode to one-shot timer mode.
  - Changing operation mode from event counter mode to one-shot timer mode.

Therefore, to use timer A0 interrupt (interrupt request bit), set timer A0 interrupt request bit to "0" after the above listed changes have been made.

**Timer A (pulse width modulation mode)**

- (1) The timer A0 interrupt request bit becomes "1" if setting operation mode of the timer in compliance with any of the following procedures:
- Selecting PWM mode after reset.
  - Changing operation mode from timer mode to PWM mode.
  - Changing operation mode from event counter mode to PWM mode.

Therefore, to use timer A0 interrupt (interrupt request bit), set timer A0 interrupt request bit to "0" after the above listed changes have been made.

- (2) Setting the count start flag to "0" while PWM pulses are being output causes the counter to stop counting. If the TA0OUT pin is outputting an "H" level in this instance, the output level goes to "L", and the timer A0 interrupt request bit goes to "1". If the TA0OUT pin is outputting an "L" level in this instance, the level does not change, and the timer A0 interrupt request bit does not becomes "1".

## Usage precaution

---

### Timer B (timer mode, event counter mode)

- (1) Reading the timer Bi register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Bi register with the reload timing gets "FFFF<sub>16</sub>". Reading the timer Bi register after setting a value in the timer Bi register with a count halted but before the counter starts counting gets a proper value.

### Timer B (pulse period/pulse width measurement mode)

- (1) If changing the measurement mode select bit is set after a count is started, the timer Bi interrupt request bit goes to "1".
- (2) When the first effective edge is input after a count is started, an indeterminate value is transferred to the reload register. At this time, timer Bi interrupt request is not generated.

### Timer X (timer mode)

- (1) Reading the timer Xi register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Xi register with the reload timing gets "FFFF<sub>16</sub>". Reading the timer A0 register after setting a value in the timer Xi register with a count halted but before the counter starts counting gets a proper value.

### Timer X (event counter mode)

- (1) Reading the timer Xi register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Xi register with the reload timing gets "FFFF<sub>16</sub>" by underflow or "0000<sub>16</sub>" by overflow. Reading the timer Xi register after setting a value in the timer Xi register with a count halted but before the counter starts counting gets a proper value.
- (2) When stop counting in free run type, set timer again.

### Timer X (one-shot timer mode)

- (1) Setting the count start flag to "0" while a count is in progress causes as follows:
  - The counter stops counting and a content of reload register is reloaded.
  - The TXiINOUT pin outputs "L" level.
  - The interrupt request generated and the timer Xi interrupt request bit goes to "1".
- (2) The timer Xi interrupt request bit goes to "1" if the timer's operation mode is set using any of the following procedures:
  - Selecting one-shot timer mode after reset.
  - Changing operation mode from timer mode to one-shot timer mode.
  - Changing operation mode from event counter mode to one-shot timer mode.

Therefore, to use timer Xi interrupt (interrupt request bit), set timer Xi interrupt request bit to "0" after the above listed changes have been made.

## Usage precaution

**Timer X (pulse width modulation mode)**

- (1) The timer Xi interrupt request bit becomes "1" if setting operation mode of the timer in compliance with any of the following procedures:

- Selecting PWM mode after reset.
- Changing operation mode from timer mode to PWM mode.
- Changing operation mode from event counter mode to PWM mode.

Therefore, to use timer Xi interrupt (interrupt request bit), set timer Xi interrupt request bit to "0" after the above listed changes have been made.

- (2) Setting the count start flag to "0" while PWM pulses are being output causes the counter to stop counting. If the TXiINOUT pin is outputting an "H" level in this instance, the output level goes to "L", and the timer Xi interrupt request bit goes to "1". If the TXiINOUT pin is outputting an "L" level in this instance, the level does not change, and the timer Xi interrupt request bit does not become "1".

**Timer X (pulse period/pulse width measurement mode)**

- (1) If changing the measurement mode select bit is set after a count is started, the timer Xi interrupt request bit goes to "1".
- (2) When the first effective edge is input after a count is started, an indeterminate value is transferred to the reload register. At this time, timer Xi interrupt request is not generated.

**A-D Converter**

- (1) Write to each bit (except bit 6) of A-D control register 0, to each bit of A-D control register 1, and to bit 0 of A-D control register 2 when A-D conversion is stopped (before a trigger occurs).  
In particular, when the Vref connection bit is changed from "0" to "1", start A-D conversion after an elapse of 1  $\mu$ s or longer.
- (2) When changing A-D operation mode, select analog input pin again.
- (3) Using one-shot mode or single sweep mode  
Read the correspondence A-D register after confirming A-D conversion is finished. (It is known by A-D conversion interrupt request bit.)
- (4) Using repeat mode, repeat sweep mode 0 or repeat sweep mode 1  
Use the undivided main clock as the internal CPU clock.

**Stop Mode and Wait Mode**

- (1) When returning from stop mode by hardware reset,  $\overline{\text{RESET}}$  pin must be set to "L" level until main clock oscillation is stabilized.
- (2) When shifting to WAIT mode or STOP mode, the program stops after reading 8 bytes from the WAIT instruction and the instruction that sets all clock stop bits to "1" in the instruction queue. Therefore, insert a minimum of 8 NOPs after the WAIT instruction and the instruction that sets all clock stop bits to "1".
- (3) When the MCU running in low-speed or low power dissipation mode, do not enter WAIT mode with WAIT peripheral function clock stop bit set to "1".

## Usage precaution

---

### Interrupts

#### (1) Reading address 00000<sub>16</sub>

- When maskable interrupt is occurred, CPU read the interrupt information (the interrupt number and interrupt request level) in the interrupt sequence.

The interrupt request bit of the certain interrupt written in address 00000<sub>16</sub> will then be set to "0".

Reading address 00000<sub>16</sub> by software sets enabled highest priority interrupt source request bit to "0".

Though the interrupt is generated, the interrupt routine may not be executed.

Do not read address 00000<sub>16</sub> by software.

#### (2) Setting the stack pointer

- The value of the stack pointer immediately after reset is initialized to 0000<sub>16</sub>. Accepting an interrupt before setting a value in the stack pointer may become a factor of runaway. Be sure to set a value in the stack pointer before accepting an interrupt.

Concerning the first instruction immediately after reset, generating any interrupt is prohibited.

#### (3) External interrupt

- When changing a polarity of pins  $\overline{\text{INT0}}$  and  $\overline{\text{INT1}}$ , the interrupt request bit may become "1". Clear the interrupt request bit after changing the polarity.

#### (4) Changing interrupt control register

See "Changing Interrupt Control Register".

## Electrical characteristics

### Electrical characteristics

**Table 1.36. Absolute maximum ratings**

Symbol	Parameter	Condition	Rated value	Unit
V <sub>cc</sub>	Supply voltage		- 0.3 to 6.5 (Note 1)	V
AV <sub>cc</sub>	Analog supply voltage		- 0.3 to 6.5 (Note 1)	V
V <sub>I</sub>	Input voltage RESET, CNVss, P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub> , VREF, XIN		- 0.3 to V <sub>cc</sub> + 0.3 (Note 2)	V
V <sub>O</sub>	Output voltage P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub> , VREF, XIN		- 0.3 to V <sub>cc</sub> + 0.3	V
P <sub>d</sub>	Power dissipation	T <sub>a</sub> = 25 °C	1000 (Note 3)	mW
T <sub>opr</sub>	Operating ambient temperature		- 20 to 85 (Note 4)	°C
T <sub>stg</sub>	Storage temperature		- 40 to 150 (Note 5)	°C

Note 1: Flash memory version: -0.3 to 7 (V) .

Note 2: When writing to flash MCU, CNVss is -0.3 to 13 (V) .

Note 3: Flat package (56P6S-A) is 300 mW.

Note 4: Extended operating temperature version: -40 to 85 °C. When flash memory version is program/erase mode: 25±5 °C.

Note 5: Extended operating temperature version: -65 to 150 °C.

## Electrical characteristics

Table 1.37. Recommended operating conditions (Note 1)

Symbol	Parameter		Standard			Unit
			Min	Typ.	Max.	
V <sub>CC</sub>	Supply voltage	Mask ROM version	2.7	5.0	5.5	V
		Flash memory version	4.0	5.0	5.5	
A <sub>V</sub> CC	Analog supply voltage			V <sub>CC</sub>		V
V <sub>SS</sub>	Supply voltage			0		V
A <sub>V</sub> SS	Analog supply voltage			0		V
V <sub>IH</sub>	HIGH input voltage	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71, X <sub>IN</sub> , RESET, CNV <sub>SS</sub> ,	0.8V <sub>CC</sub>		V <sub>CC</sub>	V
V <sub>IL</sub>	LOW input voltage	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71, X <sub>IN</sub> , RESET, CNV <sub>SS</sub>	0		0.2V <sub>CC</sub>	V
I <sub>OH</sub> (peak)	HIGH peak output current	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71			- 10.0	mA
I <sub>OL</sub> (peak)	LOW peak output current	P00 to P07, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71			10.0	mA
I <sub>OL</sub> (peak)	LOW peak output current	P10 to P17			30.0	mA
		HIGHPOWER LOWPOWER			10.0	
I <sub>OH</sub> (avg)	HIGH average output current	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71			- 5.0	mA
I <sub>OL</sub> (avg)	LOW average output current	P00 to P07, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71			5.0	mA
I <sub>OL</sub> (avg)	LOW average output current	P10 to P17			15.0	mA
		HIGHPOWER LOWPOWER			5.0	
f (X <sub>IN</sub> )	Main clock input oscillation frequency	Mask ROM version	V <sub>CC</sub> =4.0V to 5.5V	0	10	MHz
			V <sub>CC</sub> =2.7V to 4.0V	0	5 x V <sub>CC</sub> - 10.000	MHz
		Flash memory version	V <sub>CC</sub> =4.0V to 5.5V	0	10	MHz
f (X <sub>CIN</sub> )	Subclock oscillation frequency			32.768	50	kHz


Note 1: Unless otherwise noted: V<sub>CC</sub> = 2.7V to 5.5V, V<sub>SS</sub> = 0V, T<sub>a</sub> = - 20 to 85°C (Extended operating temperature version:- 40 to 85°C). Flash version: V<sub>CC</sub> = 4.0V to 5.5V, V<sub>SS</sub> = 0V, T<sub>a</sub> = - 20 to 85°C (Extended operating temperature version:- 40 to 85°C.)

Note 2: The average output current is an average value measured over 100ms.

Note 3: Keep output current as follows:

The sum of port P3 and P4 I<sub>OL</sub> (peak) is under 40 mA. The sum of port P1 I<sub>OL</sub> (peak) is under 60 mA. The sum of port P1, P3 and P4 I<sub>OH</sub> (peak) is under 40 mA. The sum of port P0, P5, P6 and P7 I<sub>OL</sub> (peak) is under 80 mA. The sum of port P0, P5, P6 and P7 I<sub>OH</sub> (peak) is under 80 mA.

Note 4: Relationship between main clock oscillation frequency and supply voltage.

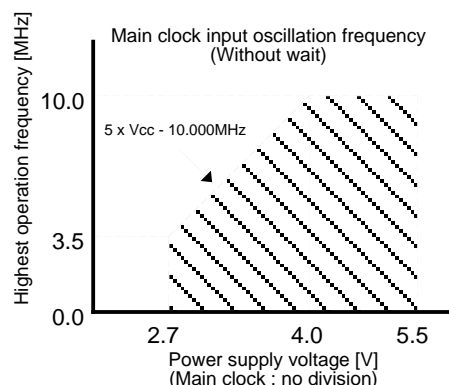

Electrical characteristics (Vcc = 5V)

Vcc = 5V

**Table 1.38. Electrical characteristics (Note1)**

Symbol	Parameter		Measuring condition	Standard			Unit
				Min.	Typ.	Max.	
VOH	HIGH output voltage	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71	IOH = - 5 mA	3.0			V
VOH	HIGH output voltage	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71	IOH = - 200 $\mu$ A	4.7			V
VOH	HIGH output voltage	XOUT	HIGHPOWER	3.0			V
			LOWPOWER	3.0			
VOH	HIGH output voltage	XCOUT	HIGHPOWER		3.0		V
			LOWPOWER		1.6		
VOL	LOW output voltage	P00 to P07, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71	IOL = 5 mA			2.0	V
VOL	LOW output voltage	P00 to P07, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71	IOL = 200 $\mu$ A			0.45	V
VOL	LOW output voltage	P10 to P17	HIGHPOWER			2.0	V
			LOWPOWER			2.0	
VOL	LOW output voltage	P10 to P17	HIGHPOWER			0.3	V
			LOWPOWER			0.45	
VOL	LOW output voltage	XOUT	HIGHPOWER			2.0	V
			LOWPOWER			2.0	
VOL	LOW output voltage	XOUT	HIGHPOWER		0		V
			LOWPOWER		0		
VT+ -VT-	Hysteresis	TA0IN, TX0INOUT, TX1INOUT, TX2INOUT, TB0IN, TB1IN, INT0, INT1, CLK0, KI0 to KI7, RxD0, RxD1		0.2		0.8	V
VT+ -VT-	Hysteresis	RESET		0.2		1.8	V
IiH	HIGH input current	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71, RESET, CNVss	Vi = 5V			5.0	$\mu$ A
IiL	LOW input current	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71, RESET, CNVss	Vi = 0V			-5.0	$\mu$ A
RPULLUP	Pull-up resistor	P00 to P07, P10 to P17, P30 to P35, P40 to P45, P50 to P54, P60 to P67, P70, P71	Vi = 0V	30.0	50.0	167.0	k $\Omega$
RXIN	Feedback resistor	XIN			1.0		M $\Omega$
RXCIN	Feedback resistor	XCIN			6.0		M $\Omega$
V <sub>RAM</sub>	RAM retention voltage		When clock is stopped	2.0			V
Icc	Power supply current	I/O pin has no load	f(XIN)=10MHz Square wave, no division		19.0	38.0	mA
			f(XCIN)=32kHz Square wave		90.0		$\mu$ A
			f(XCIN)=32kHz When a WAIT instruction is executed (Note 2)		4.0		$\mu$ A
			Ta=25°C when clock is stopped			1.0	$\mu$ A
			Ta=85°C when clock is stopped			20.0	

Note 1: Unless otherwise noted: Vcc = 5V, Vss = 0V at Ta = -20 to 85°C, f(XIN) = 10MHz

(Extended operating temperature version; -40 to 85°C)

Note 2: With one timer operated using fc32.



Electrical characteristics ( $V_{CC} = 5V$ )

$V_{CC} = 5V$

**Table 1.39. A-D conversion characteristics (Note)**

Symbol	Parameter		Measuring condition	Standard			Unit
				Min.	Typ.	Max.	
—	Resolution		$V_{REF} = V_{CC}$			10	Bits
—	Absolute accuracy	Sample & hold function not available	$V_{REF} = V_{CC} = 5V$			$\pm 3$	LSB
		Sample & hold function available(10bit)	$V_{REF} = V_{CC} = 5V$			$\pm 3$	LSB
		Sample & hold function available(8bit)	$V_{REF} = V_{CC} = 5V$			$\pm 2$	LSB
$R_{LADDER}$	Ladder resistance		$V_{REF} = V_{CC}$	10		40	kohm
$t_{CONV}$	Conversion time(10bit)			3.3			$\mu s$
$t_{CONV}$	Conversion time(8bit)			2.8			$\mu s$
$t_{SAMP}$	Sampling time			0.3			$\mu s$
$V_{REF}$	Reference voltage			2		$V_{CC}$	V
$V_{IA}$	Analog input voltage			0		$V_{REF}$	V

Note : Unless otherwise noted:  $V_{CC} = AV_{CC} = V_{REF} = 5V$ ,  $V_{SS} = AV_{SS} = 0V$  at  $T_a = -25^{\circ}C$ ,  $f(XIN) = 10MHz$

Electrical characteristics ( $V_{CC} = 5V$ )

$V_{CC} = 5V$

Timing requirements (referenced to  $V_{CC} = 5V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)

\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$

**Table 1.40. External clock input**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c$	External clock input cycle time	100		ns
$t_{w(H)}$	External clock input HIGH pulse width	40		ns
$t_{w(L)}$	External clock input LOW pulse width	40		ns
$t_r$	External clock rise time		15	ns
$t_f$	External clock fall time		15	ns

**Table 1.41. Timer A input (counter input in event counter mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	100		ns
$t_w(TAH)$	TA0IN input HIGH pulse width	40		ns
$t_w(TAL)$	TA0IN input LOW pulse width	40		ns

**Table 1.42. Timer A input (gating input in timer mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	400		ns
$t_w(TAH)$	TA0IN input HIGH pulse width	200		ns
$t_w(TAL)$	TA0IN input LOW pulse width	200		ns

**Table 1.43. Timer A input (external trigger input in one-shot timer mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	200		ns
$t_w(TAH)$	TA0IN input HIGH pulse width	100		ns
$t_w(TAL)$	TA0IN input LOW pulse width	100		ns

**Table 1.44. Timer A input (external trigger input in pulse width modulation mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_w(TAH)$	TA0IN input HIGH pulse width	100		ns
$t_w(TAL)$	TA0IN input LOW pulse width	100		ns

**Table 1.45. Timer A input (up/down input in event counter mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(UP)$	TA0OUT input cycle time	2000		ns
$t_w(UPH)$	TA0OUT input HIGH pulse width	1000		ns
$t_w(UPL)$	TA0OUT input LOW pulse width	1000		ns
$t_{su}(UP-TIN)$	TA0OUT input setup time	400		ns
$t_h(TIN-UP)$	TA0OUT input hold time	400		ns

Electrical characteristics ( $V_{CC} = 5V$ )

$V_{CC} = 5V$

Timing requirements (referenced to  $V_{CC} = 5V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)

\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$

**Table 1.46. Timer B input (counter input in event counter mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time (counted on one edge)	100		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on one edge)	40		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on one edge)	40		ns
$t_{c(TB)}$	TBiIN input cycle time (counted on both edges)	200		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on both edges)	80		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on both edges)	80		ns

**Table 1.47. Timer B input (pulse period measurement mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	400		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	200		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	200		ns

**Table 1.48. Timer B input (pulse width measurement mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	400		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	200		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	200		ns

**Table 1.49. Timer X input (counter input in event counter mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	100		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	40		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	40		ns

**Table 1.50. Timer X input (gate input in timer mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	400		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	200		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	200		ns

**Table 1.51. Timer X input (external trigger input in one-shot timer mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	200		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	100		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	100		ns

Electrical characteristics ( $V_{CC} = 5V$ )

$V_{CC} = 5V$

**Timing requirements (referenced to  $V_{CC} = 5V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)**

**\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$**

**Table 1.52. Timer X input (pulse period measurement mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TX)$	TXiINOUT input cycle time	400		ns
$t_w(TXH)$	TXiINOUT input HIGH pulse width	200		ns
$t_w(TXL)$	TXiINOUT input LOW pulse width	200		ns

**Table 1.53. Timer X input (pulse width measurement mode)**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TX)$	TXiINOUT input cycle time	400		ns
$t_w(TXH)$	TXiINOUT input HIGH pulse width	200		ns
$t_w(TXL)$	TXiINOUT input LOW pulse width	200		ns


**Table 1.54. Serial I/O**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(CK)$	CLK0 input cycle time	200		ns
$t_w(CKH)$	CLK0 input HIGH pulse width	100		ns
$t_w(CKL)$	CLK0 input LOW pulse width	100		ns
$t_d(C-Q)$	TxDi output delay time		80	ns
$t_h(C-Q)$	TxDi hold time	0		ns
$t_{su}(D-C)$	RxDi input setup time	30		ns
$t_h(C-D)$	RxDi input hold time	90		ns

**Table 1.55. External interrupt  $\overline{INTi}$  inputs**

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_w(INH)$	$\overline{INTi}$ input HIGH pulse width	250		ns
$t_w(INL)$	$\overline{INTi}$ input LOW pulse width	250		ns

# Electrical characteristics ( $V_{CC} = 5V$ )

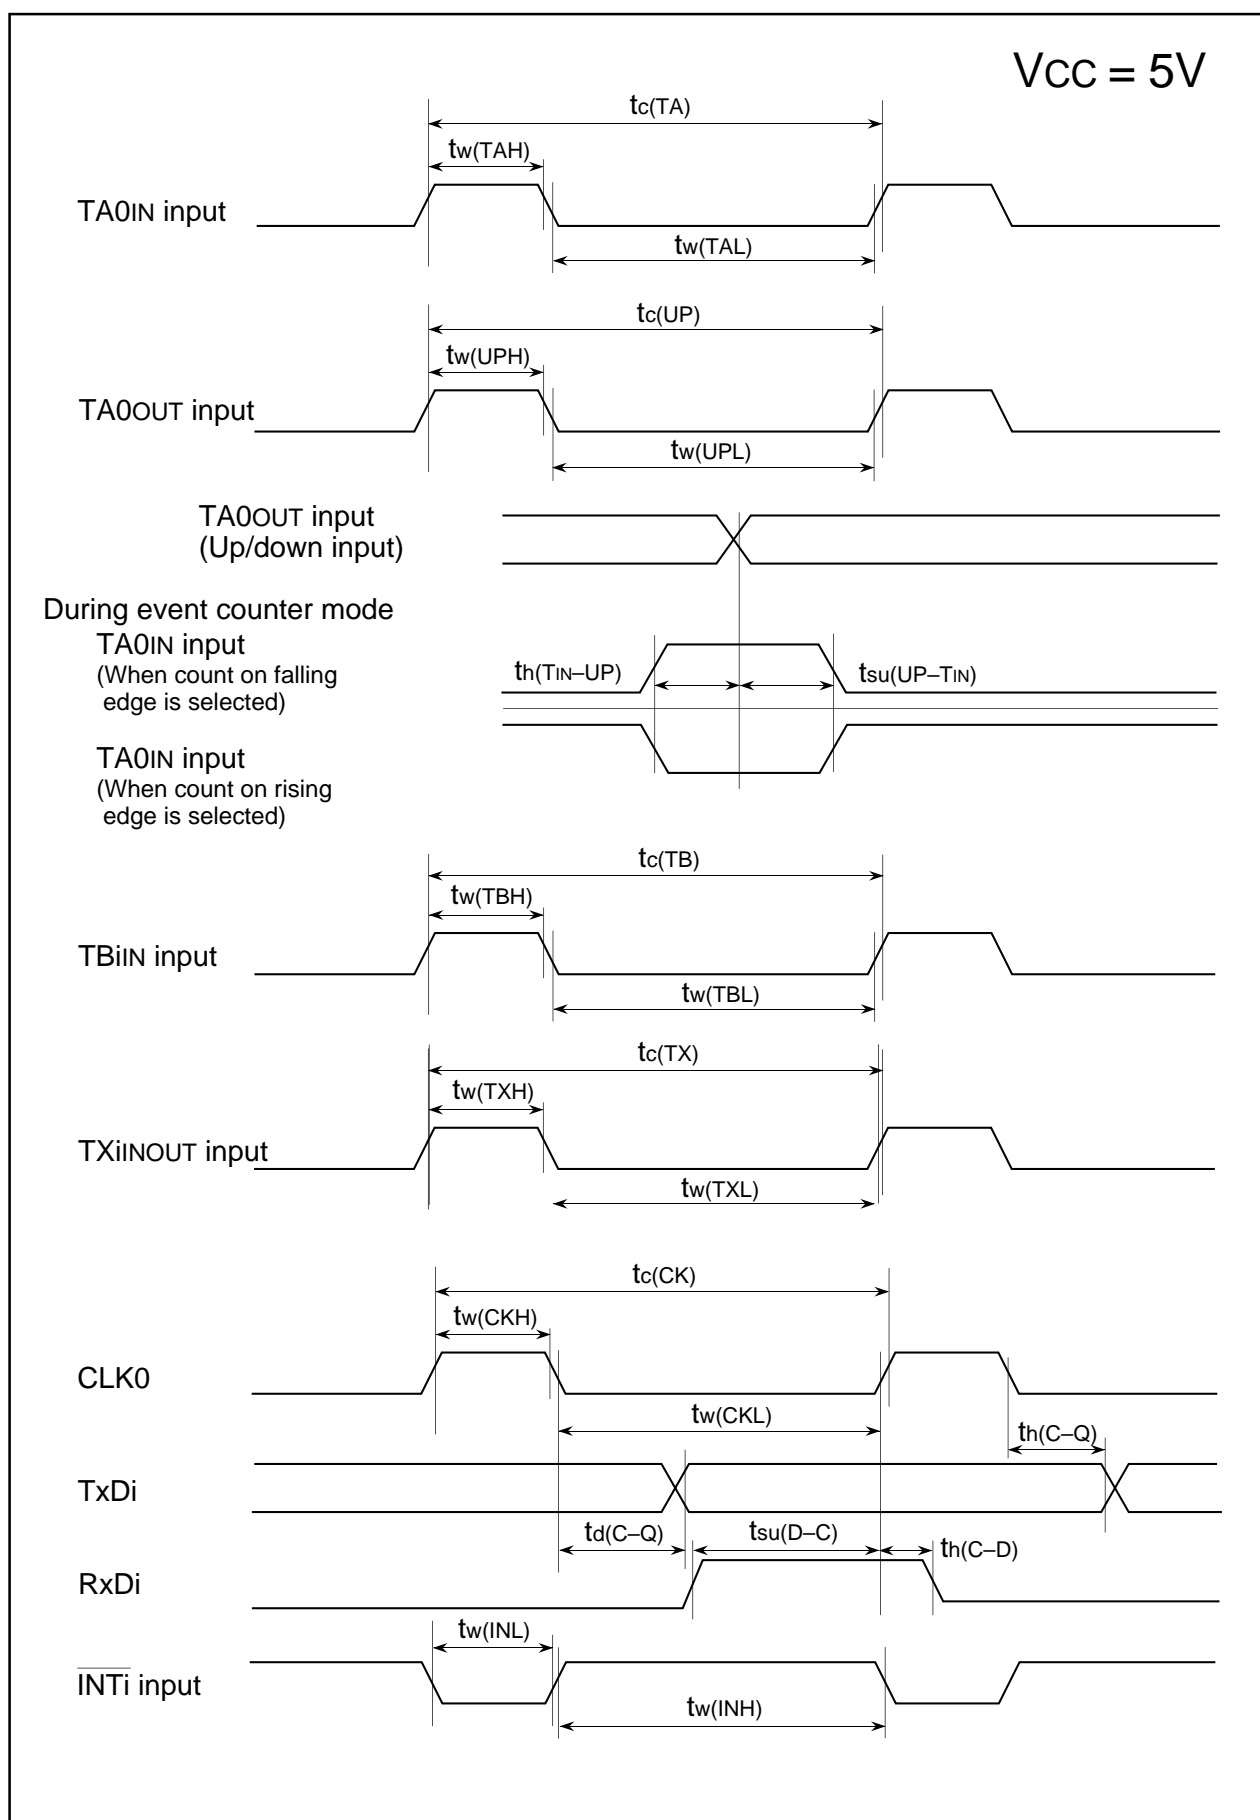

Electrical characteristics (V<sub>CC</sub> = 3V)V<sub>CC</sub> = 3V

Table 1.56. Electrical characteristics (Note 1)

Symbol	Parameter		Measuring condition	Standard			Unit
				Min.	Typ.	Max.	
V <sub>OH</sub>	HIGH output voltage	P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub>	I <sub>OH</sub> = - 1mA	2.5			V
V <sub>OH</sub>	HIGH output voltage	X <sub>OUT</sub>	HIGHPOWER	2.5			V
			LOWPOWER	2.5			
V <sub>OH</sub>	HIGH output voltage	X <sub>COUT</sub>	HIGHPOWER		3.0		V
			LOWPOWER		1.6		
V <sub>OL</sub>	LOW output voltage	P0 <sub>0</sub> to P0 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub>	I <sub>OL</sub> = 1 mA			0.5	V
V <sub>OL</sub>	LOW output voltage	P1 <sub>0</sub> to P1 <sub>7</sub>	HIGHPOWER			0.5	V
			LOWPOWER			0.5	
V <sub>OL</sub>	LOW output voltage	X <sub>OUT</sub>	HIGHPOWER			0.5	V
			LOWPOWER			0.5	
V <sub>OL</sub>	LOW output voltage	X <sub>OUT</sub>	HIGHPOWER		0		V
			LOWPOWER		0		
V <sub>T+</sub> -V <sub>T-</sub>	Hysteresis	TA0IN, TX0INOUT, TX1INOUT, TX2INOUT TB0IN, TB1IN INT0, INT1, CLK0, K10 to K17 RxD0, RxD1		0.2		0.8	V
V <sub>T+</sub> -V <sub>T-</sub>	Hysteresis	RESET		0.2		1.8	V
I <sub>IH</sub>	HIGH input current	P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub> , RESET, CNVss	V <sub>I</sub> = 3V			4.0	μA
I <sub>IL</sub>	LOW input current	P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub> , RESET, CNVss	V <sub>I</sub> = 0V			-4.0	μA
R <sub>PULLUP</sub>	Pull-up resistor	P0 <sub>0</sub> to P0 <sub>7</sub> , P1 <sub>0</sub> to P1 <sub>7</sub> , P3 <sub>0</sub> to P3 <sub>5</sub> , P4 <sub>0</sub> to P4 <sub>5</sub> , P5 <sub>0</sub> to P5 <sub>4</sub> , P6 <sub>0</sub> to P6 <sub>7</sub> , P7 <sub>0</sub> , P7 <sub>1</sub>	V <sub>I</sub> = 0V	66.0	120.0	500.0	kΩ
R <sub>XIN</sub>	Feedback resistor	X <sub>IN</sub>			3.0		MΩ
R <sub>XIN</sub>	Feedback resistor	X <sub>IN</sub>			10.0		MΩ
V <sub>RAM</sub>	RAM retention voltage		When clock is stopped	2.0			V
I <sub>CC</sub>	Power supply current	I/O pin has no load	f(X <sub>IN</sub> )=3.5MHz Square wave, no division		3.5	7.0	mA
			f(X <sub>CIN</sub> )=32kHz Square wave		40.0		μA
			f(X <sub>CIN</sub> )=32kHz When a WAIT instruction is executed Oscillation capacity HIGH (Note 2)		2.8		μA
			f(X <sub>CIN</sub> )=32kHz When a WAIT instruction is executed Oscillation capacity LOW (Note 2)		0.9		μA
			Ta=25°C when clock is stopped			1.0	μA
			Ta=85°C when clock is stopped			20.0	

Note 1: Unless otherwise noted: V<sub>CC</sub> = 3V, V<sub>SS</sub> = 0V at Ta = -20 to 85°C, f(X<sub>IN</sub>) = 3.5MHz)  
(Extended operating temperature version; -40 to 85°C)

Note 2: With one timer operated using fc32.

Electrical characteristics ( $V_{CC} = 3V$ ) $V_{CC} = 3V$ **Table 1.57. A-D conversion characteristics (Note)**

Symbol	Parameter		Measuring condition	Standard			Unit
				Min.	Typ.	Max.	
—	Resolution		$V_{REF} = V_{CC}$			10	Bits
—	Absolute accuracy	Sample & hold function not available (8bit)	$V_{REF} = V_{CC} = 3V$ , $\emptyset_{AD} = f_{AD}$			$\pm 2$	LSB
$R_{LADDER}$	Ladder resistance		$V_{REF} = V_{CC}$	10		40	kohm
$t_{CONV}$	Conversion time(8bit)			14.0			$\mu s$
$V_{REF}$	Reference voltage			2.7		$V_{CC}$	V
$V_{IA}$	Analog input voltage			0		$V_{REF}$	V

Note : Unless otherwise noted:  $V_{CC} = AV_{CC} = V_{REF} = 3V$ ,  $V_{SS} = AV_{SS} = 0V$  at  $T_a = 25^\circ C$ ,  $f(XIN) = 3.5MHz$ .

Electrical characteristics ( $V_{CC} = 3V$ ) $V_{CC} = 3V$ 

Timing requirements (referenced to  $V_{CC} = 3V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)

\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$

Table 1.58. External clock input

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c$	External clock input cycle time	286		ns
$t_{w(H)}$	External clock input HIGH pulse width	120		ns
$t_{w(L)}$	External clock input LOW pulse width	120		ns
$t_r$	External clock rise time		18	ns
$t_f$	External clock fall time		18	ns

Table 1.59. Timer A input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	300		ns
$t_{w(TAH)}$	TA0IN input HIGH pulse width	120		ns
$t_{w(TAL)}$	TA0IN input LOW pulse width	120		ns

Table 1.60. Timer A input (gating input in timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	1200		ns
$t_{w(TAH)}$	TA0IN input HIGH pulse width	600		ns
$t_{w(TAL)}$	TA0IN input LOW pulse width	600		ns

Table 1.61. Timer A input (external trigger input in one-shot timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(TA)$	TA0IN input cycle time	600		ns
$t_{w(TAH)}$	TA0IN input HIGH pulse width	300		ns
$t_{w(TAL)}$	TA0IN input LOW pulse width	300		ns

Table 1.62. Timer A input (external trigger input in pulse width modulation mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(TAH)}$	TA0IN input HIGH pulse width	300		ns
$t_{w(TAL)}$	TA0IN input LOW pulse width	300		ns

Table 1.63. Timer A input (up/down input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_c(UP)$	TA0OUT input cycle time	6000		ns
$t_{w(UPH)}$	TA0OUT input HIGH pulse width	3000		ns
$t_{w(UPL)}$	TA0OUT input LOW pulse width	3000		ns
$t_{su}(UP-TIN)$	TA0OUT input setup time	1200		ns
$t_h(TIN-UP)$	TA0OUT input hold time	1200		ns



Electrical characteristics ( $V_{CC} = 3V$ ) $V_{CC} = 3V$ 

Timing requirements (referenced to  $V_{CC} = 3V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)

\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$

Table 1.64. Timer B input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time (counted on one edge)	300		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on one edge)	120		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on one edge)	120		ns
$t_{c(TB)}$	TBiIN input cycle time (counted on both edges)	600		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width (counted on both edges)	320		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width (counted on both edges)	320		ns

Table 1.65. Timer B input (pulse period measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	1200		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	600		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	600		ns

Table 1.66. Timer B input (pulse width measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIN input cycle time	1200		ns
$t_{w(TBH)}$	TBiIN input HIGH pulse width	600		ns
$t_{w(TBL)}$	TBiIN input LOW pulse width	600		ns

Table 1.67. Timer X input (counter input in event counter mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	300		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	120		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	120		ns

Table 1.68. Timer X input (gate input in timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	1200		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	600		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	600		ns

Table 1.69. Timer X input (external trigger input in one-shot timer mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiINOUT input cycle time	600		ns
$t_{w(TXH)}$	TXiINOUT input HIGH pulse width	300		ns
$t_{w(TXL)}$	TXiINOUT input LOW pulse width	300		ns

Electrical characteristics ( $V_{CC} = 3V$ ) $V_{CC} = 3V$ 

Timing requirements (referenced to  $V_{CC} = 3V$ ,  $V_{SS} = 0V$  at  $T_a = -20$  to  $85^{\circ}C^{(*)}$  unless otherwise specified)

\* Extended operating temperature version;  $-40$  to  $85^{\circ}C$

Table 1.70. Timer X input (pulse period measurement mode)

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiNOUT input cycle time	1200		ns
$t_{w(TXH)}$	TXiNOUT input HIGH pulse width	600		ns
$t_{w(TXL)}$	TXiNOUT input LOW pulse width	600		ns

Table 1.71. Timer X input (pulse width measurement mode)

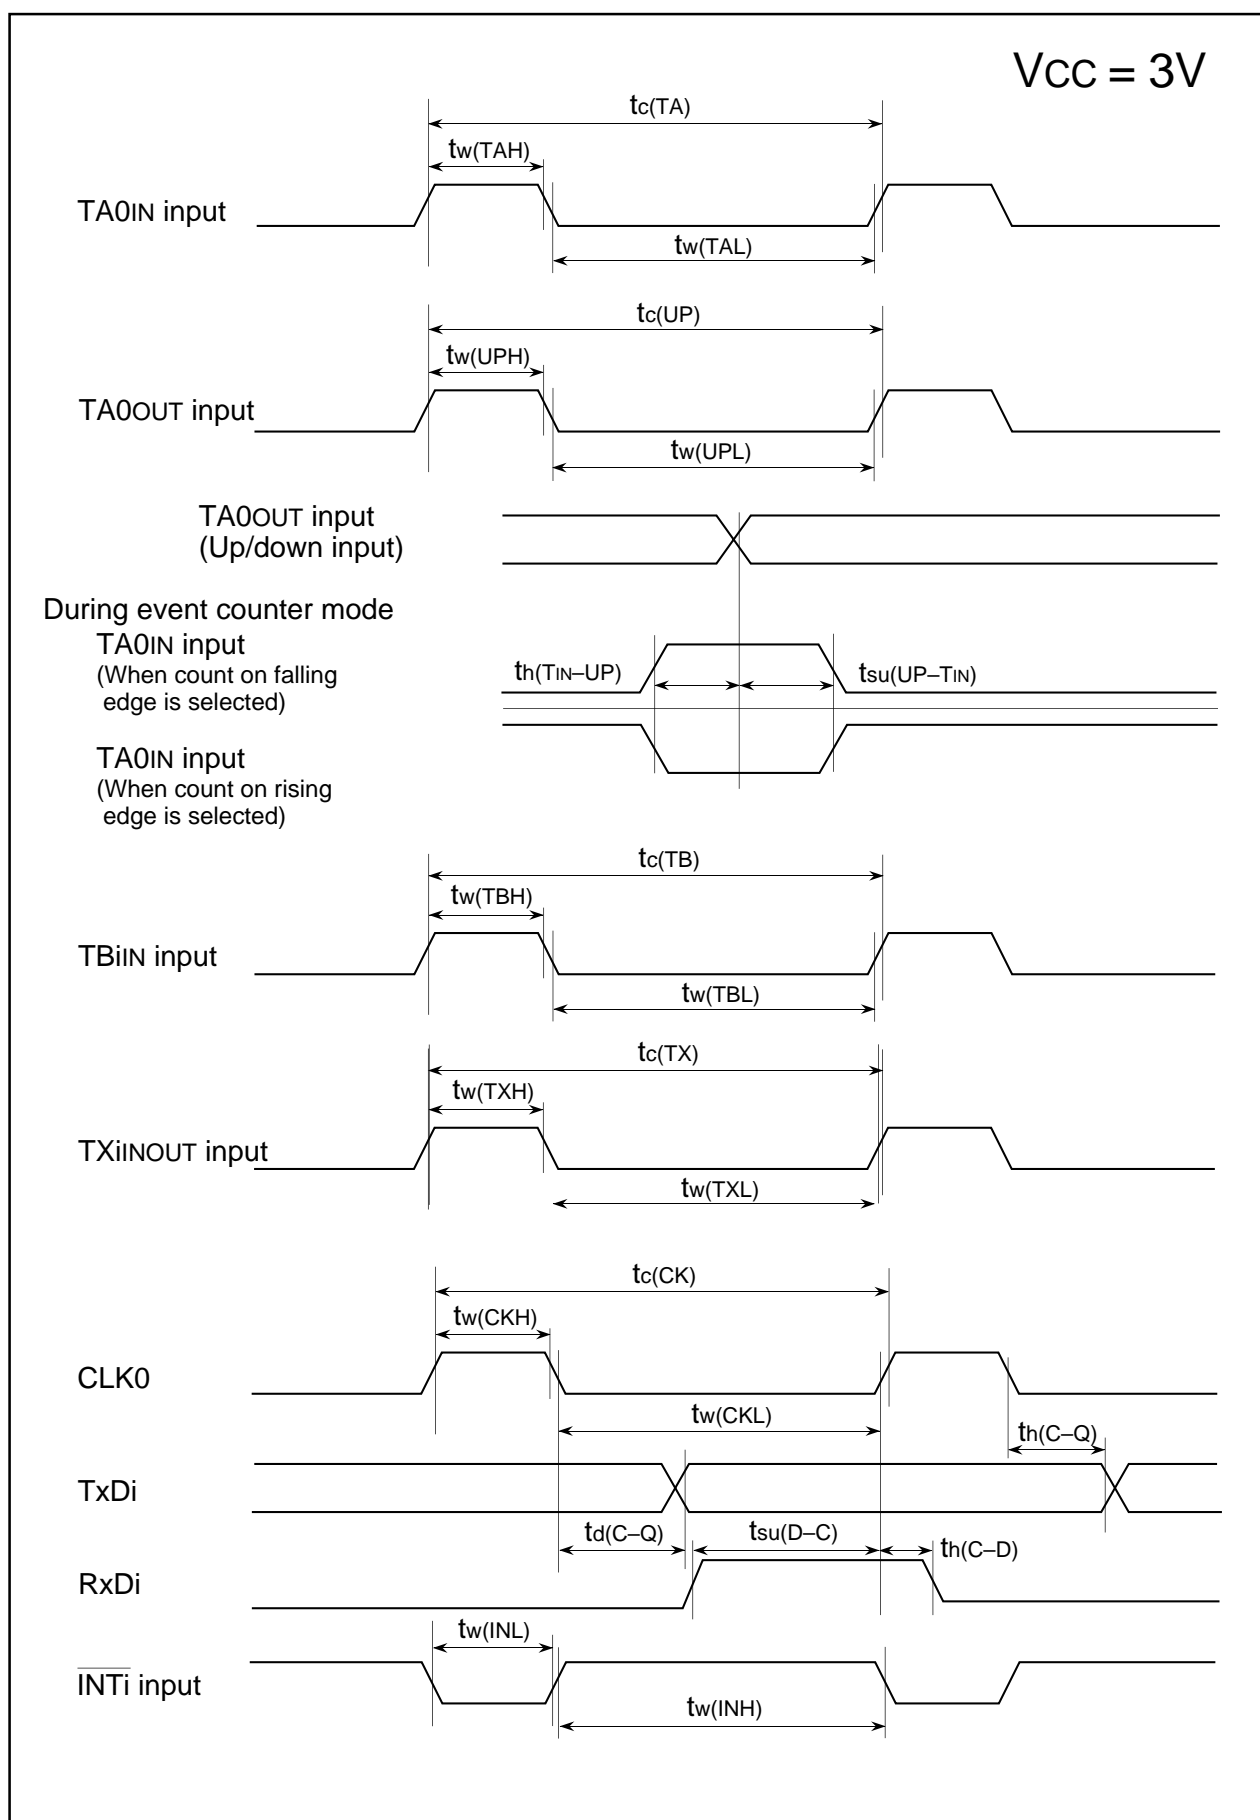
Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(TX)}$	TXiNOUT input cycle time	1200		ns
$t_{w(TXH)}$	TXiNOUT input HIGH pulse width	600		ns
$t_{w(TXL)}$	TXiNOUT input LOW pulse width	600		ns

Table 1.72. Serial I/O

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{c(CK)}$	CLK0 input cycle time	300		ns
$t_{w(CKH)}$	CLK0 input HIGH pulse width	150		ns
$t_{w(CKL)}$	CLK0 input LOW pulse width	150		ns
$t_{d(C-Q)}$	TxDi output delay time		160	ns
$t_{h(C-Q)}$	TxDi hold time	0		ns
$t_{su(D-C)}$	RxDi input setup time	50		ns
$t_{h(C-D)}$	RxDi input hold time	90		ns

Table 1.73. External interrupt  $\overline{INTi}$  inputs

Symbol	Parameter	Standard		Unit
		Min.	Max.	
$t_{w(INH)}$	$\overline{INTi}$ input HIGH pulse width	380		ns
$t_{w(INL)}$	$\overline{INTi}$ input LOW pulse width	380		ns

Electrical characteristics ( $V_{CC} = 3V$ )

## Description (Flash memory version)

## Outline Performance

Table 1.74 shows the outline performance of the M30201 (flash memory version).

**Table 1.74. Outline Performance of the M30201 (flash memory version)**

Item		Performance
Power supply voltage		4.0V to 5.5 V ( $f(XIN)=10MHz$ )
Program/erase voltage		$V_{PP}=12V \pm 5\%$ ( $f(XIN)=10MHz$ , $T_a=25\pm5^\circ C$ )
		$V_{CC}=5V \pm 10\%$ ( $f(XIN)=10MHz$ , $T_a=25\pm5^\circ C$ )
Flash memory operation mode		Three modes (parallel I/O, standard serial I/O, CPU rewrite)
Erase block division	User ROM area	See Figure 1.96
	Boot ROM area	One division (3.5 Kbytes) (Note)
Program method		In units of byte
Erase method		Collective erase
Program/erase control method		Program/erase control by software command
Number of commands		6 commands
Program/erase count		100 times
ROM code protect		Parallel I/O mode is supported.

Note: The boot ROM area contains a standard serial I/O mode control program which is stored in it when shipped from the factory. This area can be erased and programmed in only parallel I/O mode.

## Description (Flash memory version)

## Flash Memory

The M30201 (flash memory version) contains the NOR type of flash memory that requires a high-voltage VPP power supply for program/erase operations, in addition to the VCC power supply for device operation. For this flash memory, three flash memory modes are available in which to read, program, and erase: parallel I/O and standard serial I/O modes in which the flash memory can be manipulated using a programmer and a CPU rewrite mode in which the flash memory can be manipulated by the Central Processing Unit (CPU). Each mode is detailed in the pages to follow.

In addition to the ordinary user ROM area to store a microcomputer operation control program, the flash memory has a boot ROM area that is used to store a program to control rewriting in CPU rewrite and standard serial I/O modes. This boot ROM area has had a standard serial I/O mode control program stored in it when shipped from the factory. However, the user can write a rewrite control program in this area that suits the user's application system. This boot ROM area can be rewritten in only parallel I/O mode.

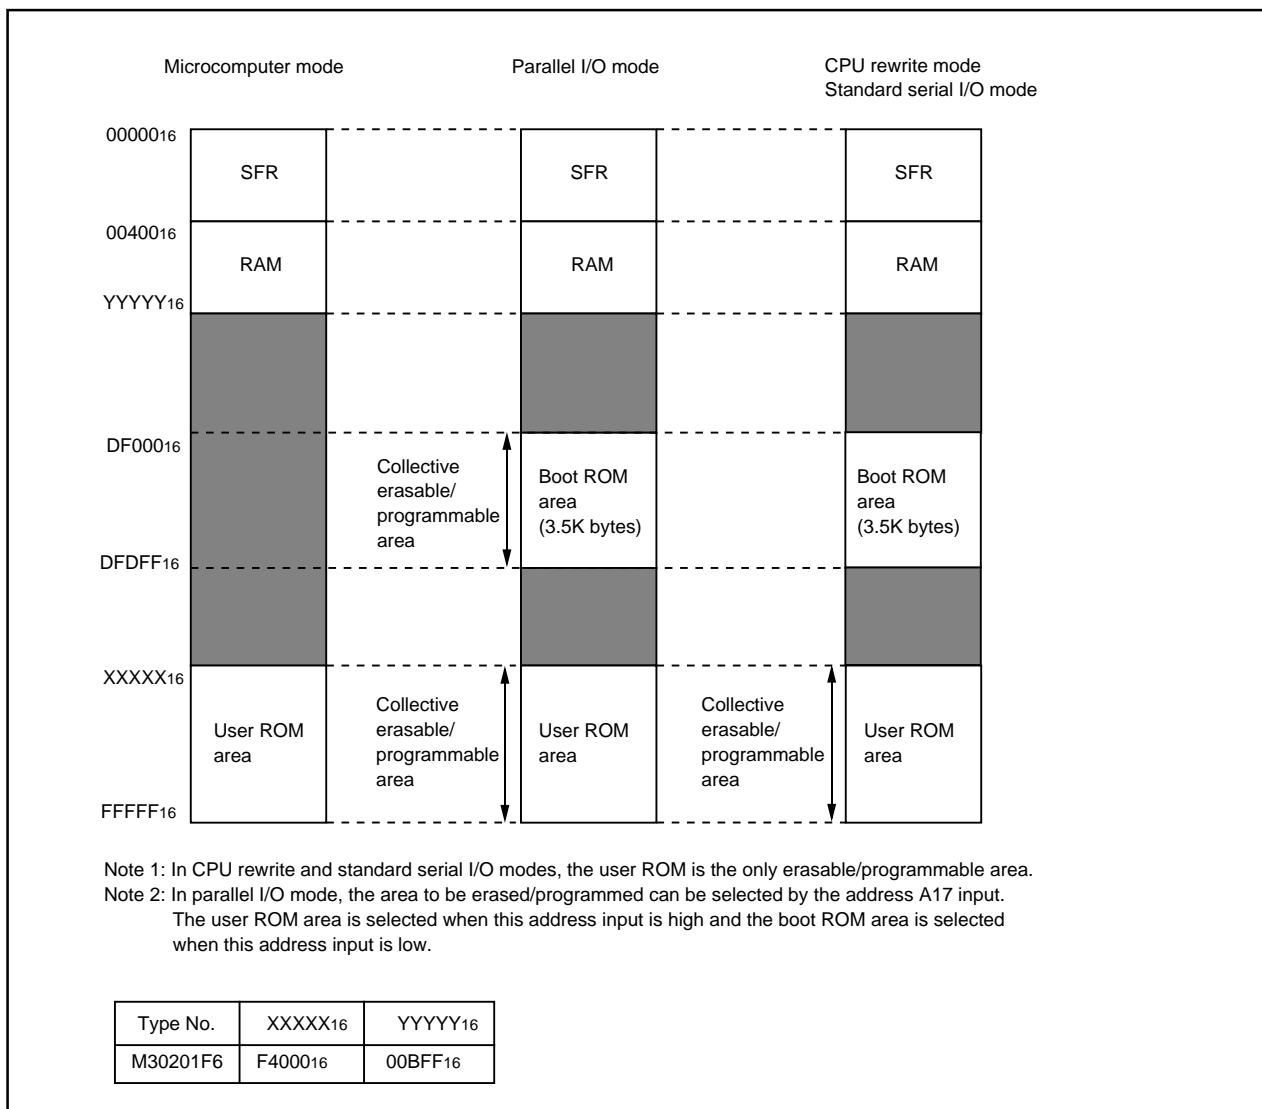


Figure 1.96. Block diagram of flash memory version

## CPU Rewrite Mode (Flash memory version)

## CPU Rewrite Mode

In CPU rewrite mode, the on-chip flash memory can be operated on (read, program, or erase) under control of the Central Processing Unit (CPU). In CPU rewrite mode, the flash memory can be operated on by reading or writing to the flash memory control register and flash command register. Figure 1.97, Figure 1.98 show the flash memory control register, and flash command register respectively.

Also, in CPU rewrite mode, the CNVss pin is used as the VPP power supply pin. Apply the power supply voltage, VPPH, from an external source to this pin.

In CPU rewrite mode, only the user ROM area shown in Figure 1.96 can be rewritten; the boot ROM area cannot be rewritten. Make sure the program and block commands are issued for only the user ROM area. The control program for CPU rewrite mode can be stored in either user ROM or boot ROM area. In the CPU rewrite mode, because the flash memory cannot be read from the CPU, the rewrite control program must be transferred to internal RAM before it can be executed.

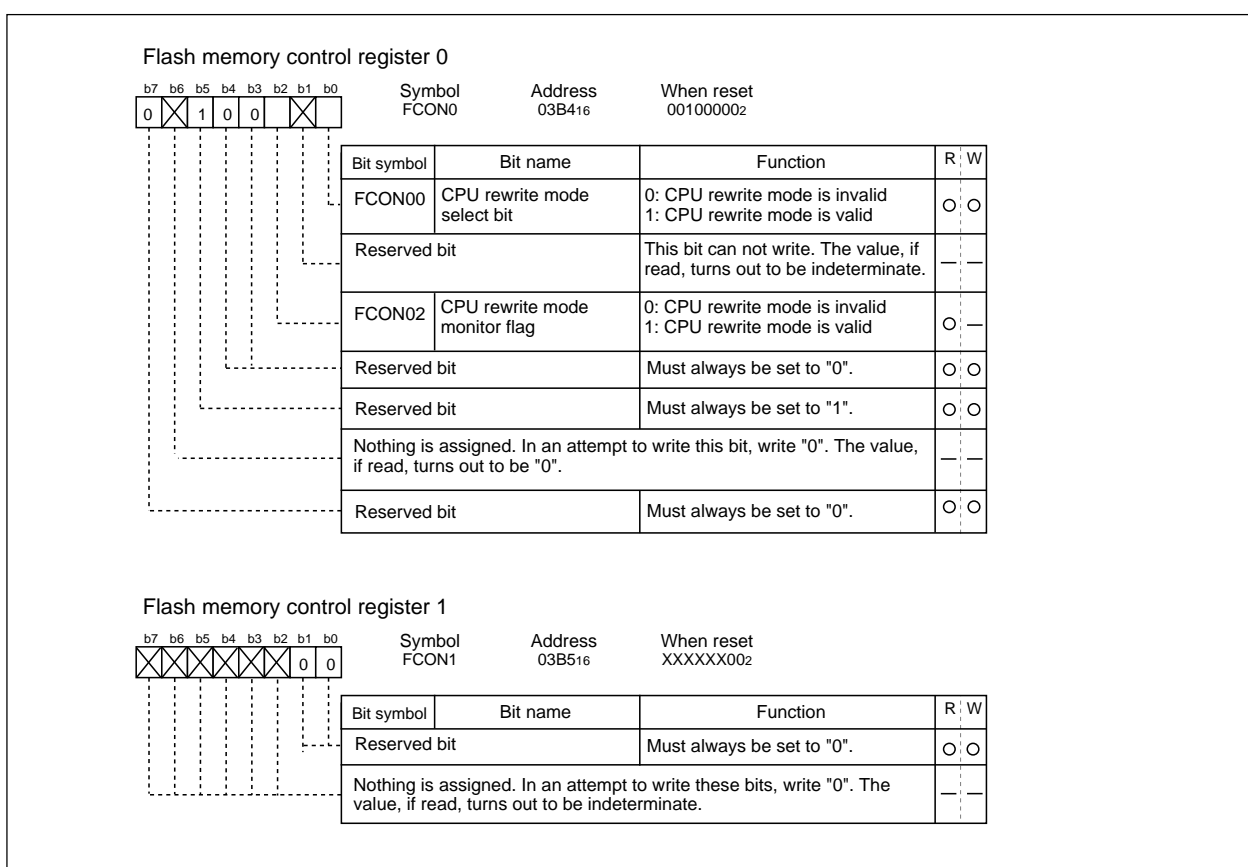


Figure 1.97. Flash memory control register

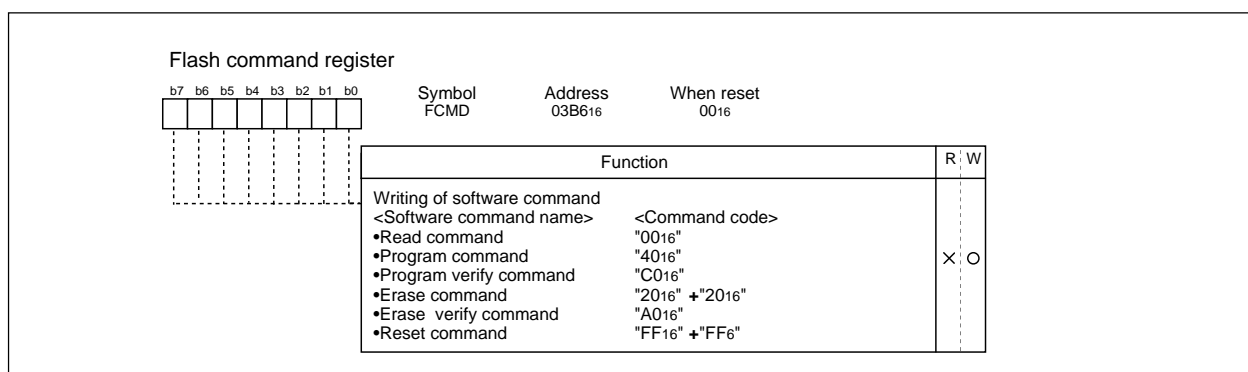


Figure 1.98. Flash command register

## CPU Rewrite Mode (Flash memory version)

**Microcomputer Mode and Boot Mode**

The control program for CPU rewrite mode must be written into the user ROM or boot ROM area in parallel I/O mode beforehand. (If the control program is written into the boot ROM area, the standard serial I/O mode becomes unusable.)

See Figure 1.96 for details about the boot ROM area.

Normal microcomputer mode is entered when the microcomputer is reset with pulling CNVSS pin low (Vss). In this case, the CPU starts operating using the control program in the user ROM area.

When the microcomputer is reset by pulling the P52 pin high (Vcc), the CNVSS pin high (VPPH), the CPU starts operating using the control program in the boot ROM area. This mode is called the "boot" mode.

The control program in the boot ROM area can also be used to rewrite the user ROM area.

**CPU rewrite mode operation procedure**

The internal flash memory can be operated on to program, read, verify, or erase it while being placed on-board by writing commands from the CPU to the flash memory control register (addresses 03B416, 03B516) and flash command register (address 03B616). Note that when in CPU rewrite mode, the boot ROM area cannot be accessed for program, read, verify, or erase operations. Before this can be accomplished, a CPU write control program must be written into the boot ROM area in parallel input/output mode. The following shows a CPU rewrite mode operation procedure.

**<Start procedure (Note 1)>**

- (1) Apply VPPH to the CNVSS/VPP pin and Vcc to the port P52 pin for reset release. Or the user can jump from the user ROM area to the boot ROM area using the JMP instruction and execute the CPU write control program. In this case, set the CPU write mode select bit of the flash memory control register to "1" before applying VPPH to the CNVSS/VPP pin.
- (2) After transferring the CPU write control program from the boot ROM area to the internal RAM, jump to this control program in RAM. (The operations described below are controlled by this program.)
- (3) Set the CPU rewrite mode select bit to "1".
- (4) Read the CPU rewrite mode monitor flag to see that the CPU rewrite mode is enabled.
- (5) Execute operation on the flash memory by writing software commands to the flash command register.

Note 1: In addition to the above, various other operations need to be performed, such as for entering the data to be written to flash memory from an external source (e.g., serial I/O), initializing the ports, and writing to the watchdog timer.

**<Clearing procedure>**

- (1) Apply Vss to the CNVSS/VPP pin.
- (2) Set the CPU rewrite mode select bit to "0".

## CPU Rewrite Mode (Flash memory version)

---

### **Precautions on CPU Rewrite Mode**

Described below are the precautions to be observed when rewriting the flash memory in CPU rewrite mode.

#### **(1) Operation speed**

During erase/program mode, set BCLK to 5 MHz or less by changing the divide ratio.

#### **(2) Instructions inhibited against use**

The instructions listed below cannot be used during CPU rewrite mode because they refer to the internal data of the flash memory:

UND instruction, INTO instruction, JMPS instruction, JSRS instruction, and BRK instruction

#### **(3) Interrupts inhibited against use**

No interrupts can be used that look up the fixed vector table in the flash memory area. Maskable interrupts may be used by setting the interrupt vector table in a location outside the flash memory area.



## CPU Rewrite Mode (Flash memory version)

**Software Commands**

Table 1.75 lists the software commands available with the M30201 (flash memory version).

When CPU rewrite mode is enabled, write software commands to the flash command register to specify the operation to erase or program.

The content of each software command is explained below.

**Table 1.75. List of Software Commands (CPU Rewrite Mode)**

Command	First bus cycle			Second bus cycle		
	Mode	Address	Data (D <sub>0</sub> to D <sub>7</sub> )	Mode	Address	Data (D <sub>0</sub> to D <sub>7</sub> )
Read	Write	03B6 <sub>16</sub>	00 <sub>16</sub>			
Program	Write	03B6 <sub>16</sub>	40 <sub>16</sub>	Write	Program address	Program data
Program verify	Write	03B6 <sub>16</sub>	C0 <sub>16</sub>	Read	Verify address	Verify data
Erase	Write	03B6 <sub>16</sub>	20 <sub>16</sub>	Write	03B6 <sub>16</sub>	20 <sub>16</sub>
Erase verify	Write	03B6 <sub>16</sub>	A0 <sub>16</sub>	Read	Verify address	Verify data
Reset	Write	03B6 <sub>16</sub>	FF <sub>16</sub>	Write	03B6 <sub>16</sub>	FF <sub>16</sub>

**Read Command (00<sub>16</sub>)**

The read mode is entered by writing the command code “00<sub>16</sub>” to the flash command register in the first bus cycle. When an address to be read is input in one of the bus cycles that follow, the content of the specified address is read out at the data bus (D<sub>0</sub>–D<sub>7</sub>), 8 bits at a time.

The read mode is retained intact until another command is written.

After reset and after the reset command is executed, the read mode is set.

**Program Command (40<sub>16</sub>)**

The program mode is entered by writing the command code “40<sub>16</sub>” to the flash command register in the first bus cycle. When the user execute an instruction to write byte data to the desired address (e.g., STE instruction) in the second bus cycle, the flash memory control circuit executes the program operation. The program operation requires approximately 20  $\mu$ s. Wait for 20  $\mu$ s or more before the user go to the next processing.

During program operation, the watchdog timer remains idle, with the value “7FFF<sub>16</sub>” set in it.

Note 1: The write operation is not completed immediately by writing a program command once. The user must always execute a program-verify command after each program command executed. And if verification fails, the user need to execute the program command repeatedly until the verification passes. See Figure 1.99 for an example of a programming flowchart.

## CPU Rewrite Mode (Flash memory version)

---

### Program-verify command (C0<sub>16</sub>)

The program-verify mode is entered by writing the command code "C0<sub>16</sub>" to the flash command register in the first bus cycle. When the user execute an instruction (e.g., LDE instruction) to read byte data from the address to be verified (the previously programmed address) in the second bus cycle, the content that has actually been written to the address is read out from the memory.

The CPU compares this read data with the data that it previously wrote to the address using the program command. If the compared data do not match, the user need to execute the program and program-verify operations one more time.

### Erase command (20<sub>16</sub> + 20<sub>16</sub>)

The flash memory control circuit executes an erase operation by writing command code "20<sub>16</sub>" to the flash command register in the first bus cycle and the same command code to the flash command register again in the second bus cycle. The erase operation requires approximately 20 ms. Wait for 20 ms or more before the user go to the next processing.

Before this erase command can be performed, all memory locations to be erased must have had data "00<sub>16</sub>" written to by using the program and program-verify commands. During erase operation, the watchdog timer remains idle, with the value "7FFF<sub>16</sub> set in it.

Note 1: The erase operation is not completed immediately by writing an erase command once. The user must always execute an erase-verify command after each erase command executed. And if verification fails, the user need to execute the erase command repeatedly until the verification passes. See Figure 1.99 for an example of an erase flowchart.

### Erase-verify command (A0<sub>16</sub>)

The erase-verify mode is entered by writing the command code "A0<sub>16</sub>" to the flash command register in the first bus cycle. When the user execute an instruction to read byte data from the address to be verified (e.g., LDE instruction) in the second bus cycle, the content of the address is read out.

The CPU must sequentially erase-verify memory contents one address at a time, over the entire area erased. If any address is encountered whose content is not "FF<sub>16</sub>" (not erased), the CPU must stop erase-verify at that point and execute erase and erase-verify operations one more time.

Note 1: If any unerased memory location is encountered during erase-verify operation, be sure to execute erase and erase-verify operations one more time. In this case, however, the user does not need to write data "00<sub>16</sub>" to memory before erasing.

## CPU Rewrite Mode (Flash memory version)

**Reset command (FF<sub>16</sub> + FF<sub>16</sub>)**

The reset command is used to stop the program command or the erase command in the middle of operation. After writing command code "40<sub>16</sub>" or "20<sub>16</sub>" twice to the flash command register, write command code "FF<sub>16</sub>" to the flash command register in the first bus cycle and the same command code to the flash command register again in the second bus cycle. The program command or erase command is disabled, with the flash memory placed in read mode.

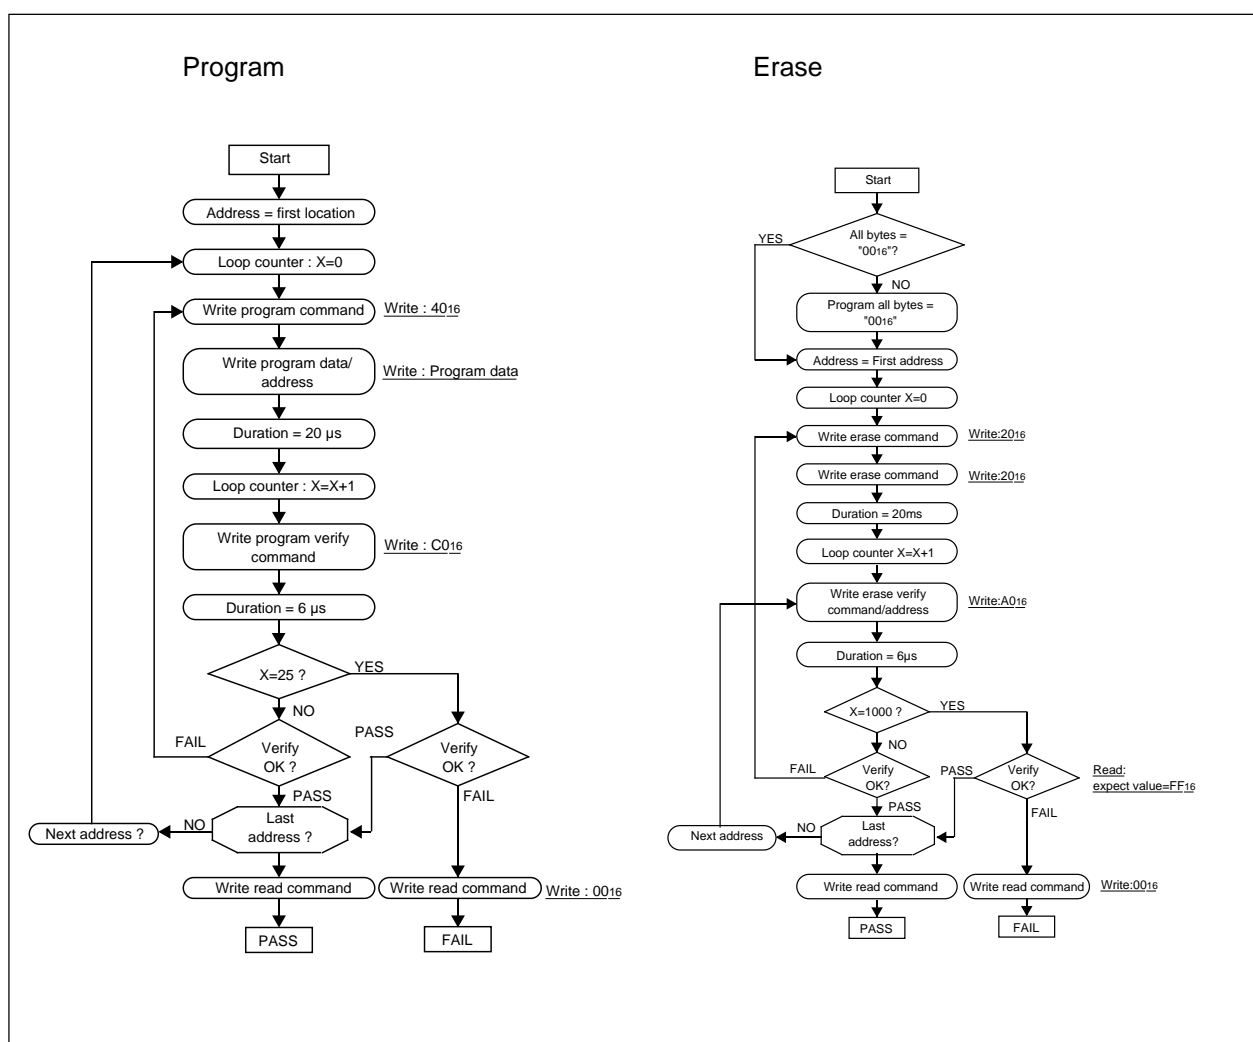


Figure 1.99. Program and erase execution flowchart in the CPU rewrite mode

## Appendix Parallel I/O Mode (Flash memory version)

## Description of Pin Function (Flash Memory Parallel I/O Mode)

Pin name	Signal name	I/O	Function
Vcc, Vss	Power supply input		Apply 5 V $\pm$ 10 % to the Vcc pin and 0 V to the Vss pin.
CNVss	CNVss	I	Apply 12 V $\pm$ 5 % to the CNVss pin.
RESET	Reset input	I	Connect this pin to Vss.
XIN	Clock input	I	Connect a ceramic or crystal resonator between the XIN and XOUT pins. When entering an externally derived clock, enter it from XIN and leave XOUT open.
XOUT	Clock output	O	
AVcc, AVss	Analog power supply input		Connect AVss to Vss and AVcc to Vcc, respectively.
VREF	Reference voltage input	I	Connect this pin to Vss.
P00 to P07	Data I/O D0 to D7	I/O	These are data D0–D7 input/output pins.
P10 to P17	Address input A8 to A15	I	These are address A8–A15 input pins.
P30 to P33	Address input A4 to A7	I	These are address A4–A7 input pins.
P34 to P35	Input port P3	I	Enter low signals to these pins.
P40	WE input	I	This is a WE input pin.
P41	OE input	I	This is a OE input pin.
P43	CE input	I	This is a CE input pin.
P42, P44, P45	Input port P4	I	Enter high signals or low signals to these pins.
P50	Address input A17	I	This is address A17 input pin.
P51	VRFY input	I	Apply V <sub>IH</sub> (5 V) to this pin when V <sub>PP</sub> = V <sub>PPH</sub> (12 V), or V <sub>IL</sub> (0 V) when V <sub>PP</sub> = V <sub>PPL</sub> (5 V).
P52	Input port P5	I	Enter low signal to this pin.
P53, P54	Input port P5	I	Enter high signals or low signals to these pins.
P60 to P63	Address input A0 to A3	I	These are address A0–A3 input pins.
P64 to P67	Input port P6	I	Enter high signals or low signals to these pins.
P70 to P71	Input port P7	I	Enter high signals or low signals to these pins.

## Appendix Parallel I/O Mode (Flash memory version)

### Parallel I/O Mode


The parallel I/O mode is entered by making connections shown in Figures 1.101 and 1.102 and then turning the VPPH power supply on. In this mode, the M30201 (flash memory version) operates in a manner similar to the NOR flash memory M5M28F101 from Mitsubishi. Note, however, that there are some differences with regard to the functions not available with the microcomputer (function of read device identification code) and matters related to memory capacity.

Table 1.76 shows pin relationship between the M30201 and M5M28F101 in parallel I/O mode.

**Table 1.76. Pin relationship in parallel I/O mode**

	M30201(flash memory version)	M5M28F101
VCC	VCC	VCC
VSS	VSS	VSS
Address input	P60 to P63, P30 to P33, P10 to P17, P50	A0 to A15, A17
Data I/O	P00 to P07	D0 to D7
OE input	P41	$\overline{\text{OE}}$
CE input	P43	$\overline{\text{CE}}$
WE input	P40	$\overline{\text{WE}}$
VERFY input (Note)	P51	—

Note: The VRFY input only selects read-only or read/write mode, and does not have any pin associated with it on the M5M28F101.

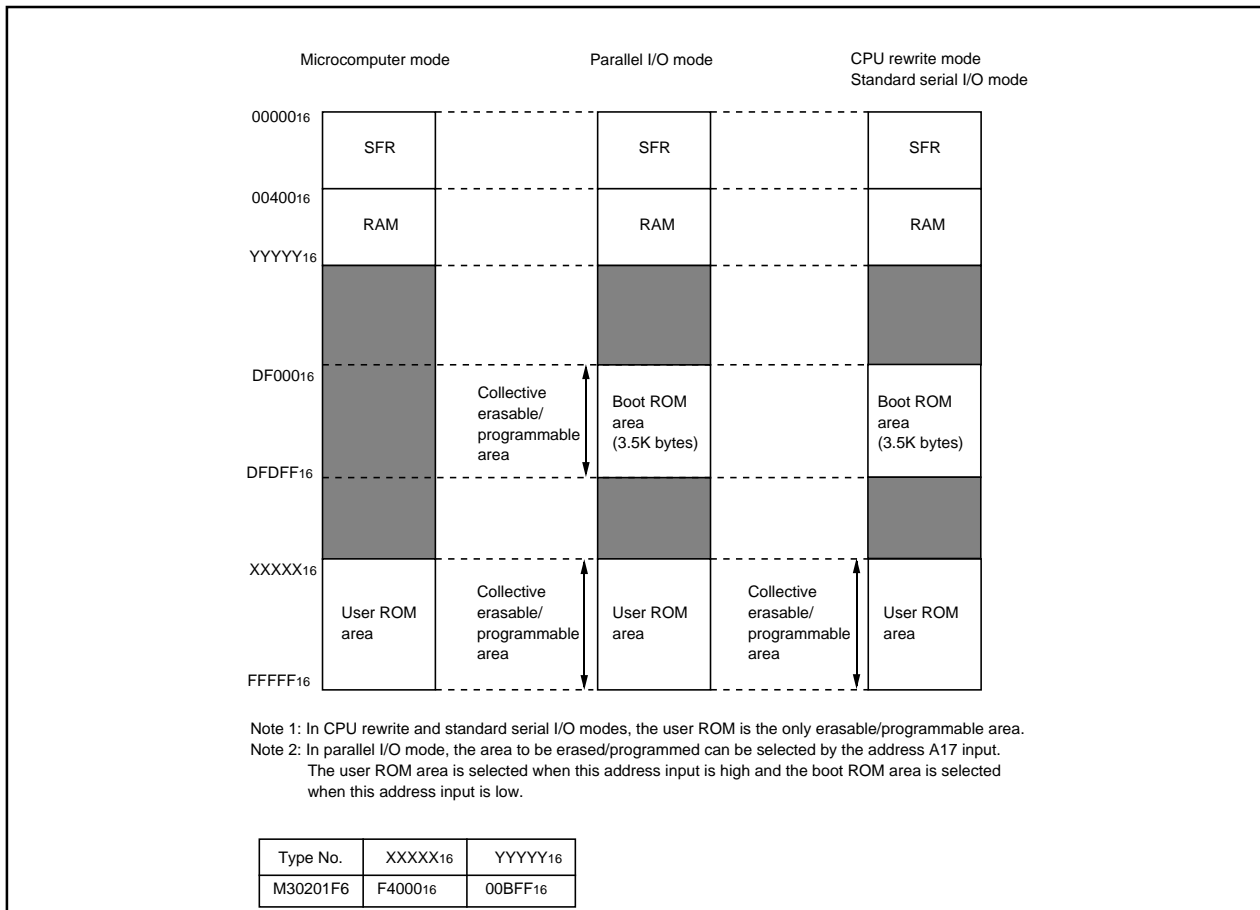

**Figure 1.100. Block diagram of flash memory version**

## Appendix Parallel I/O Mode (Flash memory version)

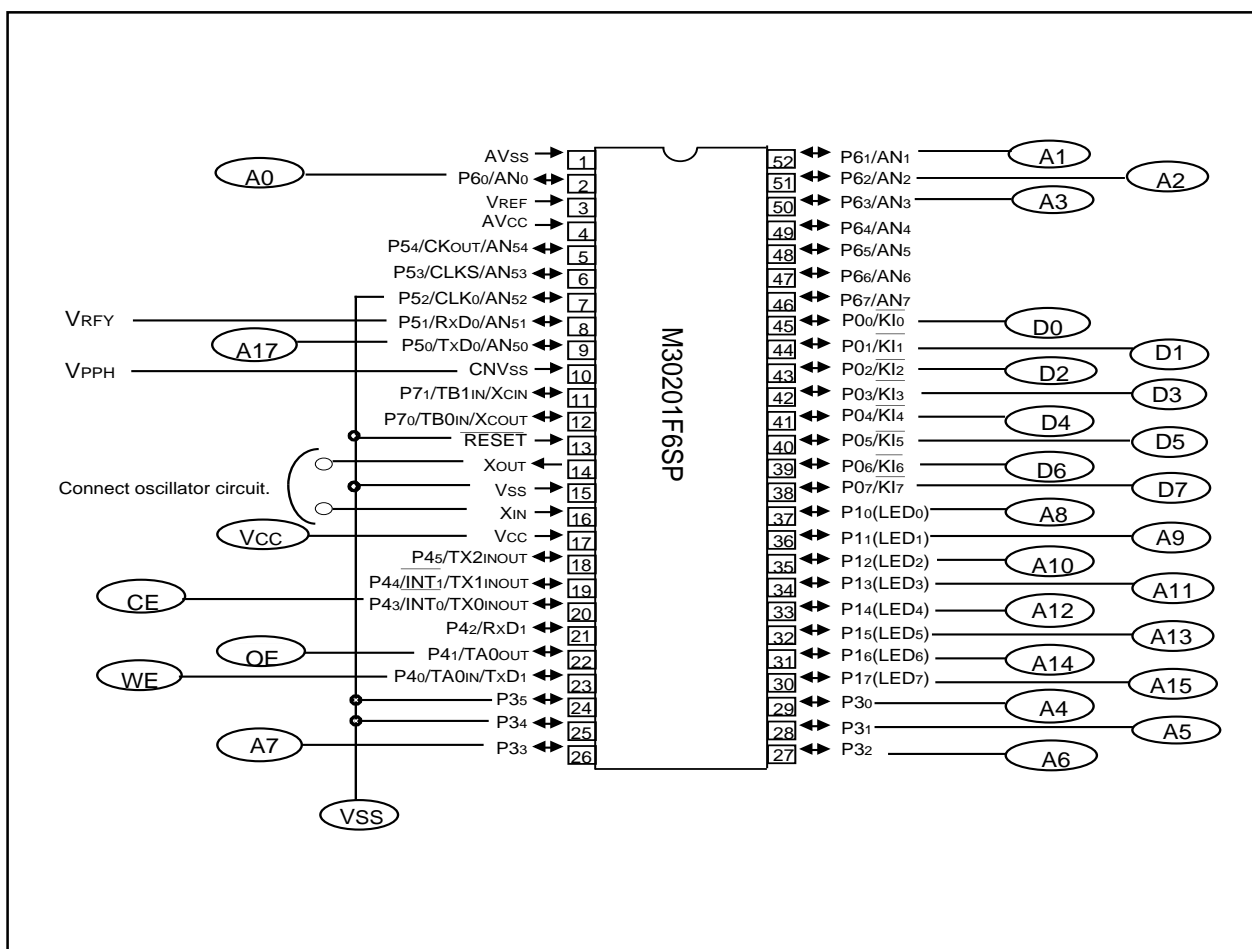


Figure 1.101. Pin connection diagram in parallel I/O mode (1)

## Appendix Parallel I/O Mode (Flash memory version)

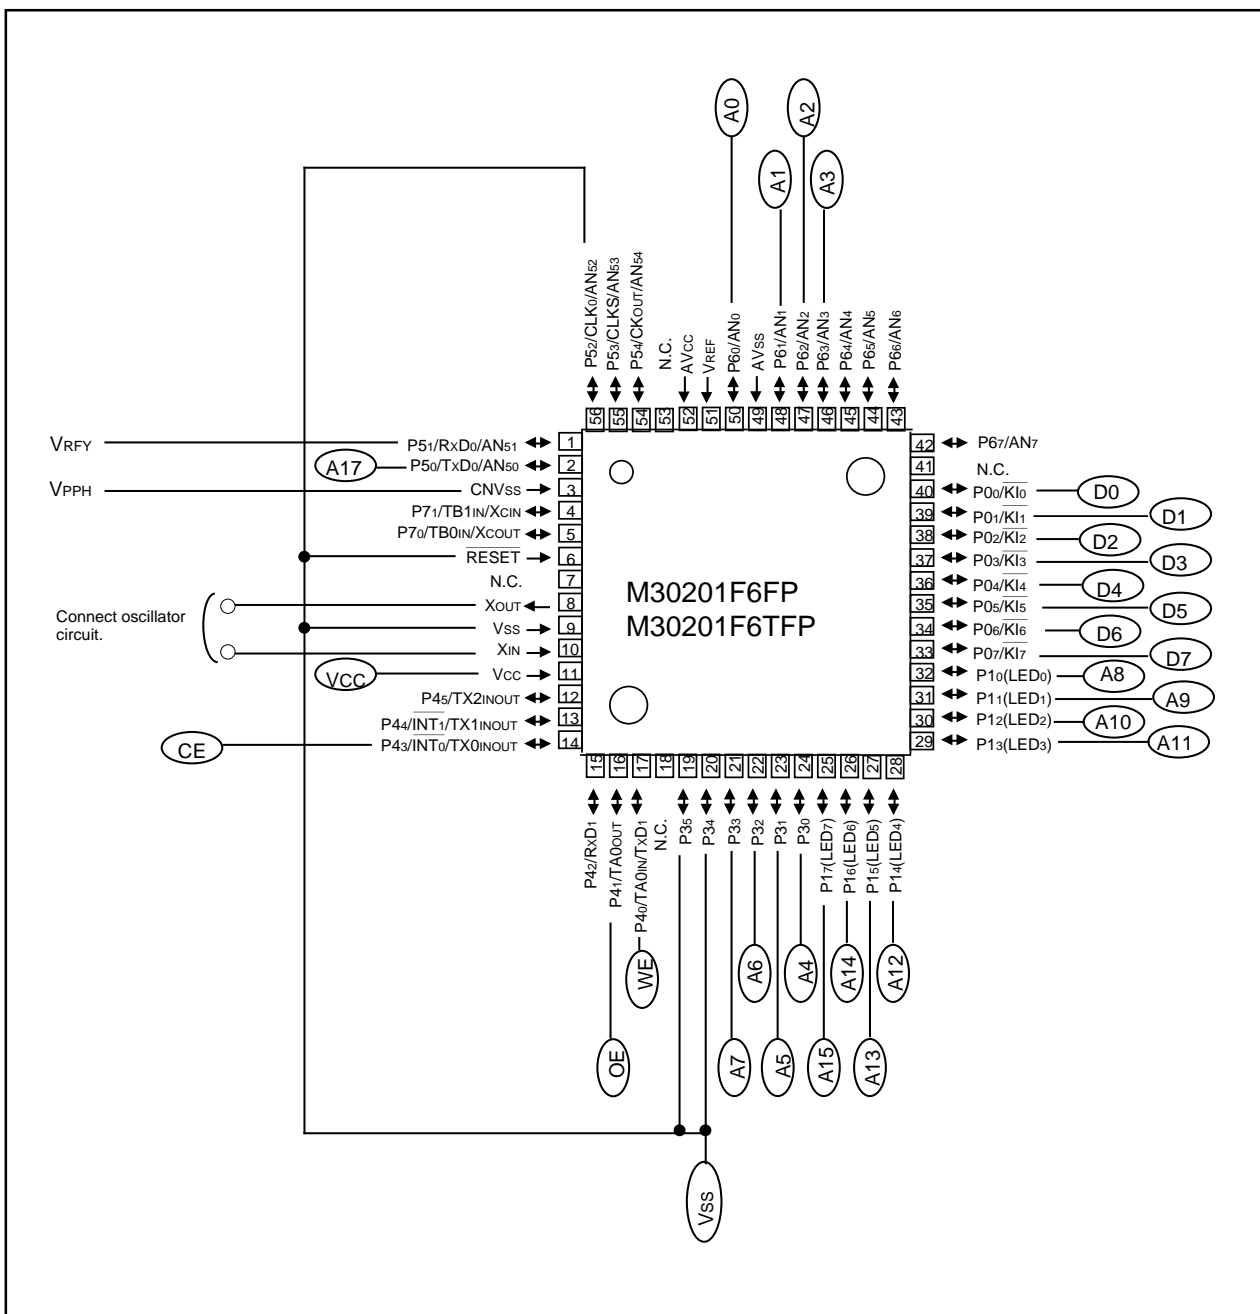


Figure 1.102. Pin connection diagram in parallel I/O mode (2)

## Appendix Parallel I/O Mode (Flash memory version)

**User ROM and Boot ROM Areas**

In parallel I/O mode, the user ROM and boot ROM areas shown in Figure 1.100 can be rewritten.

In the boot ROM area, an erase block operation is applied to only one 3.5 K byte block. The boot ROM area has had a standard serial I/O mode control program stored in it when shipped from the Mitsubishi factory. Therefore, using the device in standard serial input/output mode, the user does not need to write to the boot ROM area.

**Functional Outline (Parallel I/O Mode)**

In parallel I/O mode, bus operation modes—Read, Output Disable, Standby, and Write—are selected by the status of the  $\overline{CE}$ ,  $\overline{OE}$ ,  $\overline{WE}$ ,  $V_{RFY}$ , and  $CNVSS$  input pins.

The contents of erase, program, and other operations are selected by writing a software command. The data in memory can only be read out by a read after software command input.

Program and erase operations are controlled using software commands.

**Table 1.77. Relationship between control signals and bus operation modes**

Pin name		$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	$V_{RFY}$	$V_{PP}$	D0 to D7
Mode							
Read only	Read	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>PPH</sub>	Data output
	Output disabled	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>PPH</sub>	Hi-Z
	Stand by	V <sub>IH</sub>	X	X	V <sub>IL</sub>	V <sub>PPH</sub>	Hi-Z
Read/Write	Read	V <sub>IL</sub>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>PPH</sub>	Data output
	Output disabled	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>IH</sub>	V <sub>PPH</sub>	Hi-Z
	Stand by	V <sub>IH</sub>	X	X	V <sub>IH</sub>	V <sub>PPH</sub>	Hi-Z
	Write	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>IL</sub>	V <sub>IH</sub>	V <sub>PPH</sub>	Data input

Note: X can be V<sub>IL</sub> or V<sub>IH</sub>.



## Appendix Parallel I/O Mode (Flash memory version)

---

The following explains about bus operation modes, software commands, and status register.

### Bus Operation Modes

Read-only mode is entered by applying VPPH to the CNVSS pin and a low voltage to the VRFY pin. Read-only mode has three states: Read, Output Disable, and Standby which are selected by setting the  $\overline{CE}$ ,  $\overline{OE}$ , and  $\overline{WE}$  pins high or low.

Read-write mode is entered by applying VPPH to the CNVSS pin and a high voltage to the VRFY pin. Read-write mode has four states: Read, Output Disable, Standby, and Write which are selected by setting the  $\overline{CE}$ ,  $\overline{OE}$ , and  $\overline{WE}$  pins high or low.

#### Read

The Read mode is entered by pulling the  $\overline{WE}$  pin high when the  $\overline{CE}$  and  $\overline{OE}$  pins are low. In Read mode, the data corresponding to each software command entered is output from the data I/O pins D0–D7.

#### Output Disable

The Output Disable mode is entered by pulling the  $\overline{CE}$  pin low and the  $\overline{WE}$  and  $\overline{OE}$  pins high. Also, the data I/O pins are placed in the high-impedance state.

#### Standby

The Standby mode is entered by driving the  $\overline{CE}$  pin high. Also, the data I/O pins are placed in the high-impedance state.

#### Write

The Write mode is entered by applying VPPH to the CNVSS pin and a high voltage to the VRFY pin and then pulling the  $\overline{WE}$  pin low when the  $\overline{CE}$  pin is low and  $\overline{OE}$  pin is high. In this mode, the device accepts the software commands or write data entered from the data I/O pins. A program, erase, or some other operation is initiated depending on the content of the software command entered here. The input data such as address is latched at the falling edge of  $\overline{WE}$  pin. The input data such as software command is latched at the rising edge of  $\overline{WE}$  pin.

## Appendix Parallel I/O Mode (Flash memory version)

**Software Commands**

Table 1.78 lists the software commands available with the M30201 (flash memory version). By entering a software command from the data I/O pins (D0–D7) in Write mode, specify the content of the operation, such as erase or program operation, to be performed.

The following explains the content of each software command.

**Table 1.78. Software command list (parallel I/O mode)**

Command	First bus cycle			Second bus cycle		
	Mode	Address	Data (D0 to D7)	Mode	Address	Data (D0 to D7)
Read	Write	x	00 <sub>16</sub>			
Program	Write	x	40 <sub>16</sub>	Write	Program address	Program data
Program verify	Write	x	C0 <sub>16</sub>	Read	x	Verify data
Erase	Write	x	20 <sub>16</sub>	Write	x	20 <sub>16</sub>
Erase verify	Write	Verify address	A0 <sub>16</sub>	Read	x	Verify data
Reset	Write	x	FF <sub>16</sub>	Write	x	FF <sub>16</sub>

**Read Command (00<sub>16</sub>)**

The read mode is entered by writing the command code “00<sub>16</sub>” in the first bus cycle. When an address to be read is input in one of the bus cycles that follow, the content of the specified address is read out at the data I/O pins (D0–D7).

The read mode is retained intact until another command is written.

After reset and after the reset command is executed, the read mode is set.

**Program Command (40<sub>16</sub>)**

The program mode is entered by writing the command code “40<sub>16</sub>” in the first bus cycle. When an address and data to be program is write in the second bus cycle, the flash memory control circuit executes the program operation. The program operation requires approximately 20 μs. Wait for 20 μs or more before the user go to the next processing.

Note 1: The write operation is not completed immediately by writing a program command once. The user must always execute a program-verify command after each program command executed. And if verification fails, the user need to execute the program command repeatedly until the verification passes. See Figure 1.103 for an example of a programming flowchart.

## Appendix Parallel I/O Mode (Flash memory version)

---

### **Program-verify command (C016)**

The program-verify mode is entered by writing the command code "C016" in the first bus cycle and the verify data is output from the data I/O pins (D0–D7) in the second bus cycle.

### **Erase command (2016 + 2016)**

The flash memory control circuit executes an erase operation by writing command code "2016" in the first bus cycle and the same command code again in the second bus cycle. The erase operation requires approximately 20 ms. Wait for 20 ms or more before the user go to the next processing. Before this erase command can be performed, all memory locations to be erased must have had data "0016" written to by using the program and program-verify commands.

Note 1: The erase operation is not completed immediately by writing an erase command once. The user must always execute an erase-verify command after each erase command executed. And if verification fails, the user need to execute the erase command repeatedly until the verification passes. See Figure 1.103 for an example of an erase flowchart.

### **Erase-verify command (A016)**

The erase-verify mode is entered by writing the command code "A016" in the first bus cycle and the verify data is output from the data I/O pins (D0–D7) in the second bus cycle.

Note 1: If any unerased memory location is encountered during erase-verify operation, be sure to execute erase and erase-verify operations one more time. In this case, however, the user does not need to write data "0016" to memory before erasing.

## Appendix Parallel I/O Mode (Flash memory version)

**Reset command (FF<sub>16</sub> + FF<sub>16</sub>)**

The reset command is used to stop the program command or the erase command in the middle of operation. After writing command code "40<sub>16</sub>" or "20<sub>16</sub>" twice, write command code "FF<sub>16</sub>" in the first bus cycle and the same command code again in the second bus cycle. The program command or erase command is disabled, with the flash memory placed in read mode.

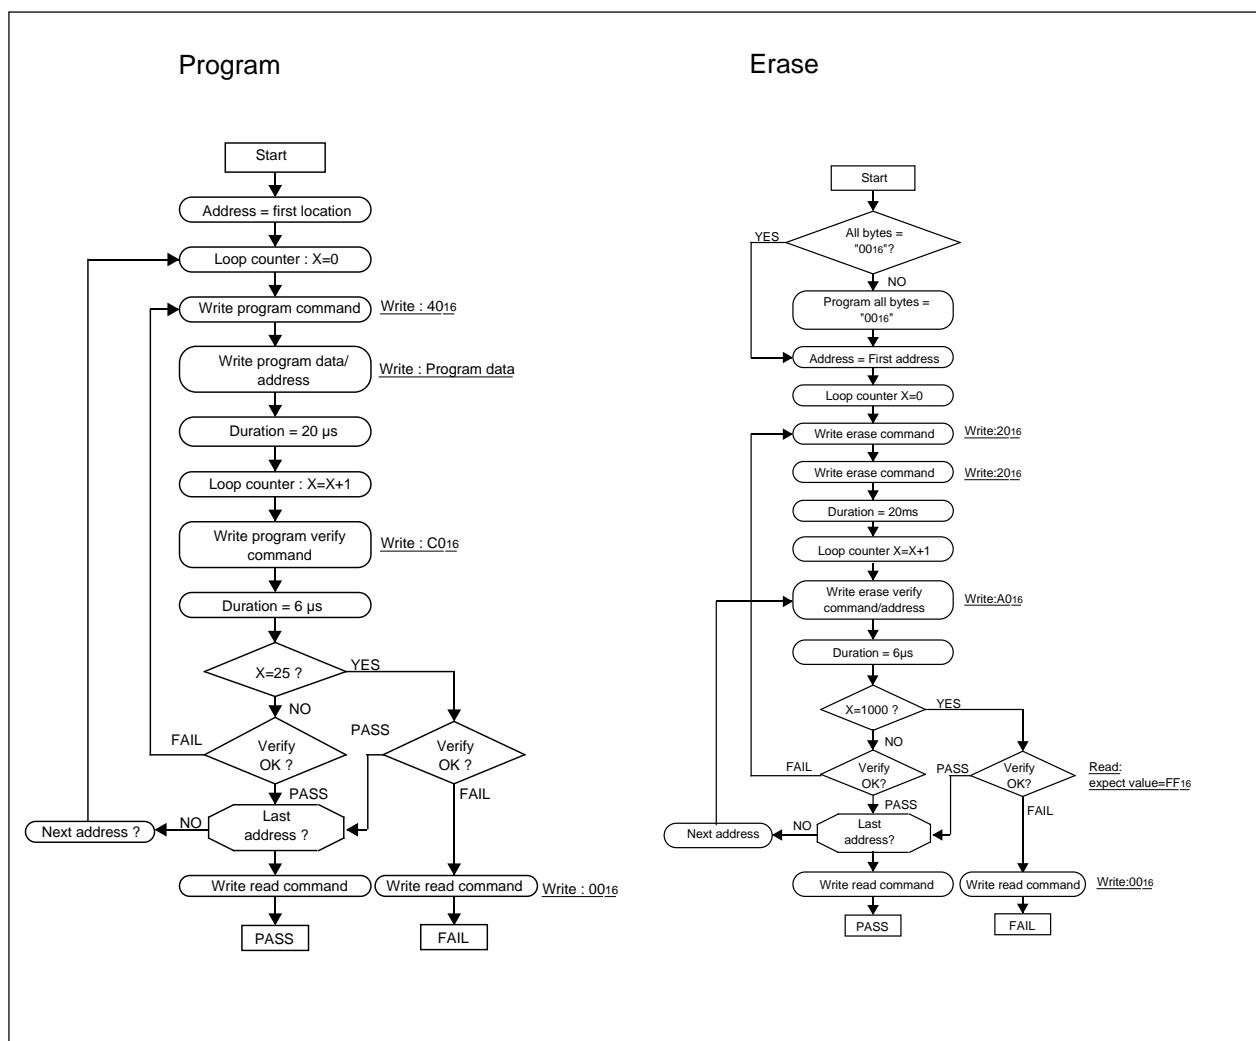


Figure 1.103. Program and erase execution flowchart in the CPU rewrite mode


## Appendix Parallel I/O Mode (Flash memory version)

**Protect function**

In parallel I/O mode, the internal flash memory has the "protect function" available. This function protects the flash memory contents from being read or rewritten easily.

Depending on the content at the protect control address (FFFFF<sub>16</sub>) in parallel I/O mode, this function inhibits the flash memory contents against read or modification. The protect control address (FFFFF<sub>16</sub>) is shown in Figure 1.104. (This address exists in the user ROM area.)

The protect function is enabled by setting one of the two protect set bits to "0", so that the internal flash memory contents are inhibited against read or modification. The protect function is disabled by setting both of the two protect reset bits to "00", so that the internal flash memory contents can be read or modified. Once the protect function is set, the user cannot change settings of the protect clear bits while in parallel I/O mode. Settings of the protect reset bits can only be changed in CPU rewrite mode.

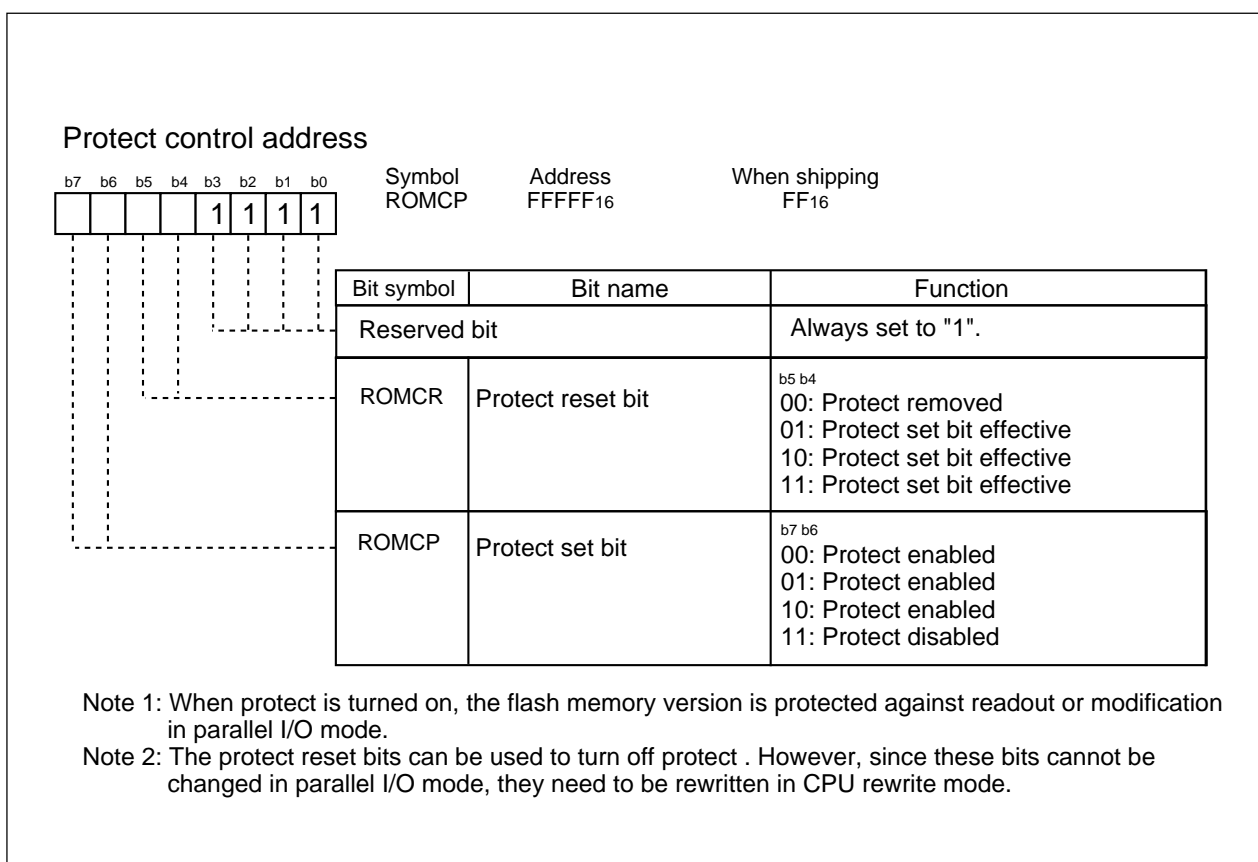**Figure 1.104. Protect control address**

## Appendix Standard Serial I/O Mode (Flash Memory Version)

## Pin functions (Flash memory standard serial I/O mode)

Pin	Name	I/O	Description
Vcc,Vss	Power input		Apply 5V $\pm$ 10 % to Vcc pin and 0 V to Vss pin.
CNVss	CNVss	I	Mode entry pin. Apply 12V $\pm$ 5 % to this pin.
RESET	Reset input	I	Reset input pin. While reset is "L" level, a 20 cycle or longer clock must be input to XIN pin.
XIN	Clock input	I	Connect a ceramic resonator or crystal oscillator between XIN and XOUT pins. To input an externally generated clock, input it to XIN pin and open XOUT pin.
XOUT	Clock output	O	
AVcc, AVss	Analog power supply input		Connect AVss to Vss and AVcc to Vcc, respectively.
VREF	Reference voltage input	I	Enter the reference voltage for AD from this pin.
P00 to P07	Input port P0	I	Input "H" or "L" level signal or open.
P10 to P17	Input port P1	I	Input "H" or "L" level signal or open.
P30 to P35	Input port P3	I	Input "H" or "L" level signal or open.
P40 to P45	Input port P4	I	Input "H" or "L" level signal or open.
P54	Input port P5	I	Input "H" or "L" level signal or open.
P50	TxD output	O	Serial data output pin.
P51	RxD input	I	Serial data input pin.
P52	SCLK input	I	Mode entry pin. Supply "H" level when powering on MCU. When startup is completed this pin serves the serial input clock.
P53	BUSY	I $\rightarrow$ O	This pin sets the type of serial flash programming mode. •An "H" level input (mode 1) sets the mode to clock synchronous. •An "L" level input (mode 2) sets the mode to clock asynchronous. This pin changes to "output" after entry into standard serial I/O mode.
P60 to P67	Input port P6	I	Input "H" or "L" level signal or open.
P70 to P71	Input port P7	I	Input "H" or "L" level signal or open.

## Mode setup method

Signal	Value
CNVss	V <sub>PPH</sub>
RESET	V <sub>ss</sub> → V <sub>cc</sub>
SCLK	V <sub>cc</sub> (Note)

Note: Apply V<sub>cc</sub> when powering on MCU.

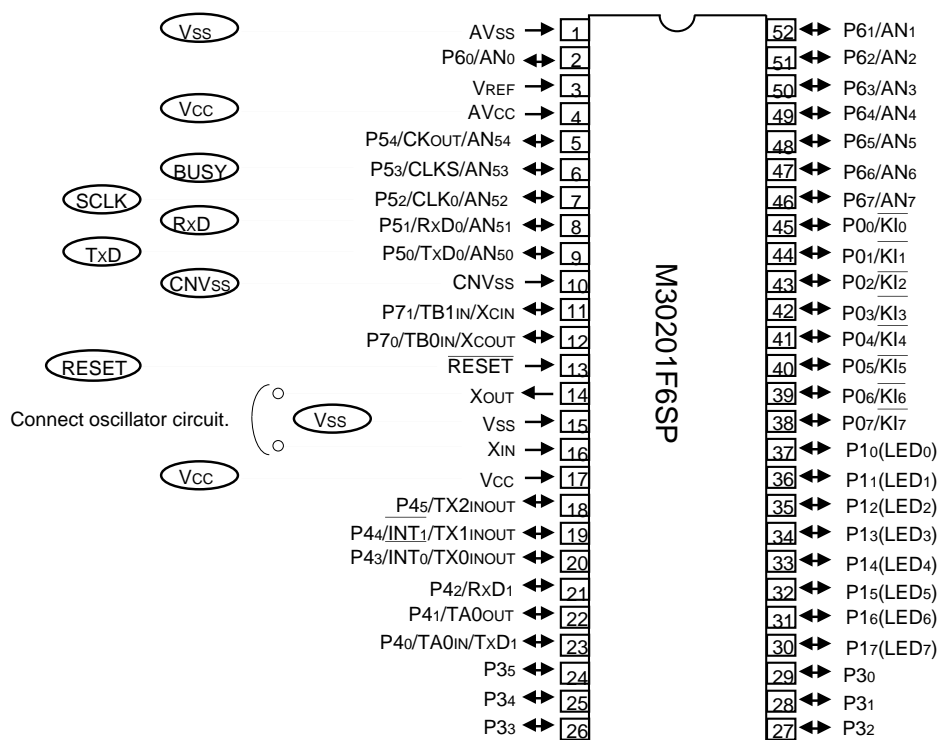


Figure 1.105. Pin connections for standard serial I/O mode (1)

## Appendix Standard Serial I/O Mode (Flash Memory Version)

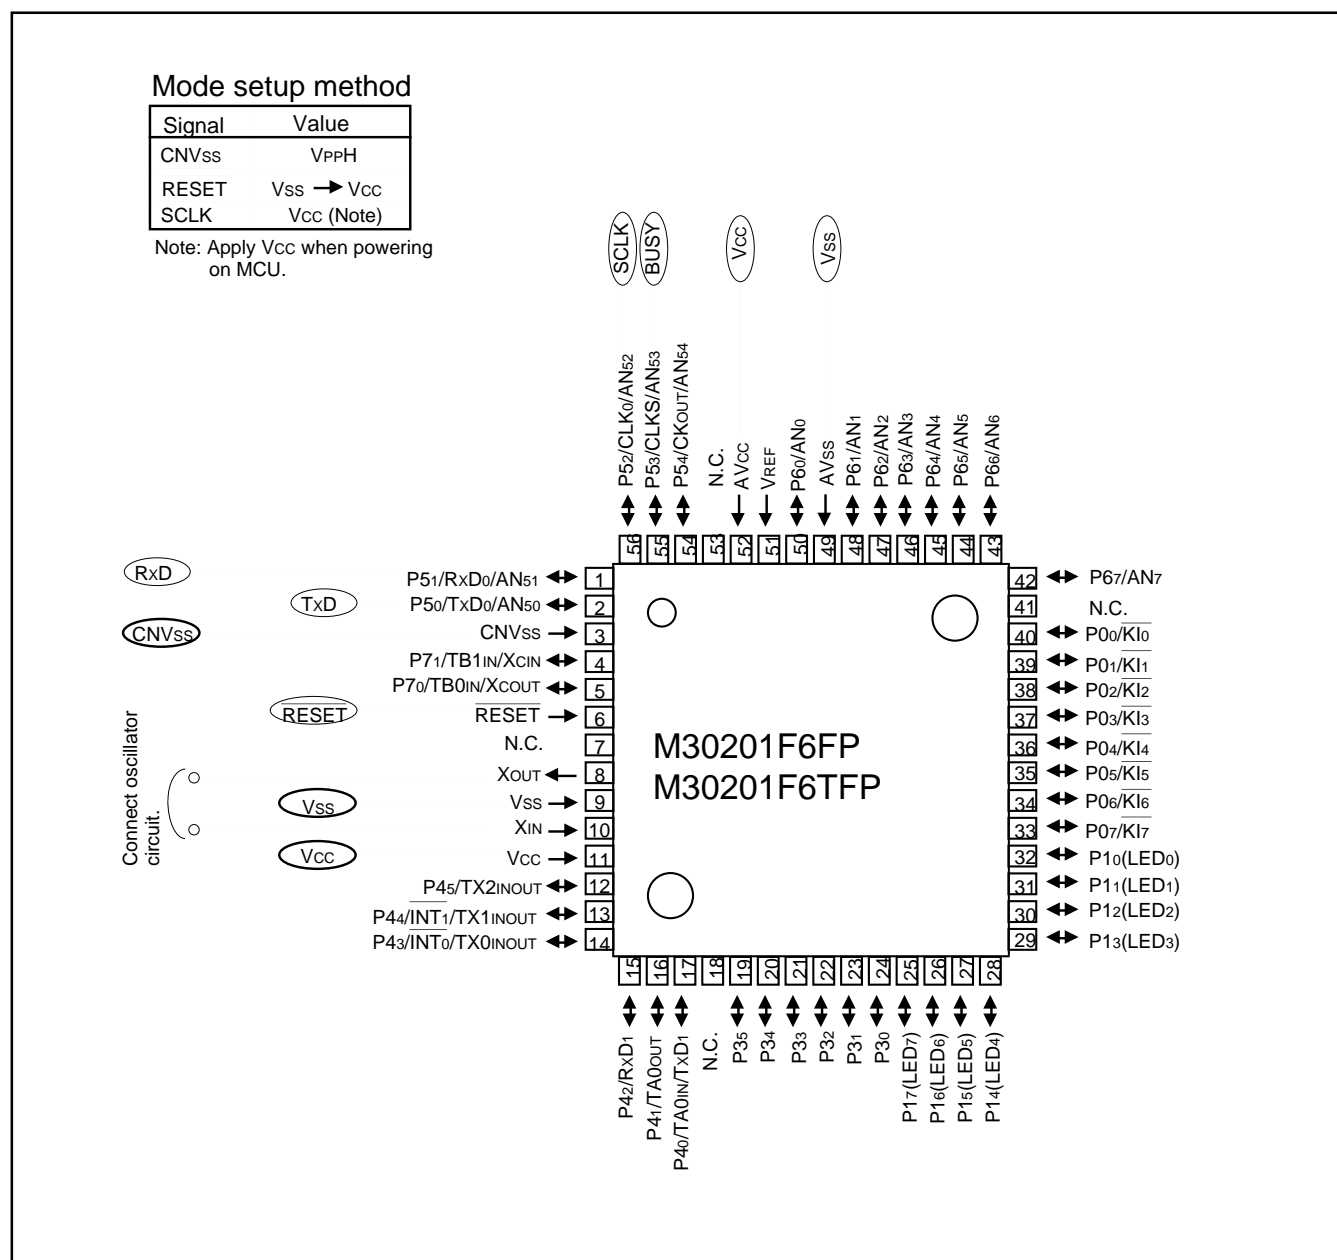


Figure 1.106. Pin connections for serial I/O mode (2)



## Appendix Standard Serial I/O Mode (Flash Memory Version)

**Standard serial I/O mode**

The standard serial I/O mode inputs and outputs the software commands, addresses and data needed to operate (read, program, erase, etc.) the internal flash memory. This I/O is serial. There are actually two standard serial I/O modes: mode 1, which is clock synchronized, and mode 2, which is asynchronous. Both modes require a purpose-specific peripheral unit.

The standard serial I/O mode is different from the parallel I/O mode in that the CPU controls flash memory rewrite (uses the CPU's rewrite mode), rewrite data input and so forth. It is started when the reset is released, which is done when the P52 (SCLK) pin is "H" level, the CNVss pin "VppH" level. (In the ordinary command mode, set CNVss pin to "L" level.)

This control program is written in the boot ROM area when the product is shipped from Mitsubishi. Accordingly, make note of the fact that the standard serial I/O mode cannot be used if the boot ROM area is rewritten in the parallel I/O mode. Figures 1.105 and 1.106 show the pin connections for the standard serial I/O mode. Serial data I/O uses UART0 and transfers the data serially in 8-bit units. Standard serial I/O switches between mode 1 (clock synchronized) and mode 2 (clock asynchronous) according to the level of P53 (BUSY) pin when the reset is released.

To use standard serial I/O mode 1 (clock synchronized), set the P53 (BUSY) pin to "H" level and release the reset. The operation uses the four UART0 pins CLK0, RxD0, TxD0 and P53 (BUSY). The CLK0 pin is the transfer clock input pin through which an external transfer clock is input. The TxD0 pin is for CMOS output. The P53 (BUSY) pin outputs an "L" level when ready for reception and an "H" level when reception starts.

To use standard serial I/O mode 2 (clock asynchronous), set the P53 (BUSY) pin to "L" level and release the reset. The operation uses the two UART0 pins RxD0 and TxD0.

In the standard serial I/O mode, only the user ROM area indicated in Figure 1.96 can be rewritten. The boot ROM cannot.

In the standard serial I/O mode, a 7-byte ID code is used. When there is data in the flash memory, commands sent from the peripheral unit are not accepted unless the ID code matches.

### Overview of standard serial I/O mode 1 (clock synchronized)

In standard serial I/O mode 1, software commands, addresses and data are input and output between the MCU and peripheral units (serial programmer, etc.) using clock-synchronized serial I/O (UART0) and P53 (BUSY). Standard serial I/O mode 1 is engaged by releasing the reset with the P53 (BUSY) pin "H" level. In reception, software commands, addresses and program data are synchronized with the rise of the transfer clock that is input to the CLK0 pin, and are then input to the MCU via the RxDo pin. In transmission, the read data and status are synchronized with the fall of the transfer clock, and output from the TxDo pin.

The TxDo pin is for CMOS output. Transfer is in 8-bit units with LSB first.

When busy, such as during transmission, reception, erasing or program execution, the P53 (BUSY) pin is "H" level. Accordingly, always start the next transfer after the P53 (BUSY) pin is "L" level.

Also, data and status registers in memory can be read after inputting software commands. Status, such as the operating state of the flash memory or whether a program or erase operation ended successfully or not, can be checked by reading the status register. Here following are explained software commands, status registers, etc.

## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

## Software Commands

Table 1.79 lists software commands. In the standard serial I/O mode 1, erase operations, programs and reading are controlled by transferring software commands via the RxD0 pin. Software commands are explained here below.

Table 1.79. Software commands (Standard serial I/O mode 1)

	Control command		2nd byte	3rd byte	4th byte	5th byte	6th byte		When ID is not verificate
1	Page read	FF <sub>16</sub>	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
2	Page program	41 <sub>16</sub>	Address (middle)	Address (high)	Data input	Data input	Data input	Data input to 259th byte	Not acceptable
3	Erase all unlocked blocks	A7 <sub>16</sub>	D0 <sub>16</sub>						Not acceptable
4	Read status register	70 <sub>16</sub>	SRD output	SRD1 output					Acceptable
5	Clear status register	50 <sub>16</sub>							Not acceptable
6	Read lockbit status	71 <sub>16</sub>	Address (middle)	Address (high)	Lock bit data output				Not acceptable
7	ID check function	F5 <sub>16</sub>	Address (low)	Address (middle)	Address (high)	ID size	ID1	To ID7	Acceptable
8	Download function	FA <sub>16</sub>	Size (low)	Size (high)	Check-sum	Data input	To required number of times		Not acceptable
9	Version data output function	FB <sub>16</sub>	Version data output	Version data output	Version data output	Version data output	Version data output	Version data output to 9th byte	Acceptable
10	Boot area output function	FC <sub>16</sub>	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable

Note 1: Shading indicates transfer from flash memory microcomputer to peripheral unit. All other data is transferred from the peripheral unit to the flash memory microcomputer.

Note 2: SRD refers to status register data. SRD1 refers to status register 1 data.

Note 3: All commands can be accepted when the flash memory is totally blank.

## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

**Page Read Command**

This command reads the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page read command as explained here following.

- (1) Transfer the "FF<sub>16</sub>" command code with the 1st byte.
- (2) Transfer addresses A<sub>8</sub> to A<sub>15</sub> and A<sub>16</sub> to A<sub>23</sub> with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, data (D<sub>0</sub>–D<sub>7</sub>) for the page (256 bytes) specified with addresses A<sub>8</sub> to A<sub>23</sub> will be output sequentially from the smallest address first in sync with the rise of the clock.

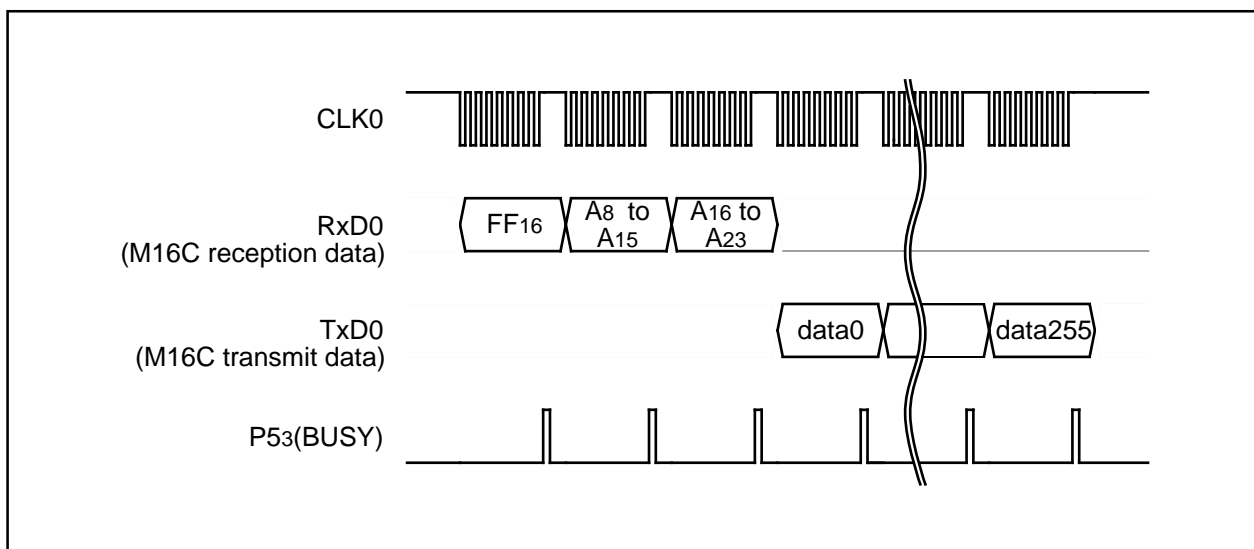


Figure 1.107. Timing for page read

**Read Status Register Command**

This command reads status information. When the "70<sub>16</sub>" command code is sent with the 1st byte, the contents of the status register (SRD) specified with the 2nd byte and the contents of status register 1 (SRD1) specified with the 3rd byte are read.

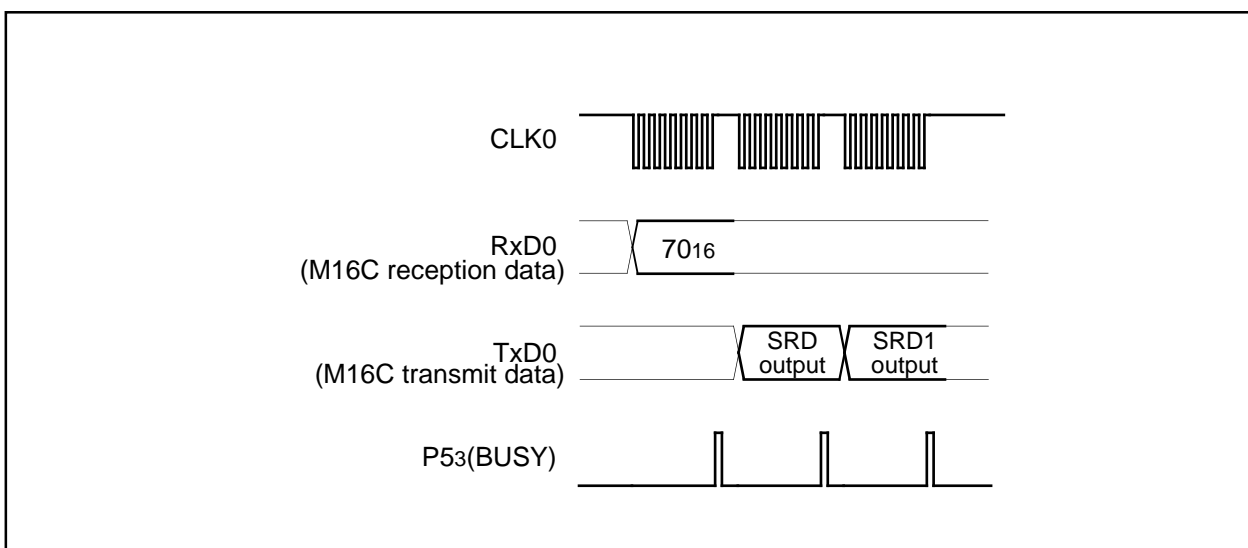


Figure 1.108. Timing for reading the status register

**Clear Status Register Command**

This command clears the bits (SR3–SR4) which are set when the status register operation ends in error. When the “5016” command code is sent with the 1st byte, the aforementioned bits are cleared. When the clear status register operation ends, the P53 (BUSY) signal changes from the “H” to the “L” level.

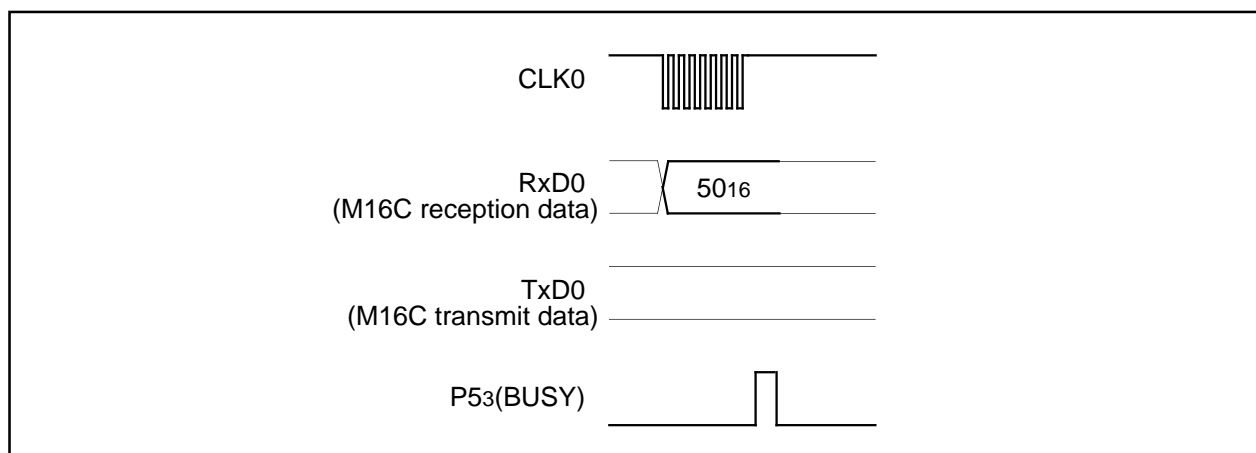


Figure 1.109. Timing for clearing the status register

**Page Program Command**

This command writes the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page program command as explained here following.

- (1) Transfer the “4116” command code with the 1st byte.
- (2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, as write data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 is input sequentially from the smallest address first, that page is automatically written.

When reception setup for the next 256 bytes ends, the P53 (BUSY) signal changes from the “H” to the “L” level. The result of the page program can be known by reading the status register. For more information, see the section on the status register.

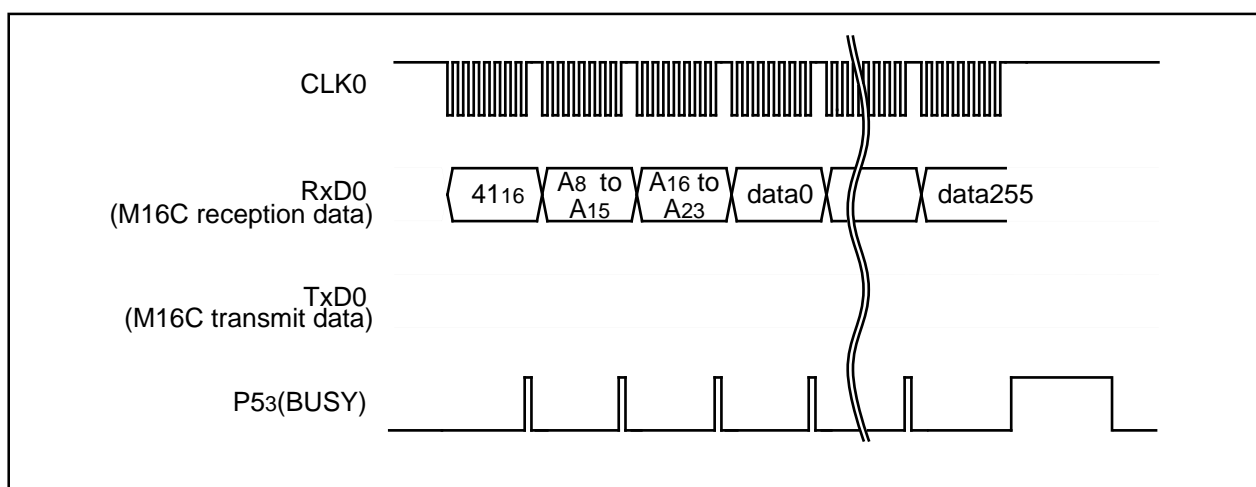


Figure 1.110. Timing for the page program

## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

**Erase All Unlocked Blocks Command**

This command erases the content of all blocks. Execute the erase all unlocked blocks command as explained here following.

- (1) Transfer the "A7<sub>16</sub>" command code with the 1st byte.
- (2) Transfer the verify command code "D0<sub>16</sub>" with the 2nd byte. With the verify command code, the erase operation will start and continue for all blocks in the flash memory.

When block erasing ends, the P53 (BUSY) signal changes from the "H" to the "L" level. The result of the erase operation can be known by reading the status register.

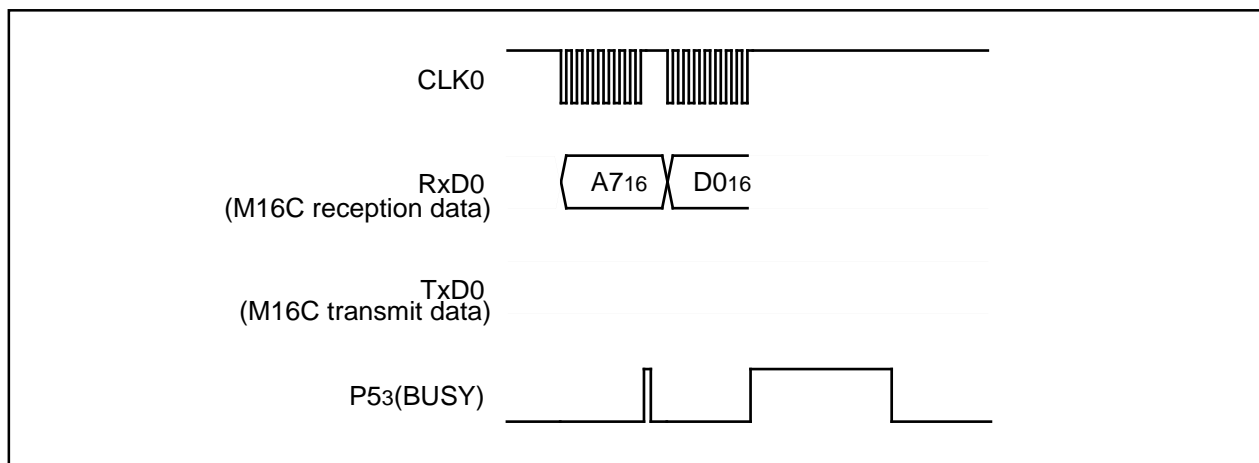


Figure 1.111. Timing for erasing all unlocked blocks

**Read Lock Bit Status Command**

This command reads the lock bit status of the specified block. Execute the read lock bit status command as explained here following.

- (1) Transfer the "71<sub>16</sub>" command code with the 1st byte.
- (2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.
- (3) The lock bit data of the specified block is output with the 4th byte. Write the highest address of the specified block for addresses A8 to A23.

The M30201 (flash memory version) does not have the lock bit, so the read value is always "1" (block unlock).

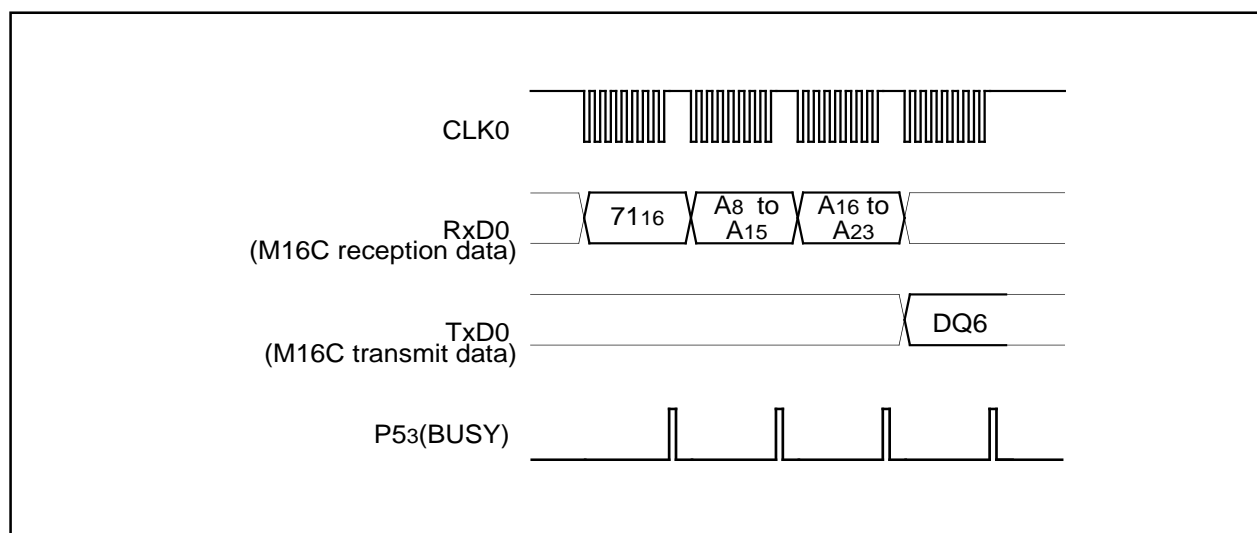


Figure 1.112. Timing for reading lock bit status


## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

**Download Command**

This command downloads a program to the RAM for execution. Execute the download command as explained here following.

- (1) Transfer the "FA16" command code with the 1st byte.
- (2) Transfer the program size with the 2nd and 3rd bytes.
- (3) Transfer the check sum with the 4th byte. The check sum is added to all data sent with the 5th byte onward.
- (4) The program to execute is sent with the 5th byte onward.

When all data has been transmitted, if the check sum matches, the downloaded program is executed. The size of the program will vary according to the internal RAM.

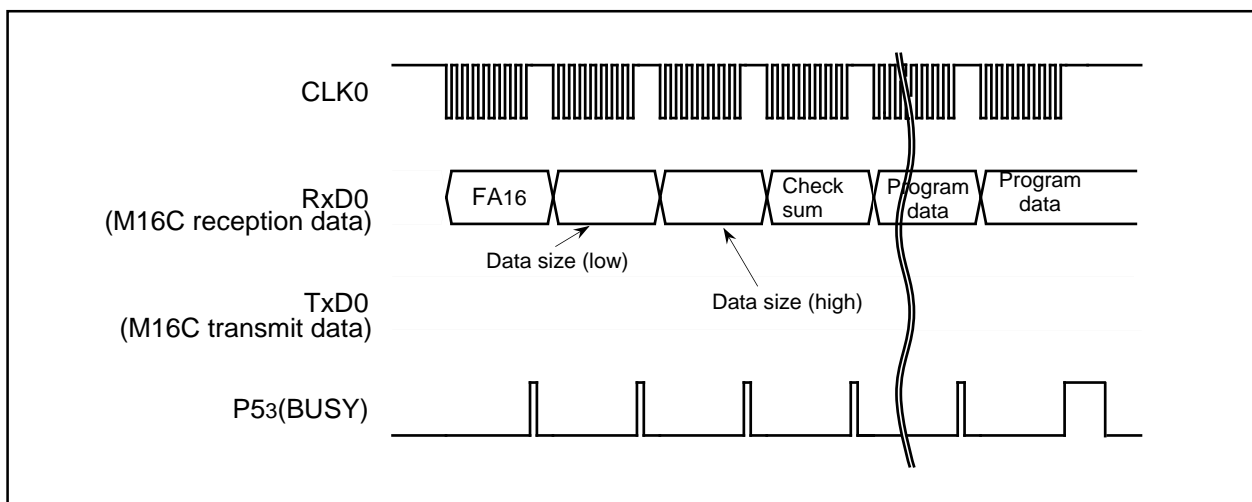

**Figure 1.113. Timing for download**

## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

**Version Information Output Command**

This command outputs the version information of the control program stored in the boot area. Execute the version information output command as explained here following.

- (1) Transfer the "FB16" command code with the 1st byte.
- (2) The version information will be output from the 2nd byte onward. This data is composed of 8 ASCII code characters.

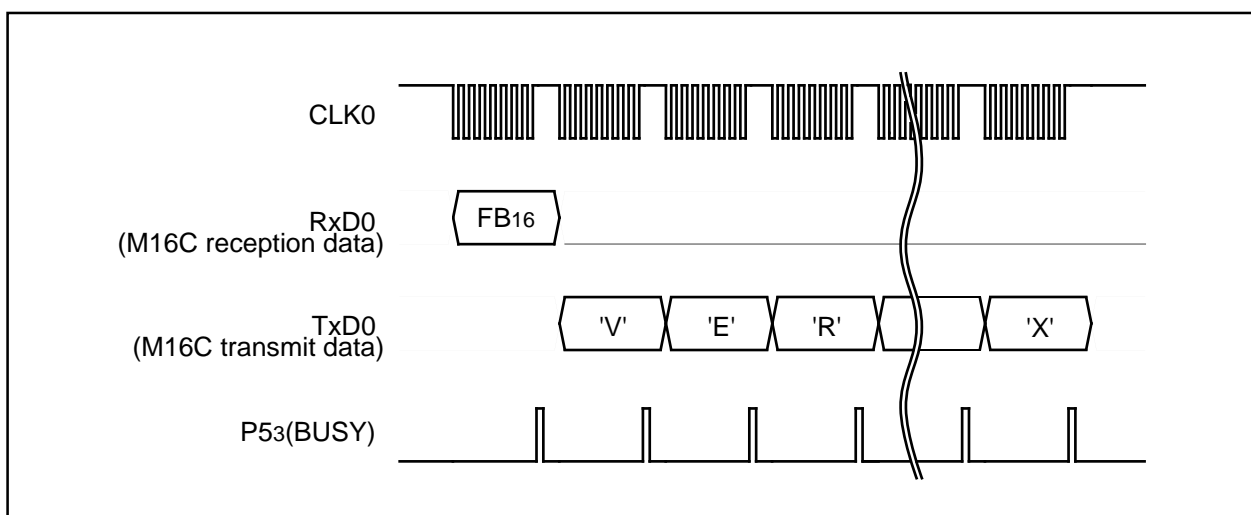


Figure 1.114. Timing for version information output

**Boot ROM Area Output Command**

This command outputs the control program stored in the boot ROM area in one page blocks (256 bytes). Execute the boot ROM area output command as explained here following.

- (1) Transfer the "FC16" command code with the 1st byte.
- (2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 will be output sequentially from the smallest address first, in sync with the fall of the clock.

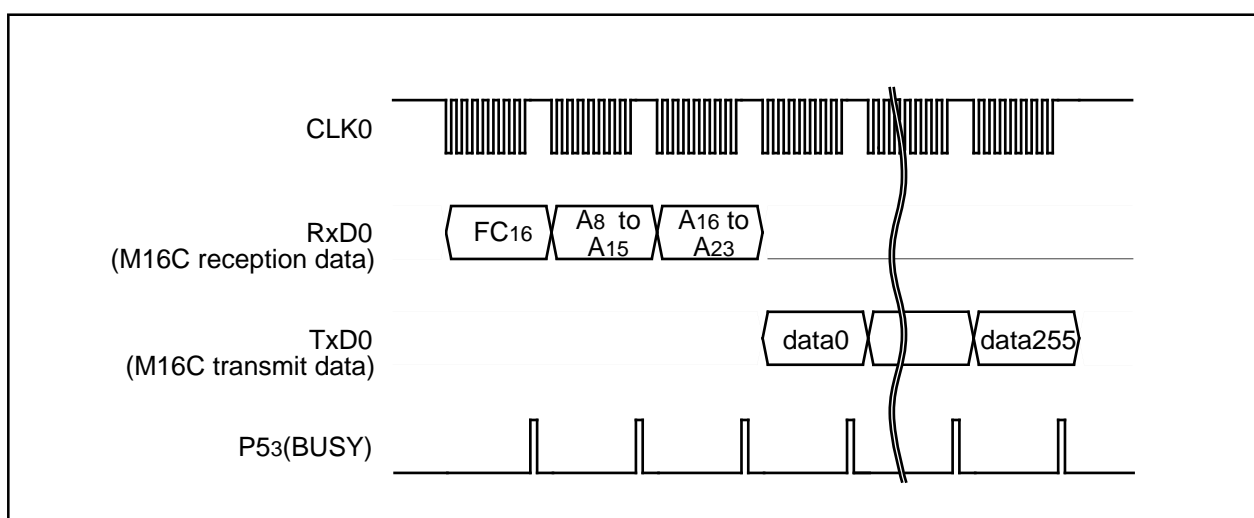


Figure 1.115. Timing for boot ROM area output



## Appendix Standard Serial I/O Mode 1 (Flash Memory Version)

**ID Check**

This command checks the ID code. Execute the boot ID check command as explained here following.

- (1) Transfer the "F5<sub>16</sub>" command code with the 1st byte.
- (2) Transfer addresses A0 to A7, A8 to A15 and A16 to A23 of the 1st byte of the ID code with the 2nd, 3rd and 4th bytes respectively.
- (3) Transfer the number of data sets of the ID code with the 5th byte.
- (4) The ID code is sent with the 6th byte onward, starting with the 1st byte of the code.

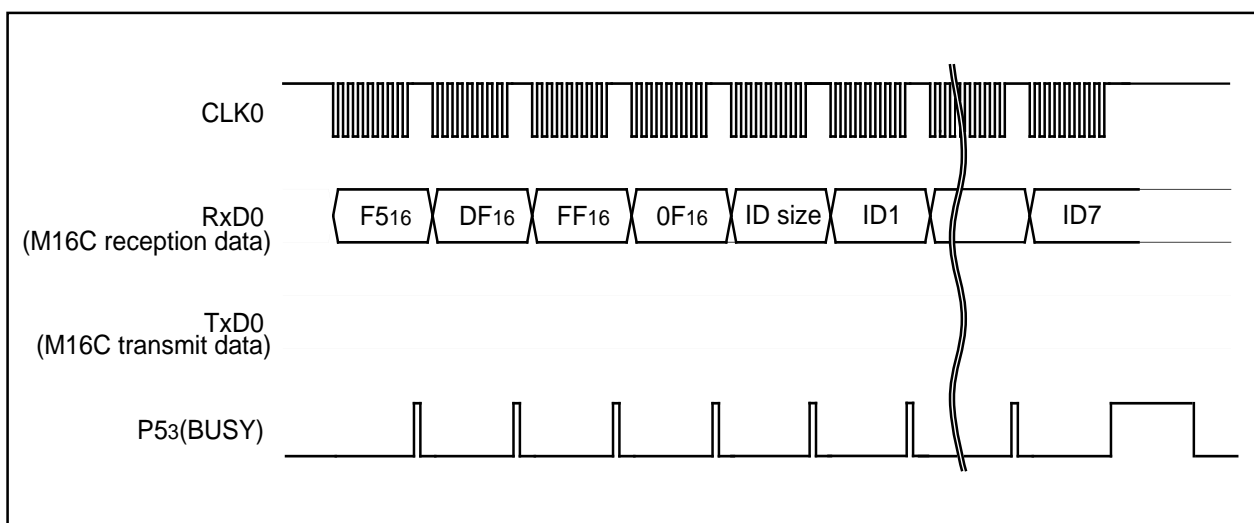


Figure 1.116. Timing for the ID check

**ID Code**

When the flash memory is not blank, the ID code sent from the peripheral units and the ID code written in the flash memory are compared to see if they match. If the codes do not match, the command sent from the peripheral units is not accepted. An ID code contains 8 bits of data. Area is, from the 1st byte, addresses 0FFFD<sub>16</sub>, 0FFFE<sub>316</sub>, 0FFFE<sub>B16</sub>, 0FFFE<sub>F16</sub>, 0FFFF<sub>316</sub>, 0FFFF<sub>716</sub> and 0FFFF<sub>B16</sub>. Write a program into the flash memory, which already has the ID code set for these addresses.

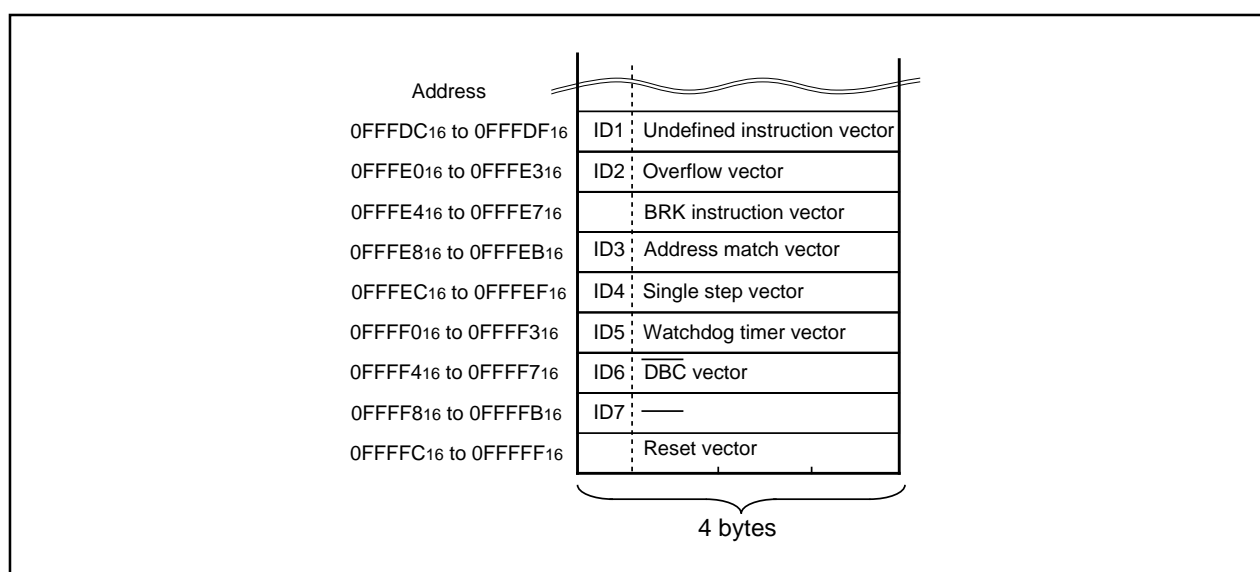


Figure 1.117. ID code storage addresses

## Status Register (SRD)

The status register indicates operating status of the flash memory and status such as whether an erase operation or a program ended successfully or in error. It can be read by writing the read status register command (70<sub>16</sub>). Also, the status register is cleared by writing the clear status register command (50<sub>16</sub>). Table 1.80 gives the definition of each status register bit. After clearing the reset, the status register outputs "80<sub>16</sub>".

**Table 1.80. Status register (SRD)**

SRD0 bits	Status name	Definition	
		"1"	"0"
SR7 (bit7)	Status bit	Ready	Busy
SR6 (bit6)	Reserved	-	-
SR5 (bit5)	Erase bit	Terminated in error	Terminated normally
SR4 (bit4)	Program bit	Terminated in error	Terminated normally
SR3 (bit3)	Reserved	-	-
SR2 (bit2)	Reserved	-	-
SR1 (bit1)	Reserved	-	-
SR0 (bit0)	Reserved	-	-

### Status bit (SR7)

The status bit indicates the operating status of the flash memory. When power is turned on, "1" (ready) is set for it. The bit is set to "0" (busy) during an auto write or auto erase operation, but it is set back to "1" when the operation ends.

### Erase Status (SR5)

The erase status reports the operating status of the auto erase operation. If an erase error occurs, it is set to "1". When the erase status is cleared, it is set to "0".

### Program Status (SR4)

The program status reports the operating status of the auto write operation. If a write error occurs, it is set to "1". When the program status is cleared, it is set to "0".

## Status Register 1 (SRD1)

Status register 1 indicates the status of serial communications, results from ID checks and results from check sum comparisons. It can be read after the SRD by writing the read status register command (70<sub>16</sub>). Also, status register 1 is cleared by writing the clear status register command (50<sub>16</sub>).

Table 1.81 gives the definition of each status register 1 bit. "00<sub>16</sub>" is output when power is turned ON and the flag status is maintained even after the reset.

**Table 1.81. Status register 1 (SRD1)**

SRD1 bits	Status name	Definition	
		"1"	"0"
SR15 (bit7)	Boot update completed bit	Update completed	Not update
SR14 (bit6)	Reserved	-	-
SR13 (bit5)	Reserved	-	-
SR12 (bit4)	Checksum match bit	Match	Mismatch
SR11 (bit3) SR10 (bit2)	ID check completed bits	00 Not verified 01 Verification mismatch 10 Reserved 11 Verified	
SR9 (bit1)	Data receive time out	Time out	Normal operation
SR8 (bit0)	Reserved	-	-

### Boot Update Completed Bit (SR15)

This flag indicates whether the control program was downloaded to the RAM or not, using the download function.

### Check Sum Consistency Bit (SR12)

This flag indicates whether the check sum matches or not when a program, is downloaded for execution using the download function.

### ID Check Completed Bits (SR11 and SR10)


These flags indicate the result of ID checks. Some commands cannot be accepted without an ID check.

### Data Reception Time Out (SR9)

This flag indicates when a time out error is generated during data reception. If this flag is attached during data reception, the received data is discarded and the microcomputer returns to the command wait state.

### Example Circuit Application for The Standard Serial I/O Mode 1

The below figure shows a circuit application for the standard serial I/O mode 1. Control pins will vary according to programmer, therefore see the peripheral unit manual for more information.

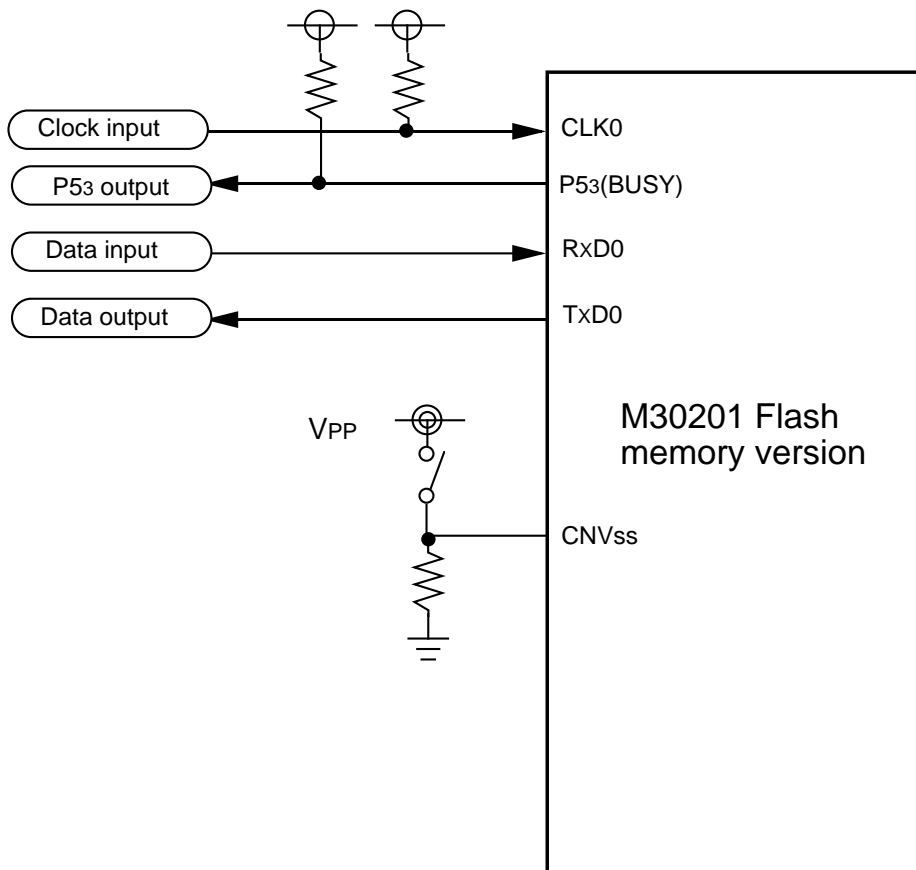

- (1) Control pins and external circuitry will vary according to peripheral unit. For more information, see the peripheral unit manual.
- (2) In this example, the microprocessor mode and standard serial I/O mode are switched via a switch.

Figure 1.118. Example circuit application for the standard serial I/O mode 1

## Overview of standard serial I/O mode 2 (clock asynchronized)

In standard serial I/O mode 2, software commands, addresses and data are input and output between the MCU and peripheral units (serial programmer, etc.) using 2-wire clock-asynchronized serial I/O (UART0). Standard serial I/O mode 2 is engaged by releasing the reset with the P5<sub>3</sub> (BUSY) pin "L" level.

The TxD<sub>0</sub> pin is for CMOS output. Data transfer is in 8-bit units with LSB first, 1 stop bit and parity OFF.

After the reset is released, connections can be established at 9,600 bps when initial communications (Figure 1.119) are made with a peripheral unit. However, this requires a main clock with a minimum 2 MHz input oscillation frequency. Baud rate can also be changed from 9,600 bps to 19,200, 38,400 or 57,600 bps by executing software commands. However, communication errors may occur because of the oscillation frequency of the main clock. If errors occur, change the main clock's oscillation frequency and the baud rate. After executing commands from a peripheral unit that requires time to erase and write data, as with erase and program commands, allow a sufficient time interval or execute the read status command and check how processing ended, before executing the next command.

Data and status registers in memory can be read after transmitting software commands. Status, such as the operating state of the flash memory or whether a program or erase operation ended successfully or not, can be checked by reading the status register. Here following are explained initial communications with peripheral units, how frequency is identified and software commands.

## Initial communications with peripheral units

After the reset is released, the bit rate generator is adjusted to 9,600 bps to match the oscillation frequency of the main clock, by sending the code as prescribed by the protocol for initial communications with peripheral units (Figure 1.119).

- (1) Transmit "B016" from a peripheral unit. If the oscillation frequency input by the main clock is 10 MHz, the MCU with internal flash memory outputs the "B016" check code. If the oscillation frequency is anything other than 10 MHz, the MCU does not output anything.
- (2) Transmit "0016" from a peripheral unit 16 times. (The MCU with internal flash memory sets the bit rate generator so that "0016" can be successfully received.)
- (3) The MCU with internal flash memory outputs the "B016" check code and initial communications end successfully \*1. Initial communications must be transmitted at a speed of 9,600 bps and a transfer interval of a minimum 15 ms. Also, the baud rate at the end of initial communications is 9,600 bps.

\*1. If the peripheral unit cannot receive "B016" successfully, change the oscillation frequency of the main clock.

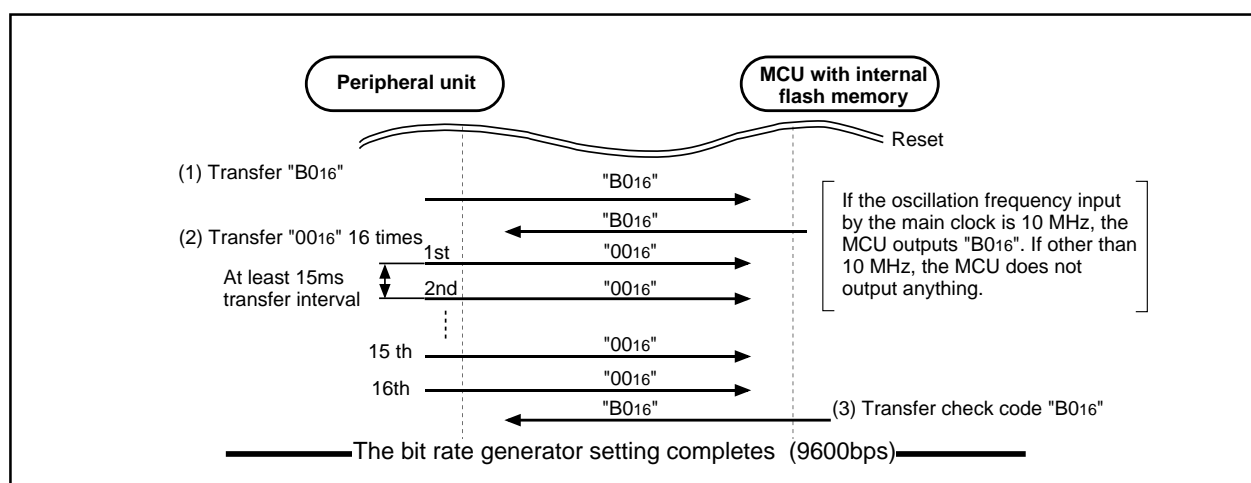


Figure 1.119. Peripheral unit and initial communication

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**How frequency is identified**

When "0016" data is received 16 times from a peripheral unit at a baud rate of 9,600 bps, the value of the bit rate generator is set to match the operating frequency (2 - 10 MHz). The highest speed is taken from the first 8 transmissions and the lowest from the last 8. These values are then used to calculate the bit rate generator value for a baud rate of 9,600 bps.

Baud rate cannot be attained with some operating frequencies. Table 1.82 gives the operation frequency and the baud rate that can be attained for.

**Table 1.82 Operation frequency and the baud rate**

Operation frequency (MHz)	Baud rate 9,600bps	Baud rate 19,200bps	Baud rate 38,400bps	Baud rate 57,600bps
10MHz	√	√	—	√
8MHz	√	√	—	√
7.3728MHz	√	√	√	√
6MHz	√	√	√	—
5MHz	√	√	—	—
4.5MHz	√	√	—	√
4.194304MHz	√	√	√	—
4MHz	√	√	—	—
3.58MHz	√	√	√	√
3MHz	√	√	√	—
2MHz	√	—	—	—

√ : Communications possible

— : Communications not possible

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

## Software Commands

Table 1.83 lists software commands. In the standard serial I/O mode 2, erase operations, programs and reading are controlled by transferring software commands via the RxD<sub>0</sub> pin. Standard serial I/O mode 2 adds four transmission speed commands - 9,600, 19,200, 38,400 and 57,600 bps - to the software commands of standard serial I/O mode 1. Software commands are explained here below.

Table 1.83. Software commands (Standard serial I/O mode 2)

	Control command	1st byte transfer	2nd byte	3rd byte	4th byte	5th byte	6th byte		When ID is not verified
1	Page read	FF <sub>16</sub>	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
2	Page program	41 <sub>16</sub>	Address (middle)	Address (high)	Data input	Data input	Data input	Data input to 259th byte	Not acceptable
3	Erase all unlocked blocks	A7 <sub>16</sub>	D0 <sub>16</sub>						Not acceptable
4	Read status register	70 <sub>16</sub>	SRD output	SRD1 output					Acceptable
5	Clear status register	50 <sub>16</sub>							Not acceptable
6	Read lock bit status	71 <sub>16</sub>	Address (middle)	Address (high)	Lock bit data output				Not acceptable
7	Code processing function	F5 <sub>16</sub>	Address (low)	Address (middle)	Address (high)	ID size	ID1	To ID7	Acceptable
8	Download function	FA <sub>16</sub>	Size (low)	Size (high)	Check-sum	Data input	To required number of times		Not acceptable
9	Version data output function	FB <sub>16</sub>	Version data output	Version data output	Version data output	Version data output	Version data output	Version data output to 9th byte	Acceptable
10	Boot ROM area output function	FC <sub>16</sub>	Address (middle)	Address (high)	Data output	Data output	Data output	Data output to 259th byte	Not acceptable
11	Baud rate 9600	B0 <sub>16</sub>	B0 <sub>16</sub>						Acceptable
12	Baud rate 19200	B1 <sub>16</sub>	B1 <sub>16</sub>						Acceptable
13	Baud rate 38400	B2 <sub>16</sub>	B2 <sub>16</sub>						Acceptable
14	Baud rate 57600	B3 <sub>16</sub>	B3 <sub>16</sub>						Acceptable

Note 1: Shading indicates transfer from flash memory microcomputer to peripheral unit. All other data is transferred from the peripheral unit to the flash memory microcomputer.

Note 2: SRD refers to status register data. SRD1 refers to status register 1 data.

Note 3: All commands can be accepted when the flash memory is totally blank.

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Page Read Command**

This command reads the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page read command as explained here following.

- (1) Transfer the "FF<sub>16</sub>" command code with the 1st byte.
- (2) Transfer addresses A<sub>8</sub> to A<sub>15</sub> and A<sub>16</sub> to A<sub>23</sub> with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, data (D<sub>0</sub>–D<sub>7</sub>) for the page (256 bytes) specified with addresses A<sub>8</sub> to A<sub>23</sub> will be output sequentially from the smallest address first in sync with the fall of the clock.

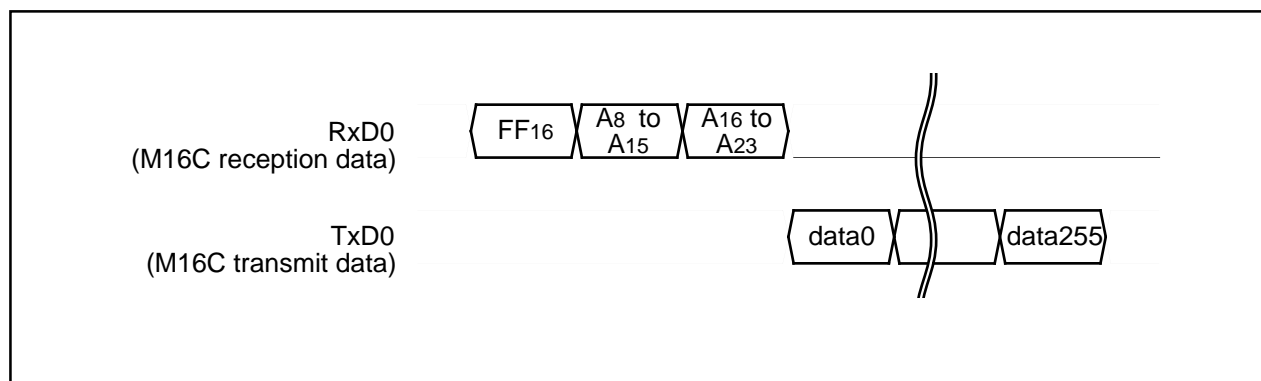


Figure 1.120. Timing for page read

**Read Status Register Command**

This command reads status information. When the "70<sub>16</sub>" command code is sent with the 1st byte, the contents of the status register (SRD) specified with the 2nd byte and the contents of status register 1 (SRD1) specified with the 3rd byte are read.

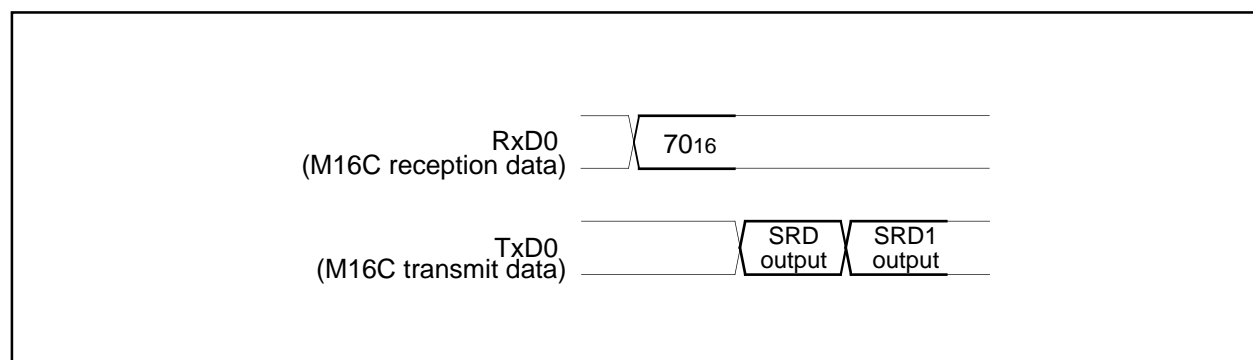


Figure 1.121. Timing for reading the status register



## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Clear Status Register Command**

This command clears the bits (SR3–SR4) which are set when the status register operation ends in error. When the “5016” command code is sent with the 1st byte, the aforementioned bits are cleared. When the clear status register operation ends, the RTS<sub>1</sub> (BUSY) signal changes from the “H” to the “L” level.

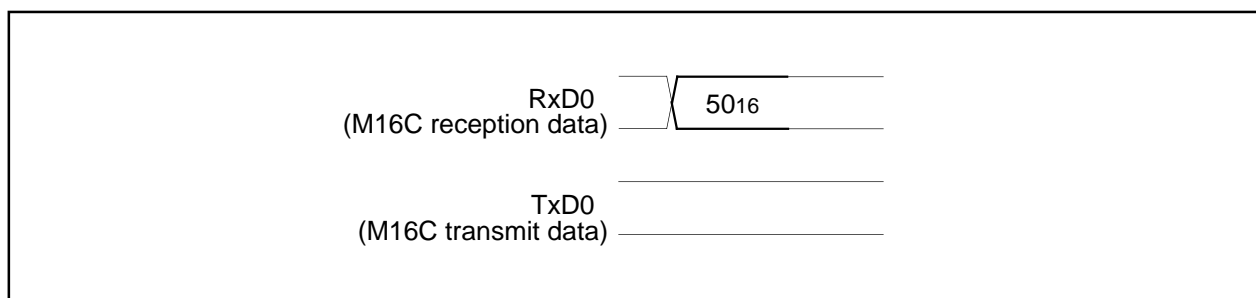


Figure 1.122. Timing for clearing the status register

**Page Program Command**

This command writes the specified page (256 bytes) in the flash memory sequentially one byte at a time. Execute the page program command as explained here following.

- (1) Transfer the “4116” command code with the 1st byte.
- (2) Transfer addresses A<sub>8</sub> to A<sub>15</sub> and A<sub>16</sub> to A<sub>23</sub> with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, as write data (D<sub>0</sub>–D<sub>7</sub>) for the page (256 bytes) specified with addresses A<sub>8</sub> to A<sub>23</sub> is input sequentially from the smallest address first, that page is automatically written.

When reception setup for the next 256 bytes ends, the RTS<sub>1</sub> (BUSY) signal changes from the “H” to the “L” level. The result of the page program can be known by reading the status register. For more information, see the section on the status register.

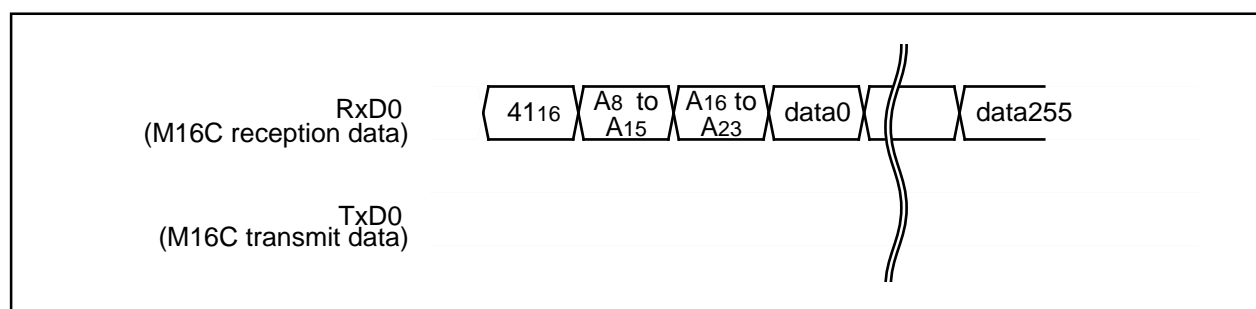


Figure 1.123. Timing for the page program


## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Erase All Unlocked Blocks Command**

This command erases the content of all blocks. Execute the erase all unlocked blocks command as explained here following.

- (1) Transfer the "A7<sub>16</sub>" command code with the 1st byte.
- (2) Transfer the verify command code "D0<sub>16</sub>" with the 2nd byte. With the verify command code, the erase operation will start and continue for all blocks in the flash memory.

When block erasing ends, the RTS<sub>1</sub> (BUSY) signal changes from the "H" to the "L" level. The result of the erase operation can be known by reading the status register.

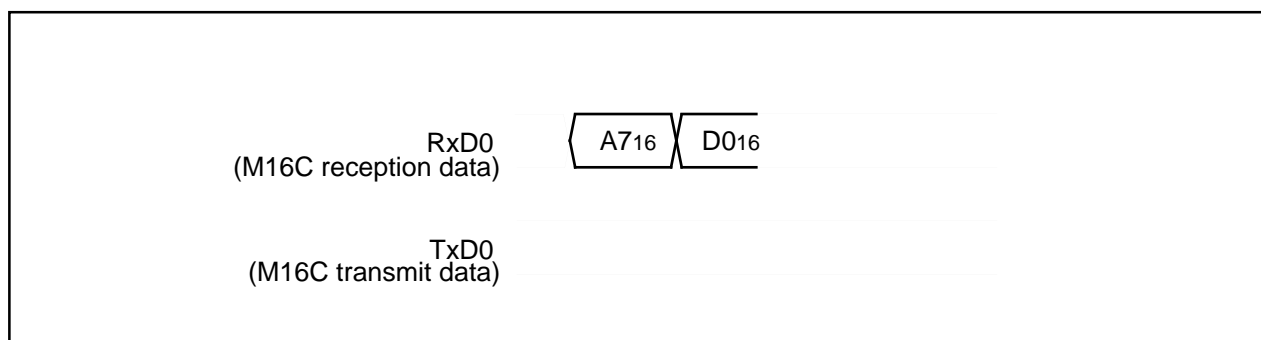

**Figure 1.124. Timing for erasing all unlocked blocks**

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Read Lock Bit Status Command**

This command reads the lock bit status of the specified block. Execute the read lock bit status command as explained here following.

- (1) Transfer the "7116" command code with the 1st byte.
- (2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.
- (3) The lock bit data of the specified block is output with the 4th byte. Write the highest address of the specified block for addresses A8 to A23.

The M30201 (flash memory version) does not have the lock bit, so the read value is always "1" (block unlock).

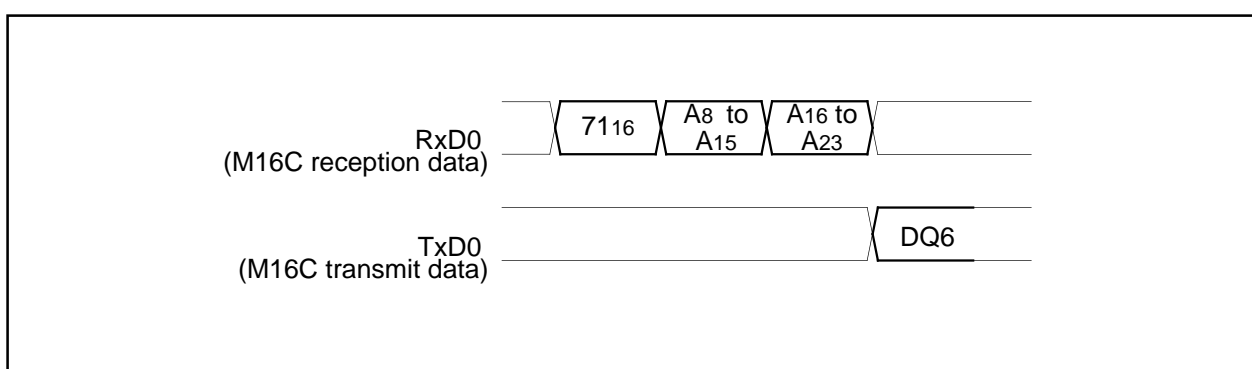


Figure 1.125. Timing for reading lock bit status

**Download Command**

This command downloads a program to the RAM for execution. Execute the download command as explained here following.

- (1) Transfer the "FA16" command code with the 1st byte.
- (2) Transfer the program size with the 2nd and 3rd bytes.
- (3) Transfer the check sum with the 4th byte. The check sum is added to all data sent with the 5th byte onward.
- (4) The program to execute is sent with the 5th byte onward.

When all data has been transmitted, if the check sum matches, the downloaded program is executed. The size of the program will vary according to the internal RAM.

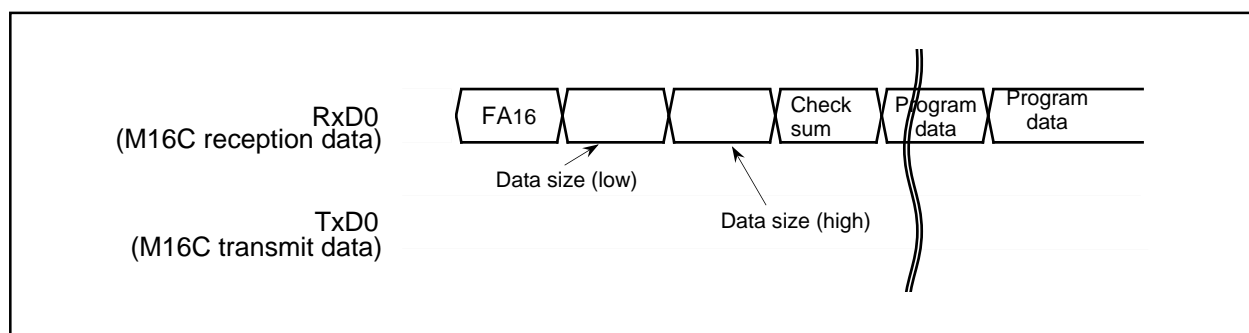



Figure 1.126. Timing for download

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Version Information Output Command**

This command outputs the version information of the control program stored in the boot area. Execute the version information output command as explained here following.

- (1) Transfer the "FB16" command code with the 1st byte.
- (2) The version information will be output from the 2nd byte onward. This data is composed of 8 ASCII code characters.

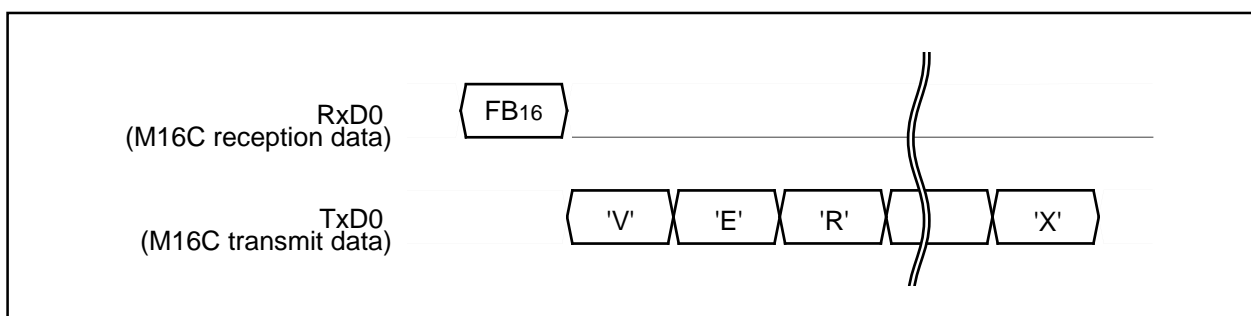


**Figure 1.127. Timing for version information output**

**Boot ROM Area Output Command**

This command outputs the control program stored in the boot ROM area in one page blocks (256 bytes). Execute the boot ROM area output command as explained here following.

- (1) Transfer the "FC16" command code with the 1st byte.
- (2) Transfer addresses A8 to A15 and A16 to A23 with the 2nd and 3rd bytes respectively.
- (3) From the 4th byte onward, data (D0–D7) for the page (256 bytes) specified with addresses A8 to A23 will be output sequentially from the smallest address first.

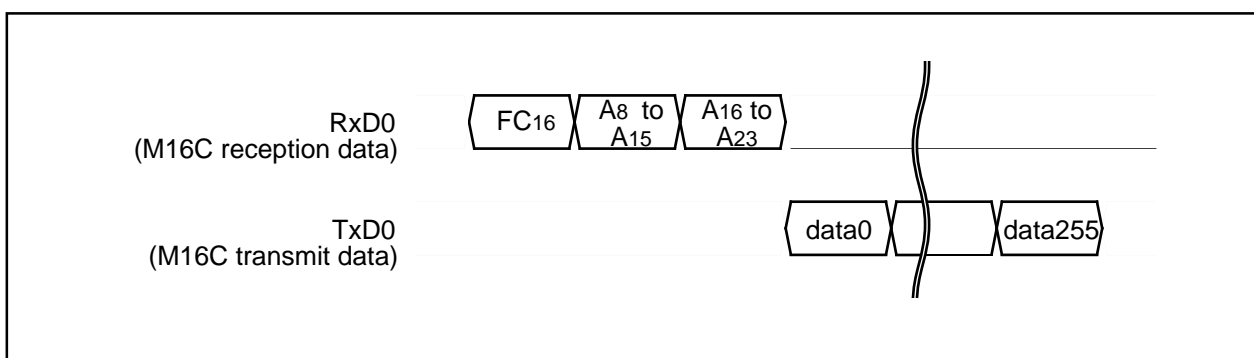


**Figure 1.128. Timing for boot ROM area output**

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**ID Check**

This command checks the ID code. Execute the boot ID check command as explained here following.


- (1) Transfer the "F5<sub>16</sub>" command code with the 1st byte.
- (2) Transfer addresses A0 to A7, A8 to A15 and A16 to A23 of the 1st byte of the ID code with the 2nd, 3rd and 4th bytes respectively.
- (3) Transfer the number of data sets of the ID code with the 5th byte.
- (4) The ID code is sent with the 6th byte onward, starting with the 1st byte of the code.

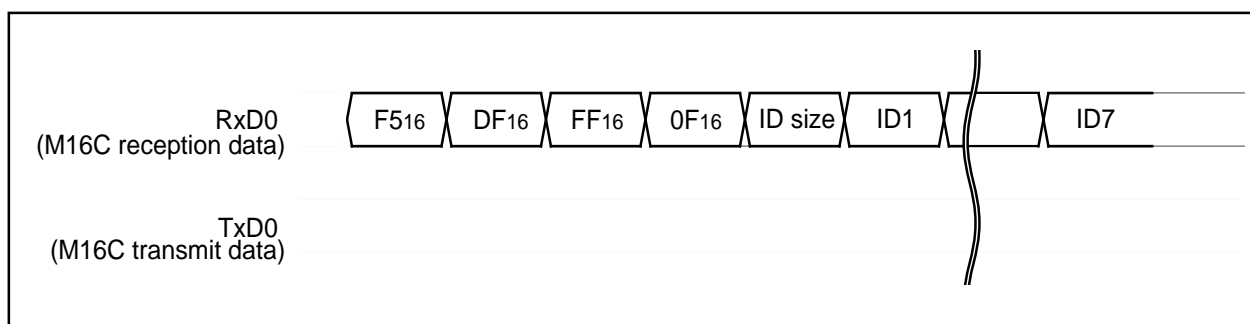

**Figure 1.129. Timing for the ID check**

**ID Code**

When the flash memory is not blank, the ID code sent from the peripheral units and the ID code written in the flash memory are compared to see if they match. If the codes do not match, the command sent from the peripheral units is not accepted. An ID code contains 8 bits of data. Area is, from the 1st byte, addresses 0FFFD<sub>16</sub>, 0FFFE<sub>316</sub>, 0FFFE<sub>B16</sub>, 0FFFE<sub>F16</sub>, 0FFFF<sub>316</sub>, 0FFFF<sub>716</sub> and 0FFFF<sub>B16</sub>. Write a program into the flash memory, which already has the ID code set for these addresses.

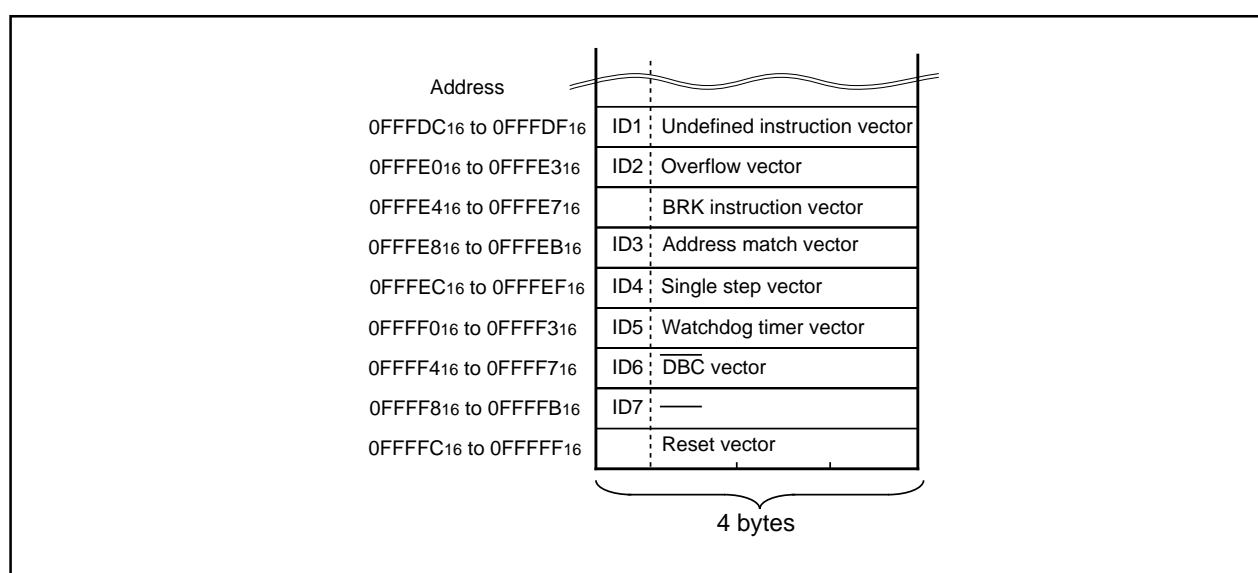


**Figure 1.130. ID code storage addresses**

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Baud Rate 9600**

This command changes baud rate to 9,600 bps. Execute it as follows.

- (1) Transfer the "B016" command code with the 1st byte.
- (2) After the "B016" check code is output with the 2nd byte, change the baud rate to 9,600 bps.

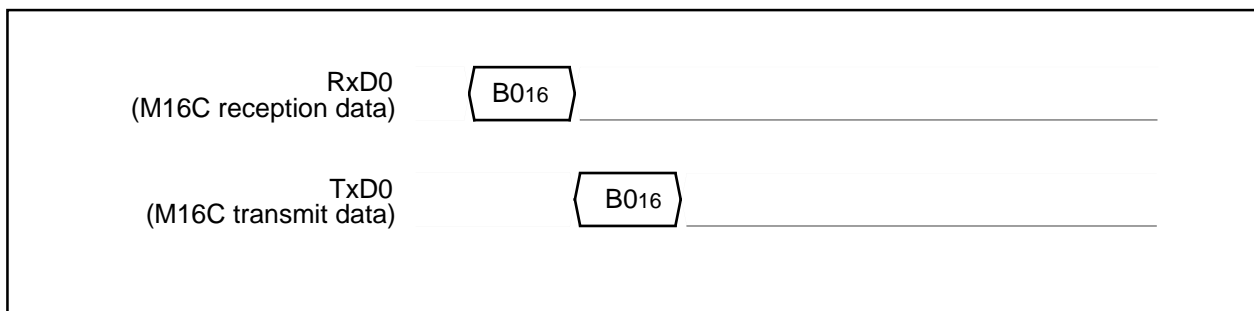

**Figure 1.131. Timing of baud rate 9600**

## Appendix Standard Serial I/O Mode 2 (Flash Memory Version)

**Baud Rate 19200**

This command changes baud rate to 19,200 bps. Execute it as follows.

- (1) Transfer the "B116" command code with the 1st byte.
- (2) After the "B116" check code is output with the 2nd byte, change the baud rate to 19,200 bps.




**Figure 1.132. Timing of baud rate 19200**

**Baud Rate 38400**

This command changes baud rate to 38,400 bps. Execute it as follows.

- (1) Transfer the "B216" command code with the 1st byte.
- (2) After the "B216" check code is output with the 2nd byte, change the baud rate to 38,400 bps.

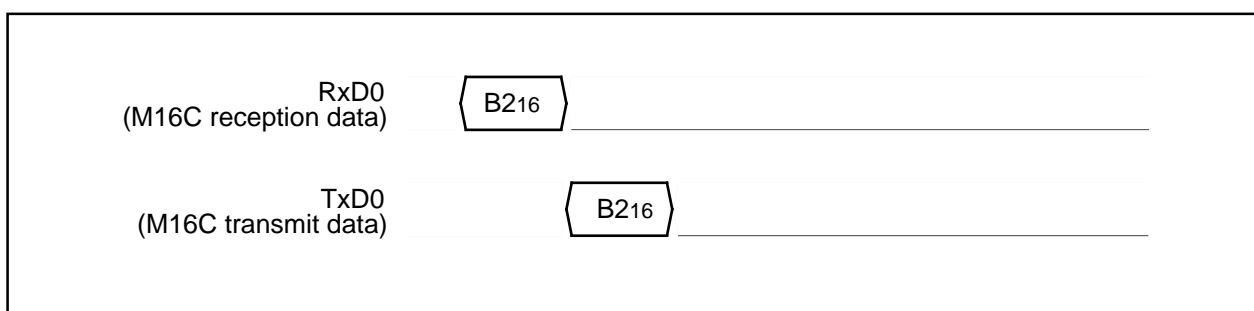


**Figure 1.133. Timing of baud rate 38400**

**Baud Rate 57600**

This command changes baud rate to 57,600 bps. Execute it as follows.

- (1) Transfer the "B316" command code with the 1st byte.
- (2) After the "B316" check code is output with the 2nd byte, change the baud rate to 57,600 bps.

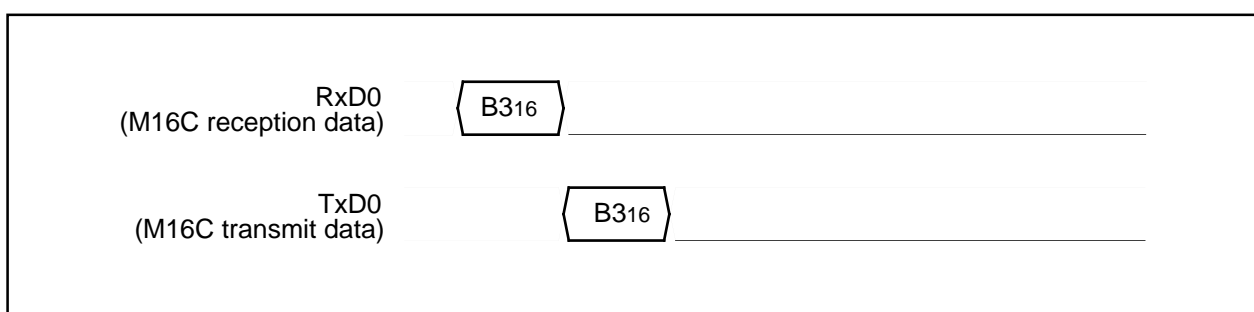

**Figure 1.134. Timing of baud rate 57600**

### Example Circuit Application for The Standard Serial I/O Mode 2

The below figure shows a circuit application for the standard serial I/O mode 2.

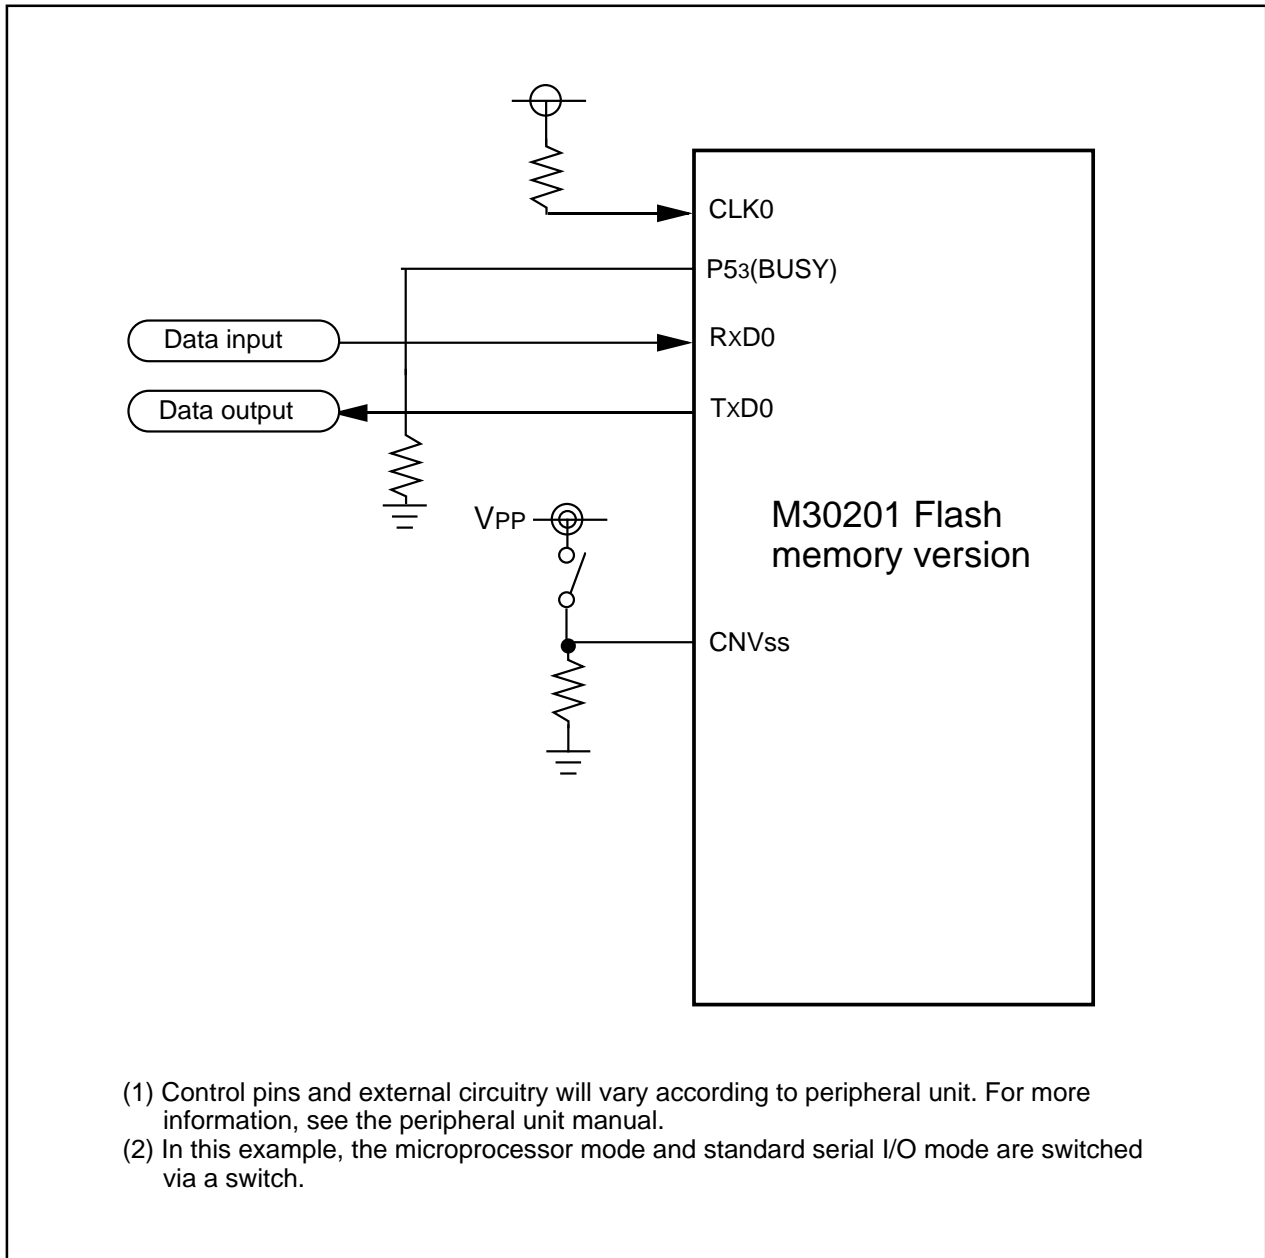


Figure 1.135. Example circuit application for the standard serial I/O mode 2




## 52P4B

(MMP)

Plastic 52pin 600mil SDIP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
SDIP52-P-600-1.78	—	5.1	Alloy 42/Cu Alloy





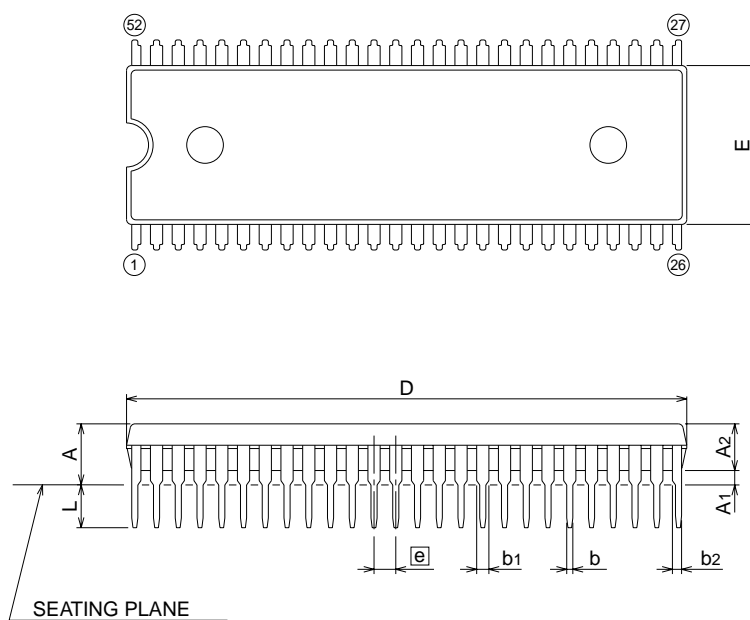


Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	—	—	5.5
A1	0.51	—	—
A2	—	3.8	—
b	0.4	0.5	0.59
b1	0.9	1.0	1.3
b2	0.65	0.75	1.05
c	0.22	0.27	0.34
D	45.65	45.85	46.05
E	12.85	13.0	13.15
e	—	1.778	—
e1	—	15.24	—
L	3.0	—	—
$\theta$	0°	—	15°

## 56P6S-A

Plastic 56pin 10×10mm body QFP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
QFP56-P-1010-0.65	—	0.59	Alloy 42

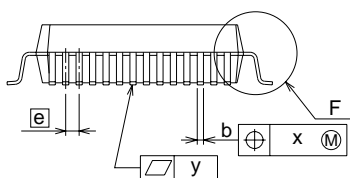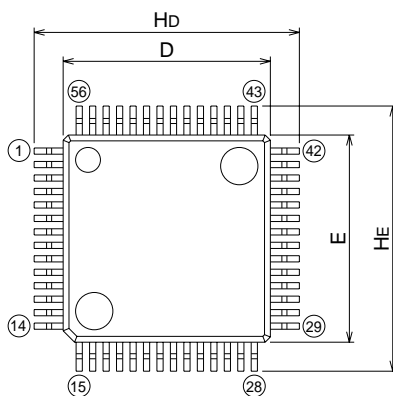

Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	—	—	3.05
A1	0	0.1	0.2
A2	—	2.8	—
b	0.25	0.3	0.4
c	0.13	0.15	0.2
D	9.8	10.0	10.2
E	9.8	10.0	10.2
e	—	0.65	—
Hd	12.5	12.8	13.1
HE	12.5	12.8	13.1
L	0.4	0.6	0.8
L1	—	1.4	—
x	—	—	0.13
y	—	—	0.1
$\theta$	0°	—	10°
b2	—	0.35	—
L2	1.3	—	—
Md	—	10.6	—
ME	—	10.6	—

## Chapter 2

---

### Peripheral Functions Usage

## Protect

## 2.1 Protect

## 2.1.1 Overview

'Protect' is a function that causes a value held in a register to be unchanged even when a program runs away. The following is an overview of the protect function:

## (1) Registers affected by the protect function

The registers affected by the protect function are:

- (a) System clock control registers 0, 1 (addresses 0006<sub>16</sub> and 0007<sub>16</sub>)
- (b) Processor mode registers 0, 1 (addresses 0004<sub>16</sub> and 0005<sub>16</sub>)
- (c) Port P4 direction register (address 03EA<sub>16</sub>)

The values in registers (1) through (3) cannot be changed in write-protect state. To change values in the registers, put the individual registers in write-enabled state.

## (2) Protect register

Figure 2.1.1 shows protect register.

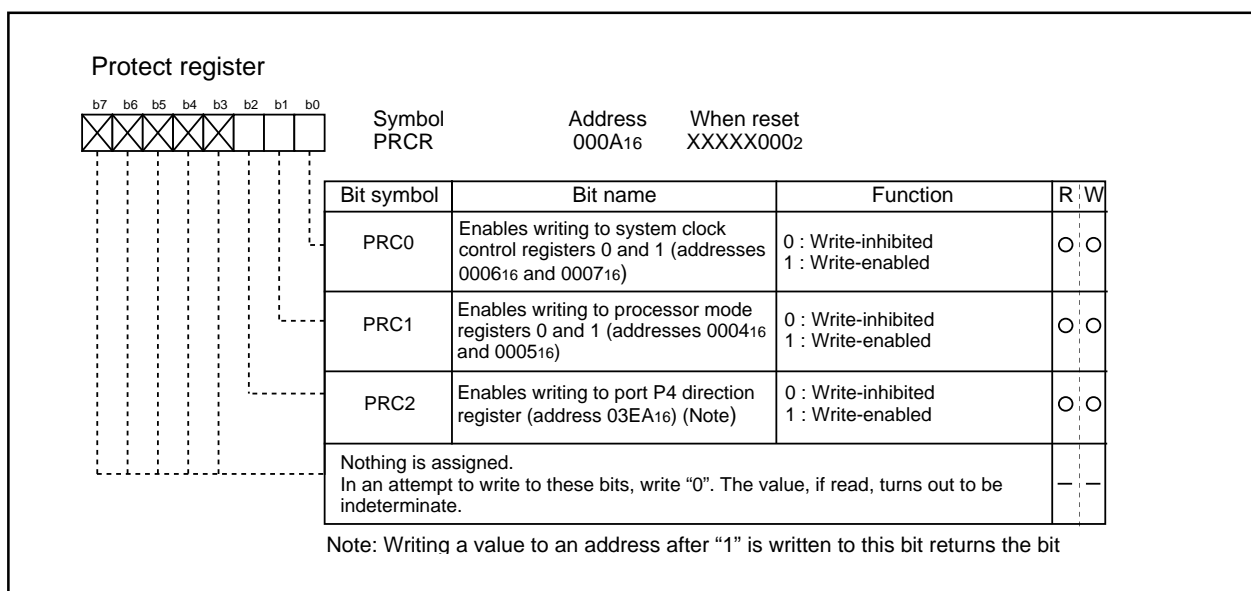


Figure 2.1.1. Protect register

## 2.1.2 Protect Operation

The following explains the protect operation. Figure 2.1.2 shows the set-up procedure.

- Operation
- (1) Setting "1" in the write-enable bit of system clock control registers 0 and 1 causes system clock control register 0 and system clock control register 1 to be in write-enabled state.
  - (2) The contents of system clock control register 0 and that of system clock control register 1 are changed.
  - (3) Setting "0" in the write-enable bit of system control registers 0 and 1 causes system clock control register 0 and system control register 1 to be in write-inhibited state.
  - (4) To change the contents of processor mode register 0 and that of processor mode register 1, follow the same steps as in dealing with system clock control registers.
  - (5) The write-enable bit of port P4 direction register goes to "0" when the next write instruction is executed after write-enabled state is readied. Make changes in input/output immediately after the instruction that sets "1" in the write-enable bit of port P4 direction register (avoid causing an interrupt).

## Protect

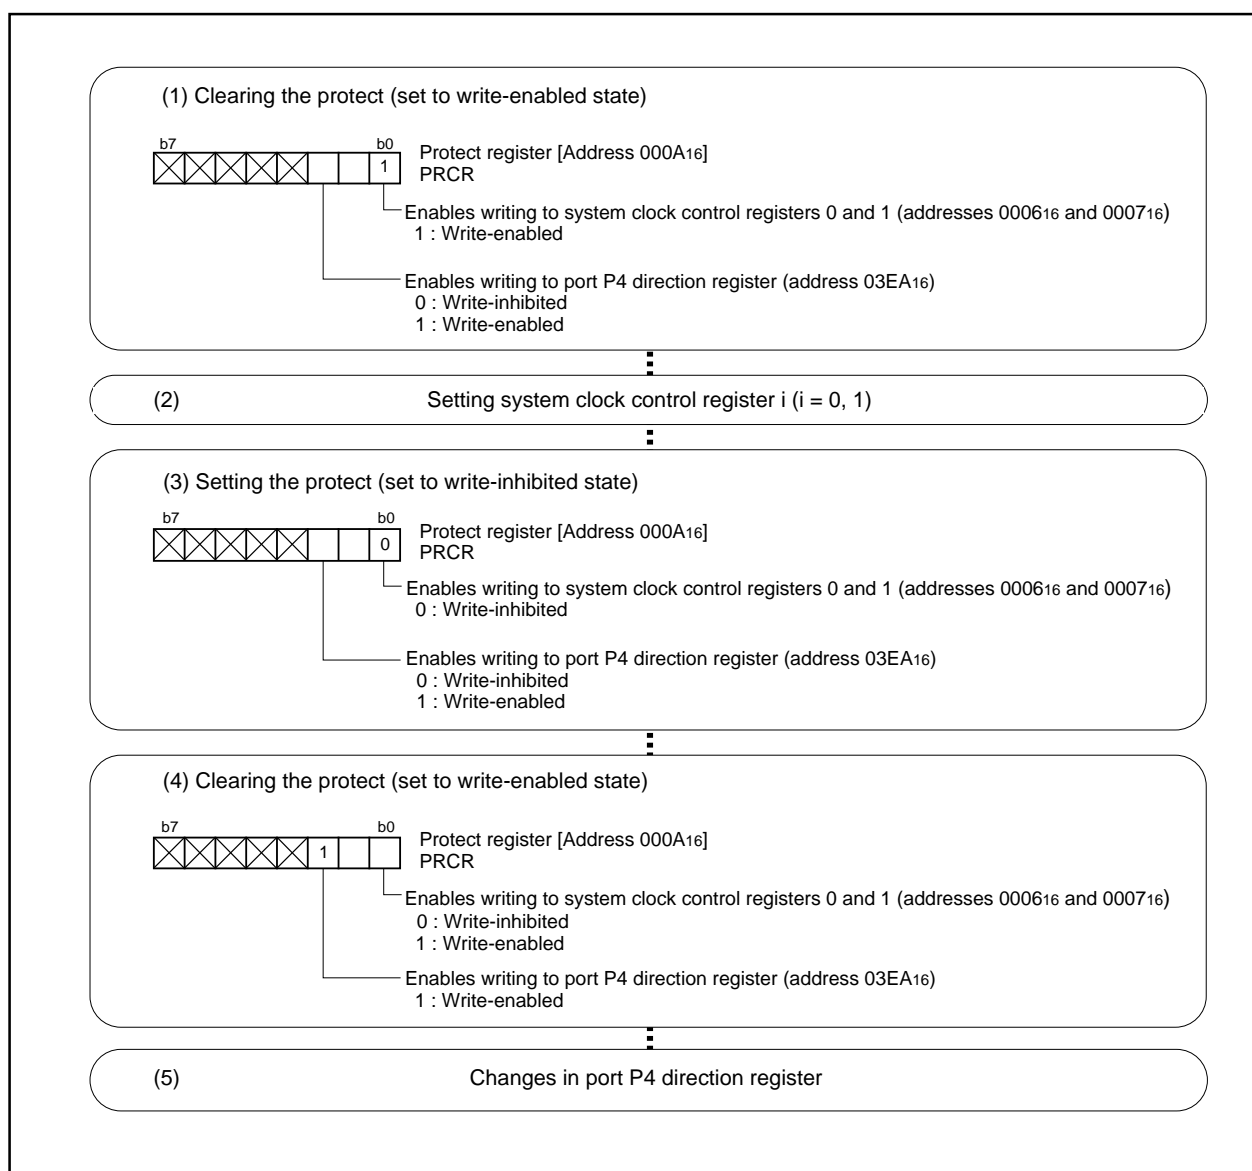


Figure 2.1.2. Set-up procedure for protect function

## 2.1.3 Precaution for Protect

- (1) The write-enable bit of port P4 direction register goes to "0" when the next write instruction is executed after write-enabled state is readied. Make changes in input/output immediately after the instruction that sets "1" in the write-enable bit of port P4 direction register (avoid causing an interrupt).

## 2.2 Timer A

### 2.2.1 Overview

The following is an overview for timer A, a 16-bit timer.

#### (1) Mode

Timer A operates in one of the four modes:

##### (a) Timer mode

In this mode, the internal count source is counted. Two functions can be selected: the pulse output function that reverses output from a port every time an overflow occurs, or the gate function which controls the count start/stop according to the input signal from a port.

- Timer mode operation ..... P180
- Timer mode, gate function operation ..... P182
- Timer mode, pulse output function operation ..... P184

##### (b) Event counter mode

This mode counts the pulses from the outside and the number of overflows in other timers. The free-run type, in which nothing is reloaded from the reload register, can be selected when an underflow occurs. The pulse output function can also be selected. Please refer to the timer mode explanation for details, as the operation is identical.

- Event counter mode operation ..... P186
- Event counter mode, free run type operation ..... P188

Furthermore, Timer A has a 2-phase pulse signal processing function which generates an up count or down count in the event counter mode, depending on the phase of the two input signals.

- Operation of the 2-phase pulse signal processing function in normal event counter mode ..... P190
- Operation of the 2-phase pulse signal processing function in 4-multiplication mode ..... P192

##### (c) One-shot timer mode

In this mode, the timer is started by the trigger and stops when the timer goes to "0". The trigger can be selected from the following 3 types: an external input signal, an overflow of the timer, or a software trigger. The pulse output function can also be selected. Please refer to the timer mode explanation for details, as the operation is identical.

- Operation in one-shot timer mode effected by software ..... P194
- Operation in one-shot timer mode effected by an external trigger ..... P196

##### (d) Pulse width modulation (PWM) mode

In this mode, the arbitrary pulses are successively output. Either a 16-bit fixed-period PWM mode or 8-bit variable-period mode can be selected. The trigger for initiating output can also be selected. Please refer to the one-shot timer mode explanation for details, as the operation is identical.

- 16-bit PWM mode operation ..... P198
- 8-bit PWM mode operation ..... P200

## Timer A

---

### (2) Count source

The internal count source can be selected from f1, f8, f32, and fc32. Clocks f1, f8, and f32 are derived by dividing the CPU's main clock by 1, 8, and 32 respectively. Clock fc32 is derived by dividing the CPU's secondary clock by 32.

### (3) Frequency division ratio

In timer mode or pulse width modulation mode, [the value set in the timer register + 1] becomes the frequency division ratio. In event counter mode, [the set value + 1] becomes the frequency division ratio when a down count is performed, or [FFFF<sub>16</sub> - the set value + 1] becomes the frequency division ratio when an up count is performed. In one-shot timer mode, the value set in the timer register becomes the frequency division ratio.

The counter overflows (or underflows) when a count source equal to a frequency division ratio is input, and an interrupt occurs. For the pulse output function, the output from the port varies (the value in the port register does not vary).

### (4) Reading the timer

Either in timer mode or in event counter mode, reading the timer register takes out the count at that moment. Read it in 16-bit units. The data either in one-shot timer mode or in pulse width modulation mode is indeterminate.

### (5) Writing to the timer

To write to the timer register when a count is in progress, the value is written only to the reload register. When writing to the timer register when a count is stopped, the value is written both to the reload register and to the counter. Write a value in 16-bit units.

### (6) Relation between the input/output to/from the timer and the direction register

With the output function of the timer, set the direction register of the relevant port to input. To input an external signal to the timer, set the direction register of the relevant port to input.

### (7) Pins related to timer A

- (a) TA0IN      Input pins to timer A.
- (b) TA0OUT     Output pins from timer A. They become input pins to timer A when event counter mode is active.

## Timer A

**(8) Registers related to timer A**

Figure 2.2.1 shows the memory map of timer A-related registers. Figures 2.2.2 through 2.2.5 show timer A-related registers.

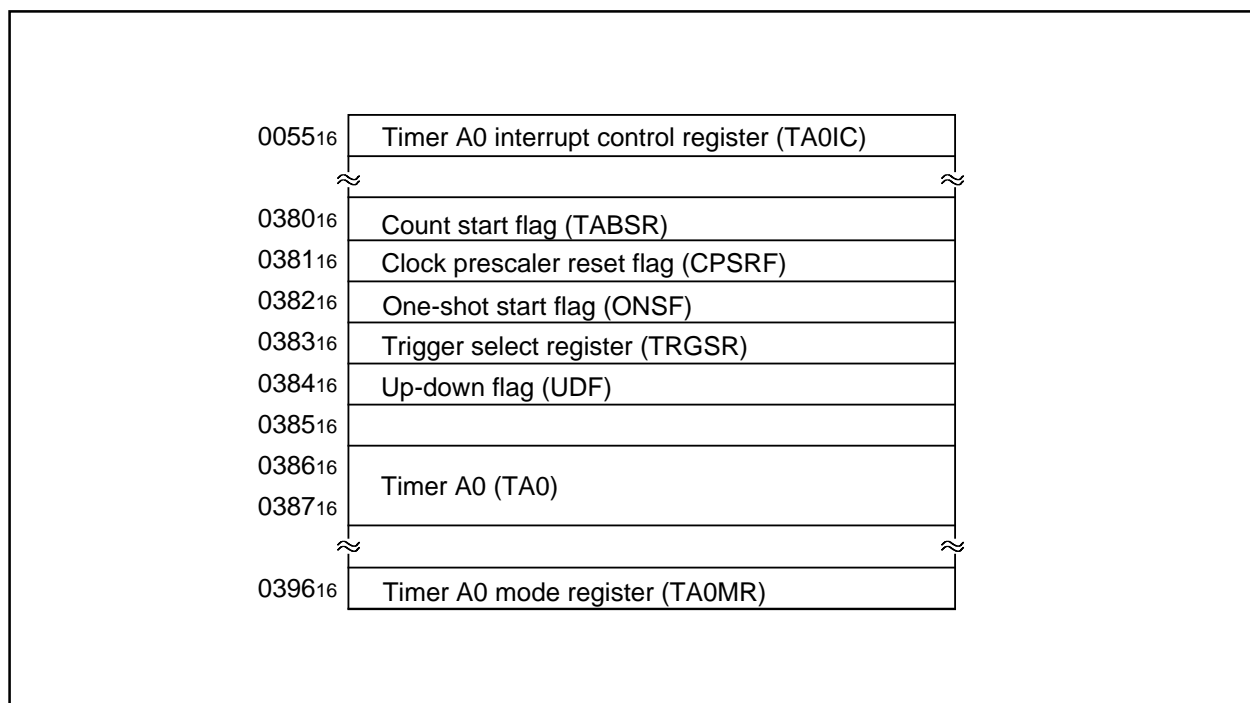


Figure 2.2.1. Memory map of timer A-related registers

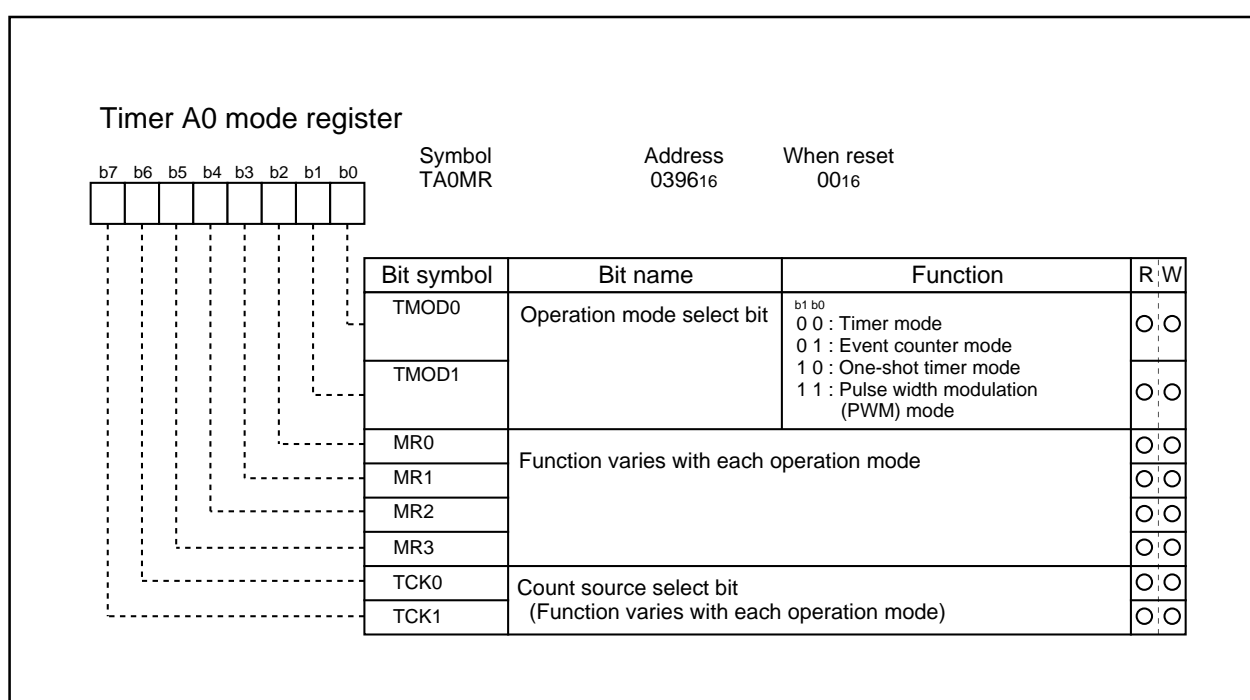



Figure 2.2.2. Timer A-related registers (1)

## Timer A

## Timer A0 register (Note 1)


Symbol  
TA0Address  
0387<sub>16</sub>, 0386<sub>16</sub>When reset  
Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts an internal count source	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• Event counter mode Counts pulses from an external source or timer overflow	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• One-shot timer mode Counts a one shot width	0000 <sub>16</sub> to FFFF <sub>16</sub> (Note 2)	×	○
• Pulse width modulation mode (16-bit PWM) Functions as a 16-bit pulse width modulator	0000 <sub>16</sub> to FFFE <sub>16</sub> (Note 2)	×	○
• Pulse width modulation mode (8-bit PWM) Timer low-order address functions as an 8-bit prescaler and high-order address functions as an 8-bit pulse width modulator	00 <sub>16</sub> to FF <sub>16</sub> (Note 2) (Both high-order and low-order addresses)	×	○

Note 1: Read and write data in 16-bit units.

Note 2: Use MOV instruction to write to this register.

## Count start flag

Symbol  
TABSRAddress  
0380<sub>16</sub>When reset  
000X0000<sub>2</sub>

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TX0S	Timer X0 count start flag		○	○
TX1S	Timer X1 count start flag		○	○
TX2S	Timer X2 count start flag		○	○
Nothing is assigned. In an attempt to write to this bit, write “0”. The value, if read, turns out to be indeterminate.			—	—
TB0S	Timer B0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TB1S	Timer B1 count start flag		○	○
CDCS	Clock divided count start flag		○	○

Figure 2.2.3. Timer A-related registers (2)



## Timer A

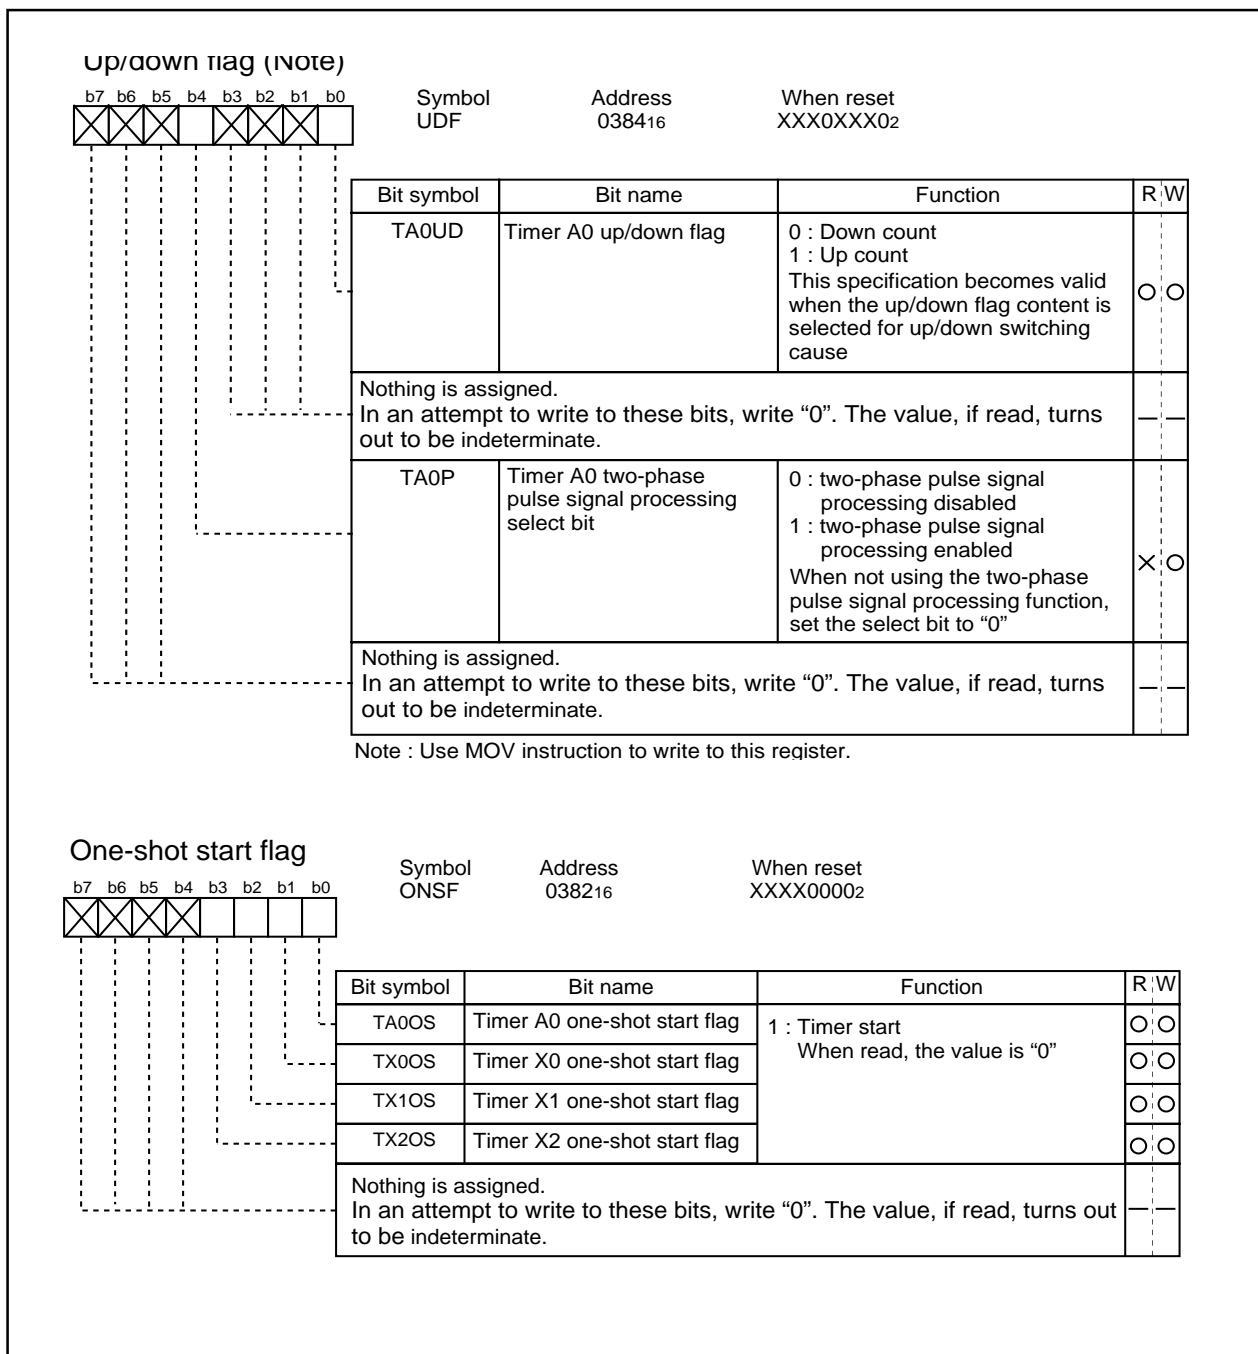


Figure 2.2.4. Timer A-related registers (3)

## Timer A

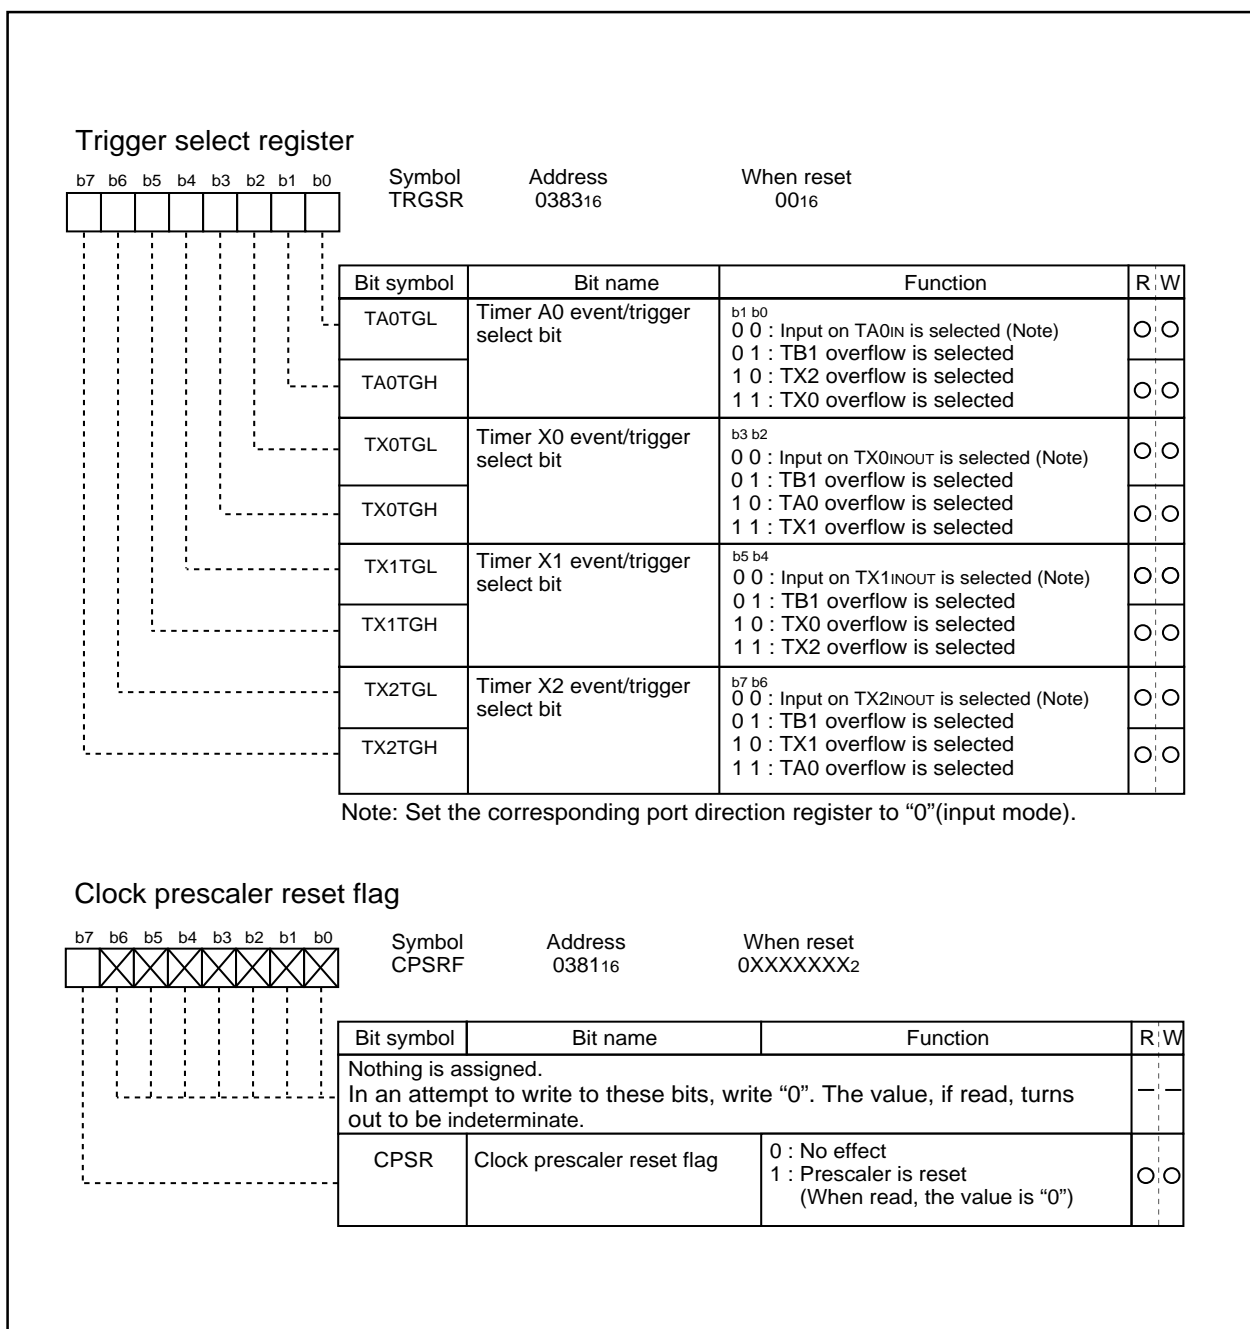


Figure 2.2.5. Timer A-related registers (4)

## Timer A

## 2.2.2 Operation of Timer A (timer mode)

In timer mode, choose functions from those listed in Table 2.2.1. Operations of the circled items are described below. Figure 2.2.6 shows the operation timing, and Figure 2.2.7 shows the set-up procedure.

Table 2.2.1. Chosen functions

Item	Set-up
Count source	○ Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function	○ No pulses output
	Pulses output
Gate function	○ No gate function
	Performs count only for the period in which the TA0IN pin is at "L" level
	Performs count only for the period in which the TA0IN pin is at "H" level

- Operation
- (1) Setting the count start flag to "1" causes the counter to perform a down count on the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.


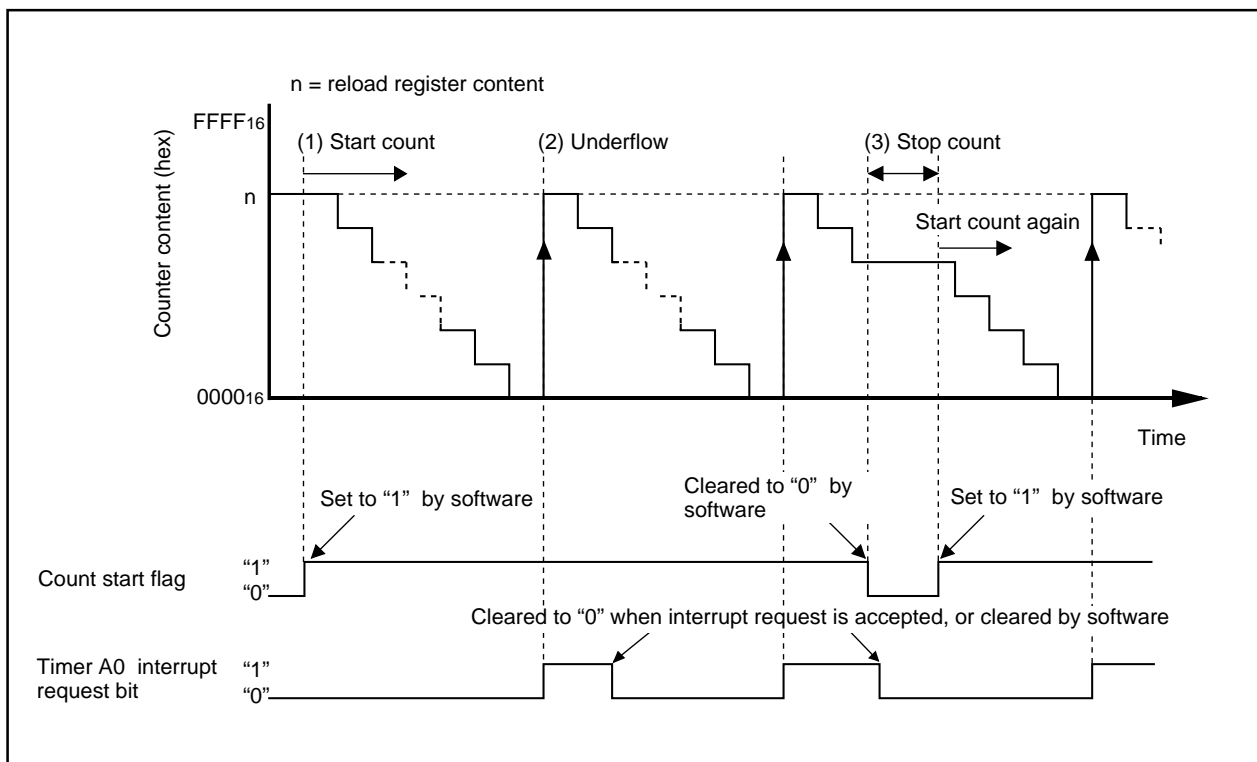



Figure 2.2.6. Operation timing of timer mode

## Timer A

## Selecting timer mode and functions

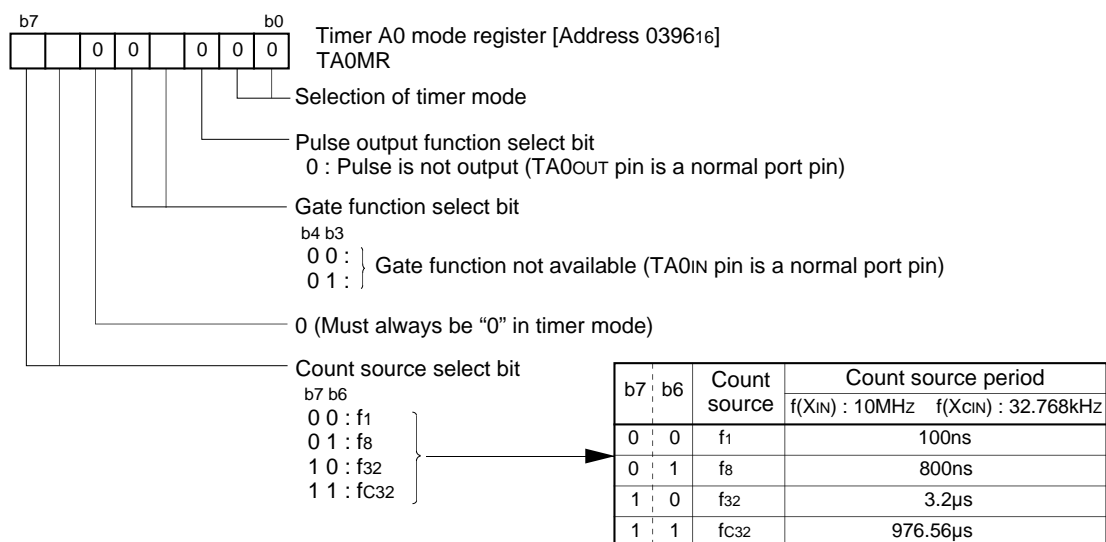


## Setting divide ratio

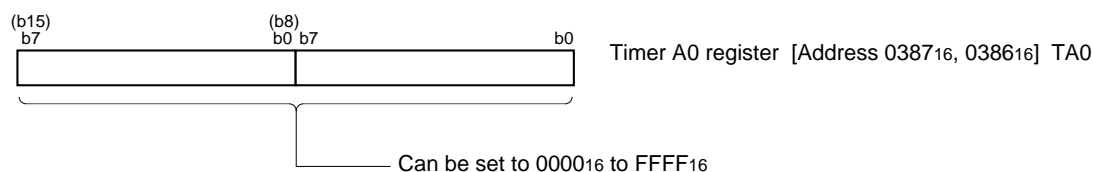


## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

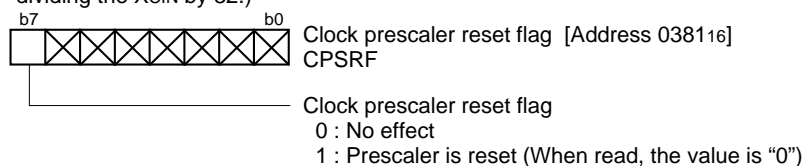

## Setting count start flag



Start count

Figure 2.2.7. Set-up procedure of timer mode

## Timer A

## 2.2.3 Operation of Timer A (timer mode, gate function selected)

In timer mode, choose functions from those listed in Table 2.2.2. Operations of the circled items are described below. Figure 2.2.8 shows the operation timing, and Figure 2.2.9 shows the set-up procedure.

Table 2.2.2. Chosed functions

Item	Set-up	
Count source	<input type="radio"/>	Internal count source( $f_1$ / $f_8$ / $f_{32}$ / $f_{c32}$ )
Pulse output function	<input type="radio"/>	No pulses output
	<input type="radio"/>	Pulses output
Gate function	<input type="radio"/>	No gate function
	<input type="radio"/>	Performs count only for the period in which the TA0IN pin is at "L" level
	<input type="radio"/>	Performs count only for the period in which the TA0IN pin is at "H" level

- Operation
- (1) When the count start flag is set to "1" and the TA0IN pin inputs at "H" level, the counter performs a down count on the count source.
  - (2) When the TA0IN pin inputs at "L" level, the counter holds its value and stops.
  - (3) If an underflow occurs, the content of the reload register is reloaded and the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop.

Note

- Make the pulse width of the signal input to the TA0IN pin not less than two cycles of the count source.


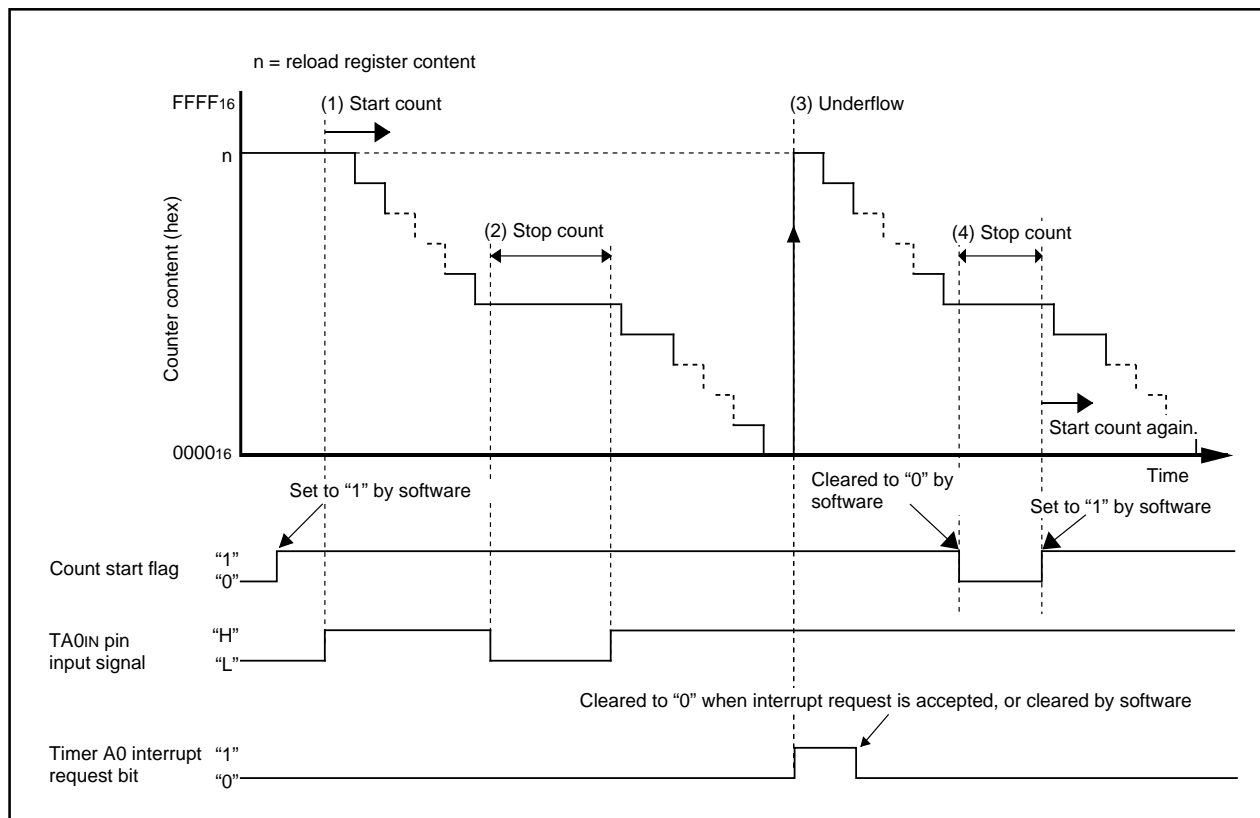


Figure 2.2.8. Operation timing of timer mode, gate function selected


## Timer A

## Selecting timer mode and functions

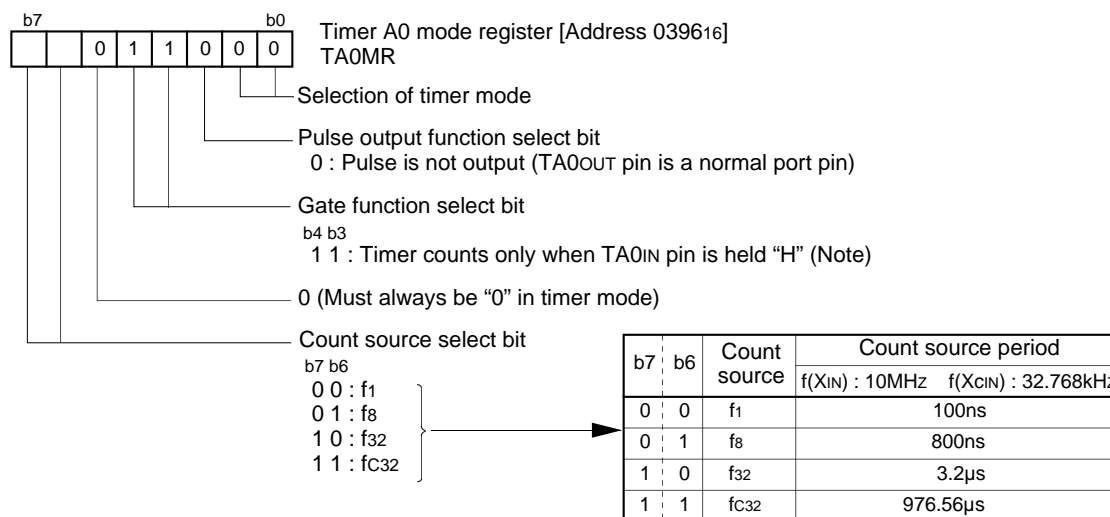


Note: Set the corresponding port direction register to "0" (input mode).

## Setting divide ratio

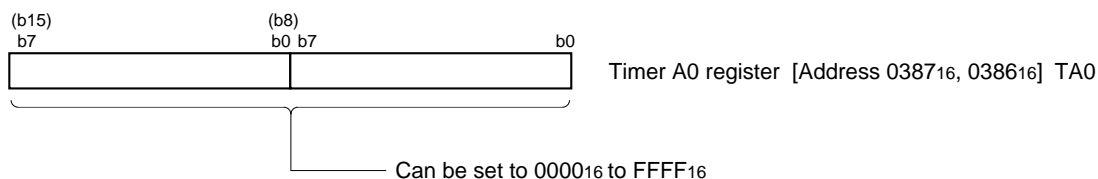


## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

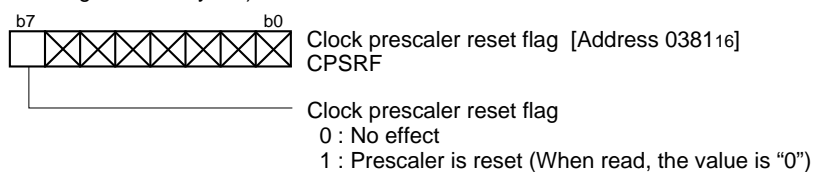

## Setting count start flag

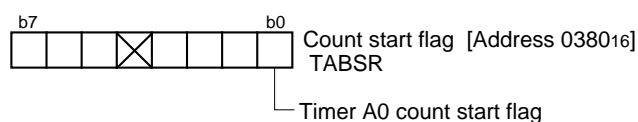

Start count

Figure 2.2.9. Set-up procedure of timer mode, gate function selected

## Timer A


### 2.2.4 Operation of Timer A (timer mode, pulse output function selected)

In timer mode, choose functions from those listed in Table 2.2.3. Operations of the circled items are described below. Figure 2.2.10 shows the operation timing, and Figure 2.2.11 shows the set-up procedure.

**Table 2.2.3. Chosed functions**

Item	Set-up	
Count source	O	Internal count source( $f_1$ / $f_8$ / $f_{32}$ / $f_{c32}$ )
Pulse output function		No pulses output
	O	Pulses output
Gate function	O	No gate function
		Performs count only for the period in which the TA0IN pin is at "L" level
		Performs count only for the period in which the TA0IN pin is at "H" level

- Operation
- (1) Setting the count start flag to "1" causes the counter to perform a down count on the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded and the count continues. At this time, the timer A0 interrupt request bit goes to "1". Also, the output polarity of the TA0OUT pin reverses.
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TA0OUT pin outputs an "L" level.

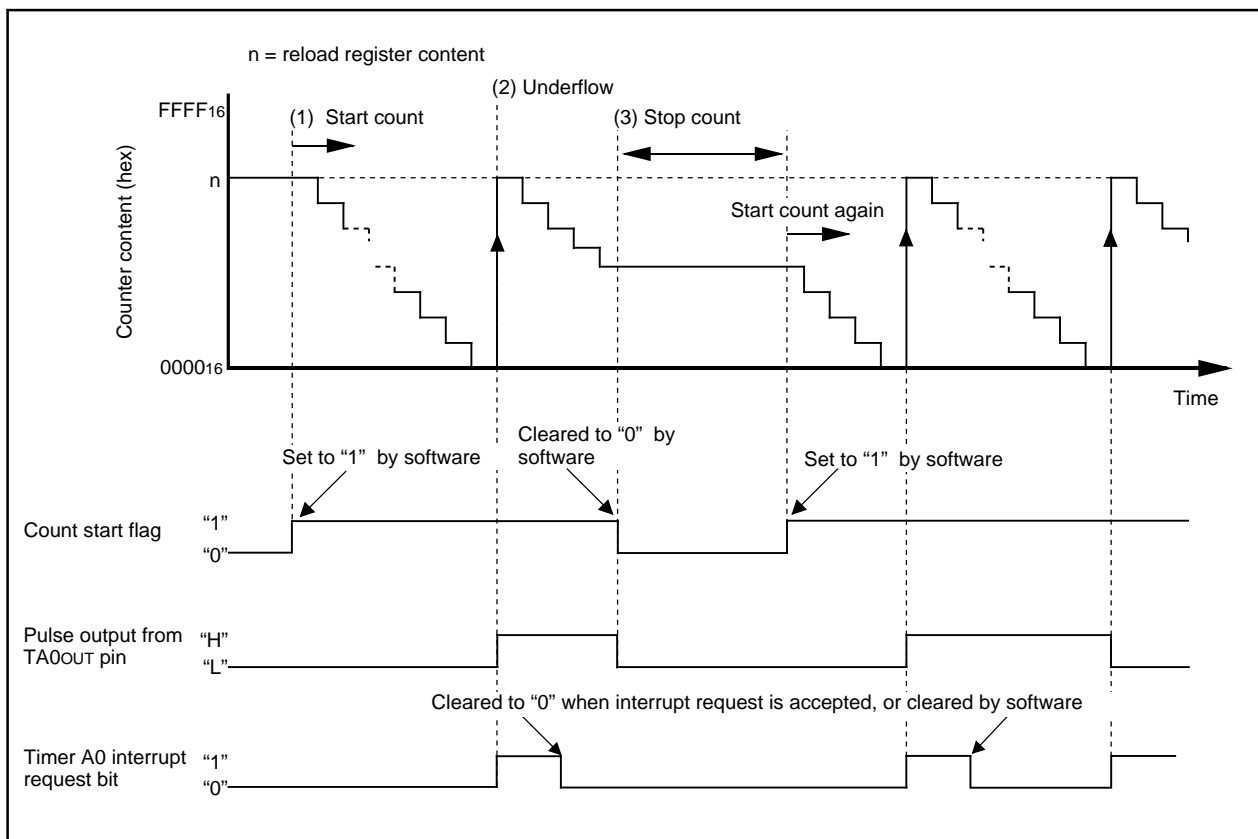

**Figure 2.2.10. Operation timing of timer mode, pulse output function selected**

## Timer A

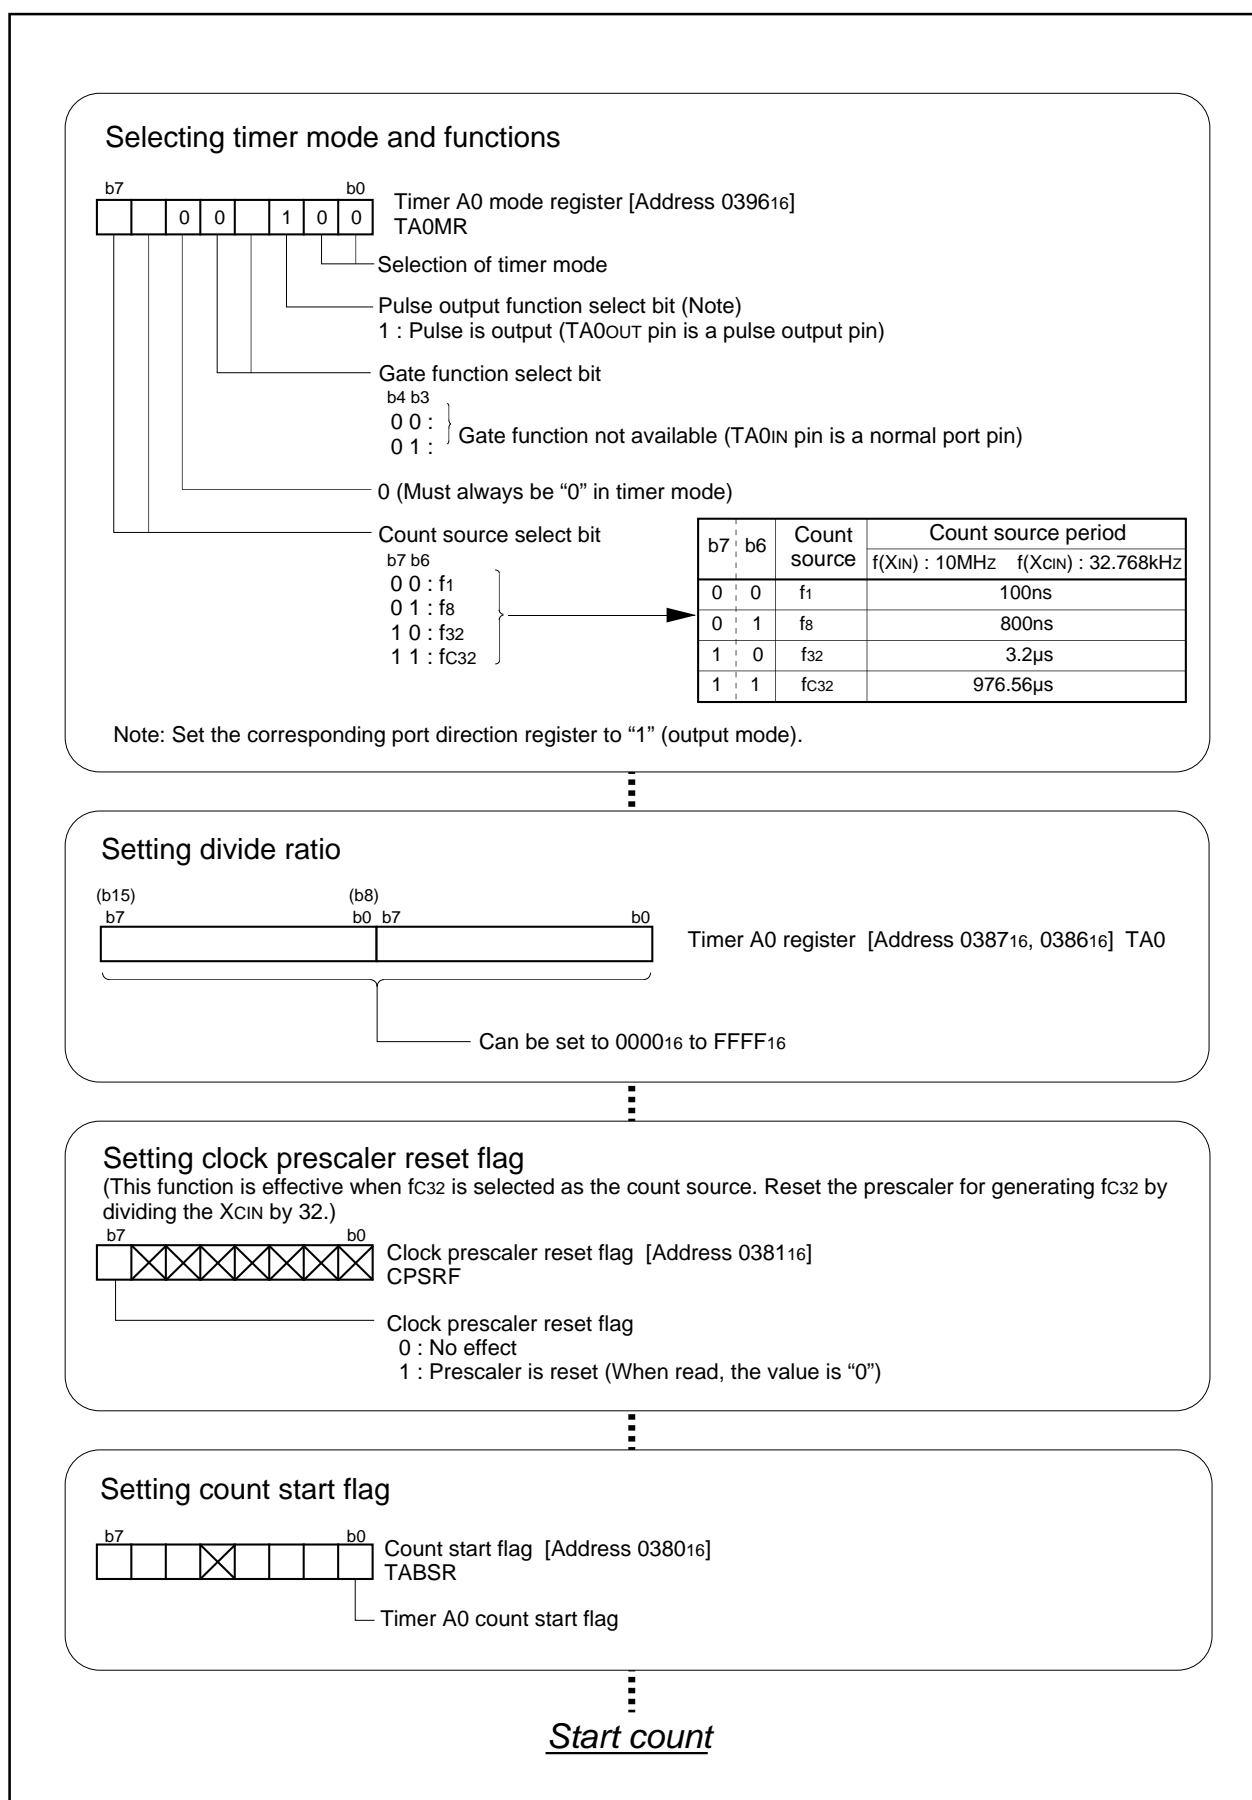


Figure 2.2.11. Set-up procedure of timer mode, pulse output function selected



## Timer A


### 2.2.5 Operation of Timer A (event counter mode, reload type selected)

In event counter mode, choose functions from those listed in Table 2.2.4. Operations of the circled items are described below. Figure 2.2.12 shows the operation timing, and Figure 2.2.13 shows the set-up procedure.

**Table 2.2.4. Chosen functions**

Item	Set-up		Item	Set-up	
Count source	○	Input signal to TA0IN (counting falling edges)	Pulse output function	○	No pulses output
					Pulses output
		Input signal to TA0IN (counting rising edges)	Count operation type	○	Reload type
					Free-run type
		Timer overflow (TB1/TX0/TX2 overflow)	Factor for switching between up and down	○	Content of up/down flag
					Input signal to TA0OUT

- Operation
- (1) Setting the count start flag to "1" causes the counter to count the falling edges of the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) If switching from an up count to a down count or vice versa while a count is in progress, the switch takes effect from the next effective edge of the count source.
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop.
  - (5) If an overflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer A0 interrupt request bit goes to "1".

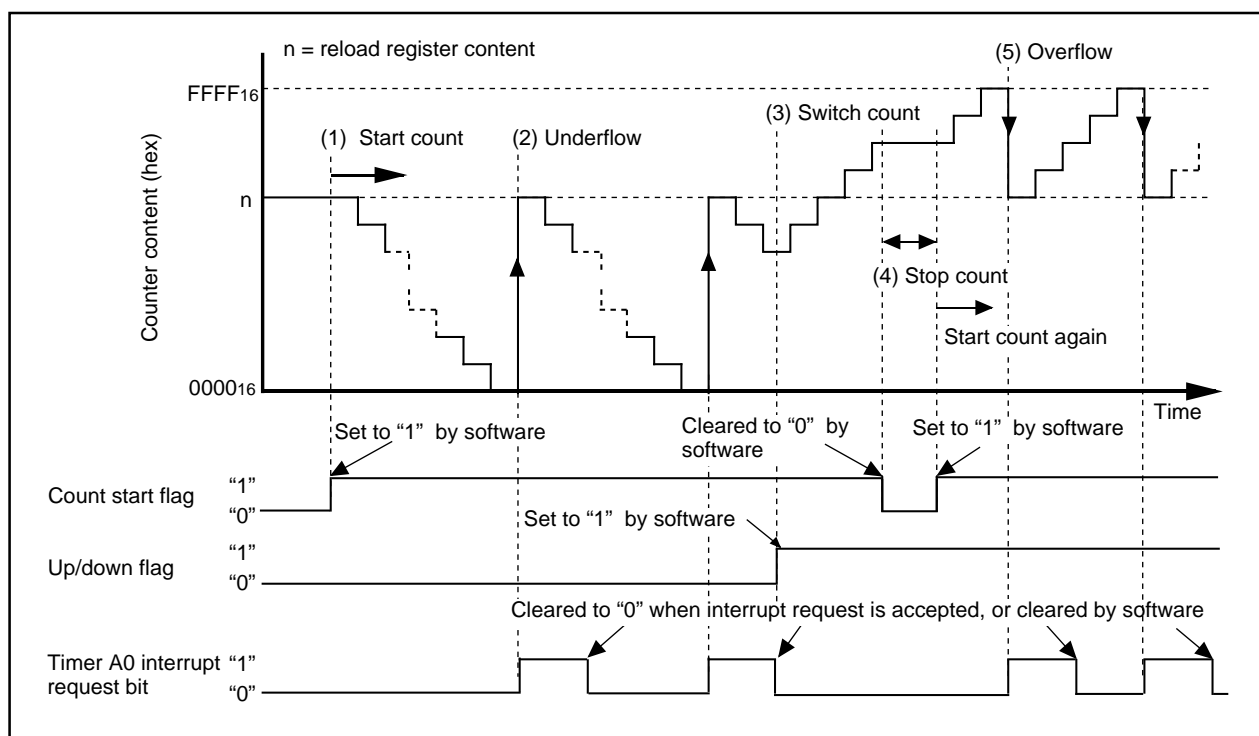

**Figure 2.2.12. Operation timing of event counter mode, reload type selected**

## Timer A

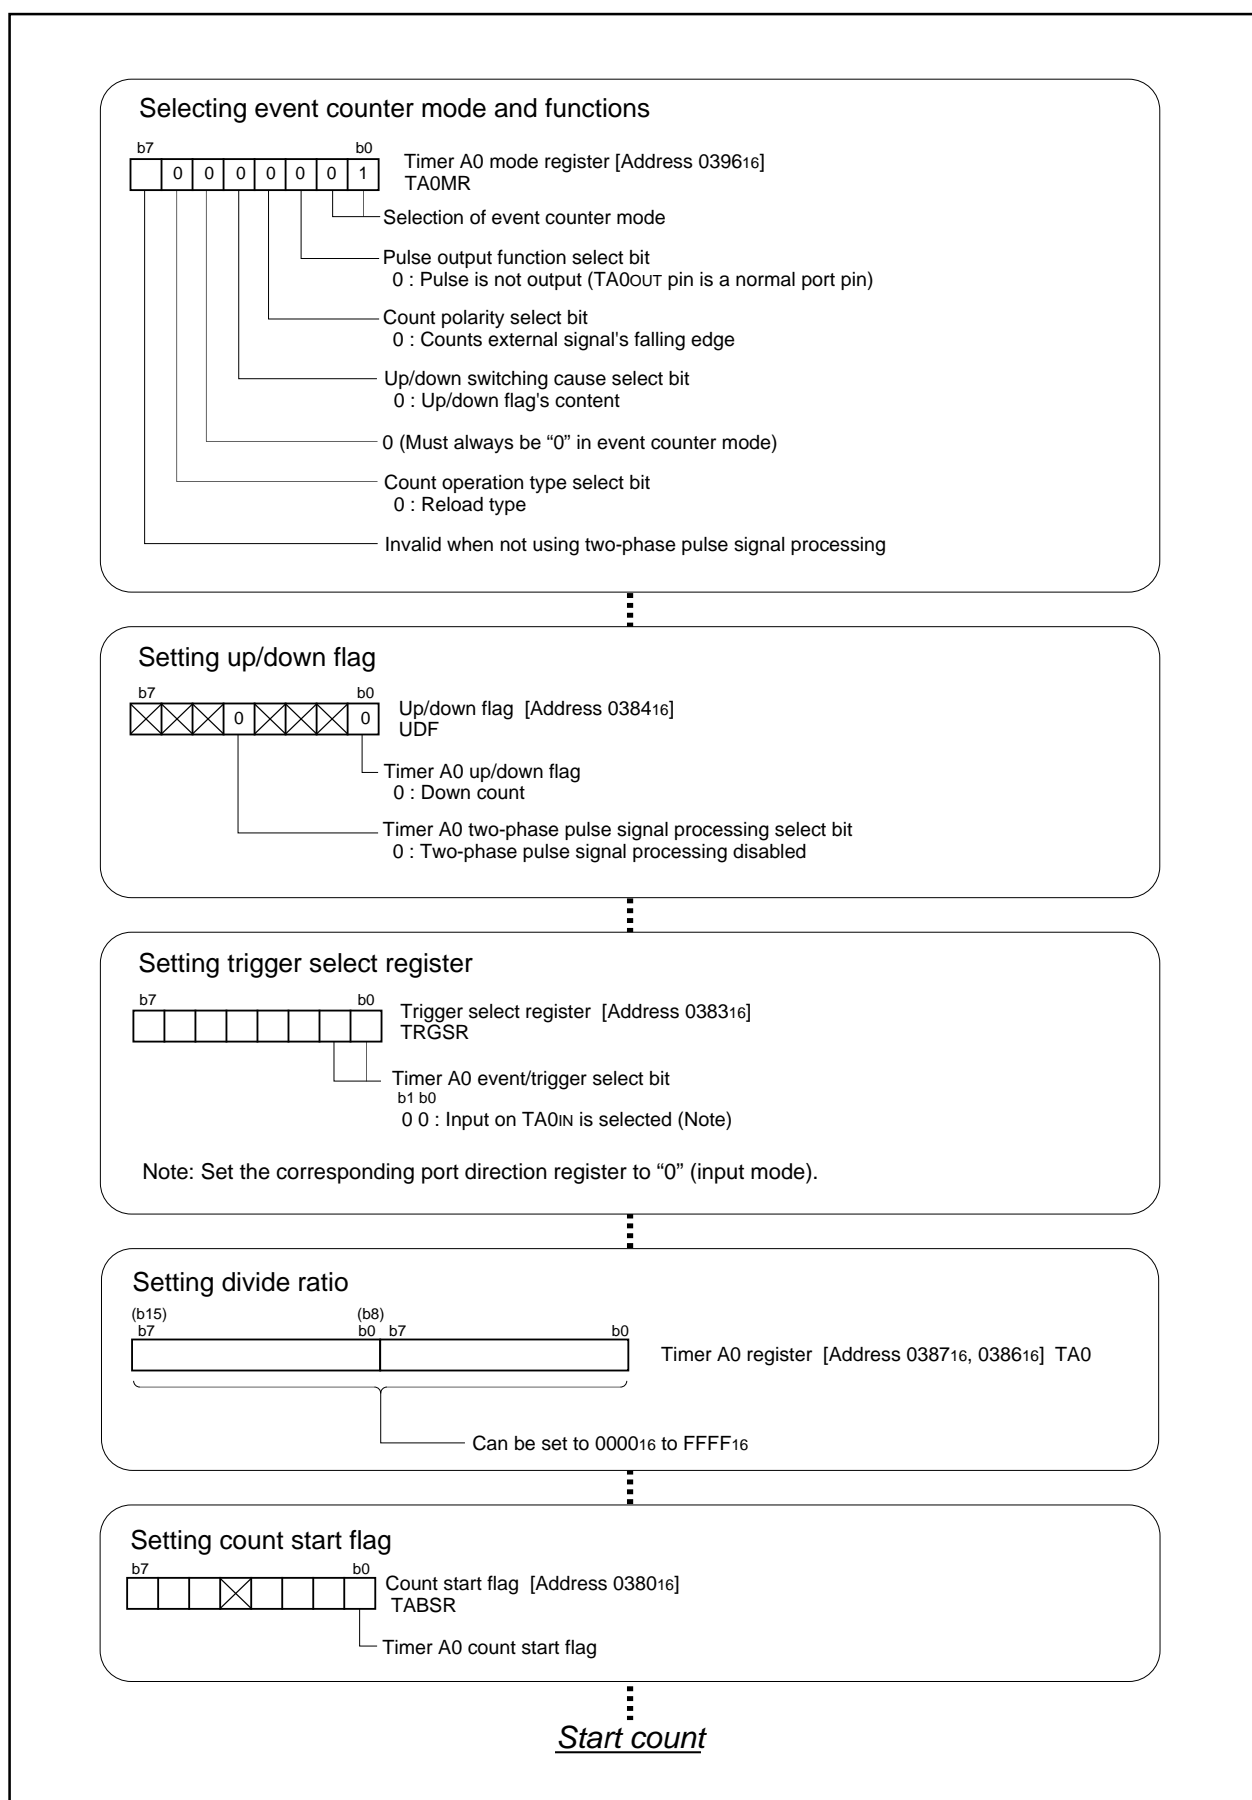


Figure 2.2.13. Set-up procedure of event counter mode, reload type selected

## Timer A


### 2.2.6 Operation of Timer A (event counter mode, free run type selected)

In event counter mode, choose functions from those listed in Table 2.2.5. Operations of the circled items are described below. Figure 2.2.14 shows the operation timing, and Figure 2.2.15 shows the set-up procedure.

**Table 2.2.5. Chosen functions**

Item	Set-up		Item	Set-up	
Count source	○	Input signal to TA0IN (counting falling edges)	Pulse output function	○	No pulses output
					Pulses output
		Input signal to TA0IN (counting rising edges)	Count operation type		Reload type
				○	Free-run type
		Timer overflow (TB1/TX0/TX2 overflow)	Factor for switching between up and down	○	Content of up/down flag
					Input signal to TA0OUT

- Operation
- (1) Setting the count start flag to "1" causes the counter to count the falling edges of the count source.
  - (2) Even if an underflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) If switching from an up count to a down count or vice versa while a count is in progress, the switch takes effect from the next effective edge of the count source.
  - (4) Even if an overflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".

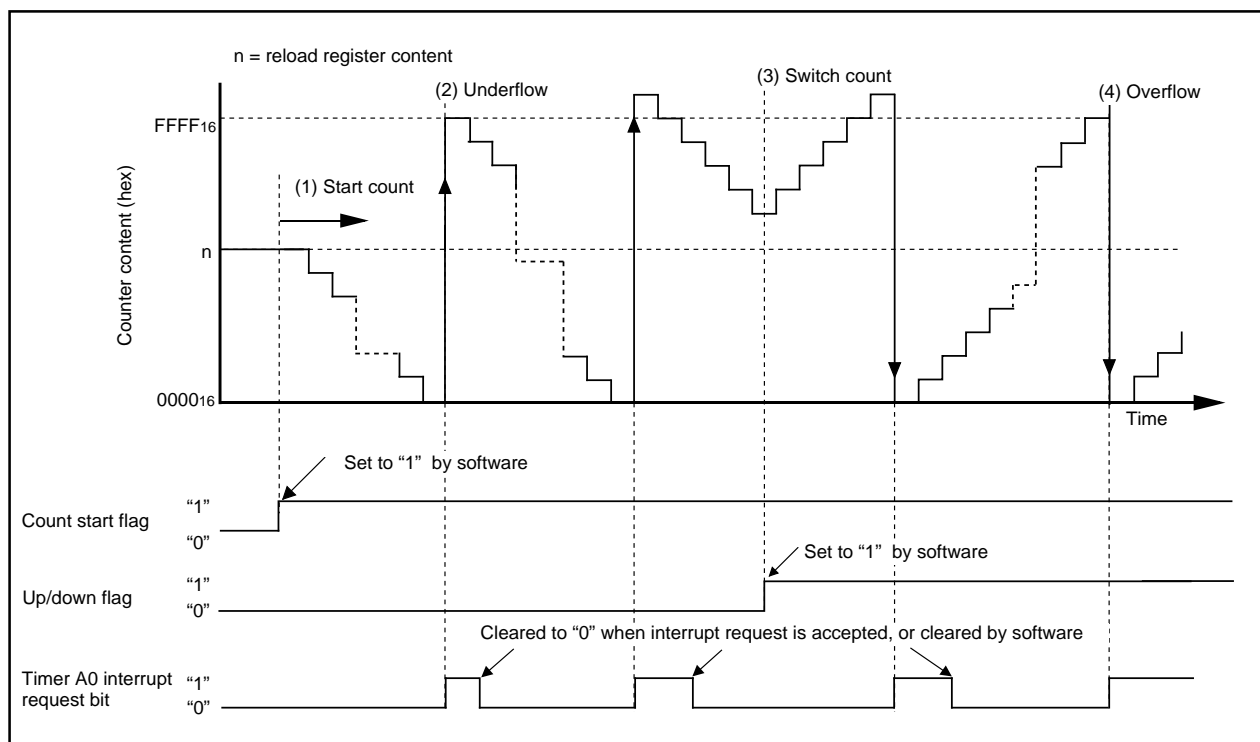

**Figure 2.2.14. Operation timing of event counter mode, free run type selected**

## Timer A

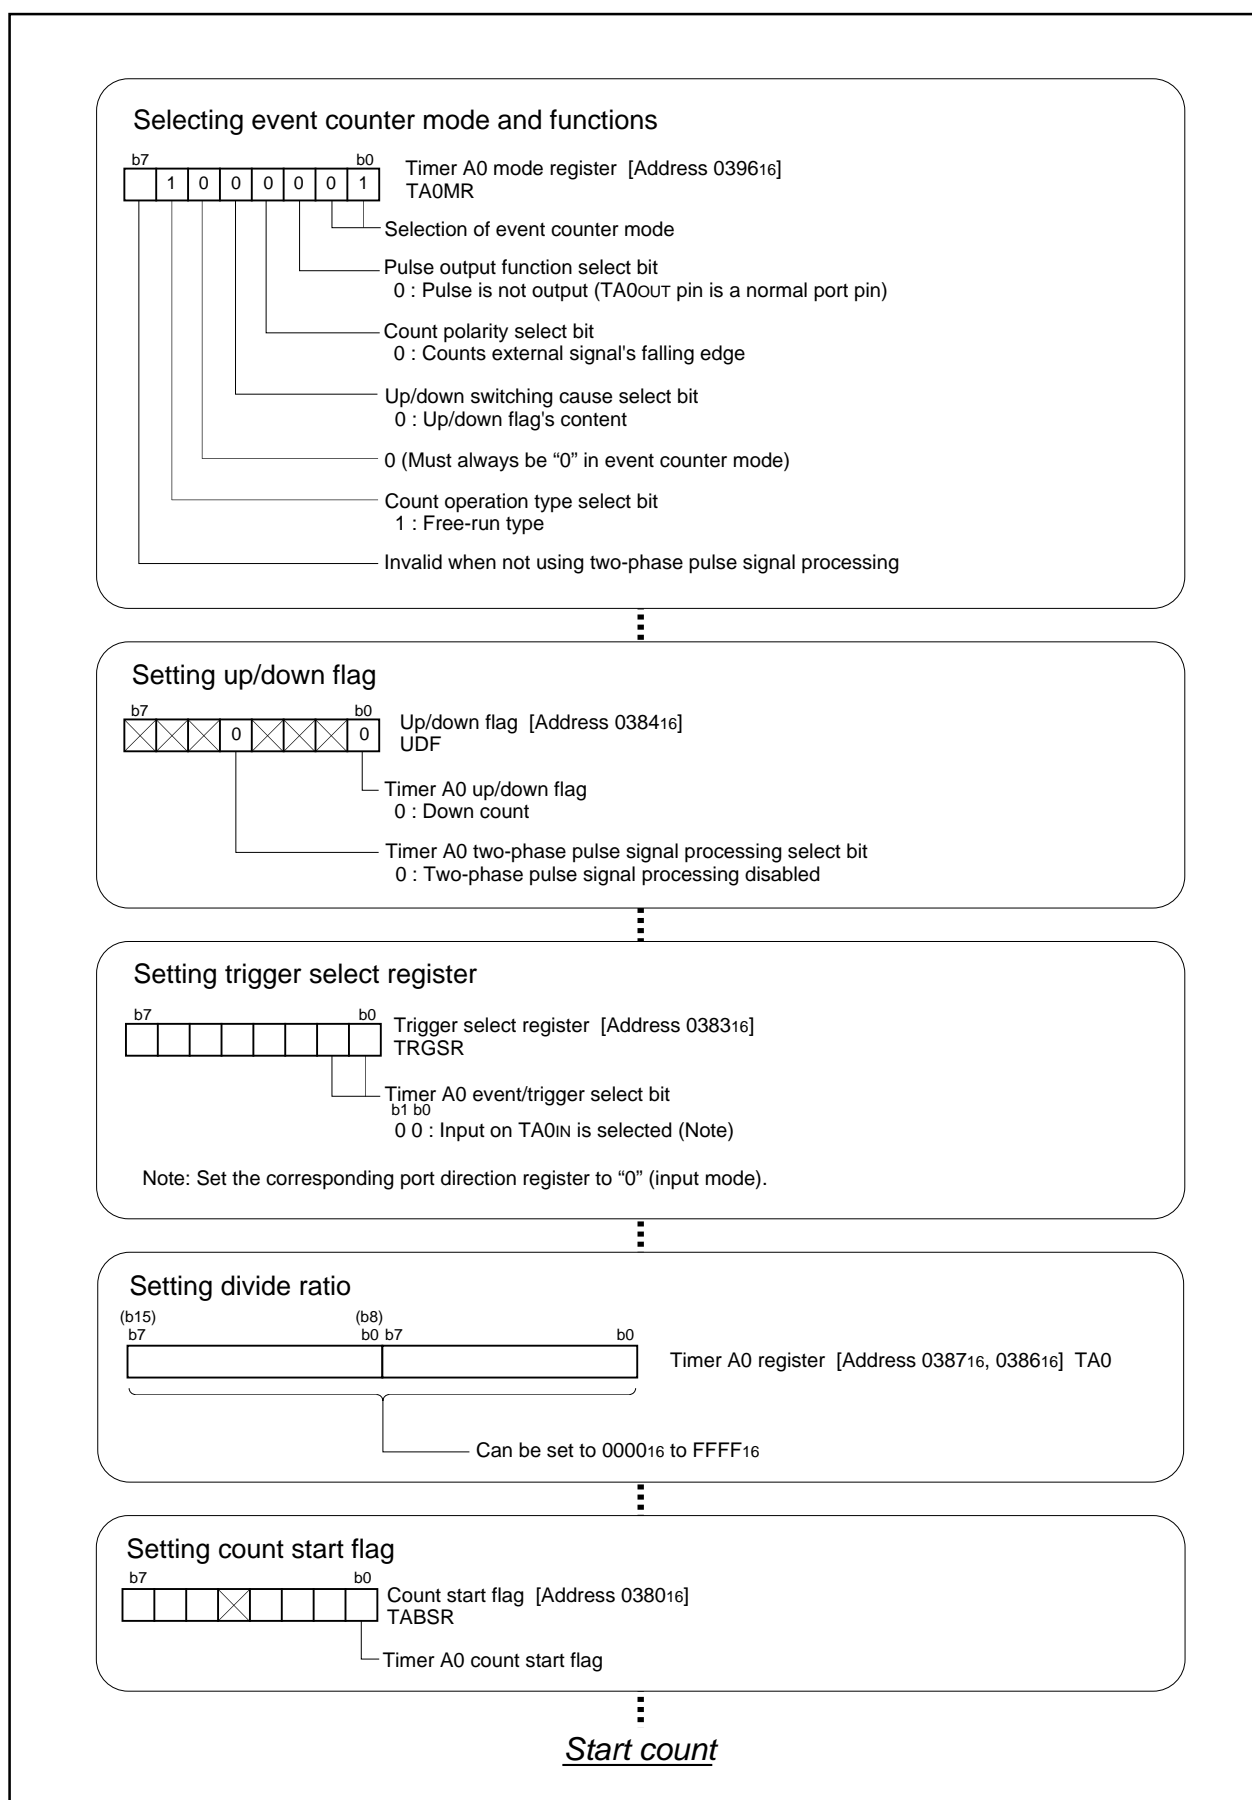


Figure 2.2.15. Set-up procedure of event counter mode, free run type selected

## Timer A

## 2.2.7 Operation of timer A (2-phase pulse signal process in event counter mode, normal mode selected)

In processing 2-phase pulse signals in event counter mode, choose functions from those listed in Table 2.2.6. Operations of the circled items are described below. Figure 2.2.16 shows the operation timing, and Figure 2.2.17 shows the set-up procedure.

**Table 2.2.6. Chosen functions**

Item	Set-up
Count operation type	Reload type
	○ Free run type
2-phase pulses process	○ Normal processing
	4-multiplication processing


- Operation
- (1) Setting the count start flag to "1" causes the counter to count effective edges of the count source.
  - (2) Even if an underflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) Even if an overflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".

**Note**

- The up count or down count conditions are as follows:

If a rising edge is present at the TA0IN pin when the input signal level to the TA0OUT pin is "H", an up count is performed.


If a falling edge is present at the TA0IN pin when the input signal level to the TA0OUT pin is "H", a down count is performed.

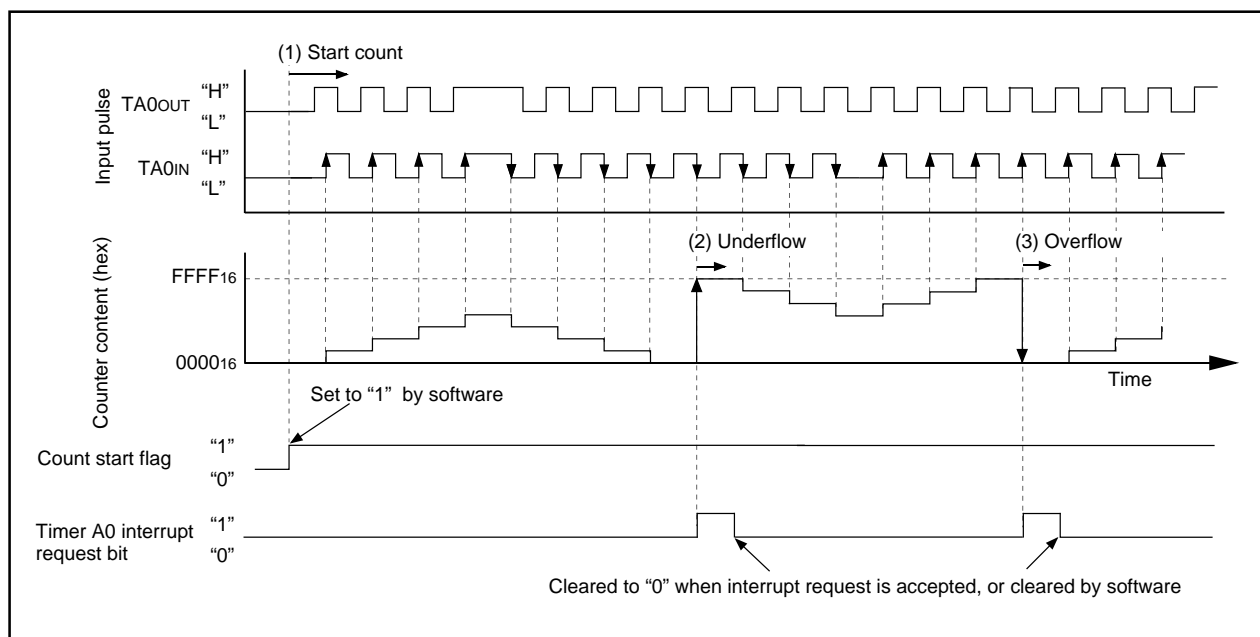

**Figure 2.2.16. Operation timing of 2-phase pulse signal process in event counter mode, normal mode selected**


## Timer A

## Selecting event counter mode and functions

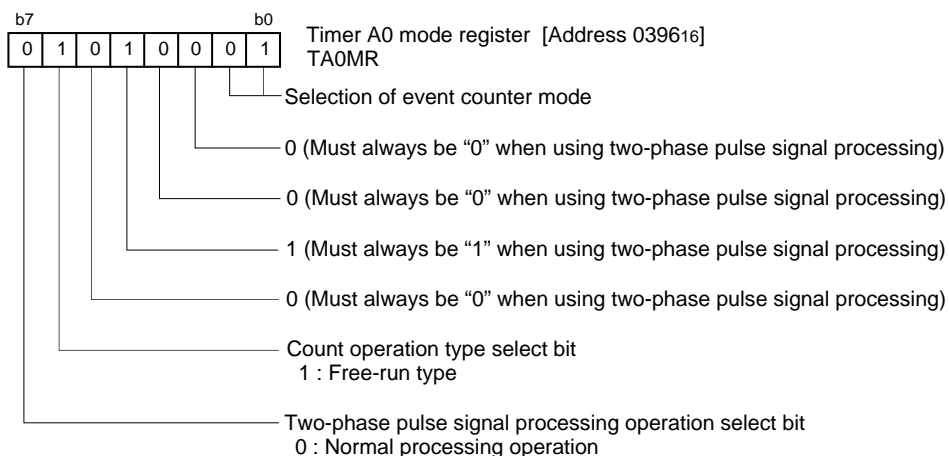


Note: Set the corresponding port direction register which inputs the pulse to "0" (input mode).


## Two-phase pulse signal processing select bit

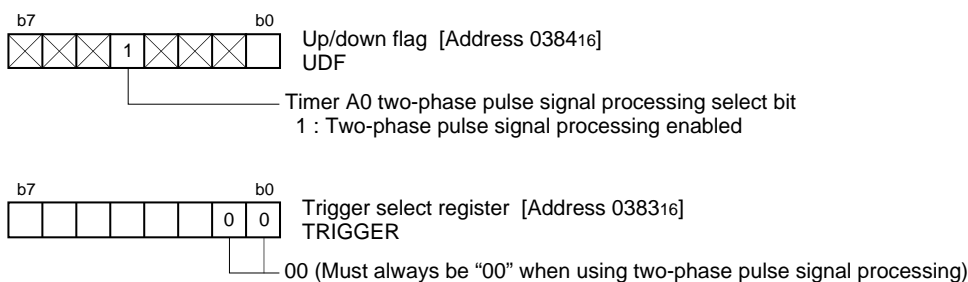

## Setting divide ratio

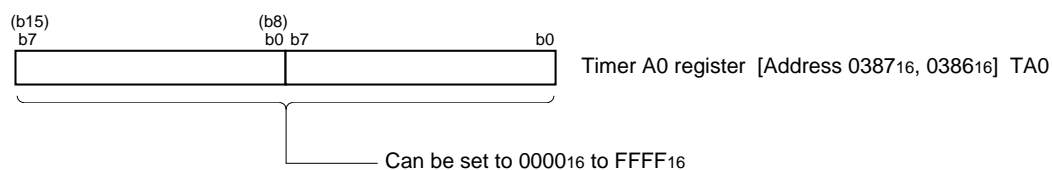

## Setting count start flag

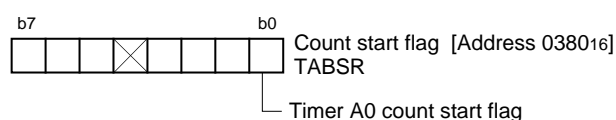

Start count

Figure 2.2.17. Set-up procedure of 2-phase pulse signal process in event counter mode, normal mode selected

## Timer A

## 2.2.8 Operation of timer A (2-phase pulse signal process in event counter mode, multiply-by-4 mode selected)

In processing 2-phase pulse signals in event counter mode, choose functions from those listed in Table 2.2.7. Operations of the circled items are described below. Figure 2.2.18 shows the operation timing, and Figure 2.2.19 shows the set-up procedure.

**Table 2.2.7. Chosed functions**


Item	Set-up		Item	Set-up	
Count operation type		Reload type	Processing 2 phase pulses		Normal processing
	○	Free run type		○	4-multiplication processing

- Operation
- (1) Setting the count start flag to "1" causes the counter to count effective edges of the count source.
  - (2) Even if an underflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) Even if an overflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer A0 interrupt request bit goes to "1".

Note • The up count or down count conditions are as follows:

**Table 2.2.8. The up count or down count conditions**


	Input signal to the TA0OUT pin	Input signal to the TA0IN pin		Input signal to the TA0OUT pin	Input signal to the TA0IN pin
Up count	"H" level	Rising	Down count	"H" level	Falling
	"L" level	Falling		"L" level	Rising
	Rising	"L" level		Rising	"H" level
	Falling	"H" level		Falling	"L" level

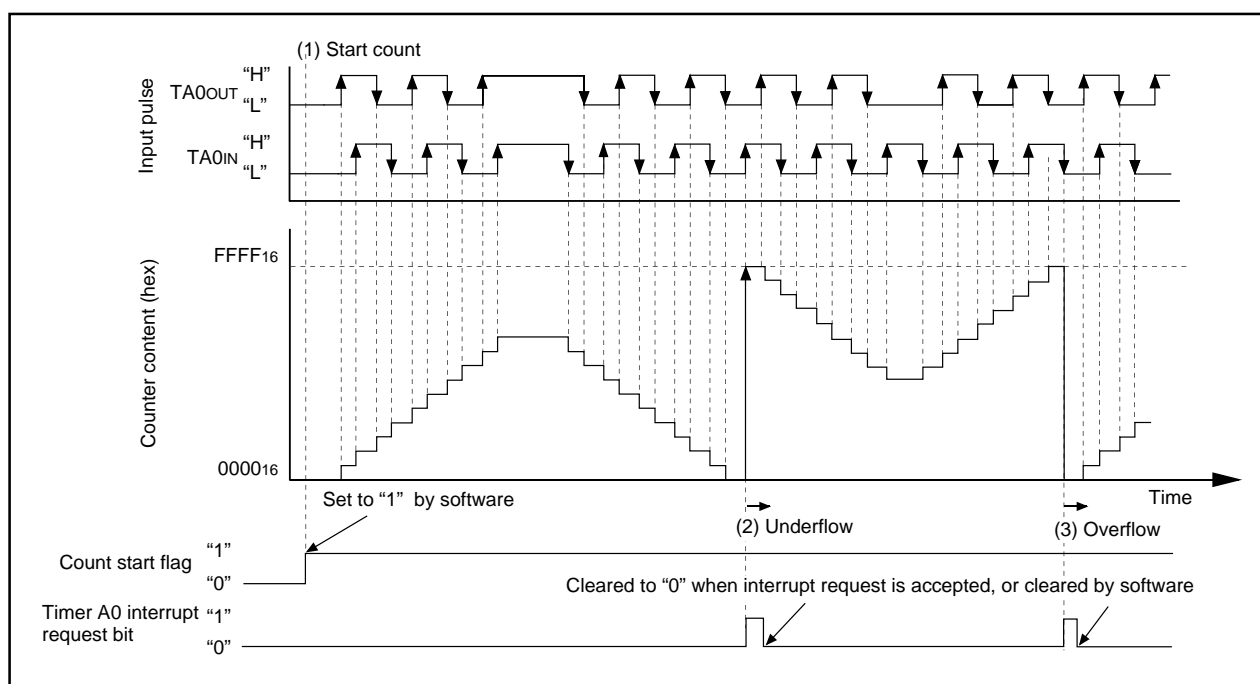

**Figure 2.2.18. Operation timing of 2-phase pulse signal process in event counter mode, multiply-by-4 mode selected**


## Timer A

## Selecting event counter mode and functions

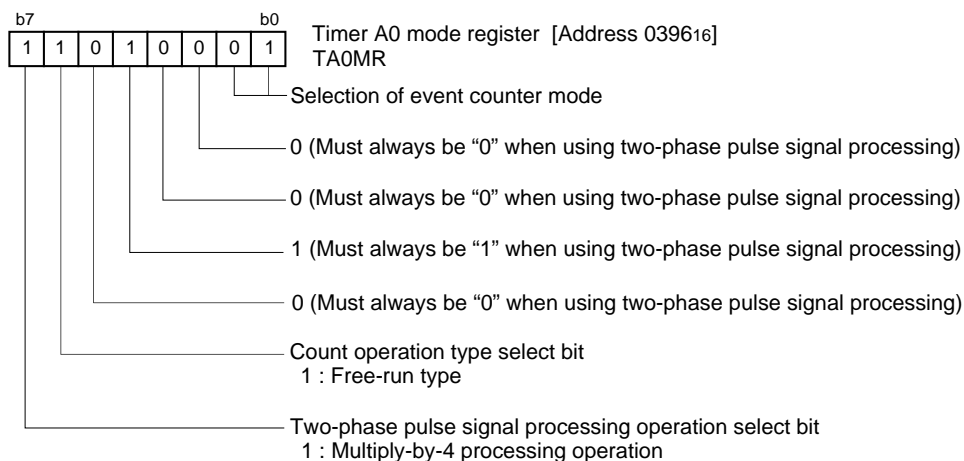


Note: Set the corresponding port direction register which inputs the pulse to "0" (input mode).


## Two-phase pulse signal processing select bit

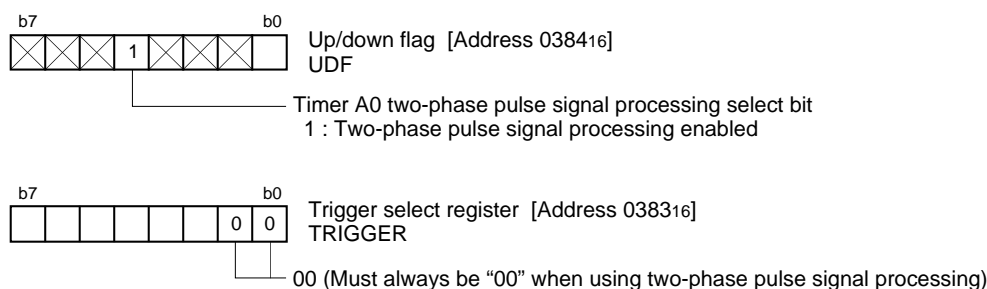

## Setting divide ratio

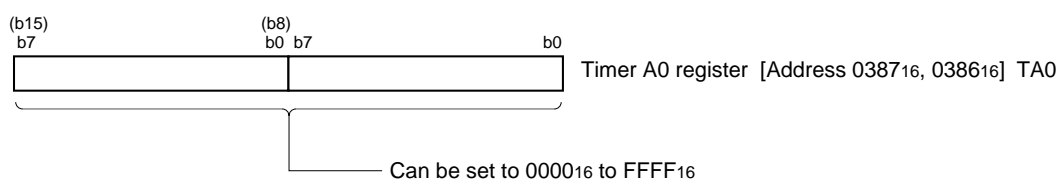

## Setting count start flag



Start count

Figure 2.2.19. Set-up procedure of 2-phase pulse signal process in event counter mode, multiply-by-4 mode selected



## Timer A

## 2.2.9 Operation of Timer A (one-shot timer mode)

In one-shot timer mode, choose functions from those listed in Table 2.2.9. Operations of the circled items are described below. Figure 2.2.20 shows the operation timing, and Figure 2.2.21 shows the set-up procedure.

Table 2.2.9. Chosed functions

Item	Set-up	
Count source	<input type="radio"/>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function		No pulses output
	<input type="radio"/>	Pulses output
Count start condition		External trigger input (falling edge of input signal to the TA0IN pin)
		External trigger input (rising edge of input signal to the TA0IN pin)
		Timer overflow (TB1/TX0/TX2 overflow)
	<input type="radio"/>	Writing "1" to the one-shot start flag

- Operation
- (1) Setting the one-shot start flag to "1" with the count start flag set to "1" causes the counter to perform a down count on the count source. At this time, the TA0OUT pin outputs an "H" level.
  - (2) The instant the value of the counter becomes "0000<sub>16</sub>", the TA0OUT pin outputs an "L" level, and the counter reloads the content of the reload register and stops counting. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) If a trigger occurs while a count is in progress, the counter reloads the value in the reload register again and continues counting. The reload timing is in step with the next count source input after the trigger.
  - (4) Setting the count start flag to "0" causes the counter to stop and to reload the content of the reload register. Also, the TA0OUT pin outputs an "L" level. At this time, the timer A0 interrupt request bit goes to "1".

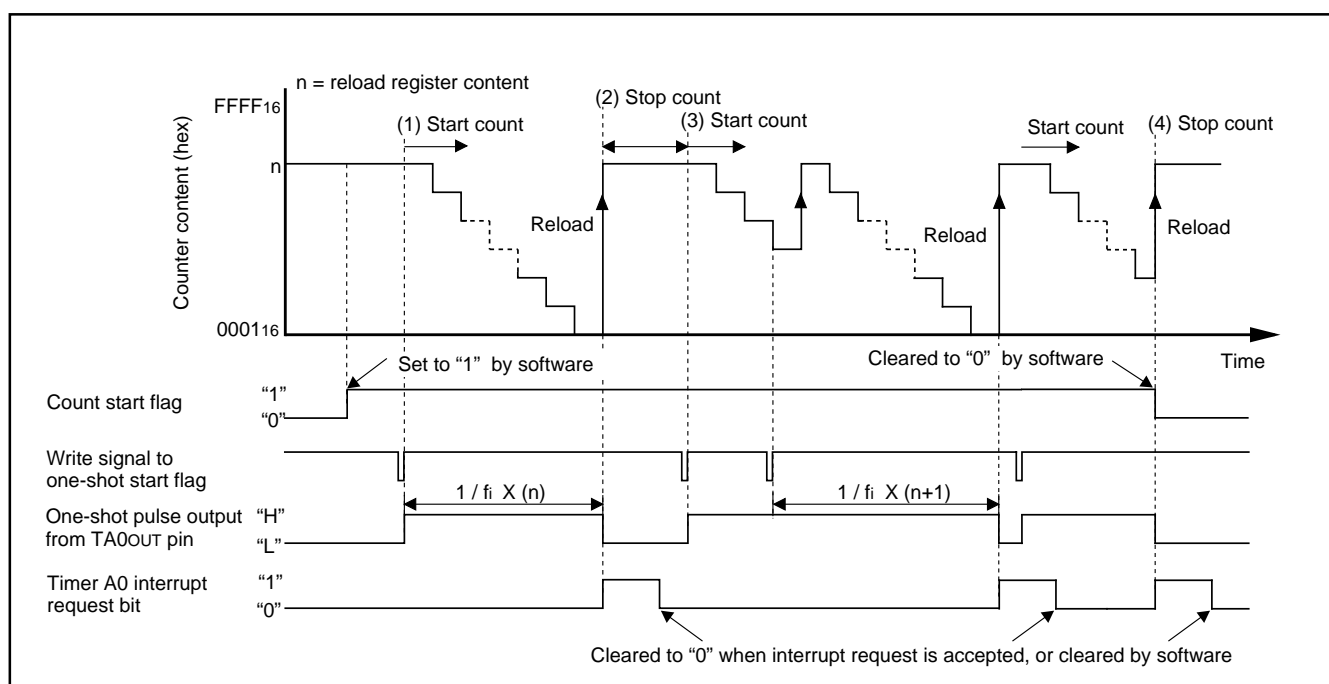


Figure 2.2.20. Operation timing of one-shot mode

## Timer A

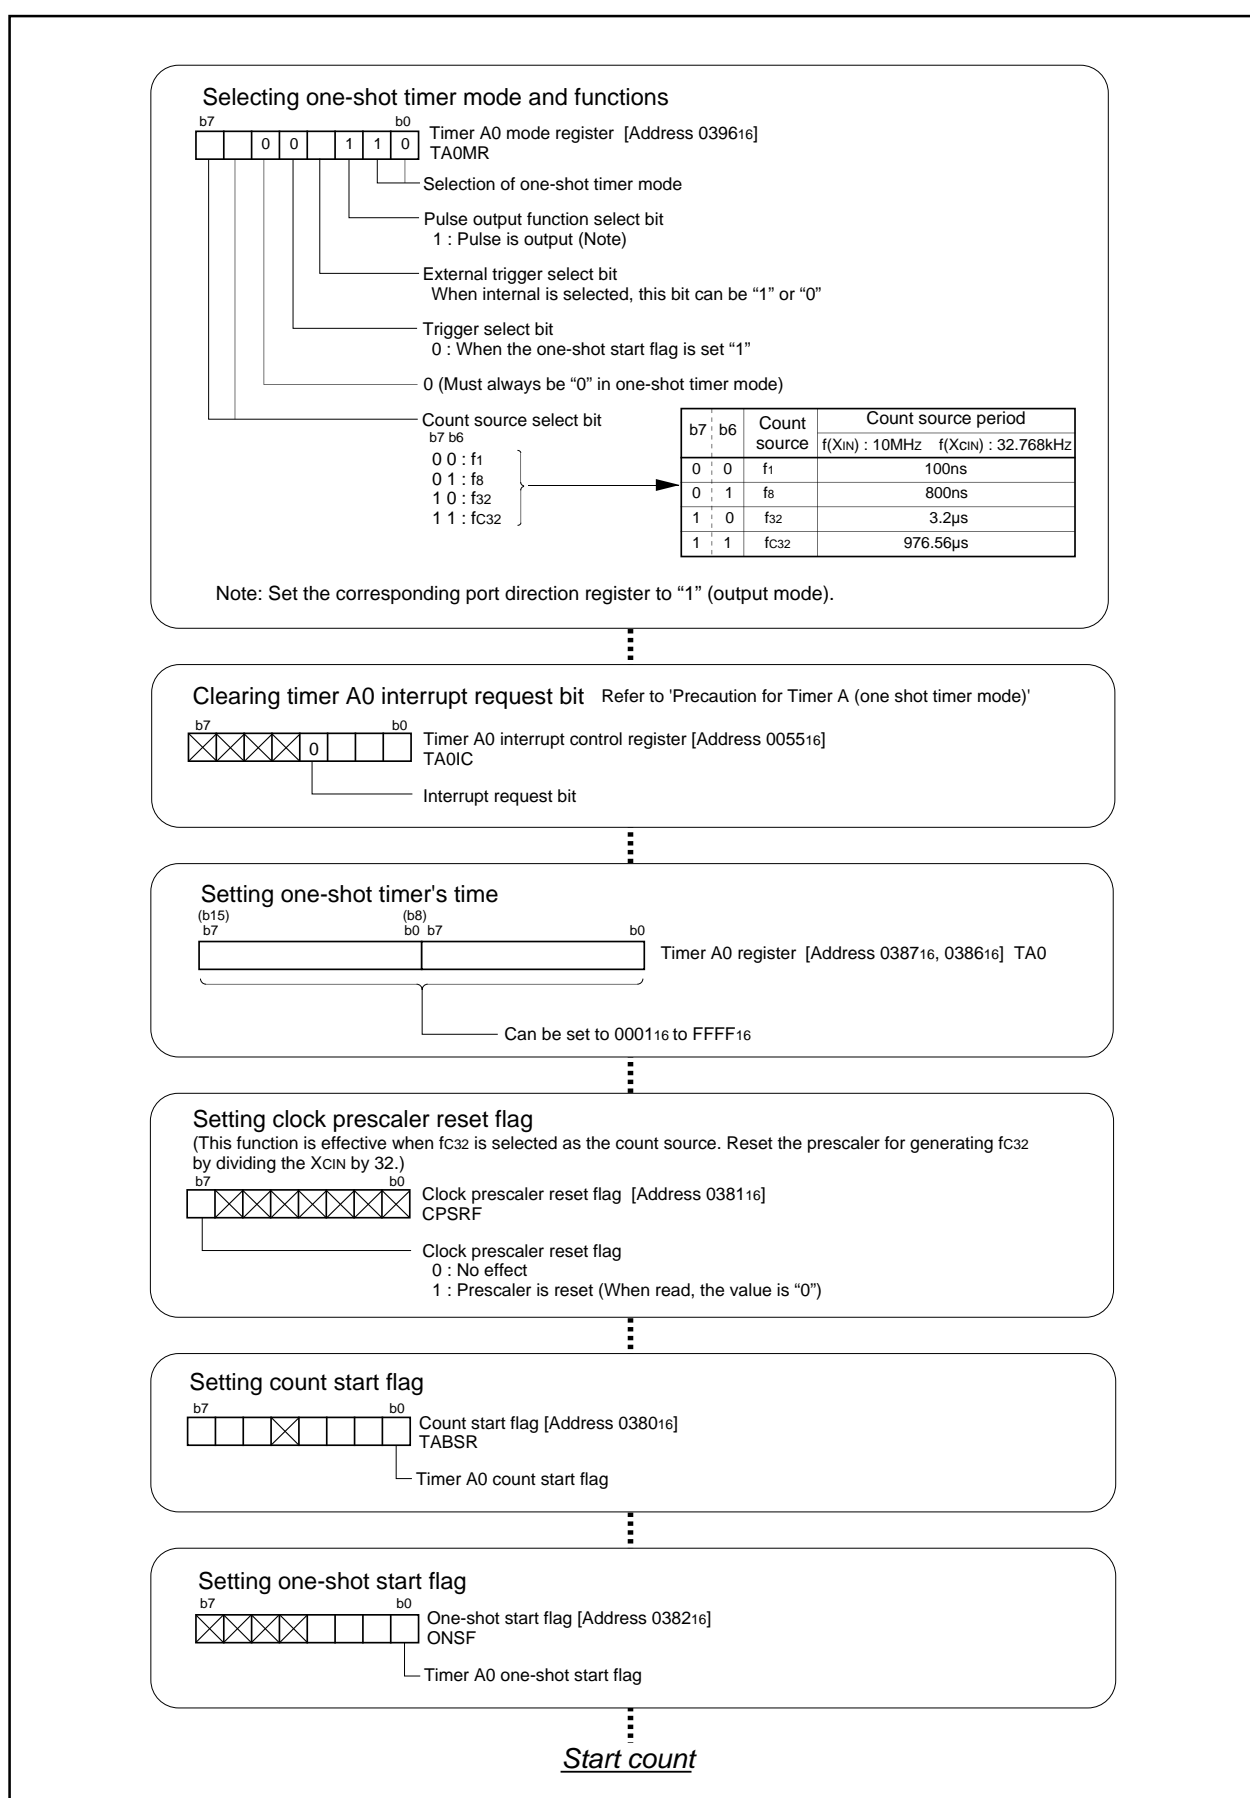


Figure 2.2.21. Set-up procedure of one-shot mode

## Timer A


**2.2.10 Operation of Timer A (one-shot timer mode, external trigger selected)**

In one-shot timer mode, choose functions from those listed in Table 2.2.10. Operations of the circled items are described below. Figure 2.2.22 shows the operation timing, and Figure 2.2.23 shows the set-up procedure.

**Table 2.2.10. Chosed functions**

Item	Set-up	
Count source	<b>O</b>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function		No pulses output
	<b>O</b>	Pulses output
Count start condition		External trigger input (falling edge of input signal to the TA0IN pin)
	<b>O</b>	External trigger input (rising edge of input signal to the TA0IN pin)
		Timer overflow (TB1/TX0/TX2 overflow)
		Writing "1" to the one-shot start flag

- Operation
- (1) If the TA0IN pin input level changes from "L" to "H" with the count start flag set to "1", the counter performs a down count on the count source. At this time, the TA0OUT pin output level goes to "H" level.
  - (2) If the value of the counter becomes "0000<sub>16</sub>", the TA0OUT pin outputs an "L" level, and the counter reloads the content of the reload register and stops counting. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) If a trigger occurs while a count is in progress, the counter reloads the value of the reload register again and continues counting. The reload timing is in step with the next count source input after the trigger.
  - (4) Setting the count start flag to "0" causes the counter to stop and to reload the content of the reload register. Also, the TA0OUT pin outputs an "L" level. At this time, the timer A0 interrupt request bit goes to "1".

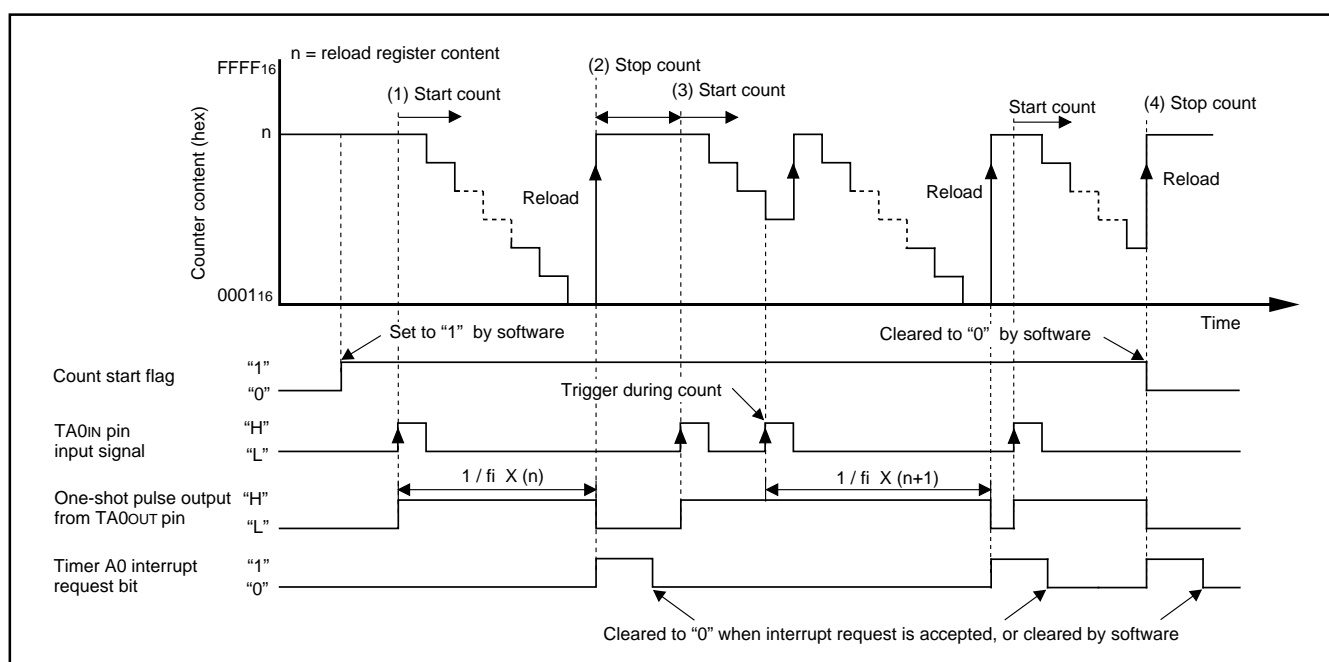**Figure 2.2.22. Operation timing of one-shot mode, external trigger selected**

## Timer A

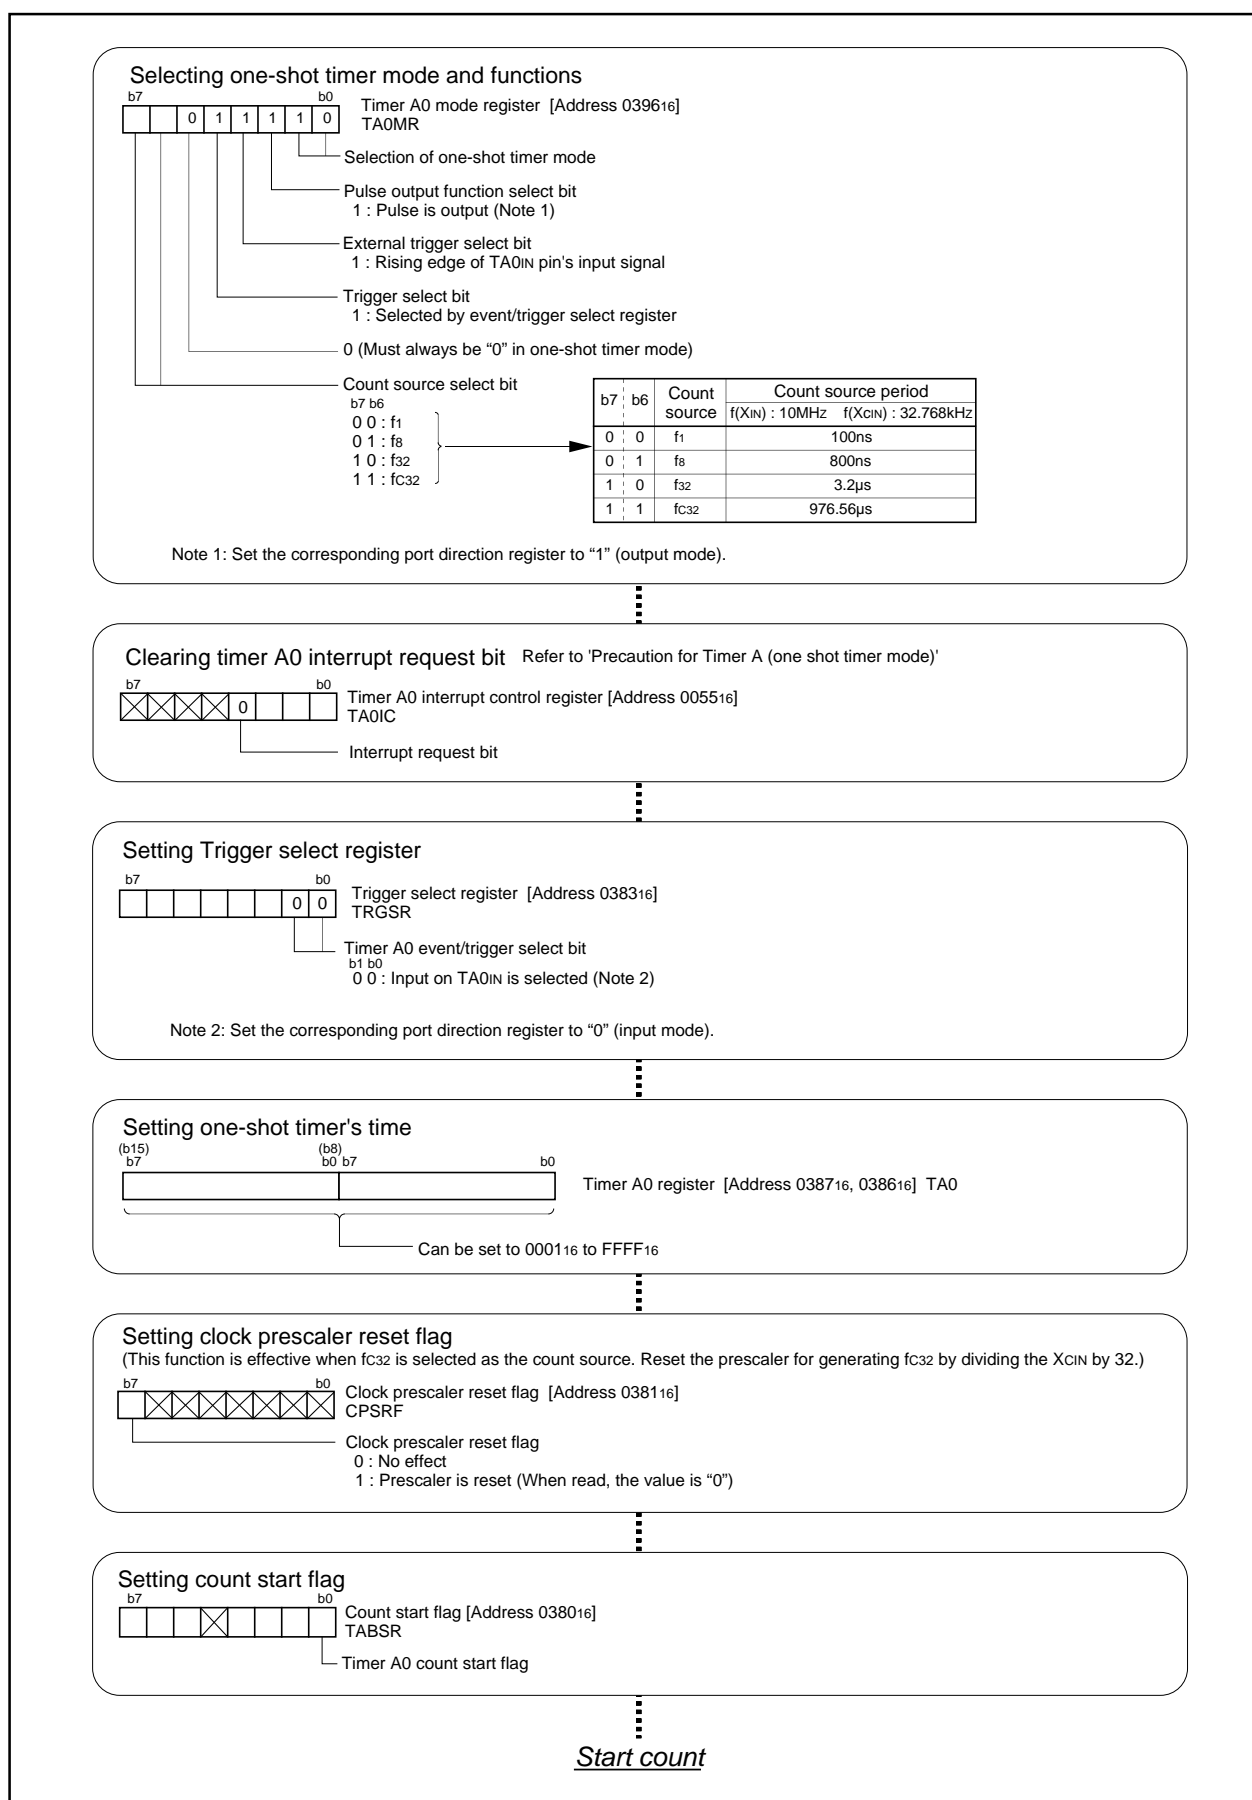


Figure 2.2.23. Set-up procedure of one-shot mode, external trigger selected

## Timer A

**2.2.11 Operation of Timer A (pulse width modulation mode, 16-bit PWM mode selected)**


In pulse width modulation mode, choose functions from those listed in Table 2.2.11. Operations of the circled items are described below. Figure 2.2.24 shows the operation timing, and Figure 2.2.25 shows the set-up procedure.

**Table 2.2.11. Chosed functions**

Item	Set-up	
Count source	<input type="radio"/>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
PWM mode	<input type="radio"/>	16-bit PWM
	<input type="radio"/>	8-bit PWM
Count start condition	<input type="radio"/>	External trigger input (falling edge of input signal to the TA0IN pin)
	<input type="radio"/>	External trigger input (rising edge of input signal to the TA0IN pin)
	<input type="radio"/>	Timer overflow (TB1/TX0/TX2 overflow)

- Operation
- (1) If the TA0IN pin input level changes from "L" to "H" with the count start flag set to "1", the counter performs a down count on the count source. Also, the TA0OUT pin outputs an "H" level.
  - (2) The TA0OUT pin output level changes from "H" to "L" when a set time period elapses. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) The counter reloads the content of the reload register every time PWM pulses are output for one cycle, and continues counting.
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TA0OUT outputs an "L" level.

- Note
- PWM pulse cycle is  $(2^{16}-1)/f_i$ , whereas H level duration is  $n/f_i$ . However, when "0000<sub>16</sub>" is set for the timer A0 register, the PWM output is "L" level for the entire period, and an interrupt request is generated for every PWM output cycle. Also, when "FFFF<sub>16</sub>" is set for the timer A0 register, the PWM output is "H" level for the entire period, and an interrupt request is generated for every PWM output cycle.
- ( $f_i$ : Count source frequency  $f_1, f_8, f_{32}, f_{c32}$   $n$ : Timer value)

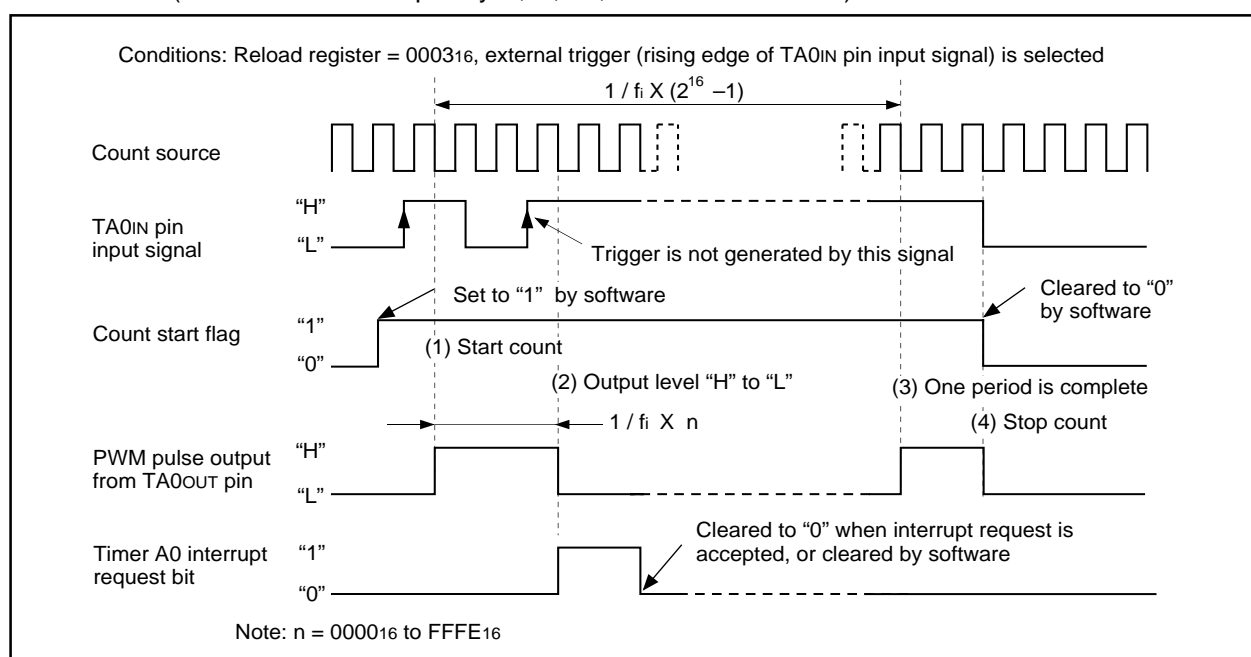**Figure 2.2.24. Operation timing of pulse width modulation mode, 16-bit PWM mode selected**

## Timer A

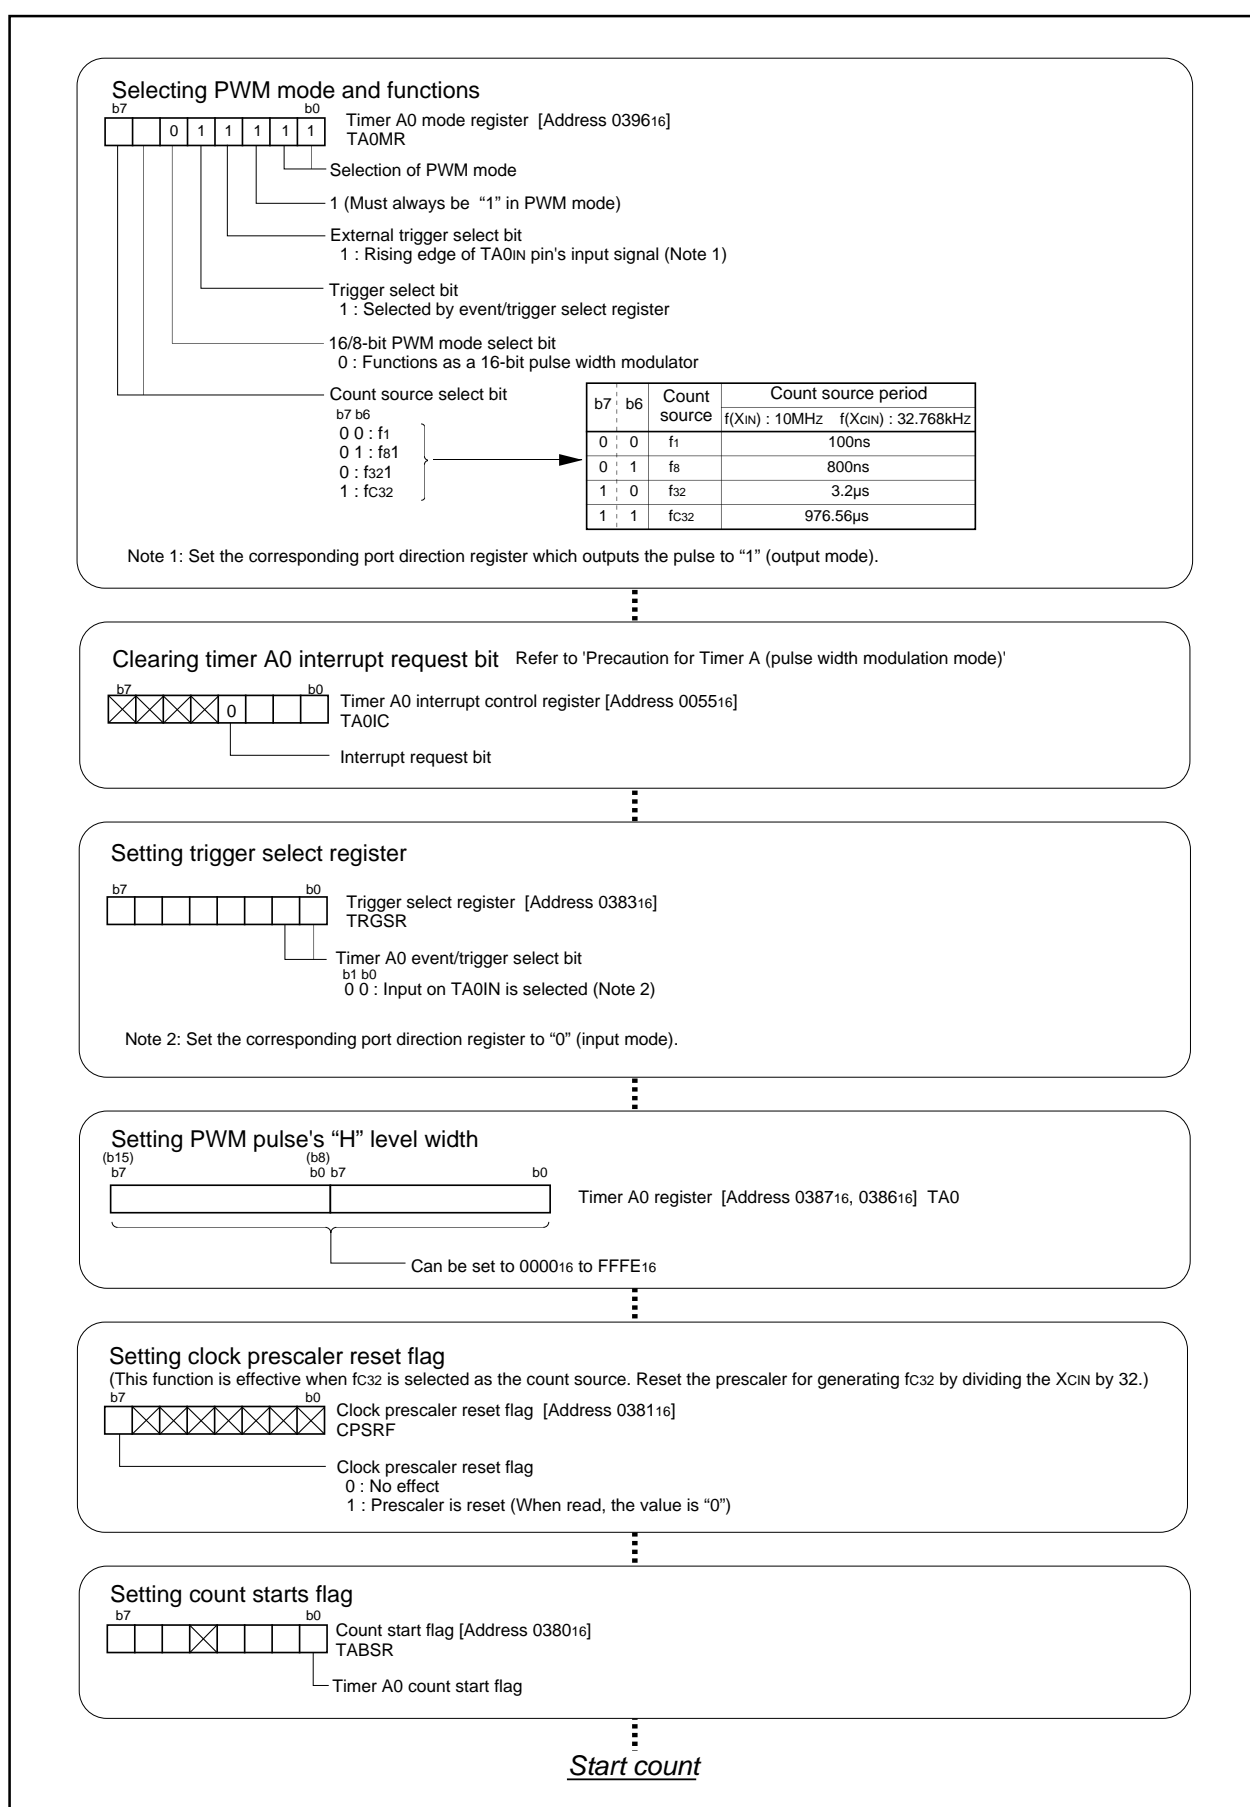


Figure 2.2.25. Set-up procedure of pulse width modulation mode, 16-bit PWM mode selected

## Timer A

**2.2.12 Operation of Timer A (pulse width modulation mode, 8-bit PWM mode selected)**


In pulse width modulation mode, choose functions from those listed in Table 2.2.12. Operations of the circled items are described below. Figure 2.2.26 shows the operation timing, and Figure 2.2.27 shows the set-up procedure.

**Table 2.2.12. Chosed functions**

Item	Set-up	
Count source	<b>○</b>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
PWM mode		16-bit PWM
	<b>○</b>	8-bit PWM
Count start condition	<b>○</b>	External trigger input (falling edge of input signal to the TA0IN pin)
		External trigger input (rising edge of input signal to the TA0IN pin)
		Timer overflow (TB1/TX0/TX2 overflow)

- Operation
- (1) If the TA0IN pin input level changes from "H" to "L" with the count start flag set to "1", the counter performs a down count on the count source. Also, the TA0OUT pin outputs an "H" level.
  - (2) The TA0OUT pin output level changes from "H" to "L" when a set time period elapses. At this time, the timer A0 interrupt request bit goes to "1".
  - (3) The counter reloads the content of the reload register every time PWM pulses are output for one cycle, and continues counting.
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TA0OUT pin outputs an "L" level.

- Note
- PWM pulse cycle is  $(m + 1) \times (2^8 - 1) / f_i$ , whereas "H" level duration is  $n \times (m + 1) / f_i$ . However, when "0016" is set for the significant 8 bits of the timer A0 register, the PWM output is "L" level for the entire period, and an interrupt request is generated for every PWM output cycle. Also, when "FF16" is set for the significant 8 bits of the timer A0 register, the PWM output is "H" level for the entire period, and an interrupt request is generated for every PWM output cycle. ( $f_i$ : Count source frequency  $f_1, f_8, f_{32}, f_{c32}$   $n$ : Timer value)

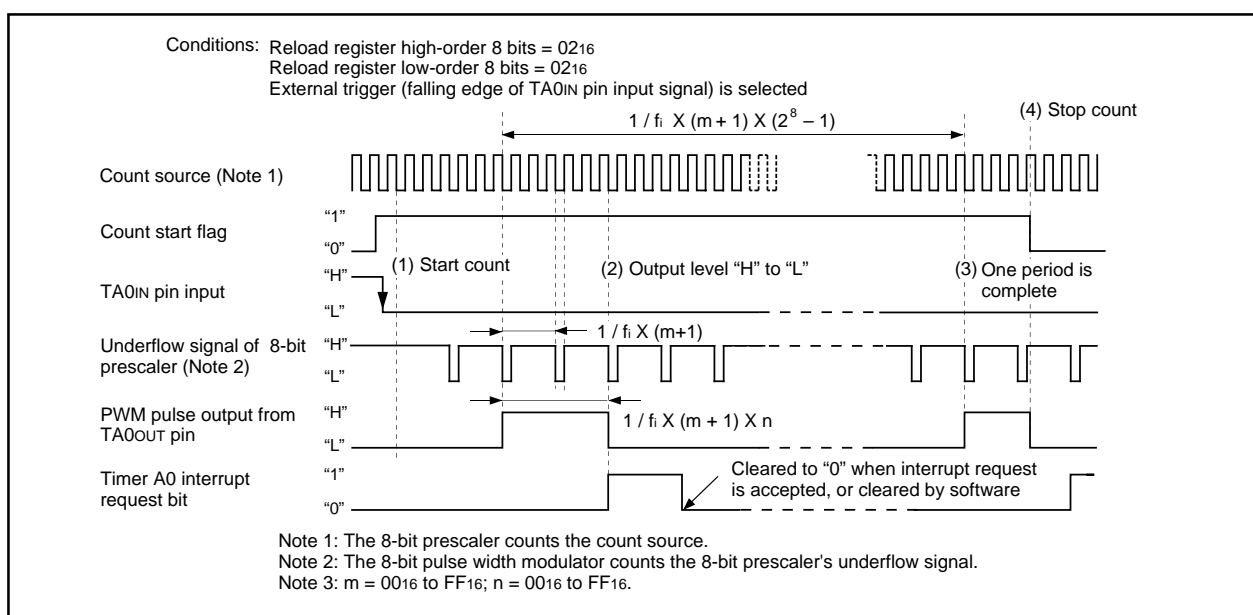**Figure 2.2.26. Operation timing of pulse width modulation mode, with 8-bit PWM mode selected**

## Timer A

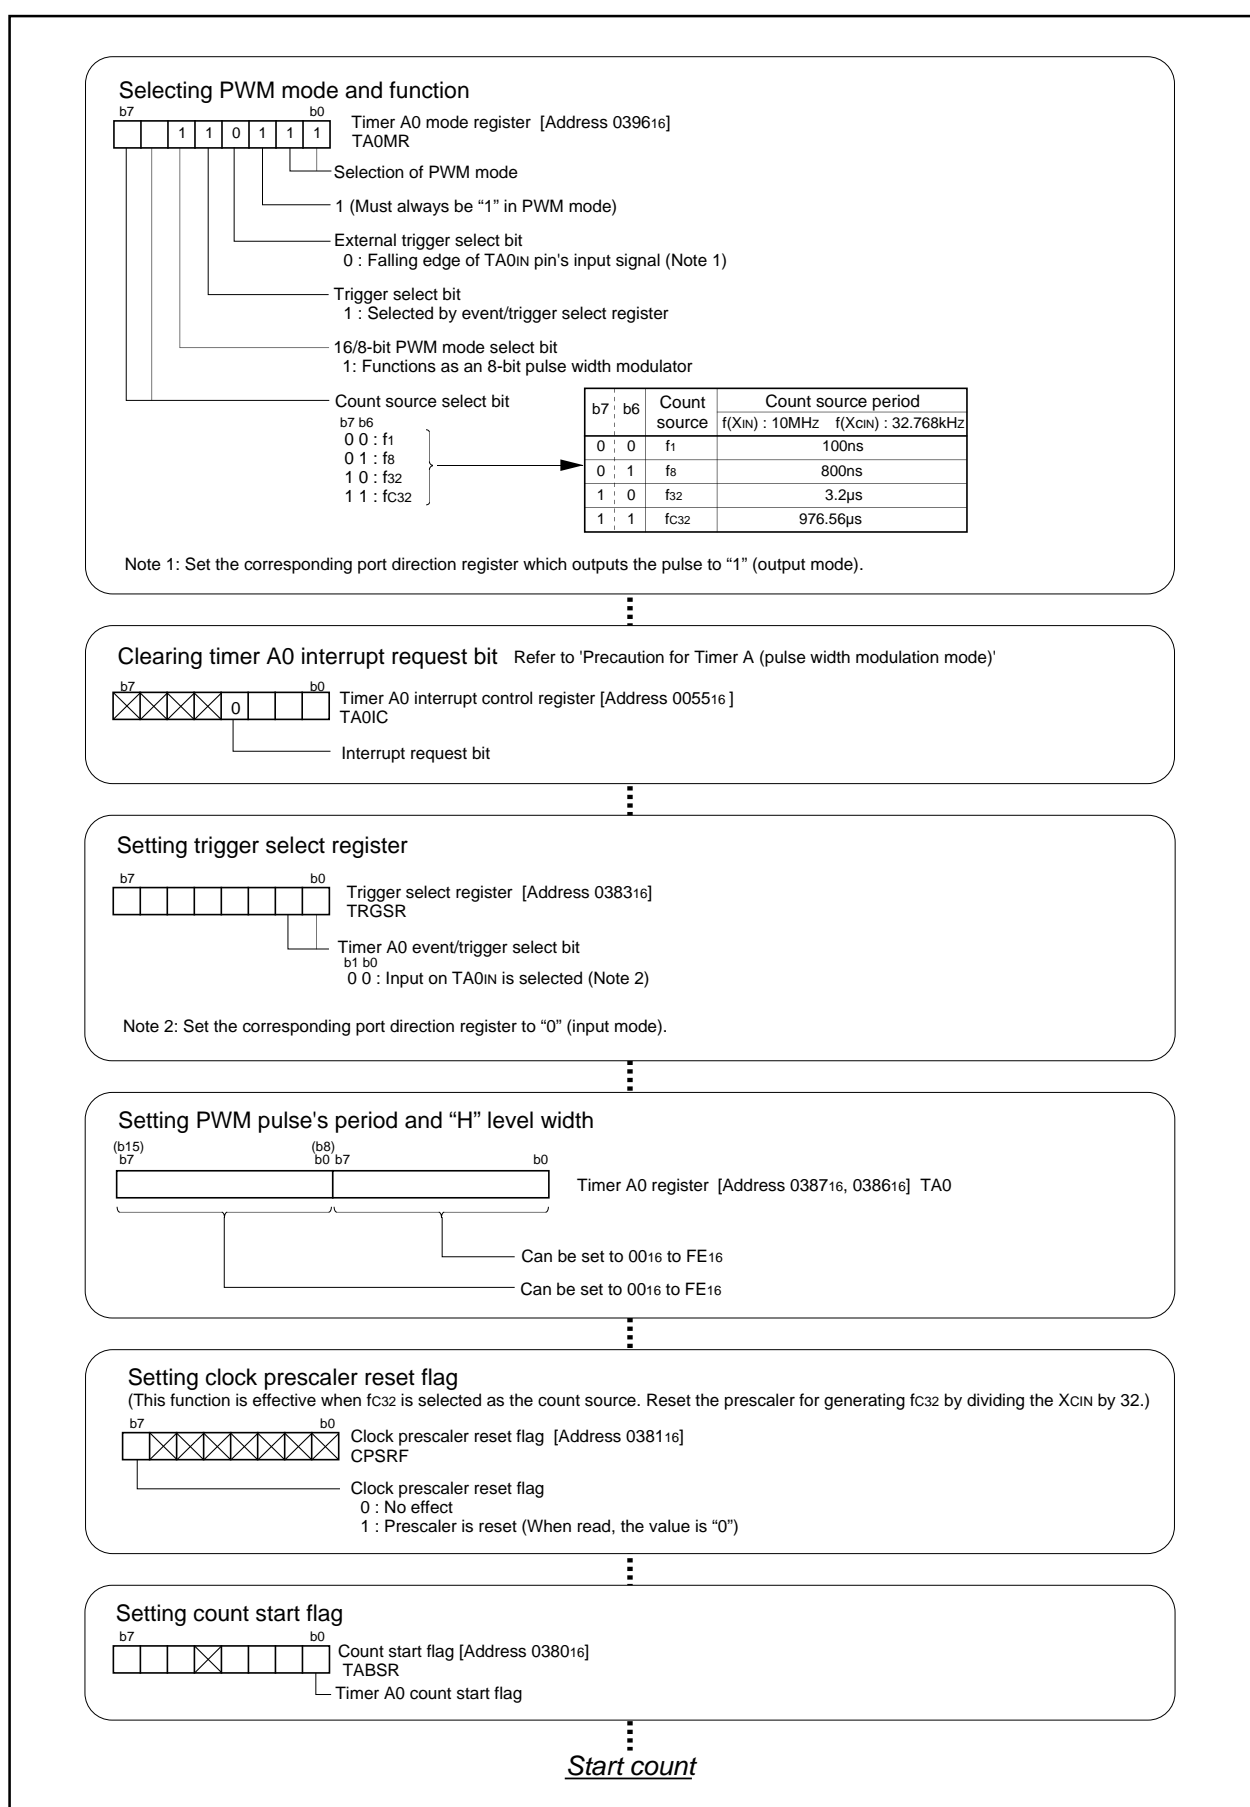



Figure 2.2.27. Set-up procedure of pulse width modulation mode, 8-bit PWM mode selected



## Timer A

**2.2.13 Precautions for Timer A (timer mode)**

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer A0 register, then set the flag to "1".
- (2) Reading the timer A0 register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer A0 register with the reload timing shown in Figure 2.2.28 gets "FFFF<sub>16</sub>". Reading the timer A0 register after setting a value in the timer A0 register with a count halted but before the counter starts counting gets a proper value.

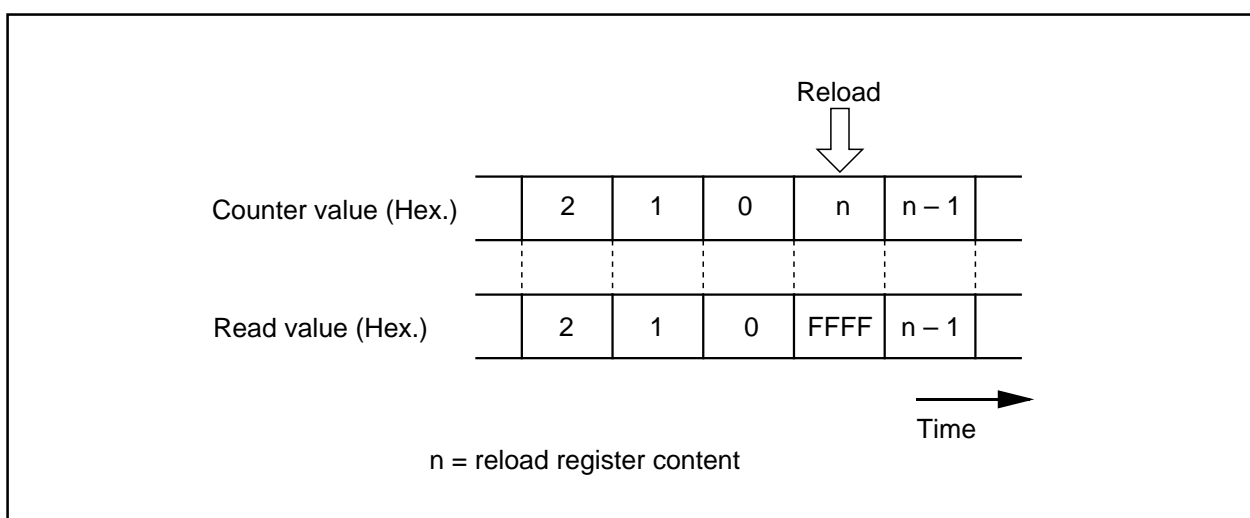**Figure 2.2.28. Reading timer A0 register**

## Timer A

## 2.2.14 Precautions for Timer A (event counter mode)

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer A0 register, then set the flag to "1".
- (2) Reading the timer A0 register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer A0 register with the reload timing shown in Figure 2.2.29 gets "FFFF<sub>16</sub>" by underflow or "0000<sub>16</sub>" by overflow. Reading the timer A0 register after setting a value in the timer A0 register with a count halted but before the counter starts counting gets a proper value.
- (3) Please note the standards for the differences between the 2 pulses used in the 2-phase pulse signals input signals to the TA0IN pin and TA0OUT pin as shown in Figure 2.2.30.
- (4) When free run type is selected, if count is stopped, set a value in the timer A0 register again.

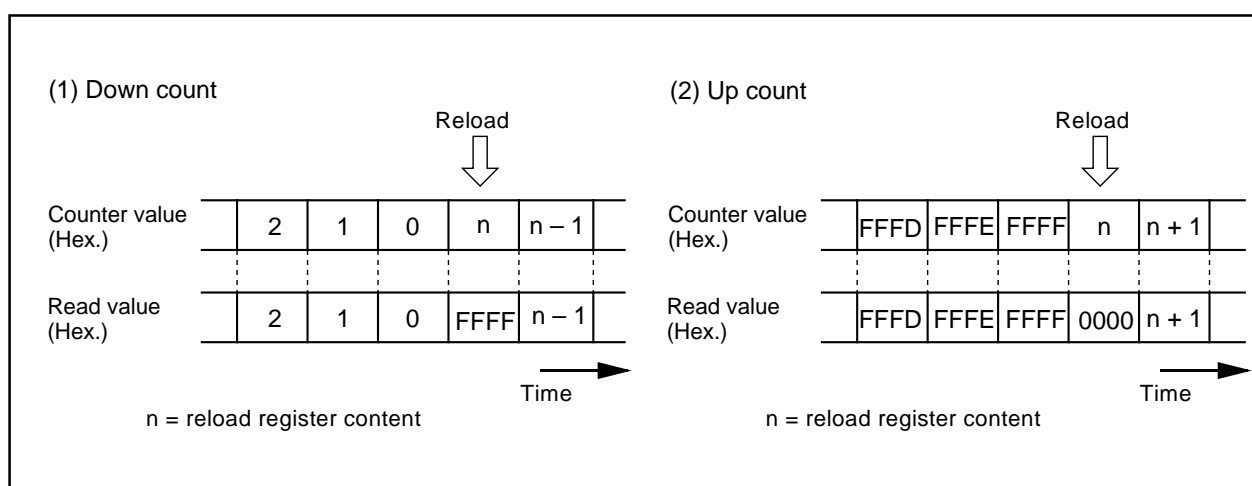


Figure 2.2.29. Reading timer A0 register

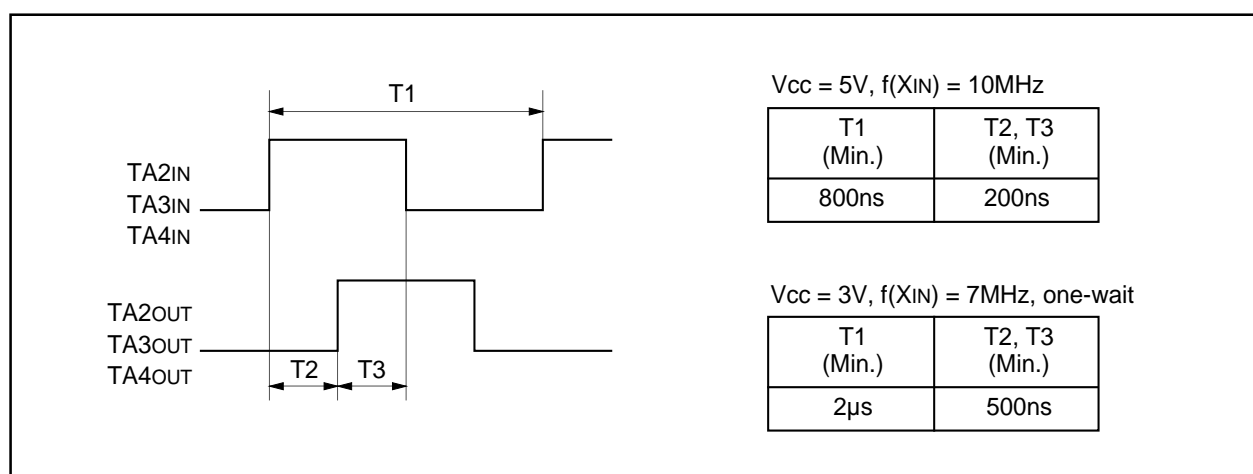


Figure 2.2.30. Standard of 2-phase pulses

### 2.2.15 Precautions for Timer A (one-shot timer mode)

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer A0 register, then set the flag to "1".
- (2) Setting the count start flag to "0" while a count is in progress causes as follows:
  - The counter stops counting and a content of reload register is reloaded.
  - The TA0OUT pin outputs "L" level.
  - The interrupt request generated and the timer A0 interrupt request bit goes to "1".
- (3) The output from the one-shot timer synchronizes with the count source generated internally. Therefore, when an external trigger has been selected, a delay of one cycle of count source as a maximum occurs between the trigger input to the TA0IN pin and the one-shot timer output.
- (4) The timer A0 interrupt request bit goes to "1" if the timer's operation mode is set using any of the following procedures:
  - Selecting one-shot timer mode after reset.
  - Changing operation mode from timer mode to one-shot timer mode.
  - Changing operation mode from event counter mode to one-shot timer mode.
 Therefore, to use timer A0 interrupt (interrupt request bit), set timer A0 interrupt request bit to "0" after the above listed changes have been made.
- (5) If a trigger occurs while a count is in progress, after the counter performs one down count following the reoccurrence of a trigger, the reload register contents are reloaded, and the count continues. To generate a trigger while a count is in progress, generate the second trigger after an elapse longer than one cycle of the timer's count source after the previous trigger occurred.

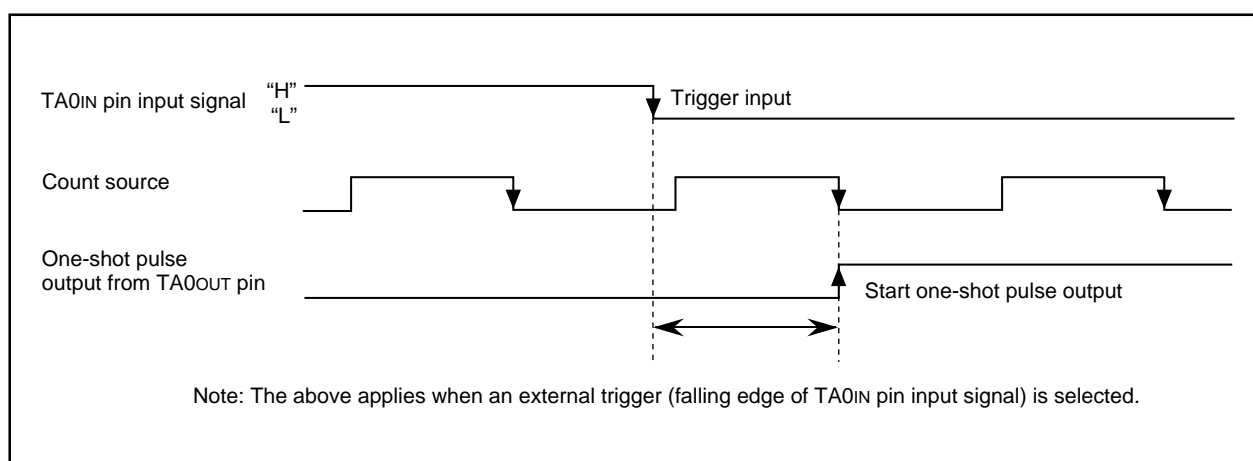


Figure 2.2.31. One-shot timer delay

## Timer A

## 2.2.16 Precautions for Timer A (pulse width modulation mode)

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer A0 register, then set the flag to "1".
- (2) The timer A0 interrupt request bit becomes "1" if setting operation mode of the timer in compliance with any of the following procedures:
  - Selecting PWM mode after reset.
  - Changing operation mode from timer mode to PWM mode.
  - Changing operation mode from event counter mode to PWM mode.
 Therefore, to use timer A0 interrupt (interrupt request bit), set timer A0 interrupt request bit to "0" after the above listed changes have been made.
- (3) Setting the count start flag to "0" while PWM pulses are being output causes the counter to stop counting. If the TA0OUT pin is outputting an "H" level in this instance, the output level goes to "L", and the timer A0 interrupt request bit goes to "1". If the TA0OUT pin is outputting an "L" level in this instance, the level does not change, and the timer A0 interrupt request bit does not become "1".
- (4) Normal PWM output is restored according to the interrupt request generate timing, both in the case of 16-bit PWM and 8-bit PWM, when PWM output is either "H" or "L" level for the entire period. This holds only when a value other than "0000<sub>16</sub>" or "FFFF<sub>16</sub>" is set during 16-bit PWM, or a value other than "00<sub>16</sub>" or "FF<sub>16</sub>" is set during 8-bit PWM.

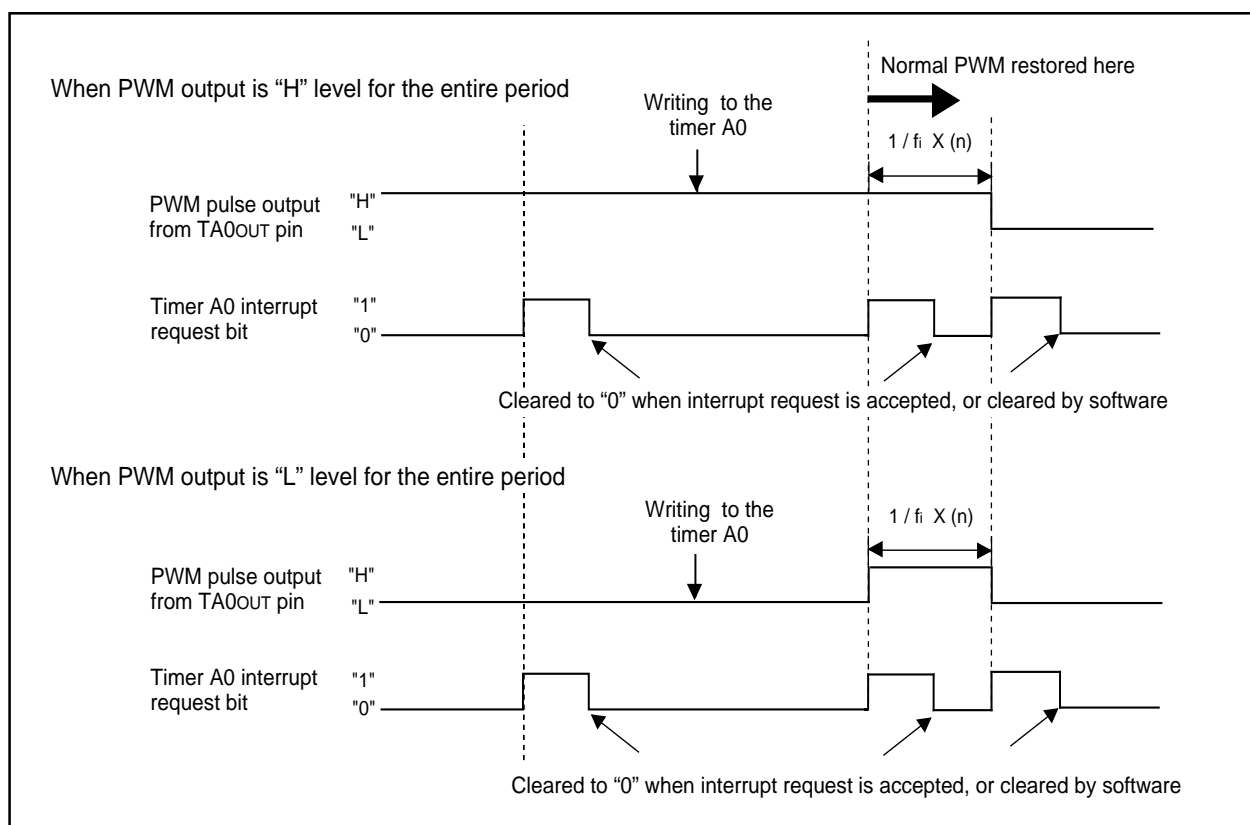


Figure 2.2.32. Operation timing of PWM output mode

## Timer B

---

### 2.3 Timer B

#### 2.3.1 Overview

The following is an overview for timer B, a 16-bit timer.

##### (1) Mode

Timer B operates in one of three modes:

##### (a) Timer mode

The internal count source is counted.

- Operation in timer mode ..... P210

##### (b) Event counter mode

The number of pulses coming from outside and the number of the timer overflows are counted.

- Operation in event counter mode ..... P212

##### (c) Pulse period measurement/pulse width measurement mode

External pulse period or external pulse widths are measured. If pulse period measurement mode is selected, the periods of input pulses are continuously measured. If pulse width measurement mode is selected, widths of "H" level pulses and those of "L" level pulses are continuously measured.

- Operation in pulse period measurement mode ..... P214
- Operation in pulse width measurement mode ..... P216

##### (2) Count source

An internal count source can be selected from f1, f8, f32, and fc32. f1, f8, and f32 are clocks obtained by dividing the CPU main clock by 1, 8, and 32 respectively. fc32 is the clock obtained by dividing the CPU secondary clock by 32.

##### (3) Frequency division ratio

The frequency division ratio equals [the value set in the timer register + 1]. The counter underflows when a count source equal to a frequency division ratio is input, and an interrupt request occurs.

##### (4) Reading the timer

In timer mode or event counter mode, the count value at the time of reading the timer register will be read. Read the register in 16-bit increments. In both the pulse period measurement mode and pulse width measurement mode, an indeterminate value is read until the second effective edge is input after a count is started, otherwise, the measurement results are read.

##### (5) Writing to the timer

When writing to the timer register while a count is in progress, the value is written only to the reload register. When writing to the timer register while a count has stopped, the value is written both to the reload register and the count. Write the value in 16-bit increments. The timer register cannot be written to in either the pulse period measurement mode or the pulse width measurement mode.

## Timer B

### (6) Input to the timer and the direction register

To input an external signal to the timer, set the direction register of the relevant port to input.

### (7) Pins related to timer B

(a) TB0IN, TB1IN      Input pins to timer B.

### (8) Registers related to timer B

Figure 2.3.1 shows the memory map of timer B-related registers. Figures 2.3.2 and 2.3.3 show timer B-related registers.

005A <sub>16</sub>	Timer B0 interrupt control register (TB0IC)
005B <sub>16</sub>	Timer B1 interrupt control register (TB1IC)
≈	≈
0380 <sub>16</sub>	Count start flag (TABSR)
0381 <sub>16</sub>	Clock prescaler reset flag (CPSRF)
0382 <sub>16</sub>	One-shot start flag (ONSF)
0383 <sub>16</sub>	Trigger select register (TRGSR)
0384 <sub>16</sub>	Up-down flag (UDF)
≈	≈
0390 <sub>16</sub>	Timer B0 (TB0)
0391 <sub>16</sub>	
0392 <sub>16</sub>	Timer B1 (TB1)
0393 <sub>16</sub>	
≈	≈
039B <sub>16</sub>	Timer B0 mode register (TB0MR)
039C <sub>16</sub>	Timer B1 mode register (TB1MR)

Figure 2.3.1. Memory map of timer B-related registers

## Timer B


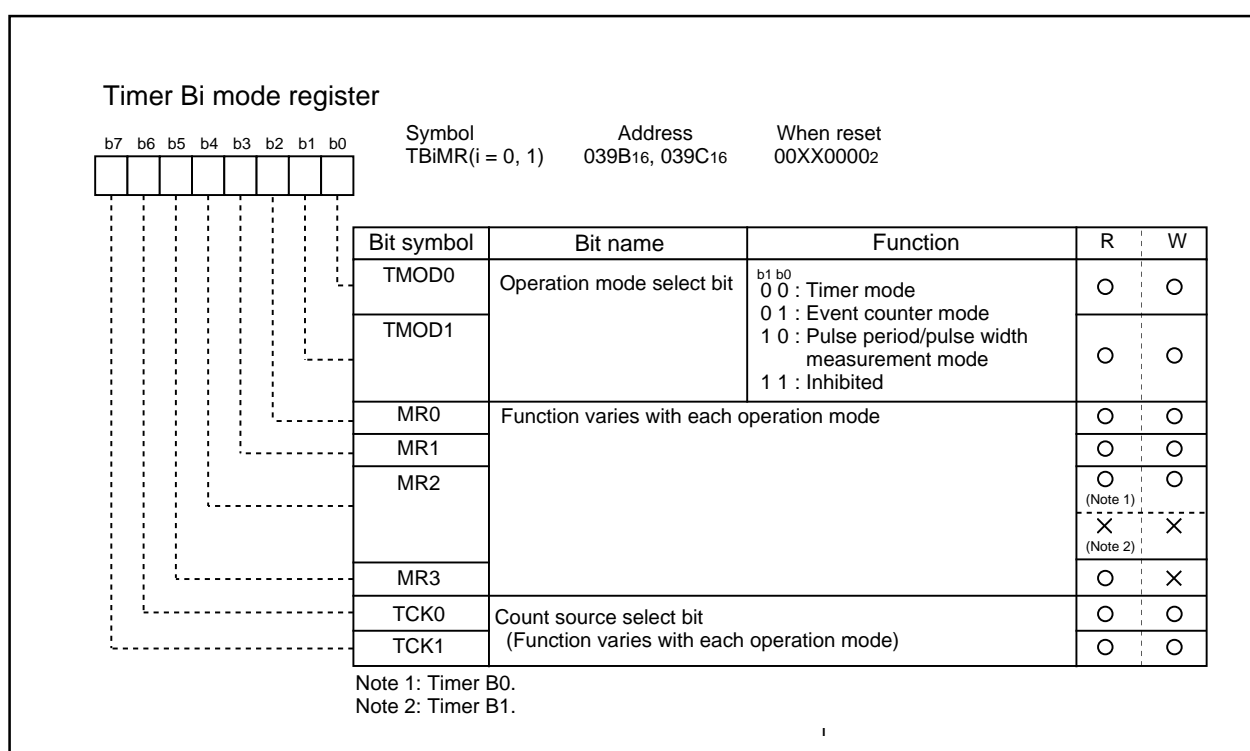


Figure 2.3.2. Timer B-related registers (1)

## Timer B

## Timer Bi register (Note)



Symbol  
TB0  
TB1


Address  
0391<sub>16</sub>, 0390<sub>16</sub>  
0393<sub>16</sub>, 0392<sub>16</sub>

When reset  
Indeterminate  
Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts the timer's period	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• Event counter mode Counts external pulses input or a timer overflow	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• Pulse period / pulse width measurement mode Measures a pulse period or width	—	○	×

Note1: Read and write data in 16-bit units.

## Count start flag




Symbol  
TABSR

Address  
0380<sub>16</sub>

When reset  
000X0000<sub>2</sub>

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TX0S	Timer X0 count start flag		○	○
TX1S	Timer X1 count start flag		○	○
TX2S	Timer X2 count start flag		○	○
Nothing is assigned. In an attempt to write to this bit, write “0”. The value, if read, turns out to be indeterminate.			—	—
TB0S	Timer B0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TB1S	Timer B1 count start flag		○	○
CDCS	Clock divided count start flag		○	○

## Clock prescaler reset flag



Symbol  
CPSRF

Address  
0381<sub>16</sub>

When reset  
0XXXXXXX<sub>2</sub>

Bit symbol	Bit name	Function	R	W
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—
CPSR	Clock prescaler reset flag	0 : No effect 1 : Prescaler is reset (When read, the value is "0")	○	○

Figure 2.3.3. Timer B-related registers (2)



## Timer B


### 2.3.2 Operation of Timer B (timer mode)

In timer mode, choose functions from those listed in Table 2.3.1. Operations of the circled items are described below. Figure 2.3.4 shows the operation timing, and Figure 2.3.5 shows the set-up procedure.

**Table 2.3.1. Chosen functions**

Item	Set-up
Count source	<b>0</b> Internal count source (f <sub>1</sub> / f <sub>8</sub> / f <sub>32</sub> / f <sub>c32</sub> )

- Operation
- (1) Setting the count start flag to "1" causes the counter to perform a down count on the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the counter continues counting. At this time, the timer Bi interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.

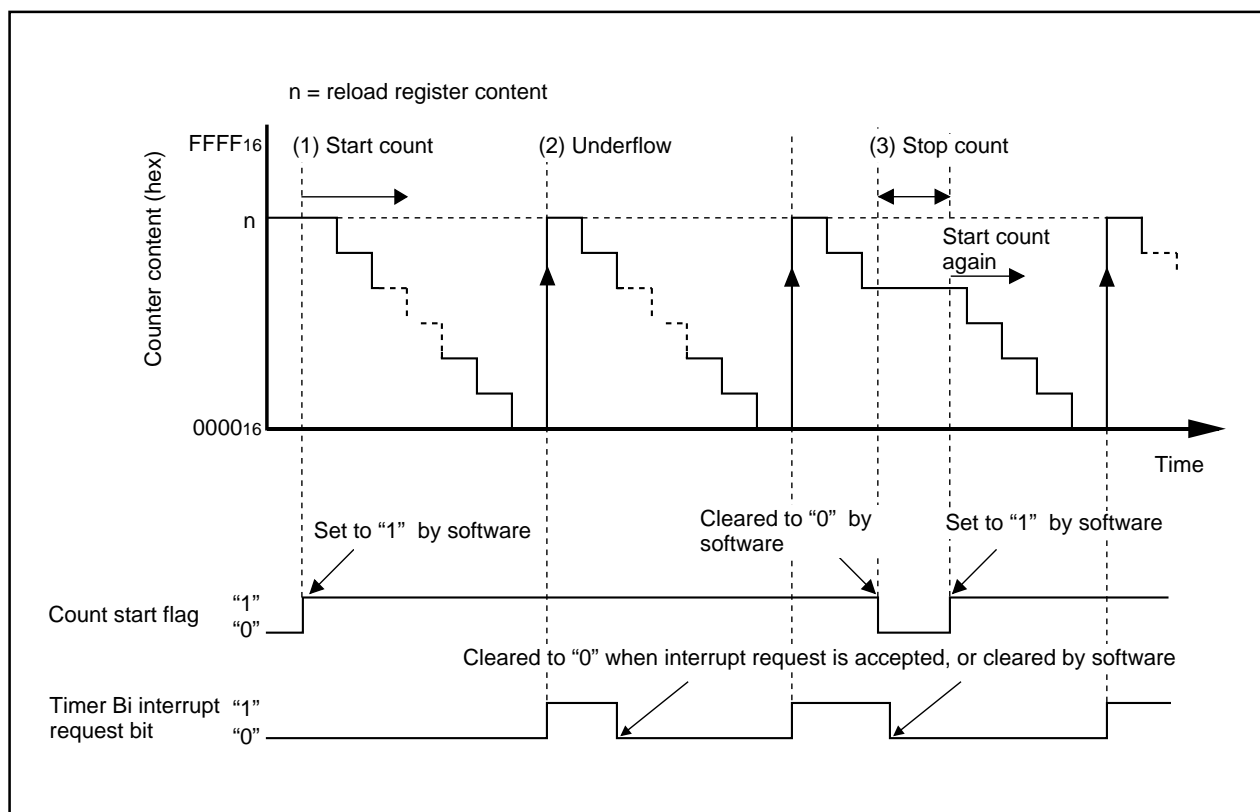

**Figure 2.3.4. Operation timing of timer mode**

## Timer B

## Selecting timer mode and functions

b7 b6 b5 b4 b3 b2 b1 b0  
 Timer Bi mode register (i=0, 1) [Address 039B<sub>16</sub>, 039C<sub>16</sub>]  
 TBiMR (i=0 to 2)

Selection of timer mode

Invalid in timer mode  
 Can be "0" or "1"

Fixed to "0" in timer mode

Count source select bit

b7 b6  
 0 0 : f<sub>1</sub>  
 0 1 : f<sub>8</sub>  
 1 0 : f<sub>32</sub>  
 1 1 : f<sub>c32</sub>

b7	b6	Count source	Count source period	
			f(X <sub>IN</sub> ) : 10MHz	f(X <sub>CIN</sub> ) : 32.768kHz
0	0	f <sub>1</sub>	100ns	
0	1	f <sub>8</sub>	800ns	
1	0	f <sub>32</sub>	3.2μs	
1	1	f <sub>c32</sub>	976.56μs	

## Setting divide ratio

(b15) b7 (b8) b0 b7 b0  
 Timer B0 register [Address 0391<sub>16</sub>, 0390<sub>16</sub>] TB0  
 Timer B1 register [Address 0393<sub>16</sub>, 0392<sub>16</sub>] TB1

Can be set to 0000<sub>16</sub> to FFFF<sub>16</sub>

## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

b7 b6 b5 b4 b3 b2 b1 b0  
 Clock prescaler reset flag [Address 0381<sub>16</sub>]  
 CPSRF

Clock prescaler reset flag

0 : No effect

1 : Prescaler is reset (When read, the value is "0")

## Setting count start flag

b7 b6 b5 b4 b3 b2 b1 b0  
 Count start flag [Address 0380<sub>16</sub>]  
 TABSR

Timer B0 count start flag

Timer B1 count start flag

Start count

Figure 2.3.5. Set-up procedure of timer mode

## Timer B


### 2.3.3 Operation of Timer B (event counter mode)

In event counter mode, choose functions from those listed in Table 2.3.2. Operations of the circled items are described below. Figure 2.3.6 shows the operation timing, and Figure 2.3.7 shows the set-up procedure.

**Table 2.3.2. Chosen functions**

Item	Set-up
Count source	<b>0</b> Input signal to the TB <sub>IN</sub> pin (counting falling edges)
	Input signal to the TB <sub>IN</sub> pin (counting rising edges)
	Input signal to the TB <sub>IN</sub> pin (counting rising edges and falling edges)
	Timer overflow(TB <sub>J</sub> overflow)

- Operation
- (1) Setting the count start flag to "1" causes the counter to count the falling edges of the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer Bi interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.

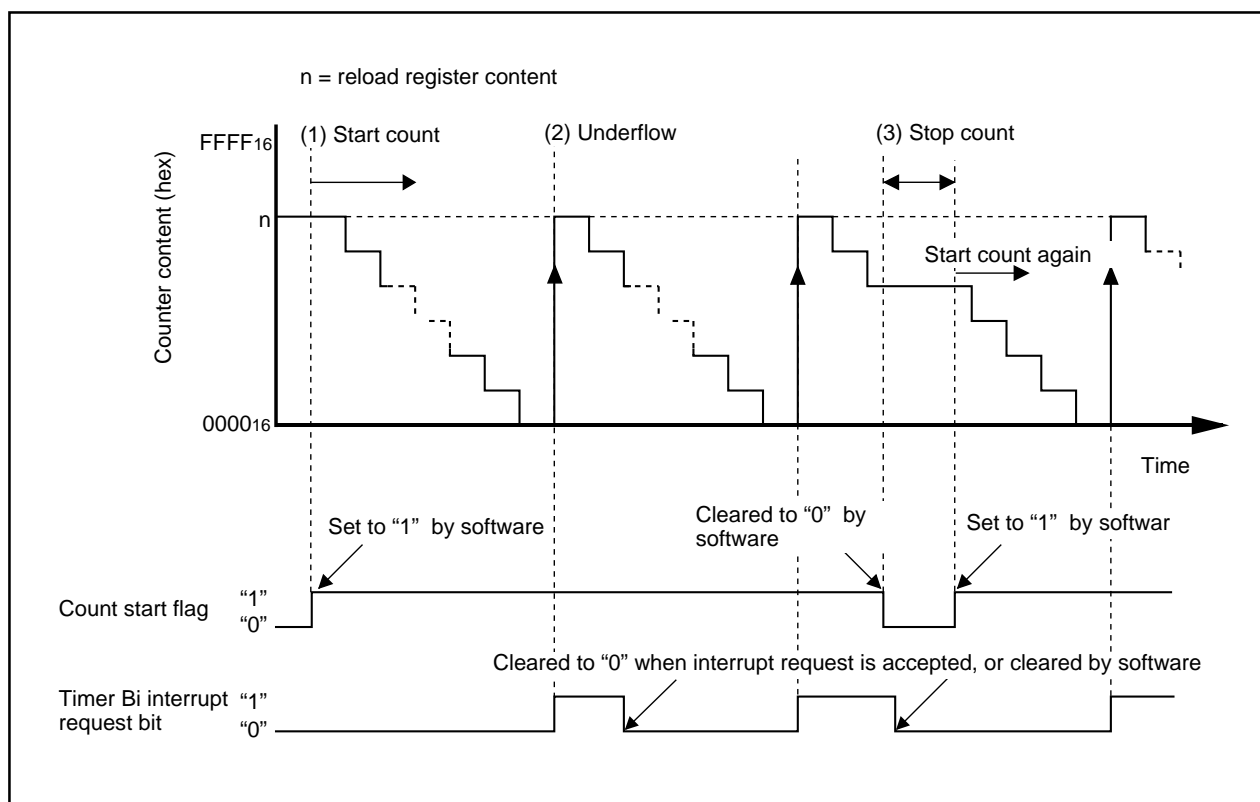

**Figure 2.3.6. Operation timing of event counter mode**

## Timer B

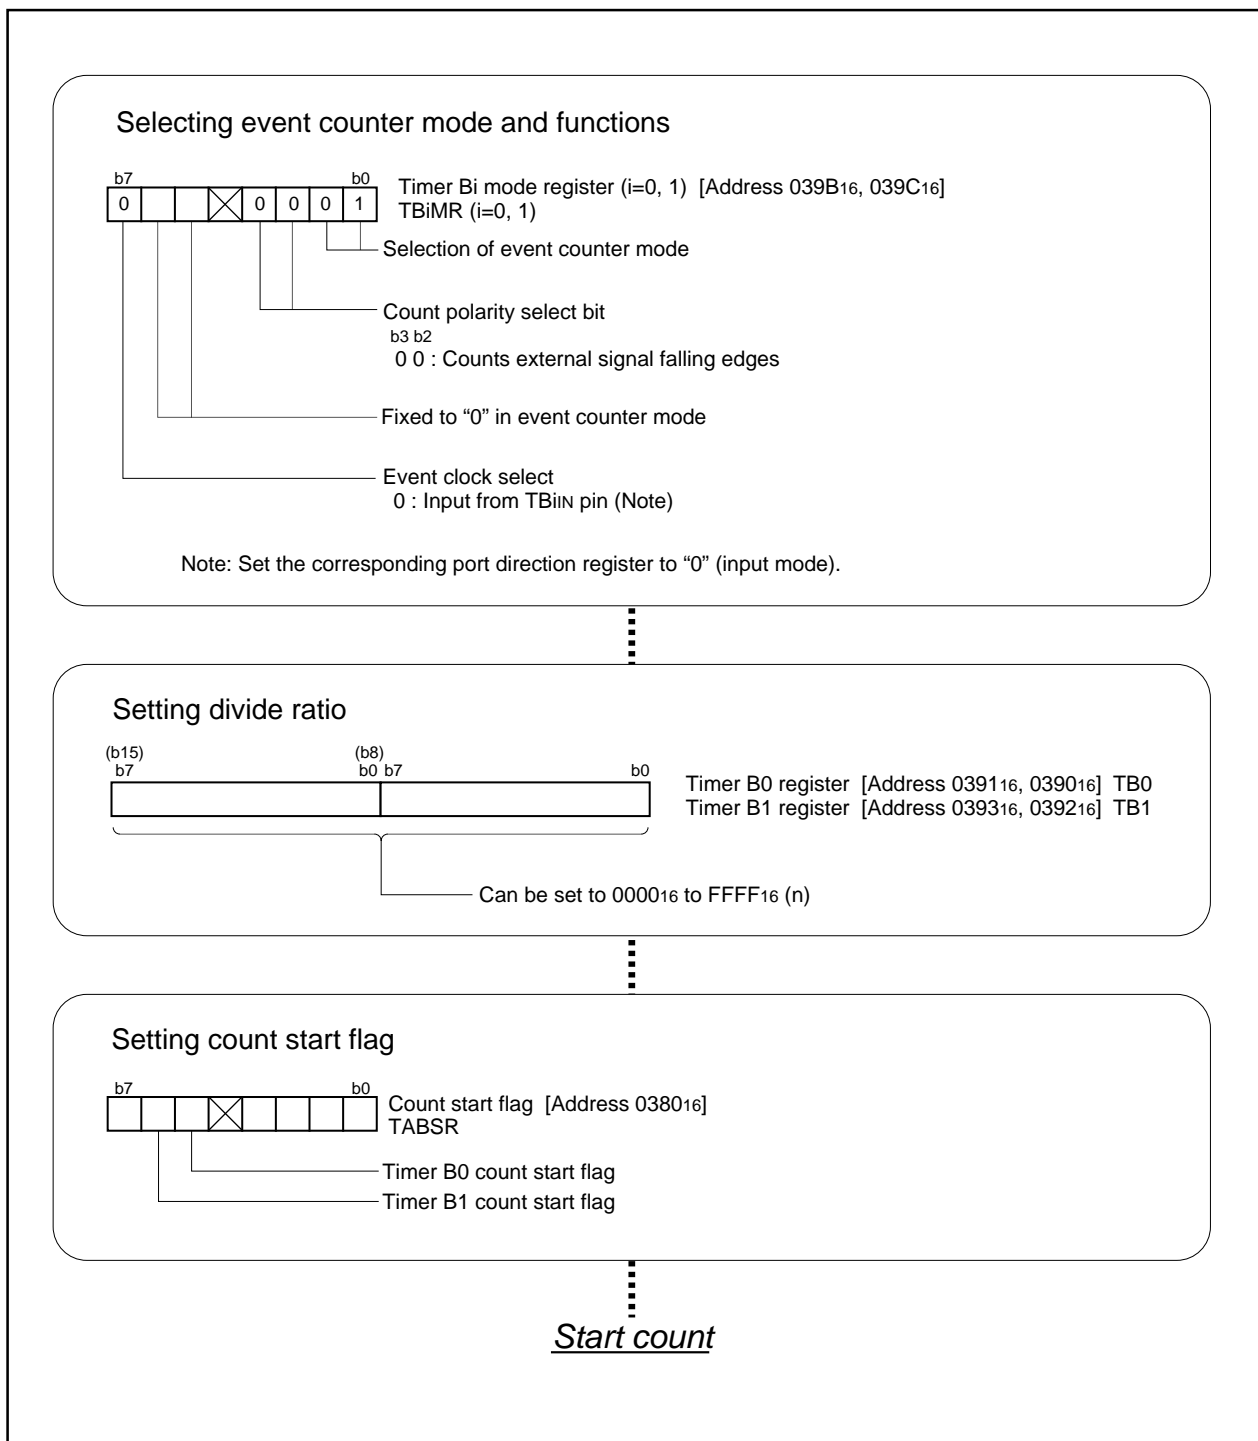


Figure 2.3.7. Set-up procedure of event counter mode

## Timer B

## 2.3.4 Operation of Timer B (pulse period measurement mode)

In pulse period/pulse width measurement mode, choose functions from those listed in Table 2.3.3. Operations of the circled items are described below. Figure 2.3.8 shows the operation timing, and Figure 2.3.9 shows the set-up procedure.

Table 2.3.3. Chosed functions

Item	Set-up
Count source	○ Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Measurement mode	○ Pulse period measurement (interval between measurement pulse falling edge to falling edge)
	Pulse period measurement (interval between measurement pulse rising edge to rising edge)
	Pulse width measurement (interval between measurement pulse falling edge to rising edge, and between rising edge to falling edge)

- Operation
- (1) Setting the count start flag to "1" causes the counter to start counting the count source.
  - (2) If a measurement pulse changes from "H" to "L", the value of the counter goes to "0000<sub>16</sub>", and measurement is started. In this instance, an indeterminate value is transferred to the reload register. The timer Bi interrupt request does not generate.
  - (3) If a measurement pulse changes from "H" to "L" again, the value of the counter is transferred to the reload register, and the timer Bi interrupt request bit goes to "1". Then the value of the counter becomes "0000<sub>16</sub>", and the measurement is started again.

- Note
- The timer Bi interrupt request bit goes to "1" when an effective edge of a measurement pulse is input or timer Bi is overflowed. The factor of interrupt request can be determined by use of the timer Bi overflow flag within the interrupt routine.
  - The value of the counter at the beginning of a count is indeterminate. Thus there can be instances in which the timer Bi overflow flag goes to "1" immediately after a count is performed.
  - The timer Bi overflow flag goes to "0" if timer Bi mode register is written to when the count start flag is "1". This flag cannot be set to "1" by software.


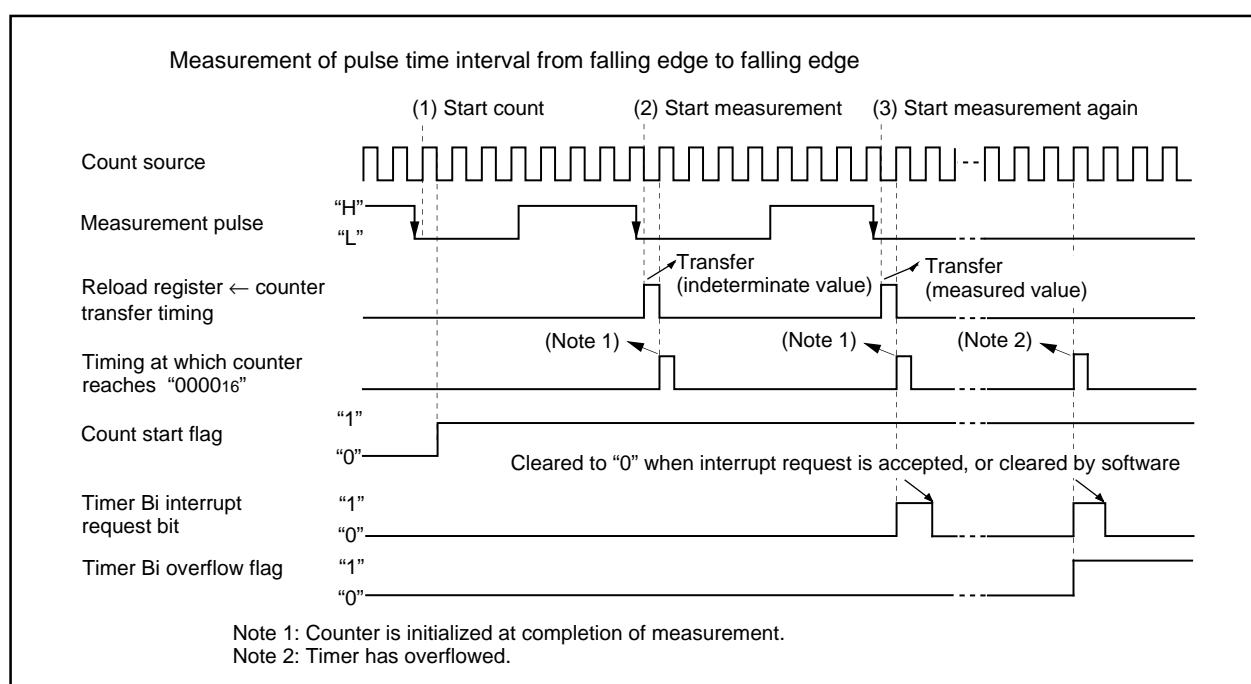


Figure 2.3.8. Operation timing of pulse period measurement mode

## Timer B


## Selecting pulse period / pulse width measurement mode and functions

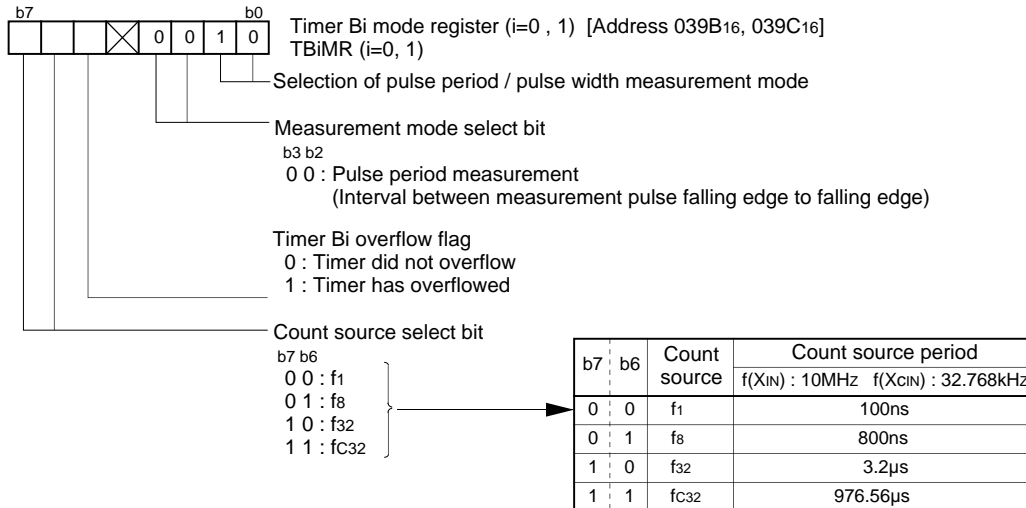


Note: Set the corresponding port direction register which sets the measurement pulse to "0" (input mode).

## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

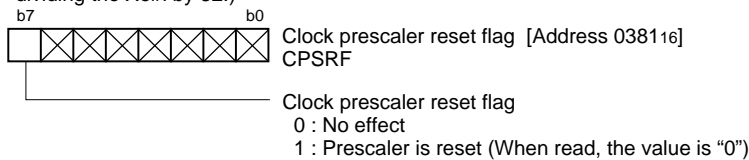

## Setting count start flag

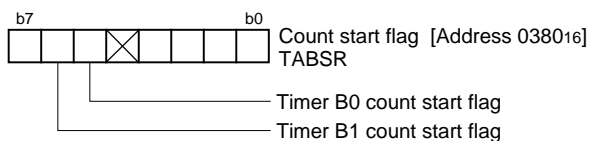

Start count

## Clearing overflow flag

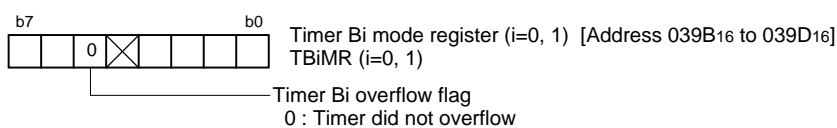


Figure 2.3.9. Set-up procedure of pulse period measurement mode

## Timer B

## 2.3.5 Operation of Timer B (pulse width measurement mode)

In pulse period/pulse width measurement mode, choose functions from those listed in Table 2.3.4. Operations of the circled items are described below. Figure 2.3.10 shows the operation timing, and Figure 2.3.11 shows the set-up procedure.

Table 2.3.4. Chooosed functions

Item	Set-up	
Count source	<b>○</b>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Measurement mode		Pulse period measurement (interval between measurement pulse falling edge to falling edge)
		Pulse period measurement (interval between measurement pulse rising edge to rising edge)
	<b>○</b>	Pulse width measurement (interval between measurement pulse falling edge to rising edge, and between rising edge to falling edge)

- Operation
- (1) Setting the count start flag to "1" causes the counter to start counting the count source.
  - (2) If an effective edge of a pulse to be measured is input, the value of the counter goes to "0000<sub>16</sub>", and measurement is started. In this instance, an indeterminate value is transferred to the reload register. The timer Bi interrupt request does not generate.
  - (3) If an effective edge of a pulse to be measured is input again, the value of the counter is transferred to the reload register, and the timer Bi interrupt request bit goes to "1". Then the value of the counter becomes "0000<sub>16</sub>", and measurement is started again.

- Note
- The timer Bi interrupt request bit goes to "1" when an effective edge of a pulse to be measured is input or timer Bi is overflows. The factor of interrupt request can be determined by use of the timer Bi overflow flag within the interrupt routine.
  - The value of the counter at the beginning of a count is indeterminate. Thus there can be instances in which the timer Bi overflow flag goes to "1" immediately after a count is performed.
  - The timer Bi overflow flag goes to "0" if timer Bi mode register is written to when the count start flag is "1". This flag cannot be set to "1" by software.


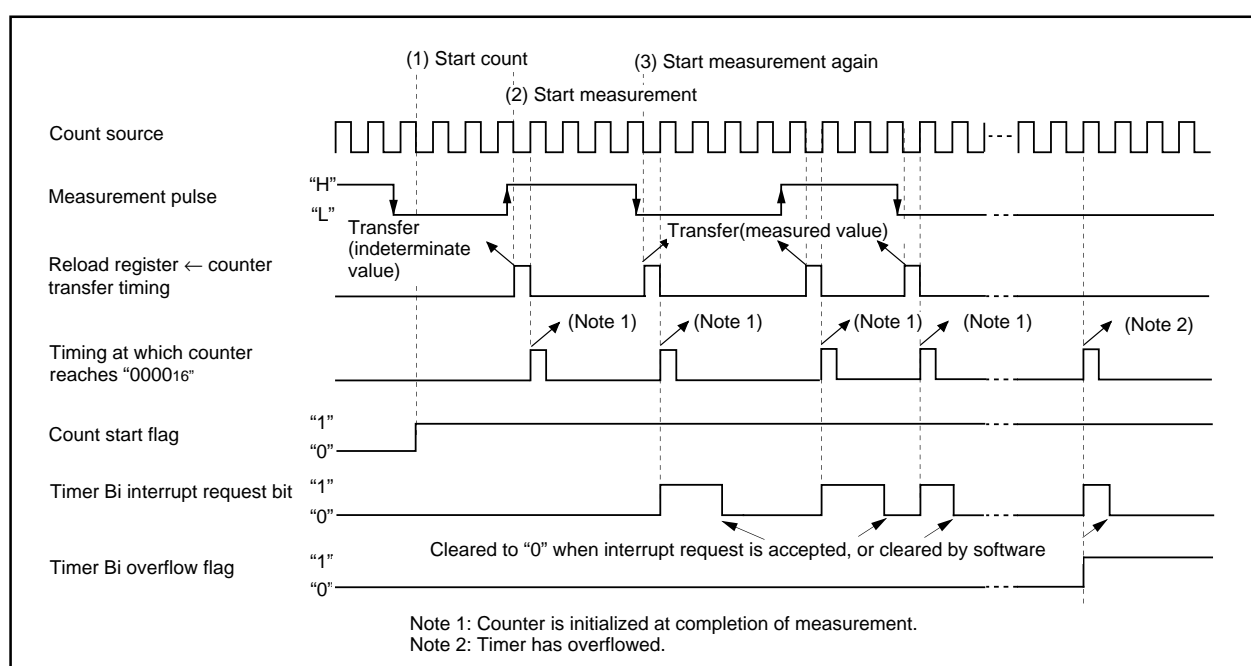


Figure 2.3.10. Operation timing of pulse width measurement mode

## Timer B


## Selecting pulse period / pulse width measurement mode and functions

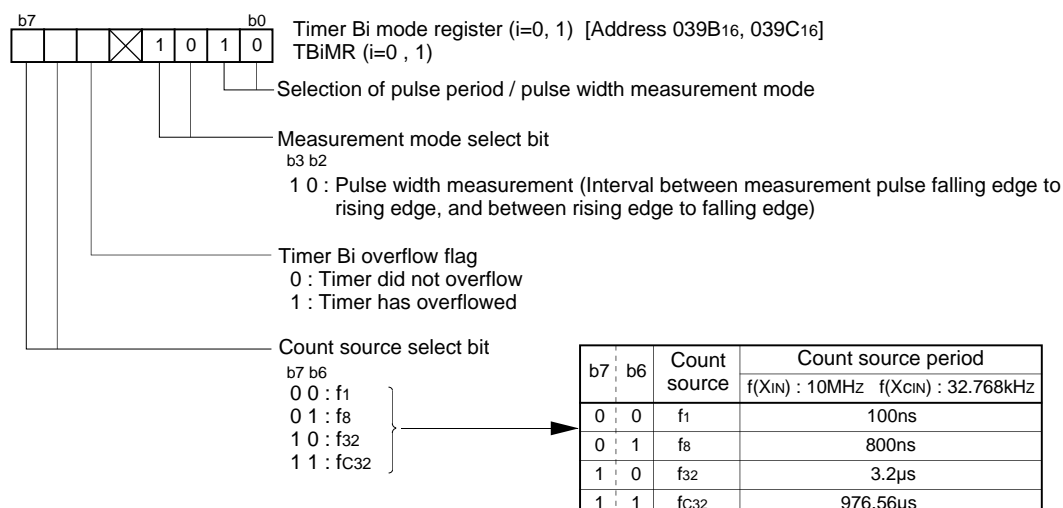


Note: Set the corresponding port direction register which sets the measurement pulse to "0" (input mode).

## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

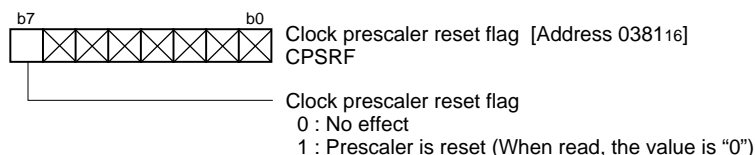

## Setting count start flag

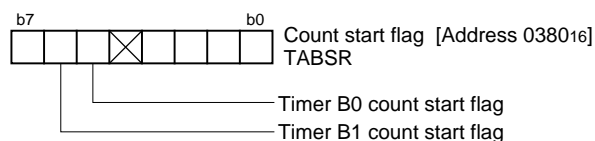

Start count

## Clearing overflow flag

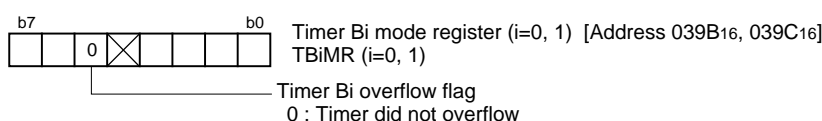



Figure 2.3.11. Set-up procedure of pulse width measurement mode



## Timer B

### 2.3.6 Precautions for Timer B (timer mode, event counter mode)

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer Bi register, then set the flag to "1".
- (2) Reading the timer Bi register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Bi register with the reload timing shown in Figure 2.3.12 gets "FFFF<sub>16</sub>". Reading the timer Bi register after setting a value in the timer Bi register with a count halted but before the counter starts counting gets a proper value.

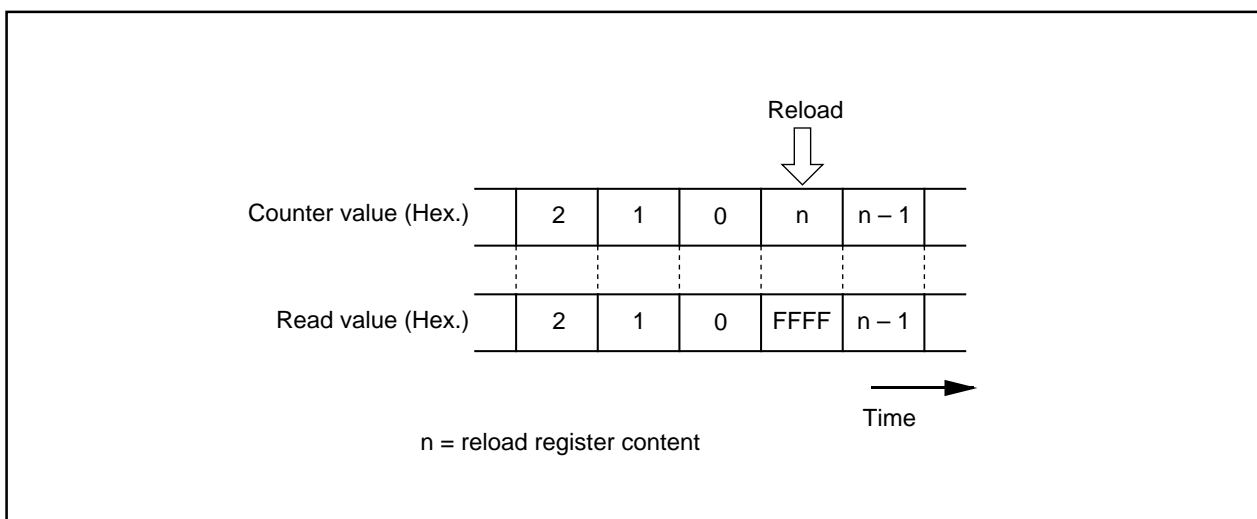

**Figure 2.3.12. Reading timer Bi register**

### 2.3.7 Precautions for Timer B (pulse period/pulse width measurement mode)

- (1) The timer Bi interrupt request bit goes to "1" when an effective edge of a measurement pulse is input or timer Bi is overflowed. The factor of interrupt request can be determined by use of the timer Bi overflow flag within the interrupt routine.
- (2) If the timer overflow occurs simultaneously with the input of a measurement pulse, and if the interrupt factor cannot be determined from the timer Bi overflow flag, connect the timers and count the number of overflows.
- (3) When reset, the timer Bi overflow flag goes to "1". This flag can be set to "0" by writing to the timer Bi mode register when the count start flag is "1".
- (4) Use the timer Bi interrupt request bit to detect only overflows. Use the timer Bi overflow flag only to determine the interrupt factor within the interrupt routine.
- (5) When the first effective edge is input after a count is started, an indeterminate value is transferred to the reload register. At this time, timer Bi interrupt request is not generated.
- (6) The value of the counter is indeterminate at the beginning of a count. Therefore the timer Bi overflow flag may go to "1" immediately after a count is started.
- (7) If changing the measurement mode select bit is set after a count is started, the timer Bi interrupt request bit goes to "1".
- (8) If the input signal to the TBiIN pin is affected by noise, precise measurement may not be performed in some cases. It is recommended to see that measurements fall within a specific range by use of software.
- (9) For pulse width measurement, pulse widths are successively measured. Use software to check whether the measurement result is an "H" level width or an "L" level width.

## Timer X

---

### 2.4 Timer X

#### 2.4.1 Overview

The following is an overview for timer X, a 16-bit timer.

##### (1) Mode

Timer X operates in one of the four modes:

##### (a) Timer mode

In this mode, the internal count source is counted. Two functions can be selected: the pulse output function that reverses output from a port every time an overflow occurs, or the gate function which controls the count start/stop according to the input signal from a port.

- Timer mode operation ..... P224
- Timer mode, gate function operation ..... P226
- Timer mode, pulse output function operation ..... P228

##### (b) Event counter mode

This mode counts the pulses from the outside and the number of overflows in other timers. The free-run type, in which nothing is reloaded from the reload register, can be selected when an underflow occurs. The pulse output function can also be selected.

- Event counter mode operation ..... P230
- Event counter mode, free run type operation ..... P232

##### (c) One-shot timer mode

In this mode, the timer is started by the trigger and stops when the timer goes to "0". The trigger can be selected from the following 3 types: an external input signal, an overflow of the timer, or a software trigger.

- One-shot timer mode operation ..... P234

##### (d) Pulse period measurement/pulse width measurement mode

External pulse period or external pulse widths are measured. If pulse period measurement mode is selected, the periods of input pulses are continuously measured. If pulse width measurement mode is selected, widths of "H" level pulses and those of "L" level pulses are continuously measured.

- Operation in pulse period measurement mode ..... P236
- Operation in pulse width measurement mode ..... P238

##### (d) Pulse width modulation (PWM) mode

In this mode, the arbitrary pulses are successively output. Either a 16-bit fixed-period PWM mode or 8-bit variable-period mode can be selected. The trigger for initiating output can also be selected.

- 16-bit PWM mode operation ..... P240
- 8-bit PWM mode operation ..... P242

##### (2) Count source

The internal count source can be selected from f1, f8, f32, and fc32. Clocks f1, f8, and f32 are derived by dividing the CPU's main clock by 1, 8, and 32 respectively. Clock fc32 is derived by dividing the CPU's secondary clock by 32.

## Timer X

**(3) Frequency division ratio**

In timer mode or pulse width modulation mode, [the value set in the timer register + 1] becomes the frequency division ratio. In event counter mode, [the set value + 1] becomes the frequency division ratio when a down count is performed, or  $[FFFF_{16} - \text{the set value} + 1]$  becomes the frequency division ratio when an up count is performed. In one-shot timer mode, the value set in the timer register becomes the frequency division ratio.

The counter overflows (or underflows) when a count source equal to a frequency division ratio is input, and an interrupt occurs. For the pulse output function, the output from the port varies (the value in the port register does not vary).

**(4) Reading the timer**

Either in timer mode or in event counter mode, reading the timer register takes out the count at that moment. Read it in 16-bit units. The data either in one-shot timer mode or in pulse width modulation mode is indeterminate. In both the pulse period measurement mode and pulse width measurement mode, an indeterminate value is read until the second effective edge is input after a count is started, otherwise, the measurement results are read.

**(5) Writing to the timer**

When writing to the timer register while a count is in progress, the value is written only to the reload register. When writing to the timer register while a count has stopped, the value is written both to the reload register and the count. Write the value in 16-bit increments. The timer register cannot be written to in either the pulse period measurement mode or the pulse width measurement mode.

**(6) Relation between the input/output to/from the timer and the direction register**

With the output function of the timer, set the direction register of the relevant port to input. To input an external signal to the timer, set the direction register of the relevant port to input. However, pulse output cannot be selected when inputting an external signal to the timer, and vice-versa.

**(7) Pins related to timer X**

(a) TX0INOUT, TX1INOUT, TX2INOUT      Input/output pins to timer X.

**(8) Registers related to timer X**


Figure 2.4.1 shows the memory map of timer X-related registers. Figures 2.4.2 and 2.4.3 show timer X-related registers.

0056 <sub>16</sub>	Timer X0 interrupt control register (TX0IC)
0057 <sub>16</sub>	Timer X1 interrupt control register (TX1IC)
0058 <sub>16</sub>	Timer X2 interrupt control register (TX2IC)
⋯	
0380 <sub>16</sub>	Count start flag (TABSR)
0381 <sub>16</sub>	Clock prescaler reset flag (CPSRF)
0382 <sub>16</sub>	One-shot start flag (ONSF)
0383 <sub>16</sub>	Trigger select register (TRGSR)
0384 <sub>16</sub>	Up-down flag (UDF)
⋯	
0388 <sub>16</sub>	Timer X0 (TX0)
0389 <sub>16</sub>	
038A <sub>16</sub>	
038B <sub>16</sub>	
038C <sub>16</sub>	Timer X1 (TX1)
038D <sub>16</sub>	
038E <sub>16</sub>	
038F <sub>16</sub>	
0390 <sub>16</sub>	Timer X2 (TX2)
0391 <sub>16</sub>	
0392 <sub>16</sub>	
0393 <sub>16</sub>	
0394 <sub>16</sub>	
⋯	
0397 <sub>16</sub>	Timer X0 mode register (TX0MR)
0398 <sub>16</sub>	Timer X1 mode register (TX1MR)
0399 <sub>16</sub>	Timer X2 mode register (TX2MR)

**Figure 2.4.1. Memory map of timer X-related registers**

## Timer X

Timer Xi mode register



Symbol  
TXiMR(i = 0 to 2)


Address  
0397<sub>16</sub> to 0399<sub>16</sub>

When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
TMOD0	Operation mode select bit	b <sub>1</sub> b <sub>0</sub> : Timer mode 0 0 : Event counter mode 1 0 : One-shot timer mode or pulse period/pulse width measurement mode 1 1 : Pulse width modulation (PWM) mode	○	○
TMOD1			○	○
MR0	Function varies with each operation mode		○	○
MR1			○	○
MR2			○	○
MR3			○	○
TCK0	Count source select bit (Function varies with each operation mode)		○	○
TCK1			○	○

Note 1: Must set "00" to operation mode select bit when using timer X2 of M30200.

Timer Xi register (Note 1)



Symbol  
TX0  
TX1  
TX2

Address  
0389<sub>16</sub>, 0388<sub>16</sub>  
038B<sub>16</sub>, 038A<sub>16</sub>  
038D<sub>16</sub>, 038C<sub>16</sub>


When reset  
Indeterminate  
Indeterminate  
Indeterminate

Function	Values that can be set	R	W
• Timer mode Counts an internal count source	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• Event counter mode Counts pulses from an external source or timer overflow	0000 <sub>16</sub> to FFFF <sub>16</sub>	○	○
• One-shot timer mode Counts a one shot width	0000 <sub>16</sub> to FFFF <sub>16</sub> (Note 2)	×	○
• Pulse period / pulse width measurement mode Measures a pulse period or width	—	○	×
• Pulse width modulation mode (16-bit PWM) Functions as a 16-bit pulse width modulator	0000 <sub>16</sub> to FFFE <sub>16</sub> (Note 2)	×	○
• Pulse width modulation mode (8-bit PWM) Timer low-order address functions as an 8-bit prescaler and high-order address functions as an 8-bit pulse width modulator	00 <sub>16</sub> to FF <sub>16</sub> (Note 2) (High-order addresses) 00 <sub>16</sub> to FF <sub>16</sub> (Note 2) (Low-order addresses)	×	○

Note 1: Read and write data in 16-bit units.

Note 2: Use MOV instruction to write to this register.

Count start flag



Symbol  
TABSR

Address  
0380<sub>16</sub>


When reset  
000X0000<sub>2</sub>

Bit symbol	Bit name	Function	R	W
TA0S	Timer A0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TX0S	Timer X0 count start flag		○	○
TX1S	Timer X1 count start flag		○	○
TX2S	Timer X2 count start flag		○	○
Nothing is assigned. In an attempt to write to this bit, write "0". The value, if read, turns out to be indeterminate.			—	—
TB0S	Timer B0 count start flag	0 : Stops counting 1 : Starts counting	○	○
TB1S	Timer B1 count start flag		○	○
CDCS	Clock divided count start flag		○	○

Figure 2.4.2. Timer X-related registers (1)


## Timer X

## One-shot start flag

Symbol  
ONSFAddress  
0382<sub>16</sub>When reset  
XXXX0000<sub>2</sub>

Bit symbol	Bit name	Function	R	W
TA0OS	Timer A0 one-shot start flag	1 : Timer start When read, the value is "0"	○	○
TX0OS	Timer X0 one-shot start flag		○	○
TX1OS	Timer X1 one-shot start flag		○	○
TX2OS	Timer X2 one-shot start flag		○	○
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—


## Trigger select register

Symbol  
TRGSRAddress  
0383<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
TA0TGL	Timer A0 event/trigger select bit	b1 b0 0 0 : Input on TA0IN is selected (Note) 0 1 : TB1 overflow is selected 1 0 : TX2 overflow is selected 1 1 : TX0 overflow is selected	○	○
TA0TGH			○	○
TX0TGL	Timer X0 event/trigger select bit	b3 b2 0 0 : Input on TX0INOUT is selected (Note) 0 1 : TB1 overflow is selected 1 0 : TA0 overflow is selected 1 1 : TX1 overflow is selected	○	○
TX0TGH			○	○
TX1TGL	Timer X1 event/trigger select bit	b5 b4 0 0 : Input on TX1INOUT is selected (Note) 0 1 : TB1 overflow is selected 1 0 : TX0 overflow is selected 1 1 : TX2 overflow is selected	○	○
TX1TGH			○	○
TX2TGL	Timer X2 event/trigger select bit	b7 b6 0 0 : Input on TX2INOUT is selected (Note) 0 1 : TB1 overflow is selected 1 0 : TX1 overflow is selected 1 1 : TA0 overflow is selected	○	○
TX2TGH			○	○

Note: Set the corresponding port direction register to "0"(input mode).

## Clock prescaler reset flag

Symbol  
CPSRFAddress  
0381<sub>16</sub>When reset  
0XXXXXXXX<sub>2</sub>

Bit symbol	Bit name	Function	R	W
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—
CPSR	Clock prescaler reset flag	0 : No effect 1 : Prescaler is reset (When read, the value is "0")	○	○

Figure 2.4.3. Timer X-related registers (2)

## Timer X


### 2.4.2 Operation of Timer X (timer mode)

In timer mode, choose functions from those listed in Table 2.4.1. Operations of the circled items are described below. Figure 2.4.4 shows the operation timing, and Figure 2.4.5 shows the set-up procedure.

**Table 2.4.1. Chosen functions**

Item	Set-up	
Count source	<input type="radio"/>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function	<input type="radio"/>	No pulses output
	<input type="radio"/>	Pulses output
Gate function	<input type="radio"/>	No gate function
	<input type="radio"/>	Performs count only for the period in which the TXiNOUT pin is at "L" level
	<input type="radio"/>	Performs count only for the period in which the TXiNOUT pin is at "H" level


- Operation
- (1) Setting the count start flag to "1" causes the counter to perform a down count on the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.

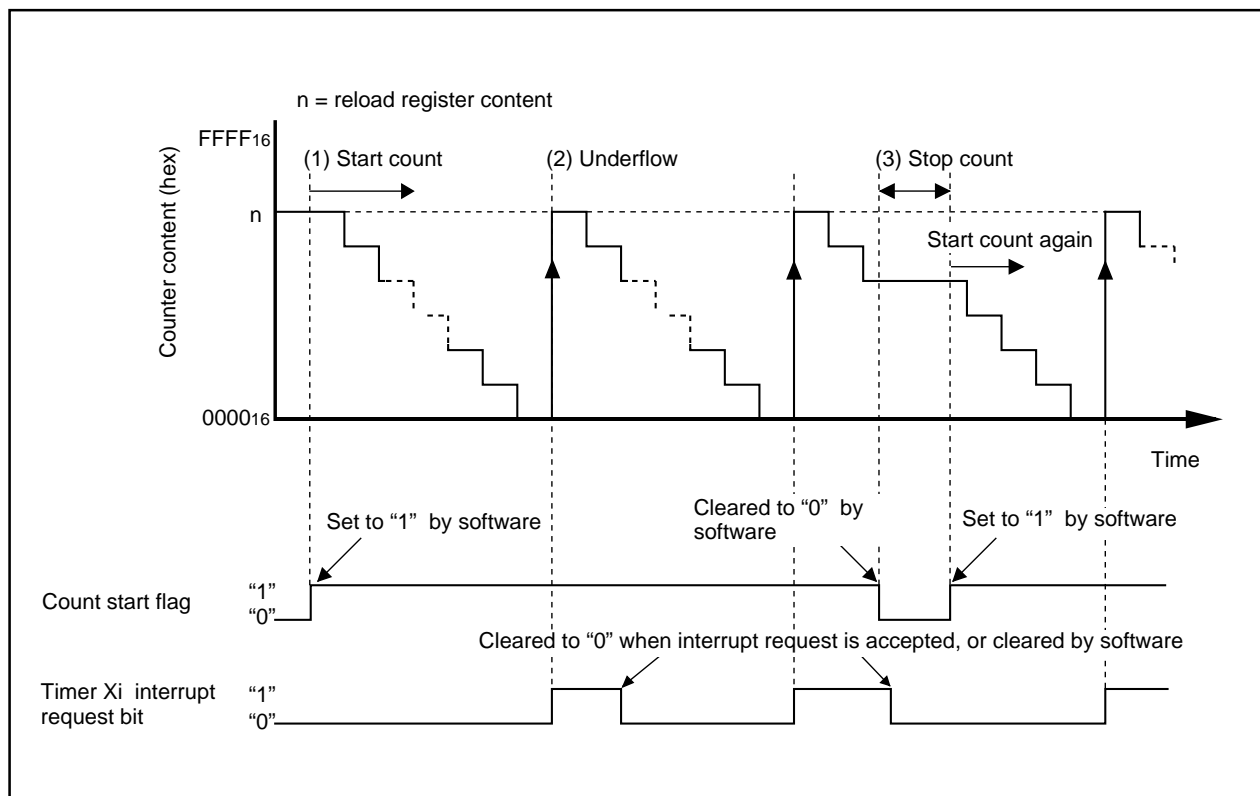


**Figure 2.4.4. Operation timing of timer mode**

## Timer X

## Selecting timer mode and functions

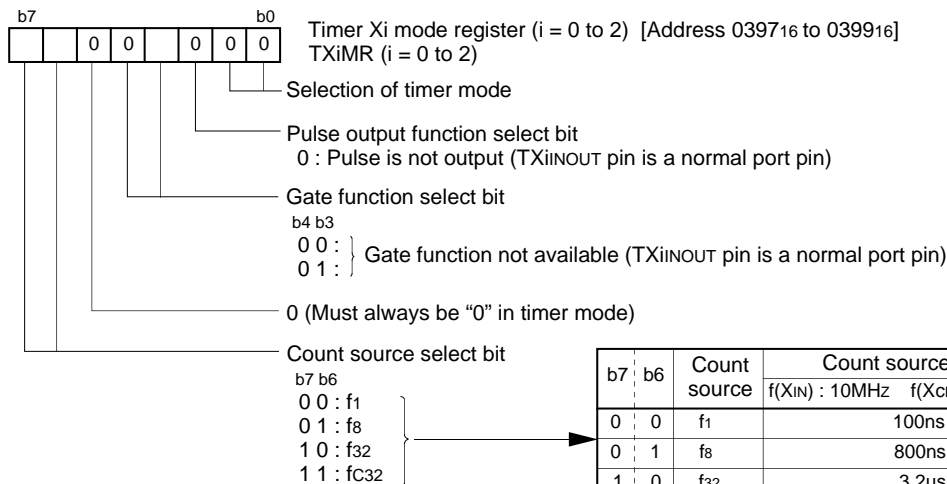


## Setting divide ratio

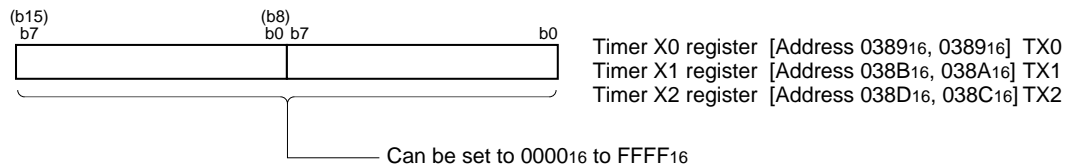


## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

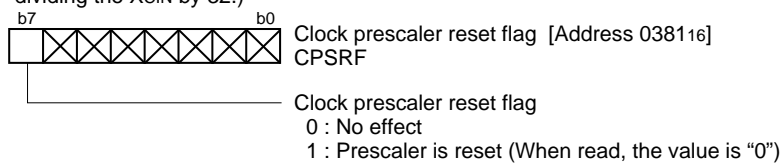

## Setting count start flag

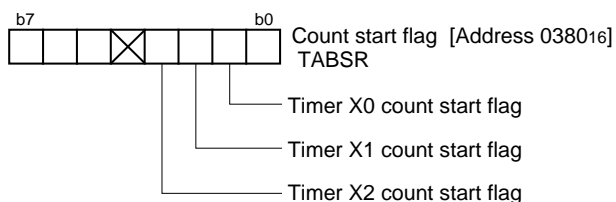

Start count

Figure 2.4.5. Set-up procedure of timer mode



## Timer X

### 2.4.3 Operation of Timer X (timer mode, gate function selected)

In timer mode, choose functions from those listed in Table 2.4.2. Operations of the circled items are described below. Figure 2.4.6 shows the operation timing, and Figure 2.4.7 shows the set-up procedure.


**Table 2.4.2. Chosed functions**

Item	Set-up	
Count source	<input type="radio"/>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function	<input type="radio"/>	No pulses output
	<input type="radio"/>	Pulses output
Gate function	<input type="radio"/>	No gate function
	<input type="radio"/>	Performs count only for the period in which the TXiINOUT pin is at "L" level
	<input type="radio"/>	Performs count only for the period in which the TXiINOUT pin is at "H" level

- Operation
- (1) When the count start flag is set to "1" and the TXiINOUT pin inputs at "H" level, the counter performs a down count on the count source.
  - (2) When the TXiINOUT pin inputs at "L" level, the counter holds its value and stops.
  - (3) If an underflow occurs, the content of the reload register is reloaded and the count continues.  
At this time, the timer Xi interrupt request bit goes to "1".
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop.

Note


- Make the pulse width of the signal input to the TXiINOUT pin not less than two cycles of the count source.

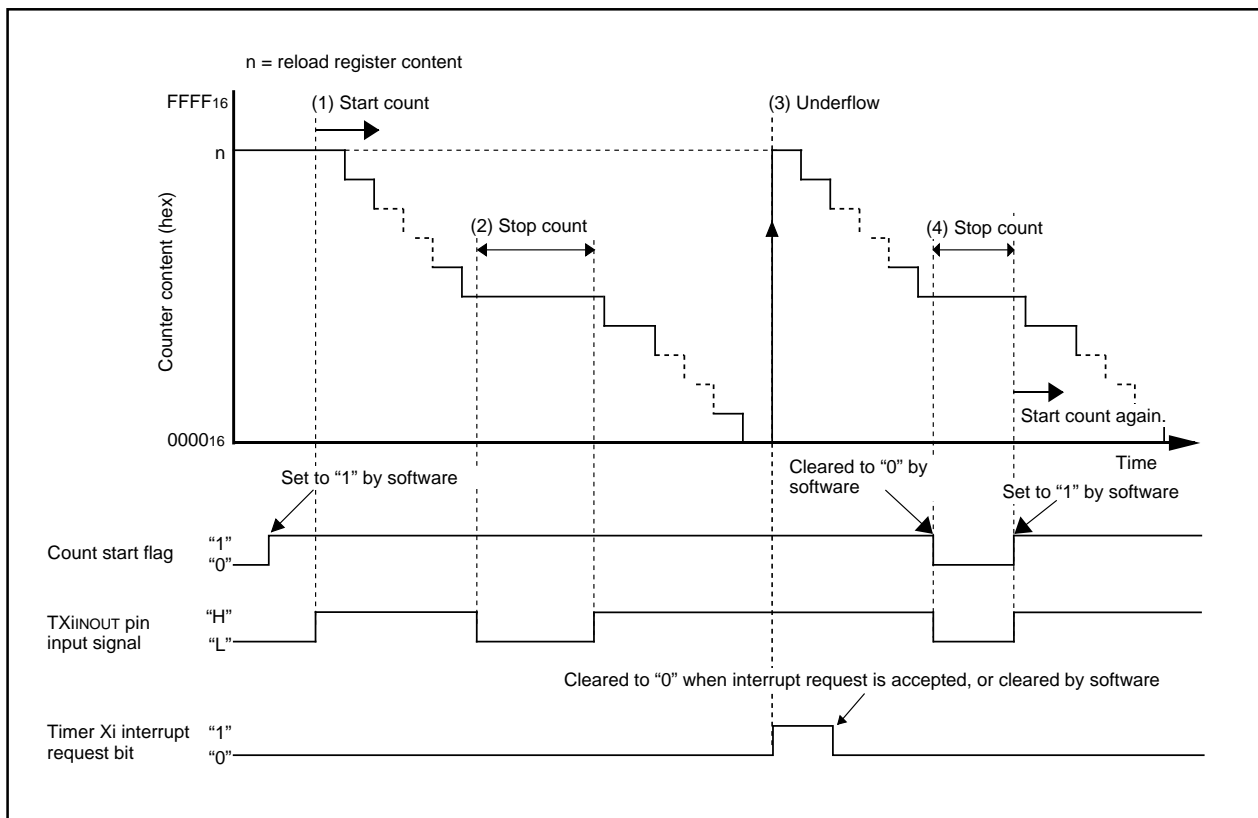

**Figure 2.4.6. Operation timing of timer mode, gate function selected**


## Timer X

## Selecting timer mode and functions

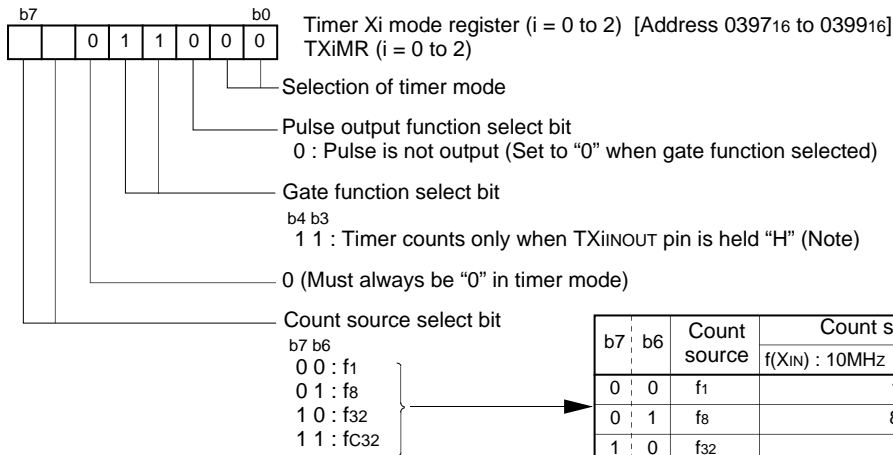


Note: Set the corresponding port direction register to "0" (input mode).

## Setting divide ratio

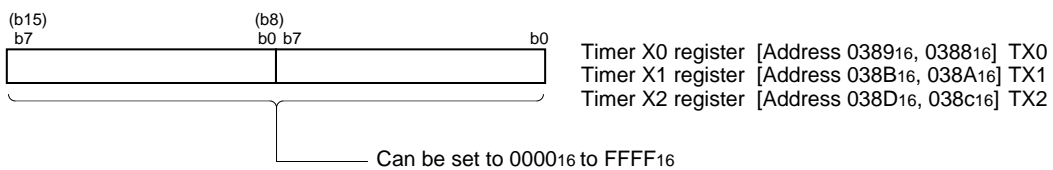


## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

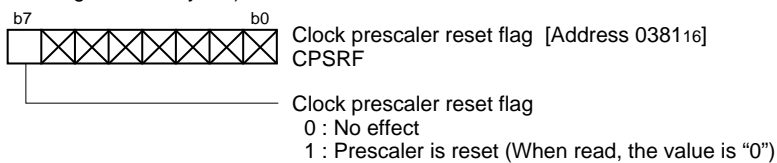

## Setting count start flag

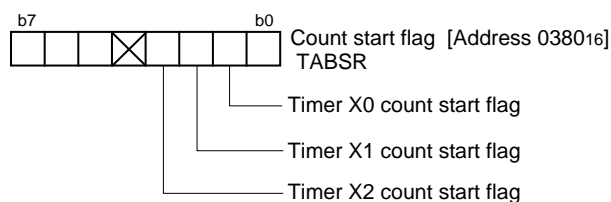

Start count

Figure 2.4.7. Set-up procedure of timer mode, gate function selected

## Timer X


### 2.4.4 Operation of Timer X (timer mode, pulse output function selected)

In timer mode, choose functions from those listed in Table 2.4.3. Operations of the circled items are described below. Figure 2.4.8 shows the operation timing, and Figure 2.4.9 shows the set-up procedure.

**Table 2.4.3. Chooosed functions**

Item	Set-up
Count source	<input type="radio"/> Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function	<input type="radio"/> No pulses output
	<input type="radio"/> Pulses output
Gate function	<input type="radio"/> No gate function
	<input type="radio"/> Performs count only for the period in which the TXiINOUT pin is at "L" level
	<input type="radio"/> Performs count only for the period in which the TXiINOUT pin is at "H" level


- Operation
- (1) Setting the count start flag to "1" causes the counter to perform a down count on the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded and the count continues. At this time, the timer Xi interrupt request bit goes to "1". Also, the output polarity of the TXiINOUT pin reverses.
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TXiINOUT pin outputs an "L" level.

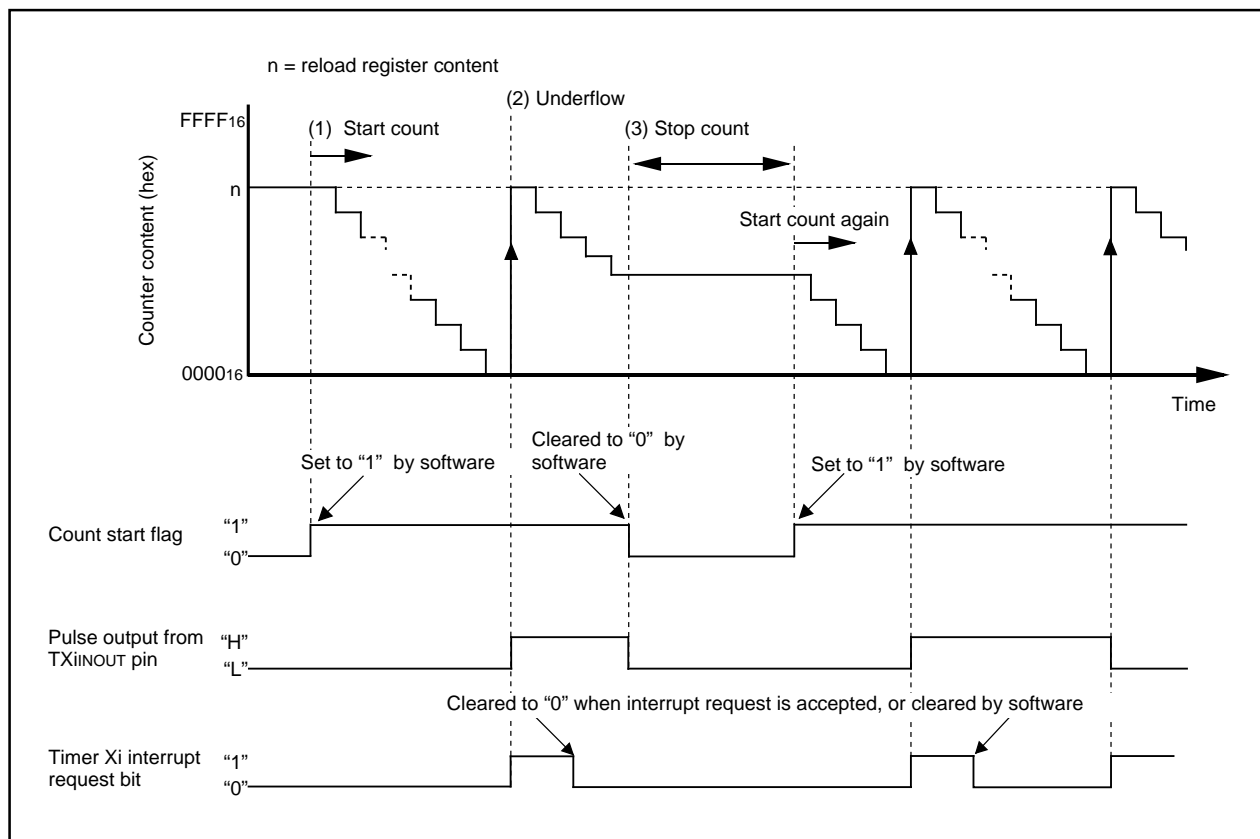

**Figure 2.4.8. Operation timing of timer mode, pulse output function selected**


## Timer X

## Selecting timer mode and functions

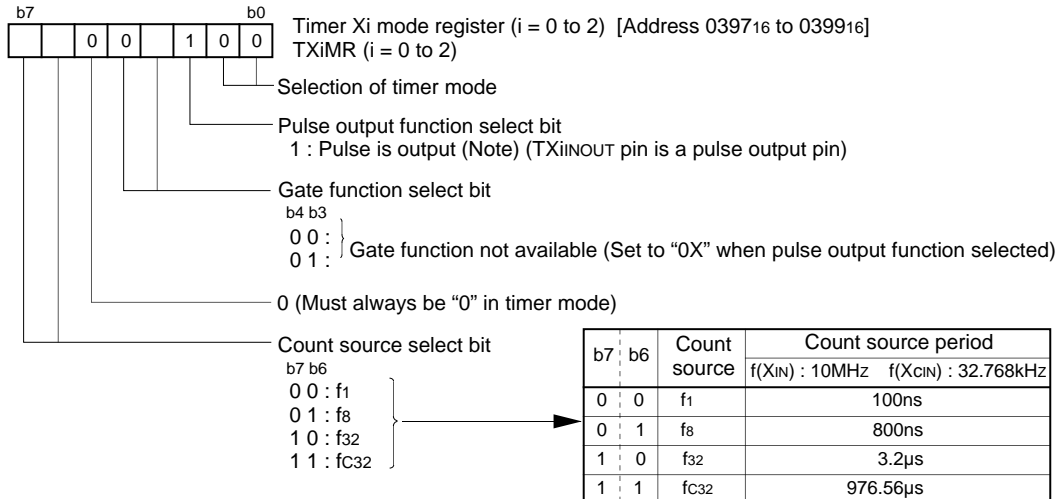


Note: Set the corresponding port direction register to "1" (output mode).

## Setting divide ratio

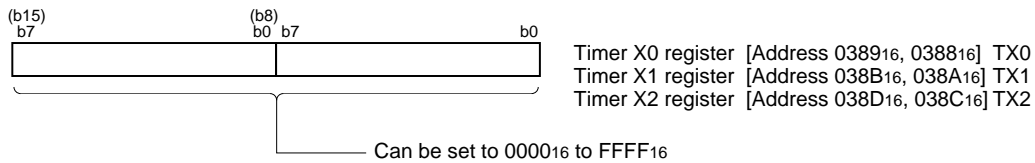


## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

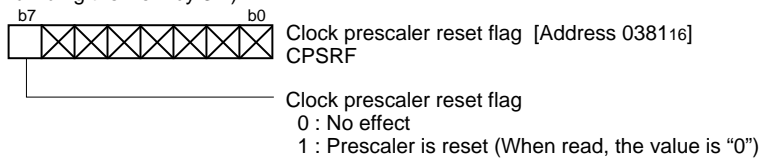

## Setting count start flag

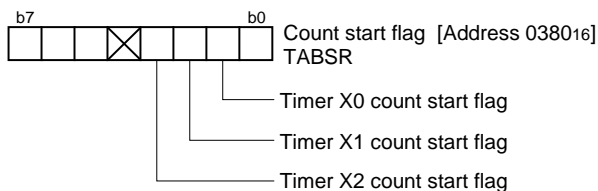

Start count

Figure 2.4.9. Set-up procedure of timer mode, pulse output function selected

## Timer X


### 2.4.5 Operation of Timer X (event counter mode, reload type selected)

In event counter mode, choose functions from those listed in Table 2.4.4. Operations of the circled items are described below. Figure 2.4.10 shows the operation timing, and Figure 2.4.11 shows the set-up procedure.

**Table 2.4.4. Chooed functions**

Item	Set-up
Count source	Input signal to TXiINOUT(counting falling edges)
	Input signal to TXiINOUT(counting rising edges)
	<input type="radio"/> Timer overflow(TB1/TA0/TXi overflow)
Pulse output function	No pulses output
	<input type="radio"/> Pulses output
Count operation type	<input type="radio"/> Reload type
	Free-run type

- Operation
- (1) Setting the count start flag to "1" causes the counter to count the falling edges of the count source.
  - (2) If an underflow occurs, the content of the reload register is reloaded, and the count continues. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.

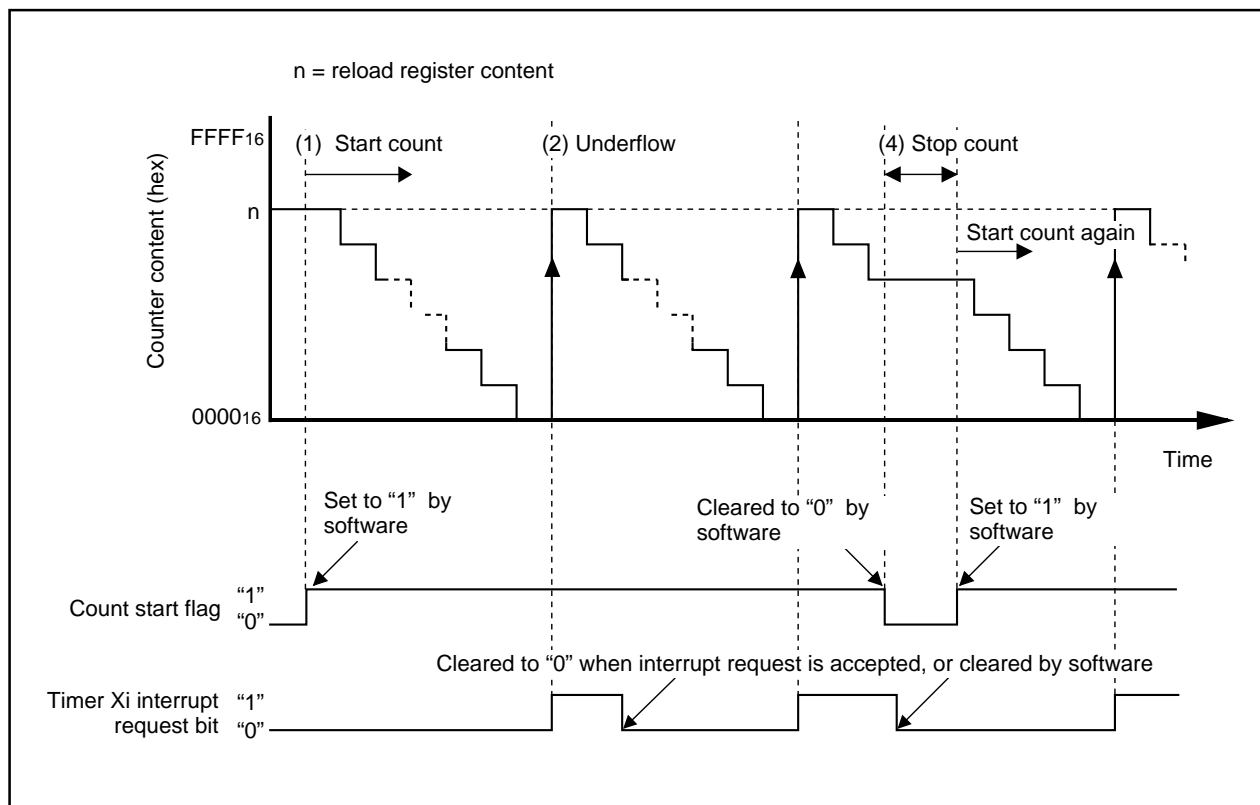

**Figure 2.4.10. Operation timing of event counter mode, reload type selected**

## Timer X

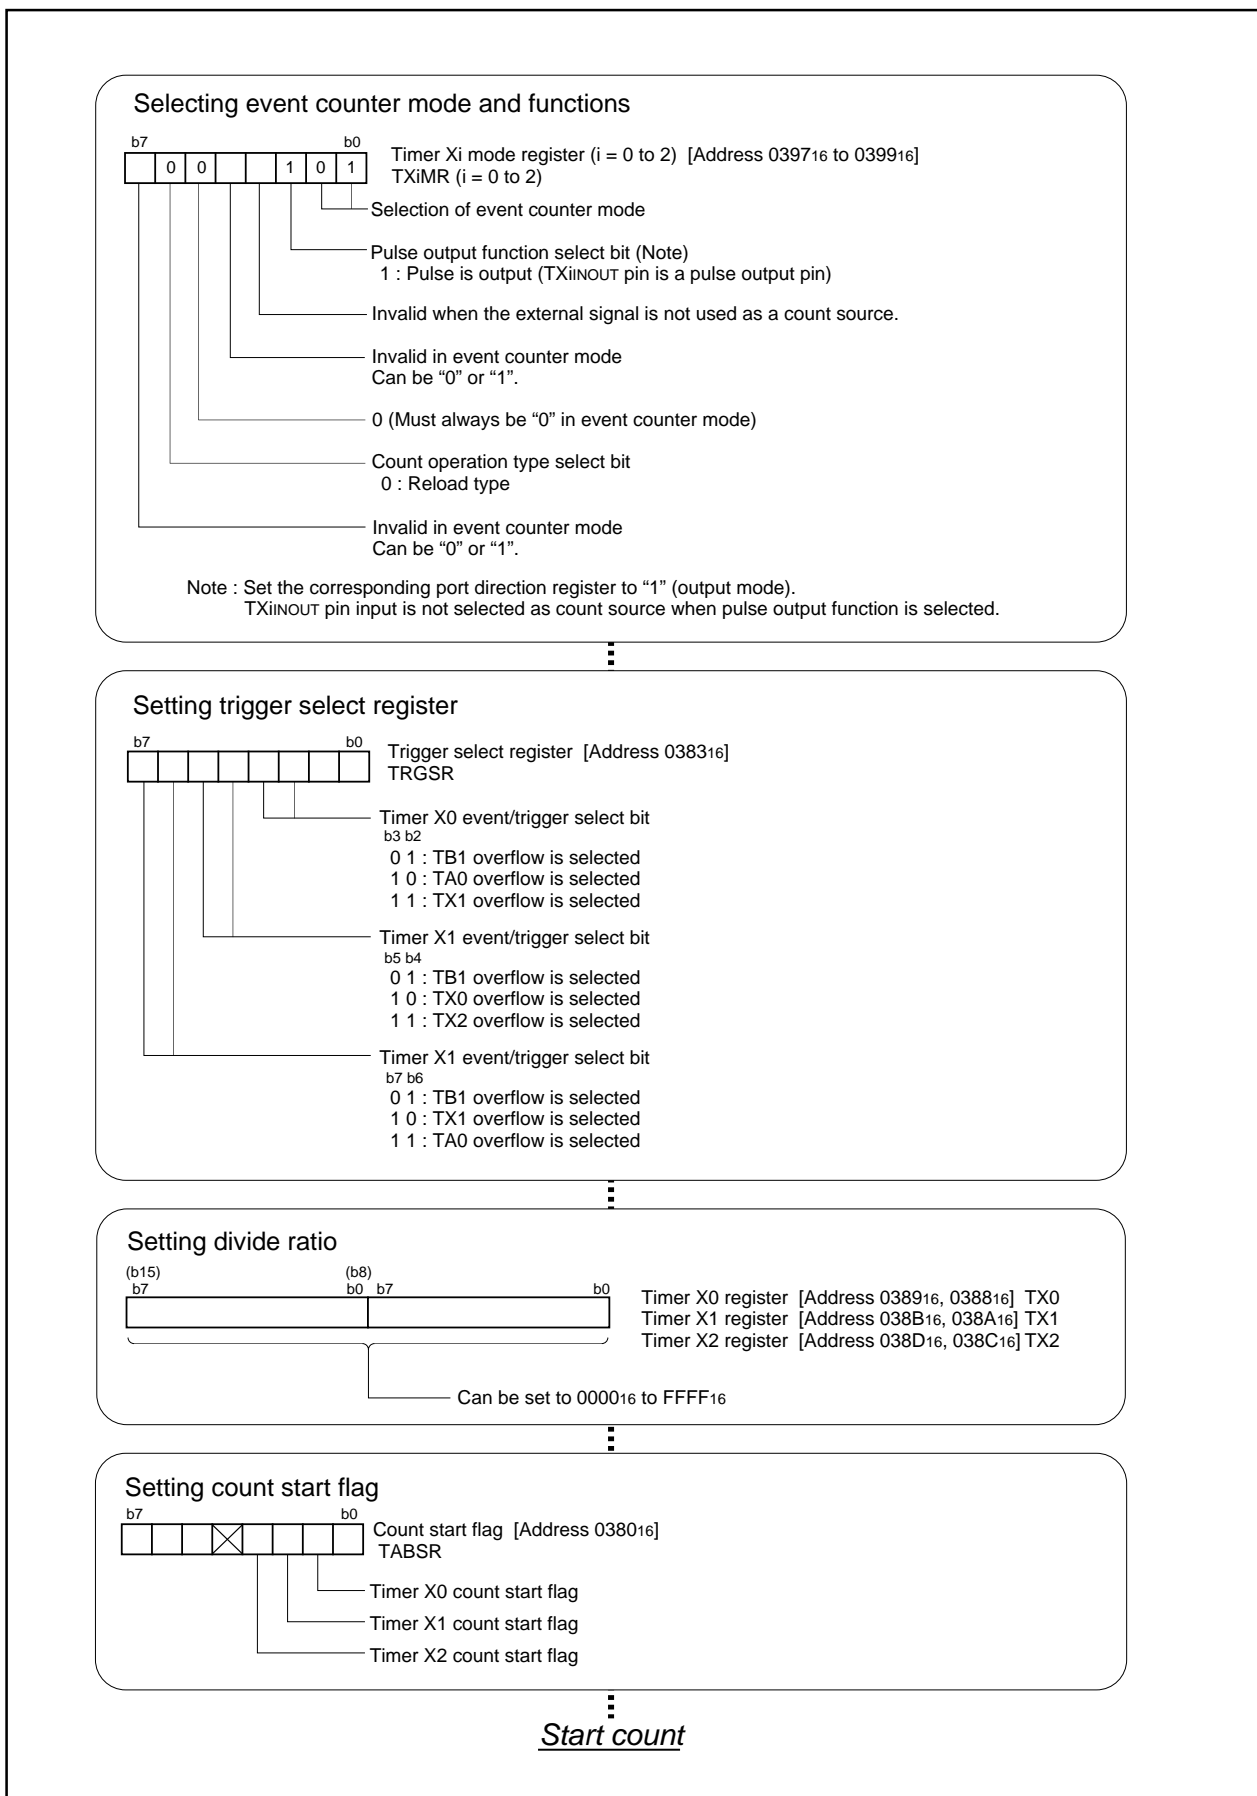


Figure 2.4.11. Set-up procedure of event counter mode, reload type selected

## Timer X


### 2.4.6 Operation of Timer X (event counter mode, free run type selected)

In event counter mode, choose functions from those listed in Table 2.4.5. Operations of the circled items are described below. Figure 2.4.12 shows the operation timing, and Figure 2.4.13 shows the set-up procedure.

**Table 2.4.5. Chosed functions**

Item	Set-up
Count source	<input type="radio"/> Input signal to TXiINOUT(counting falling edges)
	<input type="radio"/> Input signal to TXiINOUT(counting rising edges)
	<input type="radio"/> Timer overflow(TB1/TA0/TXi overflow)
Pulse output function	<input type="radio"/> No pulses output
	<input type="radio"/> Pulses output
Count operation type	<input type="radio"/> Reload type
	<input type="radio"/> Free-run type

- Operation
- (1) Setting the count start flag to "1" causes the counter to count the falling edges of the count source.
  - (2) Even if an underflow occurs, the content of the reload register is not reloaded, but the count continues. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) Setting the count start flag to "0" causes the counter to hold its value and to stop.

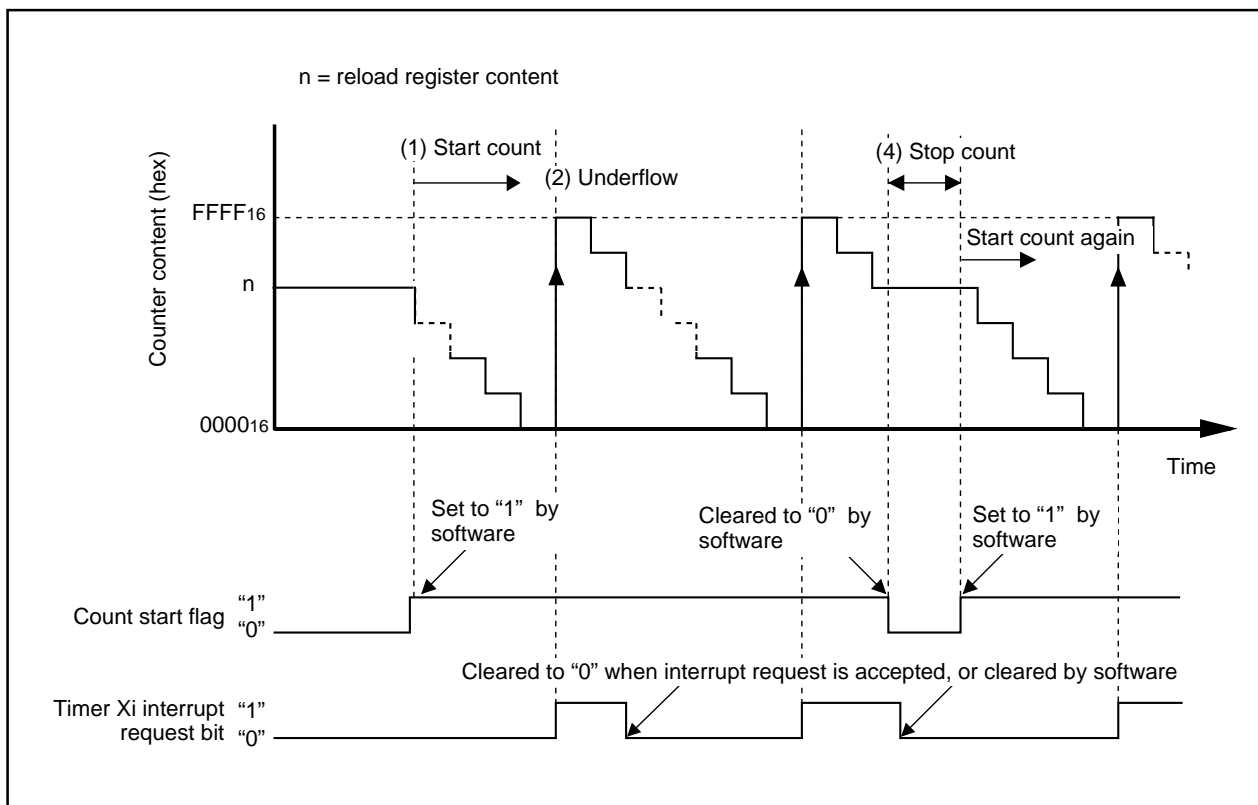

**Figure 2.4.12. Operation timing of event counter mode, free run type selected**

## Timer X

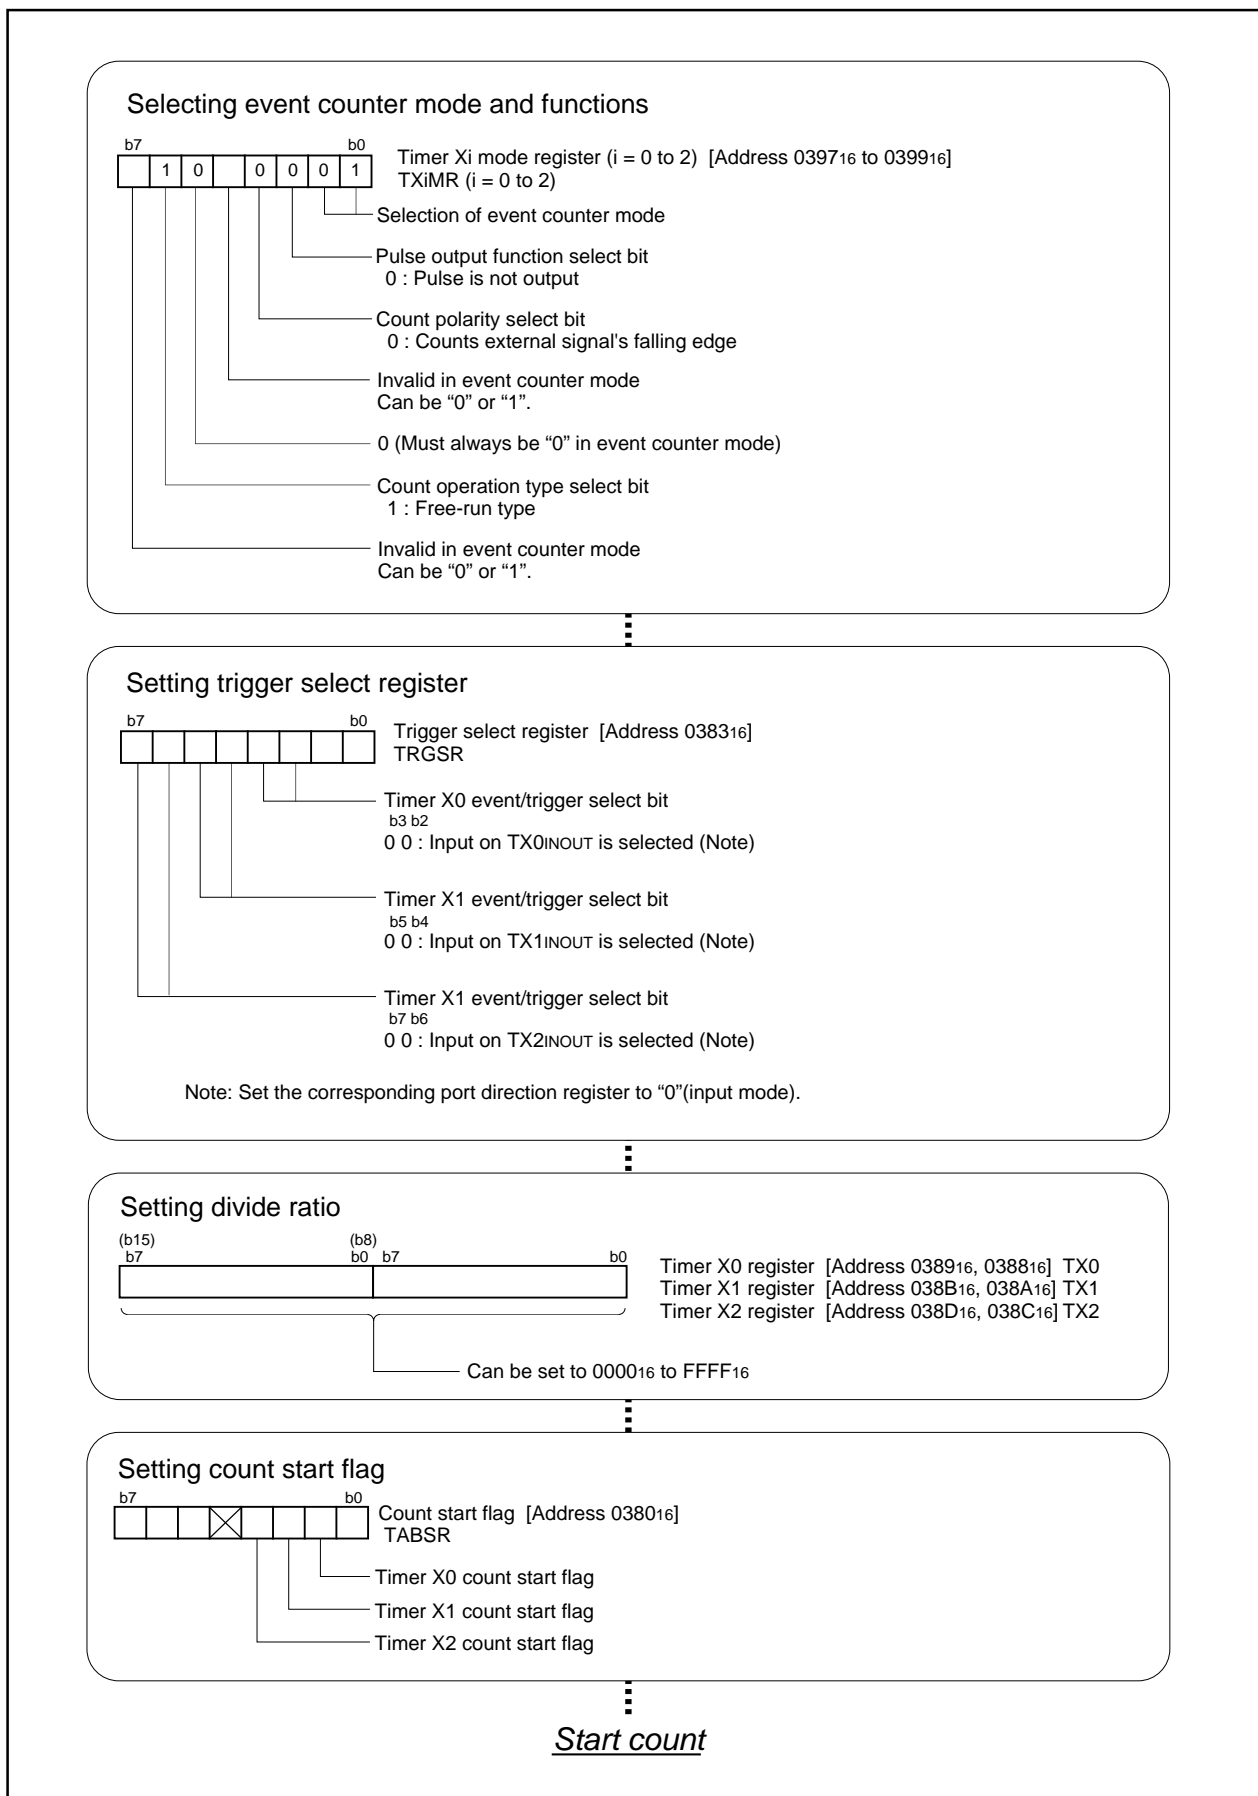


Figure 2.4.13. Set-up procedure of event counter mode, free run type selected



## Timer X

## 2.4.7 Operation of Timer X (one-shot timer mode)

In one-shot timer mode, choose functions from those listed in Table 2.4.6. Operations of the circled items are described below. Figure 2.4.14 shows the operation timing, and Figure 2.4.15 shows the set-up procedure.

Table 2.4.6. Chosed functions

Item	Set-up
Count source	○ Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Pulse output function	No pulses output
	○ Pulses output
Count start condition	External trigger input (falling edge of input signal to the TXiINOUT pin)
	External trigger input (rising edge of input signal to the TXiINOUT pin)
	Timer overflow (TB1/TX0/TXi overflow)
	○ Writing "1" to the one-shot start flag

- Operation
- (1) Setting the one-shot start flag to "1" with the count start flag set to "1" causes the counter to perform a down count on the count source. At this time, the TXiINOUT pin outputs an "H" level.
  - (2) The instant the value of the counter becomes "0000<sub>16</sub>", the TXiINOUT pin outputs an "L" level, and the counter reloads the content of the reload register and stops counting. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) If a trigger occurs while a count is in progress, the counter reloads the value in the reload register again and continues counting. The reload timing is in step with the next count source input after the trigger.
  - (4) Setting the count start flag to "0" causes the counter to stop and to reload the content of the reload register. Also, the TXiINOUT pin outputs an "L" level. At this time, the timer Xi interrupt request bit goes to "1".

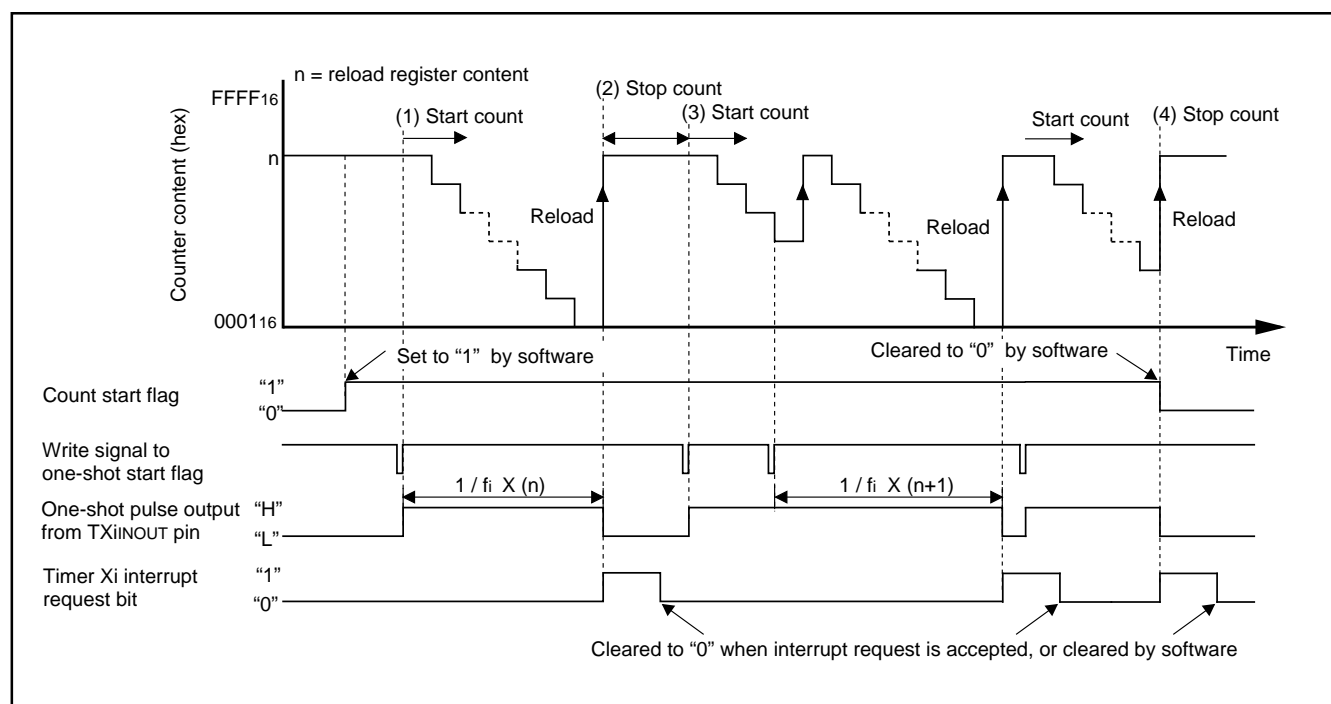


Figure 2.4.14. Operation timing of one-shot mode

## Timer X

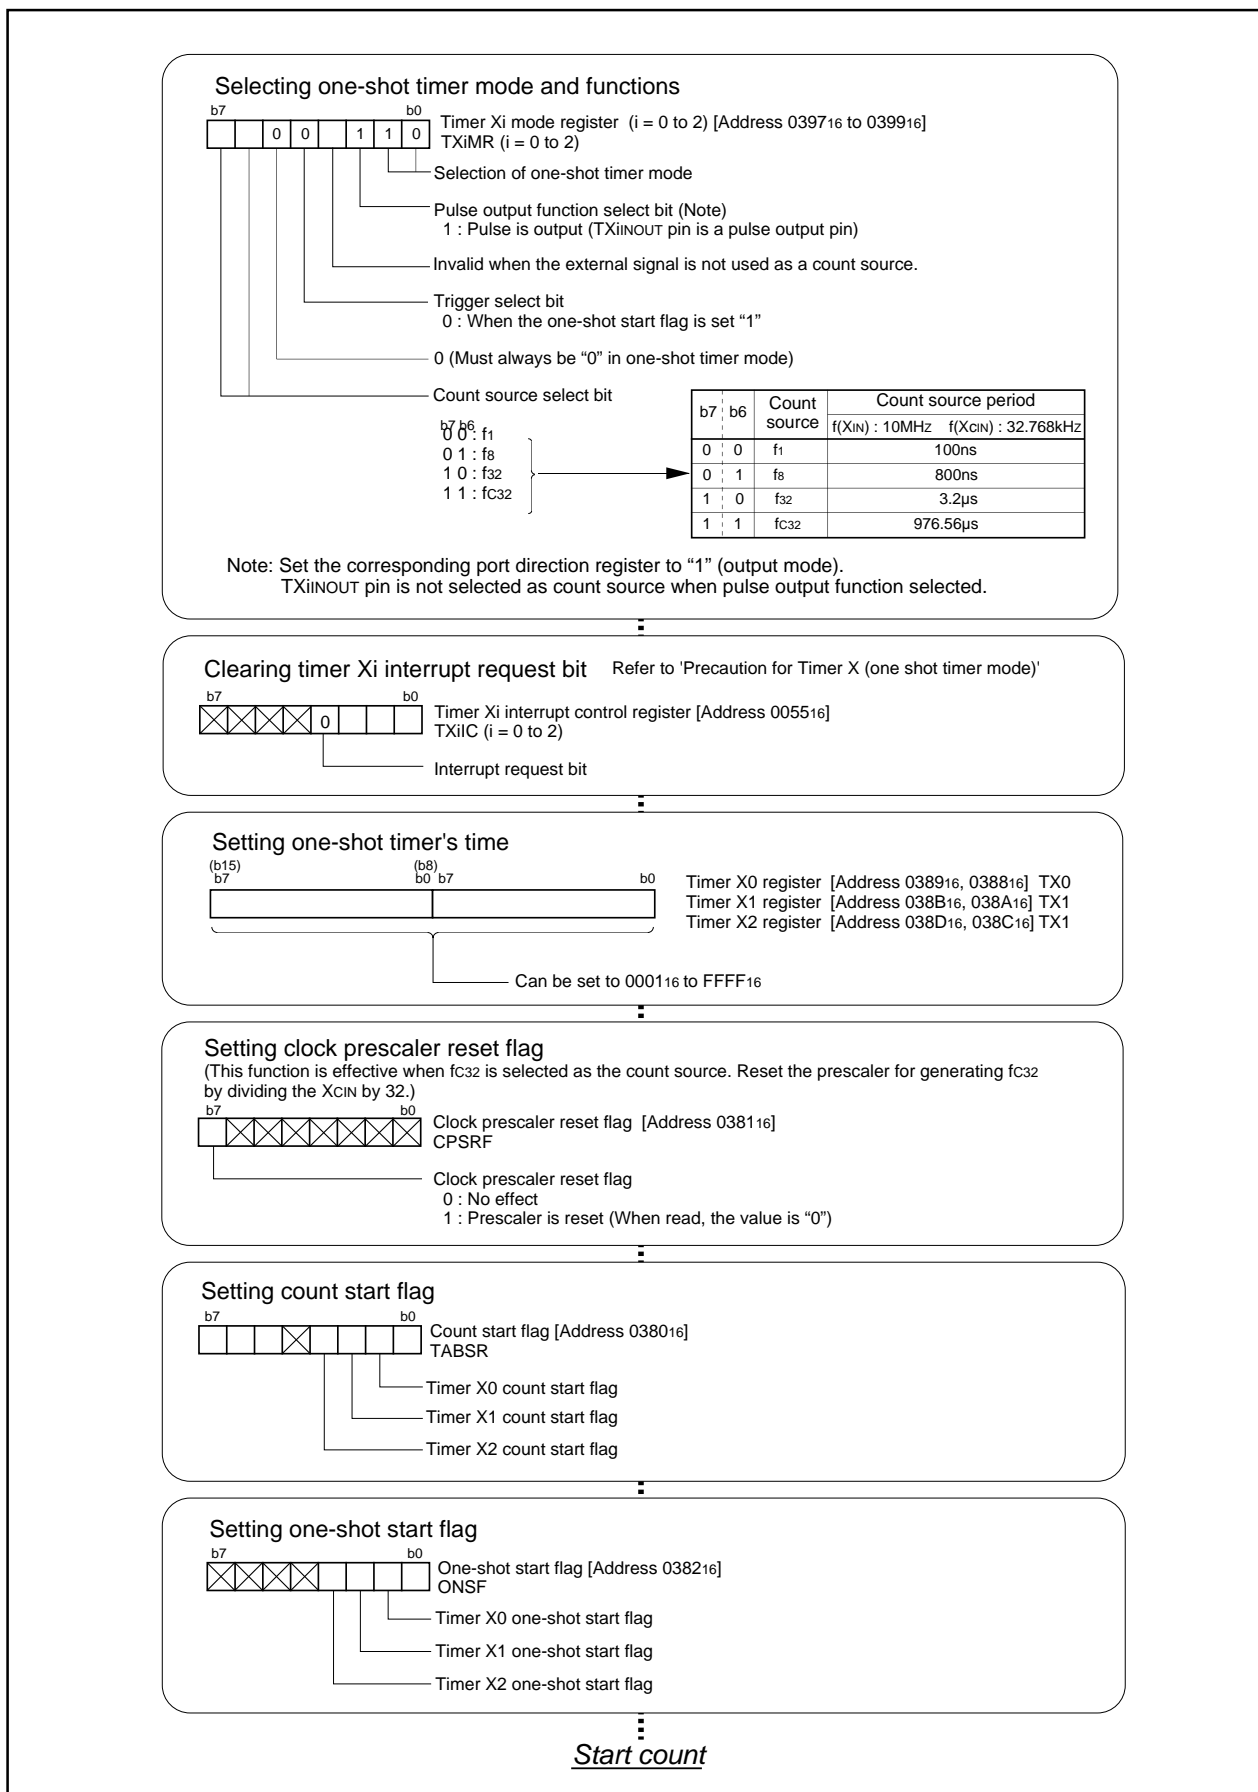


Figure 2.4.15. Set-up procedure of one-shot mode

## Timer X

## 2.4.8 Operation of Timer X (pulse period measurement mode)

In pulse period/pulse width measurement mode, choose functions from those listed in Table 2.4.7. Operations of the circled items are described below. Figure 2.4.16 shows the operation timing, and Figure 2.4.17 shows the set-up procedure.

Table 2.4.7. Chosed functions

Item	Set-up
Count source	○ Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Measurement mode	○ Pulse period measurement (interval between measurement pulse falling edge to falling edge)
	Pulse period measurement (interval between measurement pulse rising edge to rising edge)
	Pulse width measurement (interval between measurement pulse falling edge to rising edge, and between rising edge to falling edge)

- Operation
- (1) Setting the count start flag to "1" causes the counter to start counting the count source.
  - (2) If a measurement pulse changes from "H" to "L", the value of the counter goes to "0000<sub>16</sub>", and measurement is started. In this instance, an indeterminate value is transferred to the reload register. The timer Xi interrupt request does not generate.
  - (3) If a measurement pulse changes from "H" to "L" again, the value of the counter is transferred to the reload register, and the timer Xi interrupt request bit goes to "1". Then the value of the counter becomes "0000<sub>16</sub>", and the measurement is started again.

- Note
- The timer Xi interrupt request bit goes to "1" when an effective edge of a measurement pulse is input or timer Xi is overflowed. The factor of interrupt request can be determined by use of the timer Xi overflow flag within the interrupt routine.
  - The value of the counter at the beginning of a count is indeterminate. Thus there can be instances in which the timer Xi overflow flag goes to "1" immediately after a count is performed.
  - The timer Xi overflow flag goes to "0" if timer Xi mode register is written to when the count start flag is "1". This flag cannot be set to "1" by software.


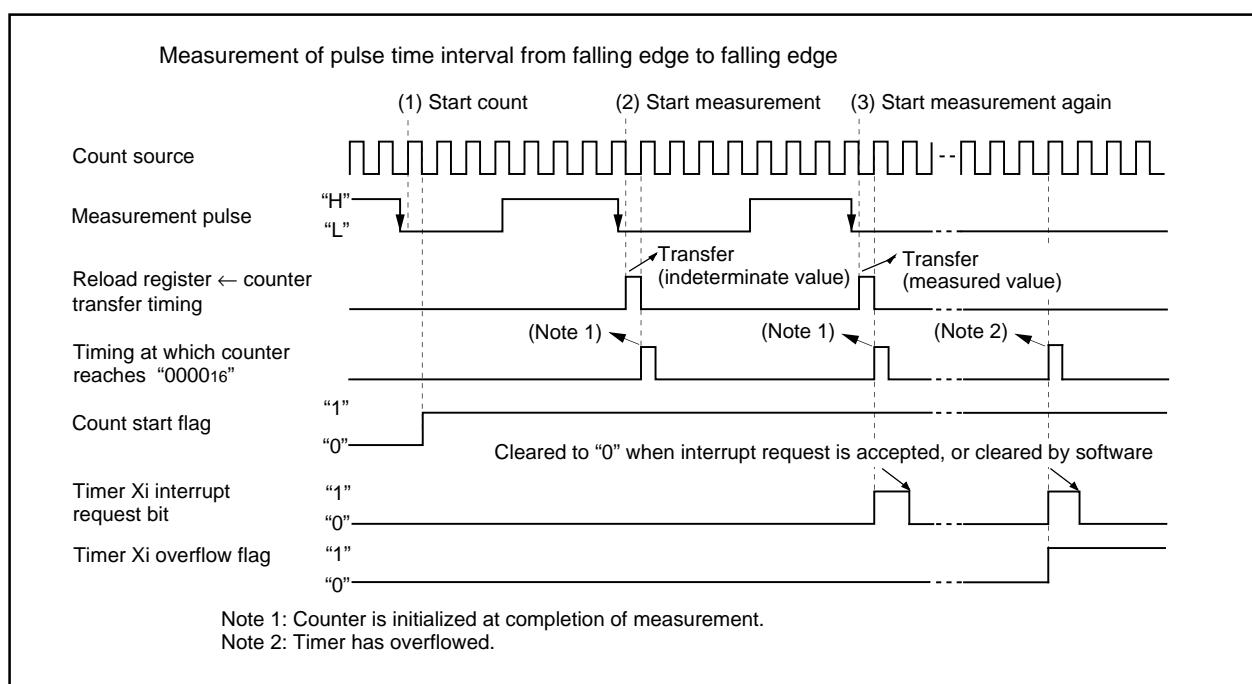


Figure 2.4.16. Operation timing of pulse period measurement mode

## Timer X


## Selecting pulse period / pulse width measurement mode and functions

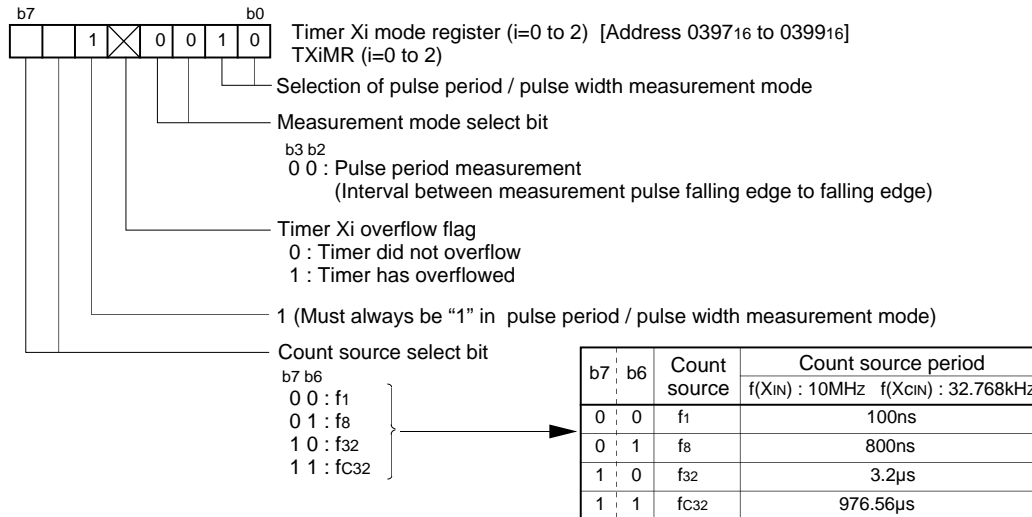


Note: Set the corresponding port direction register which sets the measurement pulse to "0" (input mode).

## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

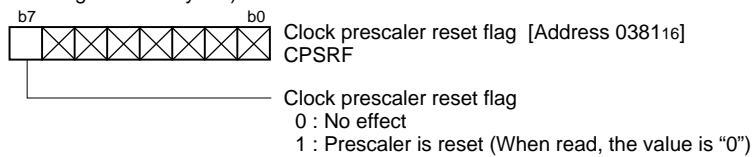

## Setting count start flag

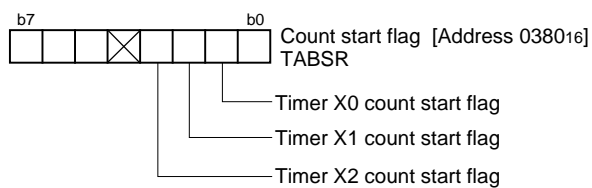

Start count

## Clearing overflow flag

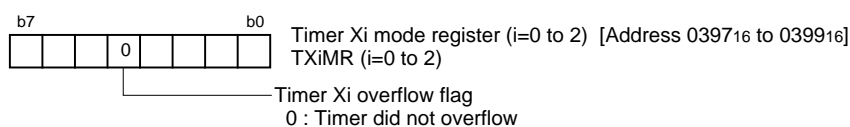


Figure 2.4.17. Set-up procedure of pulse period measurement mode

## Timer X

## 2.4.9 Operation of Timer X (pulse width measurement mode)

In pulse period/pulse width measurement mode, choose functions from those listed in Table 2.4.8. Operations of the circled items are described below. Figure 2.4.18 shows the operation timing, and Figure 2.4.19 shows the set-up procedure.

Table 2.4.8. Chooed functions

Item	Set-up	
Count source	○	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
Measurement mode		Pulse period measurement (interval between measurement pulse falling edge to falling edge)
		Pulse period measurement (interval between measurement pulse rising edge to rising edge)
	○	Pulse width measurement (interval between measurement pulse falling edge to rising edge, and between rising edge to falling edge)

- Operation
- (1) Setting the count start flag to "1" causes the counter to start counting the count source.
  - (2) If an effective edge of a pulse to be measured is input, the value of the counter goes to "000016", and measurement is started. In this instance, an indeterminate value is transferred to the reload register. The timer Xi interrupt request does not generate.
  - (3) If an effective edge of a pulse to be measured is input again, the value of the counter is transferred to the reload register, and the timer Xi interrupt request bit goes to "1". Then the value of the counter becomes "000016", and measurement is started again.

- Note
- The timer Xi interrupt request bit goes to "1" when an effective edge of a pulse to be measured is input or timer Xi is overflows. The factor of interrupt request can be determined by use of the timer Xi overflow flag within the interrupt routine.
  - The value of the counter at the beginning of a count is indeterminate. Thus there can be instances in which the timer Xi overflow flag goes to "1" immediately after a count is performed.
  - The timer Xi overflow flag goes to "0" if timer Xi mode register is written to when the count start flag is "1". This flag cannot be set to "1" by software.


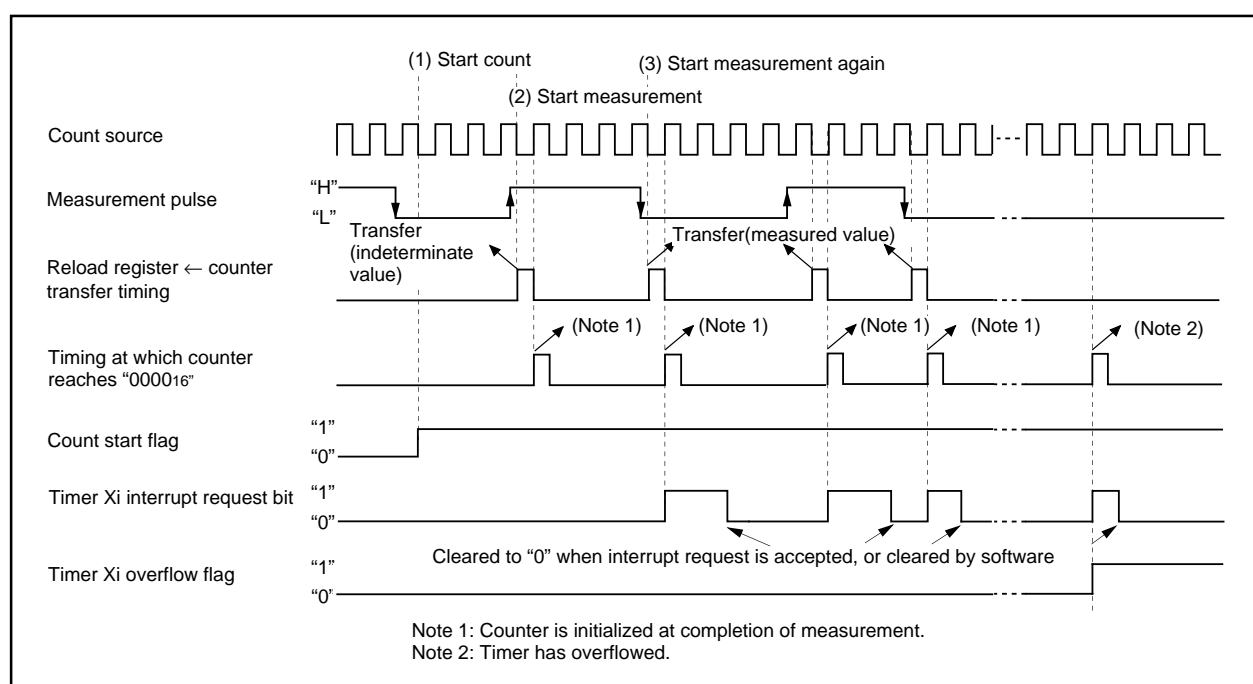


Figure 2.4.18. Operation timing of pulse width measurement mode

## Timer X


## Selecting pulse period / pulse width measurement mode and functions

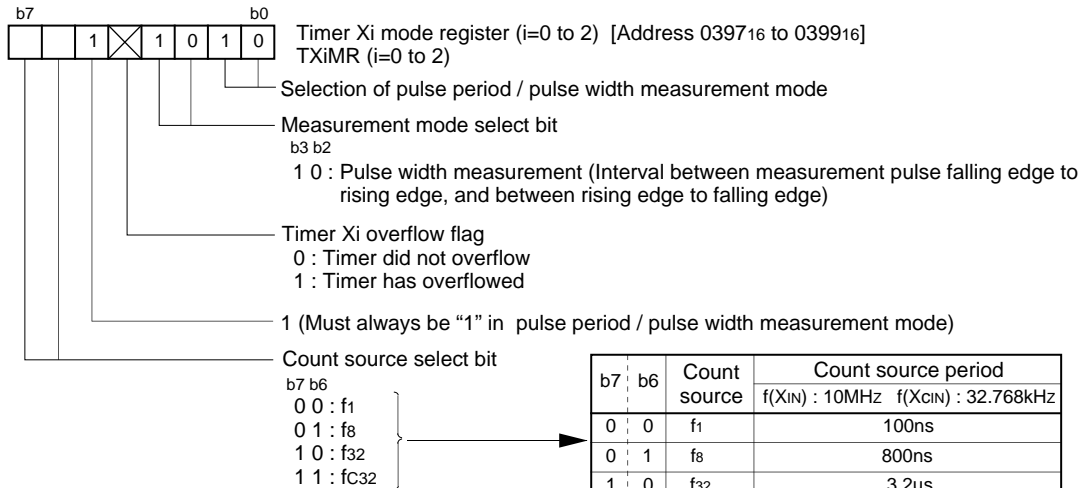


Note: Set the corresponding port direction register which sets the measurement pulse to "0" (input mode).

## Setting clock prescaler reset flag

(This function is effective when f<sub>c32</sub> is selected as the count source. Reset the prescaler for generating f<sub>c32</sub> by dividing the X<sub>CIN</sub> by 32.)

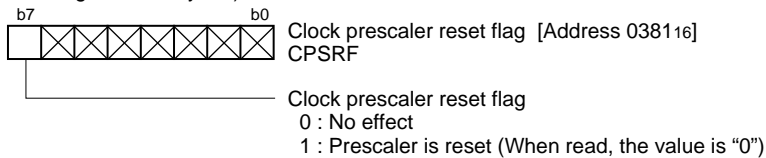

## Setting count start flag

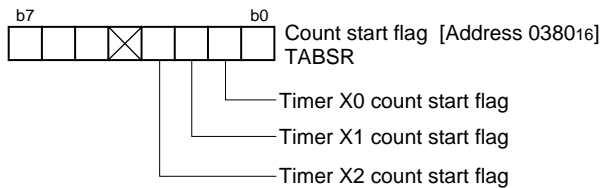

Start count

## Clearing overflow flag

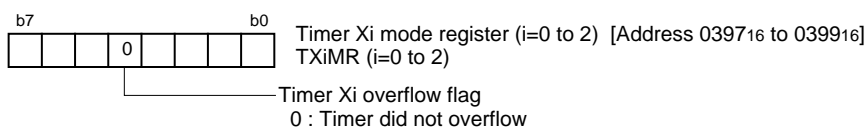


Figure 2.4.19. Set-up procedure of pulse width measurement mode

## Timer X

**2.4.10 Operation of Timer X (pulse width modulation mode, 16-bit PWM mode selected)**

In pulse width modulation mode, choose functions from those listed in Table 2.4.9. Operations of the circled items are described below. Figure 2.4.20 shows the operation timing, and Figure 2.4.21 shows the set-up procedure.

**Table 2.4.9. Chooed functions**


Item	Set-up	
Count source	<b>O</b>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
PWM mode	<b>O</b>	16-bit PWM
		8-bit PWM
Count start condition	<b>O</b>	Timer overflow (TB1/TA0/TXi overflow)

- Operation
- (1) Selected timer overflow is generated with the count start flag set to "1", the counter performs a down count on the count source. Also, the TXiINOUT pin outputs an "H" level.
  - (2) The TXiINOUT pin output level changes from "H" to "L" when a set time period elapses. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) The counter reloads the content of the reload register every time PWM pulses are output for one cycle, and continues counting.
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TXiINOUT outputs an "L" level.

Note

- PWM pulse cycle is  $(2^{16} - 1)/f_i$ , whereas "H" level duration is  $n/f_i$ . However, when "0000<sub>16</sub>" is set for the timer A0 register, the PWM output is "L" level for the entire period, and an interrupt request is generated for every PWM output cycle. Also, when "FFFF<sub>16</sub>" is set for the timer A0 register, the PWM output is "H" level for the entire period, and an interrupt request is generated for every PWM output cycle.

( $f_i$ : Count source frequency  $f_1, f_8, f_{32}, f_{c32}$   $n$ : Timer value)

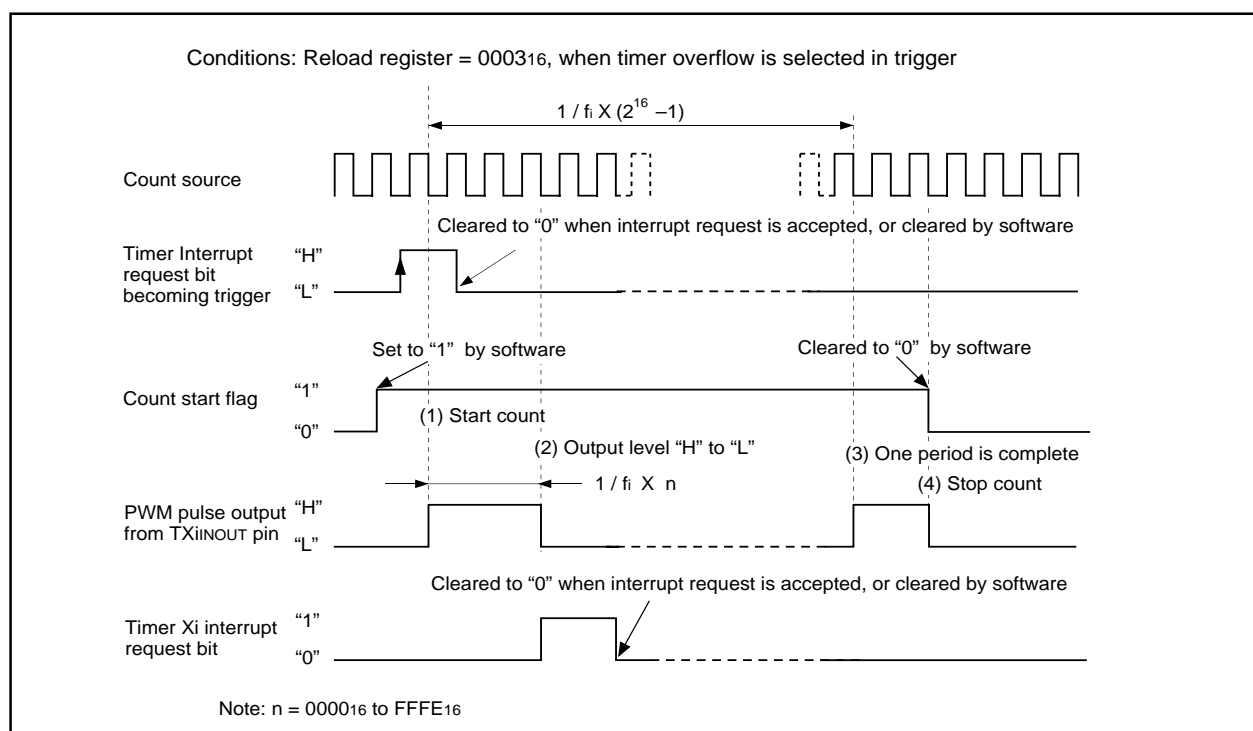**Figure 2.4.20. Operation timing of pulse width modulation mode, 16-bit PWM mode selected**

## Timer X

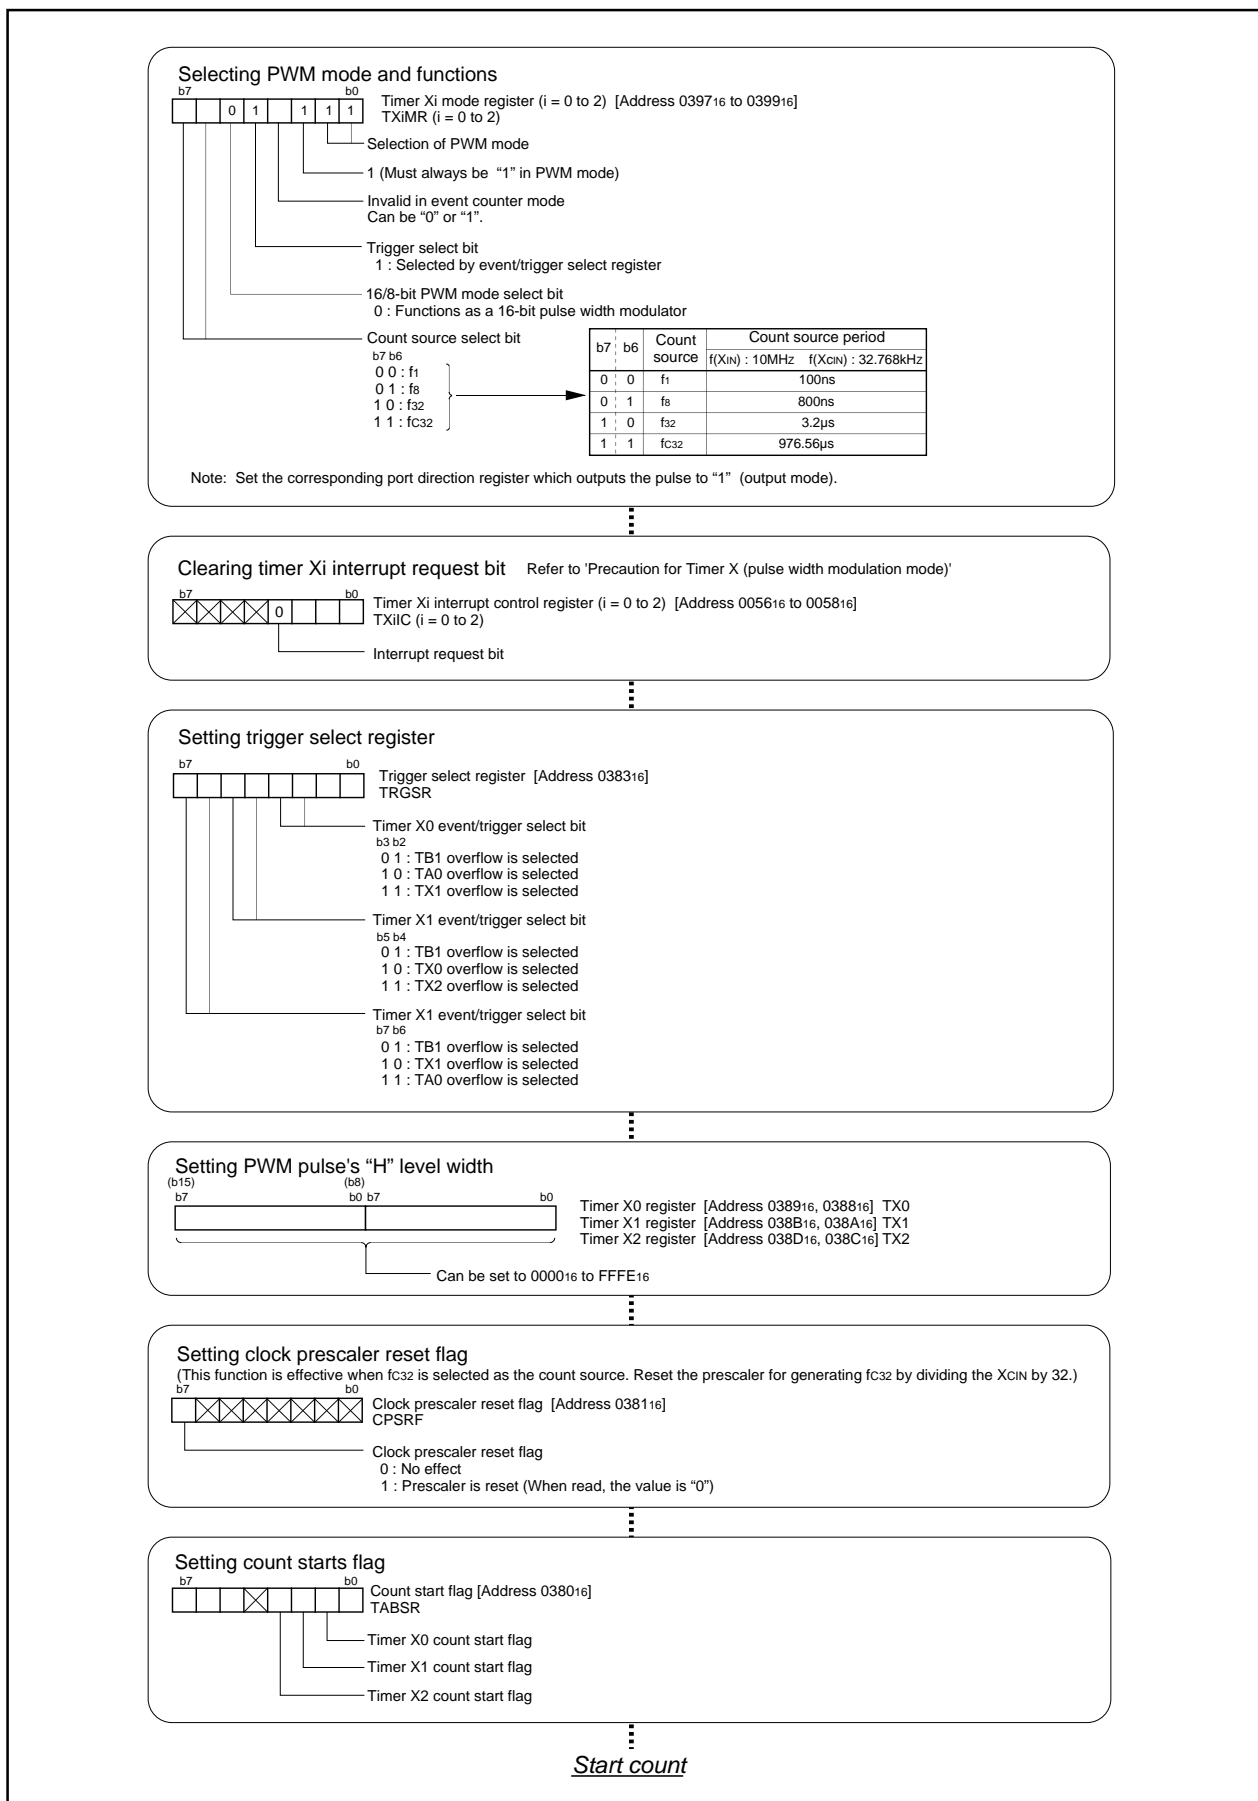


Figure 2.4.21. Set-up procedure of pulse width modulation mode, 16-bit PWM mode selected



## Timer X

## 2.4.11 Operation of Timer X (pulse width modulation mode, 8-bit PWM mode selected)

In pulse width modulation mode, choose functions from those listed in Table 2.4.10. Operations of the circled items are described below. Figure 2.4.22 shows the operation timing, and Figure 2.4.22 shows the set-up procedure.

Table 2.4.10. Chosed functions

Item	Set-up	
Count source	<input type="radio"/>	Internal count source ( $f_1 / f_8 / f_{32} / f_{c32}$ )
PWM mode	<input type="radio"/>	16-bit PWM
	<input type="radio"/>	8-bit PWM
Count start condition	<input type="radio"/>	Timer overflow (TB1/TA0/TXi overflow)

- Operation
- (1) Selected timer overflow is generated with the count start flag set to "1", the counter performs a down count on the count source. Also, the TXiINOUT pin outputs an "H" level.
  - (2) The TXiINOUT pin output level changes from "H" to "L" when a set time period elapses. At this time, the timer Xi interrupt request bit goes to "1".
  - (3) The counter reloads the content of the reload register every time PWM pulses are output for one cycle, and continues counting.
  - (4) Setting the count start flag to "0" causes the counter to hold its value and to stop. Also, the TXiOUT pin outputs an "L" level.

- Note
- PWM pulse cycle is  $(m + 1) \times (2^8 - 1) / f_i$ , whereas "H" level duration is  $n \times (m + 1) / f_i$ . However, when "0016" is set for the significant 8 bits of the timer A0 register, the PWM output is "L" level for the entire period, and an interrupt request is generated for every PWM output cycle. Also, when "FF16" is set for the significant 8 bits of the timer A0 register, the PWM output is "H" level for the entire period, and an interrupt request is generated for every PWM output cycle. ( $f_i$ : Count source frequency  $f_1, f_8, f_{32}, f_{c32}$   $n$ : Timer value)


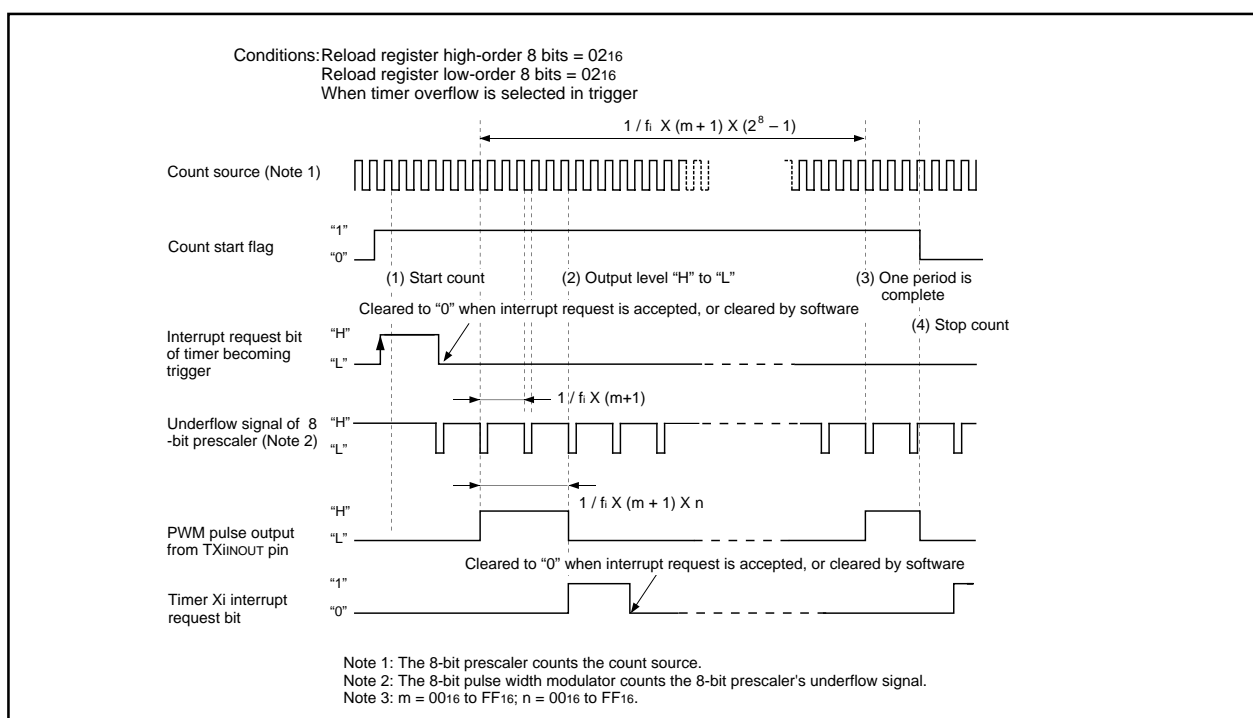


Figure 2.4.22. Operation timing of pulse width modulation mode, with 8-bit PWM mode selected

## Timer X

## Selecting PWM mode and functions


Timer Xi mode register (i = 0 to 2) [Address 0397<sub>16</sub> to 0399<sub>16</sub>]  
TXIMR (i = 0 to 2)

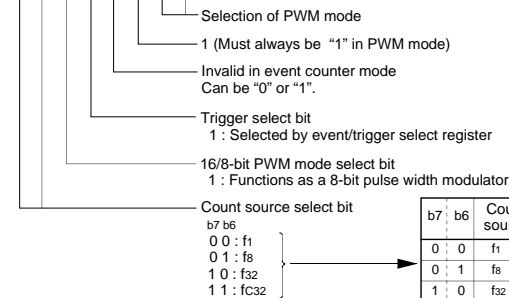

Note: Set the corresponding port direction register which outputs the pulse to "1" (output mode).


## Clearing timer Xi interrupt request bit

Refer to 'Precaution for Timer X (pulse width modulation mode)'



## Setting trigger select register

Trigger select register [Address 0383<sub>16</sub>]  
TRGSR

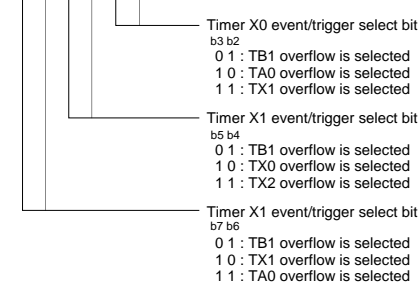


## Setting PWM pulse's "H" level width

Timer X0 register [Address 0389<sub>16</sub>, 038B<sub>16</sub>] TX0  
Timer X1 register [Address 038B<sub>16</sub>, 038A<sub>16</sub>] TX1  
Timer X2 register [Address 038D<sub>16</sub>, 038C<sub>16</sub>] TX2

Can be set to 0000<sub>16</sub> to FFFE<sub>16</sub>

## Setting clock prescaler reset flag

(This function is effective when fc<sub>32</sub> is selected as the count source. Reset the prescaler for generating fc<sub>32</sub> by dividing the X<sub>CIN</sub> by 32.)



## Setting count starts flag

Count start flag [Address 0380<sub>16</sub>]  
TABSR



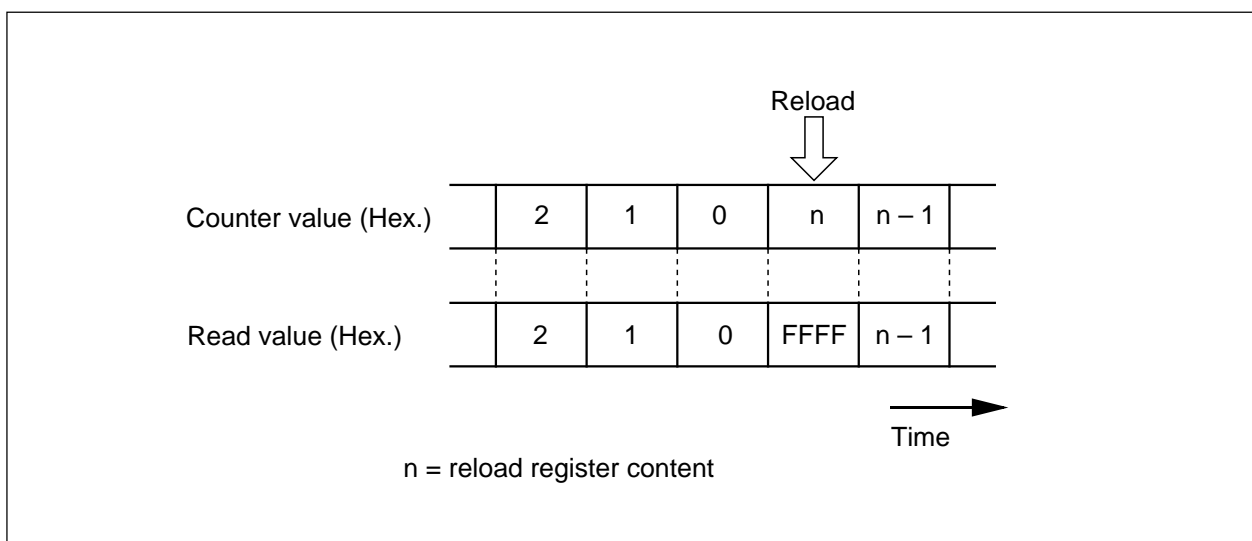
Start count

Figure 2.4.23. Set-up procedure of pulse width modulation mode, 8-bit PWM mode selected

## Timer X

**2.4.12 Precautions for Timer X (timer mode, event counter mode)**

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer Xi register, then set the flag to "1".
- (2) Reading the timer Xi register while a count is in progress allows reading, with arbitrary timing, the value of the counter. Reading the timer Xi register with the reload timing shown in Figure 2.4.24 gets "FFFF<sub>16</sub>". Reading the timer Xi register after setting a value in the timer Xi register with a count halted but before the counter starts counting gets a proper value.

**Figure 2.4.24. Reading timer Xi register**

### 2.4.13 Precautions for Timer X (one-shot timer mode)

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer Xi register, then set the flag to "1".
- (2) Setting the count start flag to "0" while a count is in progress causes as follows:
  - The counter stops counting and a content of reload register is reloaded.
  - The TXiINOUT pin outputs "L" level.
  - The interrupt request generated and the timer Xi interrupt request bit goes to "1".
- (3) The timer Xi interrupt request bit goes to "1" if the timer's operation mode is set using any of the following procedures:
  - Selecting one-shot timer mode after reset.
  - Changing operation mode from timer mode to one-shot timer mode.
  - Changing operation mode from event counter mode to one-shot timer mode.Therefore, to use timer Xi interrupt (interrupt request bit), set timer Xi interrupt request bit to "0" after the above listed changes have been made.
- (4) If a trigger occurs while a count is in progress, after the counter performs one down count following the reoccurrence of a trigger, the reload register contents are reloaded, and the count continues. To generate a trigger while a count is in progress, generate the second trigger after an elapse longer than one cycle of the timer's count source after the previous trigger occurred.


#### 2.4.14 Precautions for Timer X (pulse period/pulse width measurement mode)

- (1) The timer Xi interrupt request bit goes to "1" when an effective edge of a measurement pulse is input or timer Xi is overflowed. The factor of interrupt request can be determined by use of the timer Xi overflow flag within the interrupt routine.
- (2) If the timer overflow occurs simultaneously with the input of a measurement pulse, and if the interrupt factor cannot be determined from the timer Xi overflow flag, connect the timers and count the number of overflows.
- (3) When reset, the timer Xi overflow flag goes to "1". This flag cannot be set to "0" by writing to the timer Xi mode register when the count start flag is "1".
- (4) Use the timer Xi interrupt request bit to detect only overflows. Use the timer Xi overflow flag only to determine the interrupt factor within the interrupt routine.
- (5) When the first effective edge is input after a count is started, an indeterminate value is transferred to the reload register. At this time, timer Xi interrupt request is not generated.
- (6) The value of the counter is indeterminate at the beginning of a count. Therefore the timer Xi overflow flag may go to "1" immediately after a count is started.
- (7) If changing the measurement mode select bit is set after a count is started, the timer Xi interrupt request bit goes to "1".
- (8) If the input signal to the TXiINOUT pin is affected by noise, precise measurement may not be performed in some cases. It is recommended to see that measurements fall within a specific range by use of software.
- (9) For pulse width measurement, pulse widths are successively measured. Use software to check whether the measurement result is an "H" level width or an "L" level width.

## Timer X

**2.4.15 Precautions for Timer X (pulse width modulation mode)**

- (1) To clear reset, the count start flag is set to "0". Set a value in the timer Xi register, then set the flag to "1".
- (2) The timer Xi interrupt request bit becomes "1" if setting operation mode of the timer in compliance with any of the following procedures:
  - Selecting PWM mode after reset.
  - Changing operation mode from timer mode to PWM mode.
  - Changing operation mode from event counter mode to PWM mode.
 Therefore, to use timer Xi interrupt (interrupt request bit), set timer Xi interrupt request bit to "0" after the above listed changes have been made.
- (3) Setting the count start flag to "0" while PWM pulses are being output causes the counter to stop counting. If the TXiINOUT pin is outputting an "H" level in this instance, the output level goes to "L", and the timer Xi interrupt request bit goes to "1". If the TXiINOUT pin is outputting an "L" level in this instance, the level does not change, and the timer Xi interrupt request bit does not become "1".
- (4) Normal PWM output is restored according to the interrupt request generate timing, both in the case of 16-bit PWM and 8-bit PWM, when PWM output is either "H" or "L" level for the entire period. This holds only when a value other than "0000<sub>16</sub>" or "FFFF<sub>16</sub>" is set during 16-bit PWM, or a value other than "00<sub>16</sub>" or "FF<sub>16</sub>" is set during 8-bit PWM.

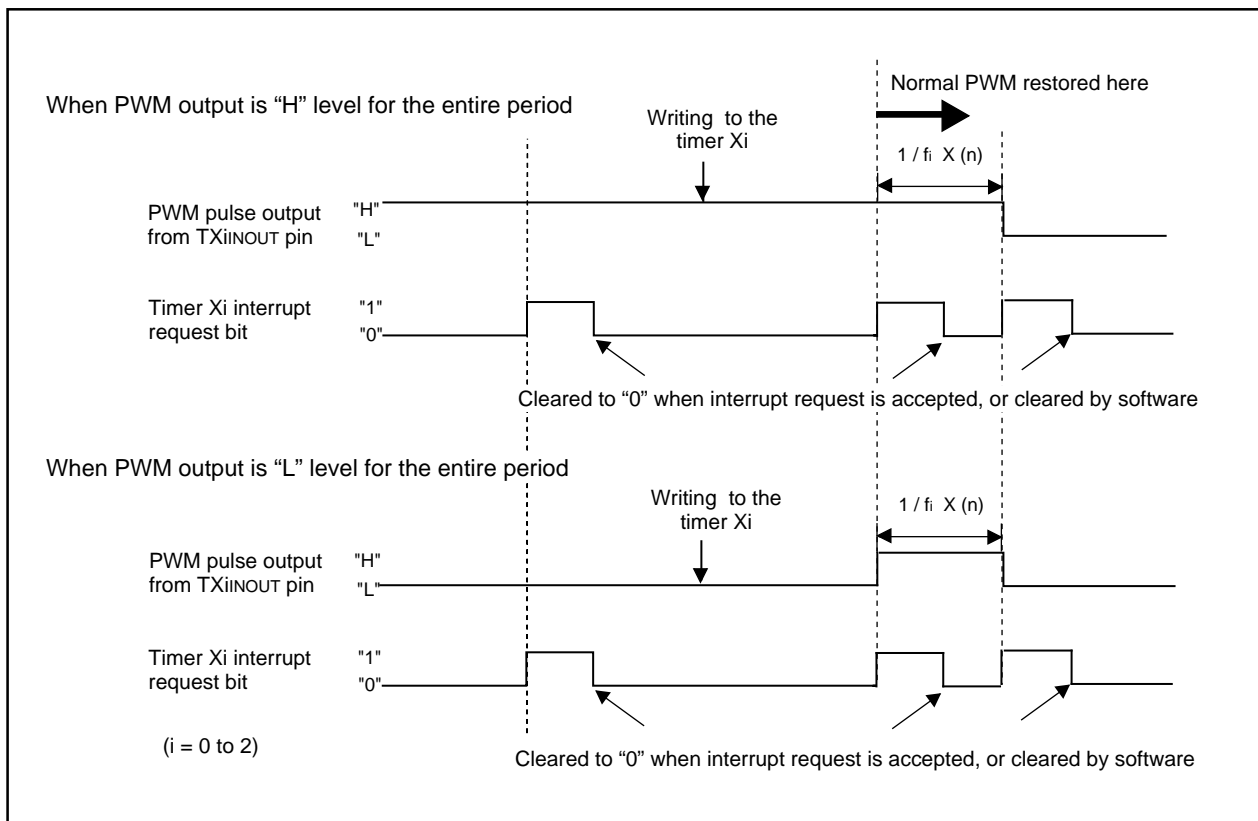**Figure 2.4.25. Operation timing of PWM output mode**

## 2.5 Clock-Synchronous Serial I/O

### 2.5.1 Overview

Clock-synchronous serial I/O carries out 8-bit data communications in synchronization with the clock. The following is an overview of the clock-synchronous serial I/O.

#### (1) Transmission/reception format

8-bit data

#### (2) Transfer rate

If the internal clock is selected as the transfer clock, the divide-by-2 frequency, resulting from the bit rate generator division, becomes the transfer rate. The bit rate generator count source can be selected from the following: f<sub>1</sub>, f<sub>8</sub>, f<sub>32</sub>, and f<sub>c</sub>. Clocks f<sub>1</sub>, f<sub>8</sub> and f<sub>32</sub> are derived by dividing the CPU's main clock by 1, 8, and 32 respectively. Clock f<sub>c</sub> is derived by dividing the CPU's sub clock by 1 respectively.

Furthermore, if an external clock is selected as the transfer clock, the clock frequency input to the CLK pin becomes the transfer rate.

#### (3) Error detection

Only overrun error can be detected. Overrun error is an error that occurs when the next data is made ready before the reception buffer register is read.

#### (4) How to deal with an error

When receiving data, read an error flag and reception data simultaneously to determine which error has occurred. If the data read is erroneous, initialize the error flag and the UART0 receive buffer register, then receive the data again.

##### To initialize the UART0 receive buffer register

1. Set the receive enable bit to "0" (disable reception).
2. Set the serial I/O mode select bit to "0002" (invalid serial I/O).
3. Set the serial I/O mode select bit.
4. Set the receive enable bit to "1" again (enable reception).

To transmit data again due to an error on the reception side when external clock is selected, clear the UART0 transmit buffer register, then transmit the data again.

##### To clear the UART0 transmit buffer register

1. Set the port P52 (CLK0 pin) direction register to "0" (input mode).
2. Set the port P50 (TxD0 pin) direction register to "0" (input mode).
3. Set the internal/external clock select bit to "0" (internal clock).
4. Checking completion of transmission (no data present in transmit register).
5. Set the internal/external clock select bit to "1" (external clock).
6. Set the port P50 (TxD0 pin) direction register to "1" (output mode), then set transmission data in the UART0 transmit buffer register.

## Clock-Synchronous Serial I/O

---

### (5) Function selection

For clock-synchronous serial I/O, the following functions can be selected:

#### (a) Function for choosing polarity

This function switches the polarity of the transfer clock. The following operations are available:

- Data is input at the falling edge of the transfer clock, and is output at the rising edge.
- Data is input at the rising edge of the transfer clock, and is output at the falling edge.

#### (b) Function for choosing which bit to transmit first

This function is to choose whether to transmit data from bit 0 or from bit 7. Choose either of the following:

- LSB first      Data is transmitted from bit 0.
- MSB first      Data is transmitted from bit 7.

#### (c) Function for choosing successive reception mode

Successive reception mode is a mode in which reading the receive buffer register makes the reception-enabled status ready. In this mode, there is no need to write dummy data to the transmit buffer register so as to make the reception-enabled status ready. But at the time of starting reception, read the receive buffer register into a dummy manner.

- Normal mode      Writing dummy data to the transmit buffer register makes the reception enabled status ready.
- Successive reception mode      Reading the reception buffer register makes the reception-enabled status ready.

#### (d) Function for outputting transfer clock to multiple pins

This function is to switch among pins to output the transfer clock. This function is effective only when selecting the internal clock. Switching among pins for outputting the transfer clock allows data transmission to two external ICs in a time-sharing manner.

#### (e) Function for choosing a transmission interrupt factor

The timing to generate a transmission interrupt can be selected from the following: the instant the transmission buffer is emptied or the instant the transmission register is emptied. When transmission buffer empty timing is selected, an interrupt occurs when transmitted data is moved from the transmission buffer to the transmission register. Therefore, data can be transmitted in succession. When transmission register empty timing is selected, an interrupt occurs when data transmission is complete.

Following are some examples in which various functions (a) through (e) are selected:

- Transmission Operation WITH: transmission at falling edge of transfer clock, LSB First, interrupt at instant transmission buffer is emptied; WITHOUT transfer clock output to multiple pins function ... P254
- Transmission Operation WITH: transmission at falling edge of transfer clock, LSB First, interrupt at instant transmission is completed; WITH transfer clock output to multiple pins function (UART0 selection available) ..... P258
- Reception WITH: reception at falling edge of transfer clock, LSB First, successive reception mode disabled; WITHOUT transfer clock output to multiple pins function ..... P262



## Clock-Synchronous Serial I/O

### (6) Input/output to the serial I/O and the direction register

To input an external signal to the serial I/O, set the direction register of the relevant port to input. To output signal from the serial I/O, set the direction register of the relevant port to output.

### (7) Pins related to the serial I/O

- CLK0 pin                      Input/output pins for the transfer clock
- RxD0, RxD1 pins          Input pins for data
- TxD0, TxD1 pins          Output pins for data (Since TxD2 pin is N-channel open drain, this pin needs pull-up resistor.)
- CLKS pin                    Output pin for transfer clock. Can be used as transfer clock output pin in the transfer clock output to multiple pins function.

Note : UART1 cannot be used in clock-synchronous serial I/O mode.

### (8) Registers related to the serial I/O

Figure 2.5.1 shows the memory map of serial I/O-related registers, and Figures 2.5.2 to 2.5.4 show serial I/O-related registers.

0051 <sub>16</sub>	UART0 transmit interrupt control register (S0TIC)
0052 <sub>16</sub>	UART0 receive interrupt control register (S0RIC)
0053 <sub>16</sub>	UART1 transmit interrupt control register (S1TIC)
0054 <sub>16</sub>	UART1 receive interrupt control register (S1RIC)
≈	
03A0 <sub>16</sub>	UART0 transmit/receive mode register (U0MR)
03A1 <sub>16</sub>	UART0 bit rate generator (U0BRG)
03A2 <sub>16</sub>	UART0 transmit buffer register (U0TB)
03A3 <sub>16</sub>	
03A4 <sub>16</sub>	UART0 transmit/receive control register 0 (U0C0)
03A5 <sub>16</sub>	UART0 transmit/receive control register 1 (U0C1)
03A6 <sub>16</sub>	UART0 receive buffer register (U0RB)
03A7 <sub>16</sub>	
03A8 <sub>16</sub>	UART1 transmit/receive mode register (U1MR)
03A9 <sub>16</sub>	UART1 bit rate generator (U1BRG)
03AA <sub>16</sub>	UART1 transmit buffer register (U1TB)
03AB <sub>16</sub>	
03AC <sub>16</sub>	UART1 transmit/receive control register 0 (U1C0)
03AD <sub>16</sub>	UART1 transmit/receive control register 1 (U1C1)
03AE <sub>16</sub>	UART1 receive buffer register (U1RB)
03AF <sub>16</sub>	
03B0 <sub>16</sub>	UART transmit/receive control register 2 (UCON)
03B1 <sub>16</sub>	

Figure 2.5.1. Memory map of serial I/O-related registers

## Clock-Synchronous Serial I/O

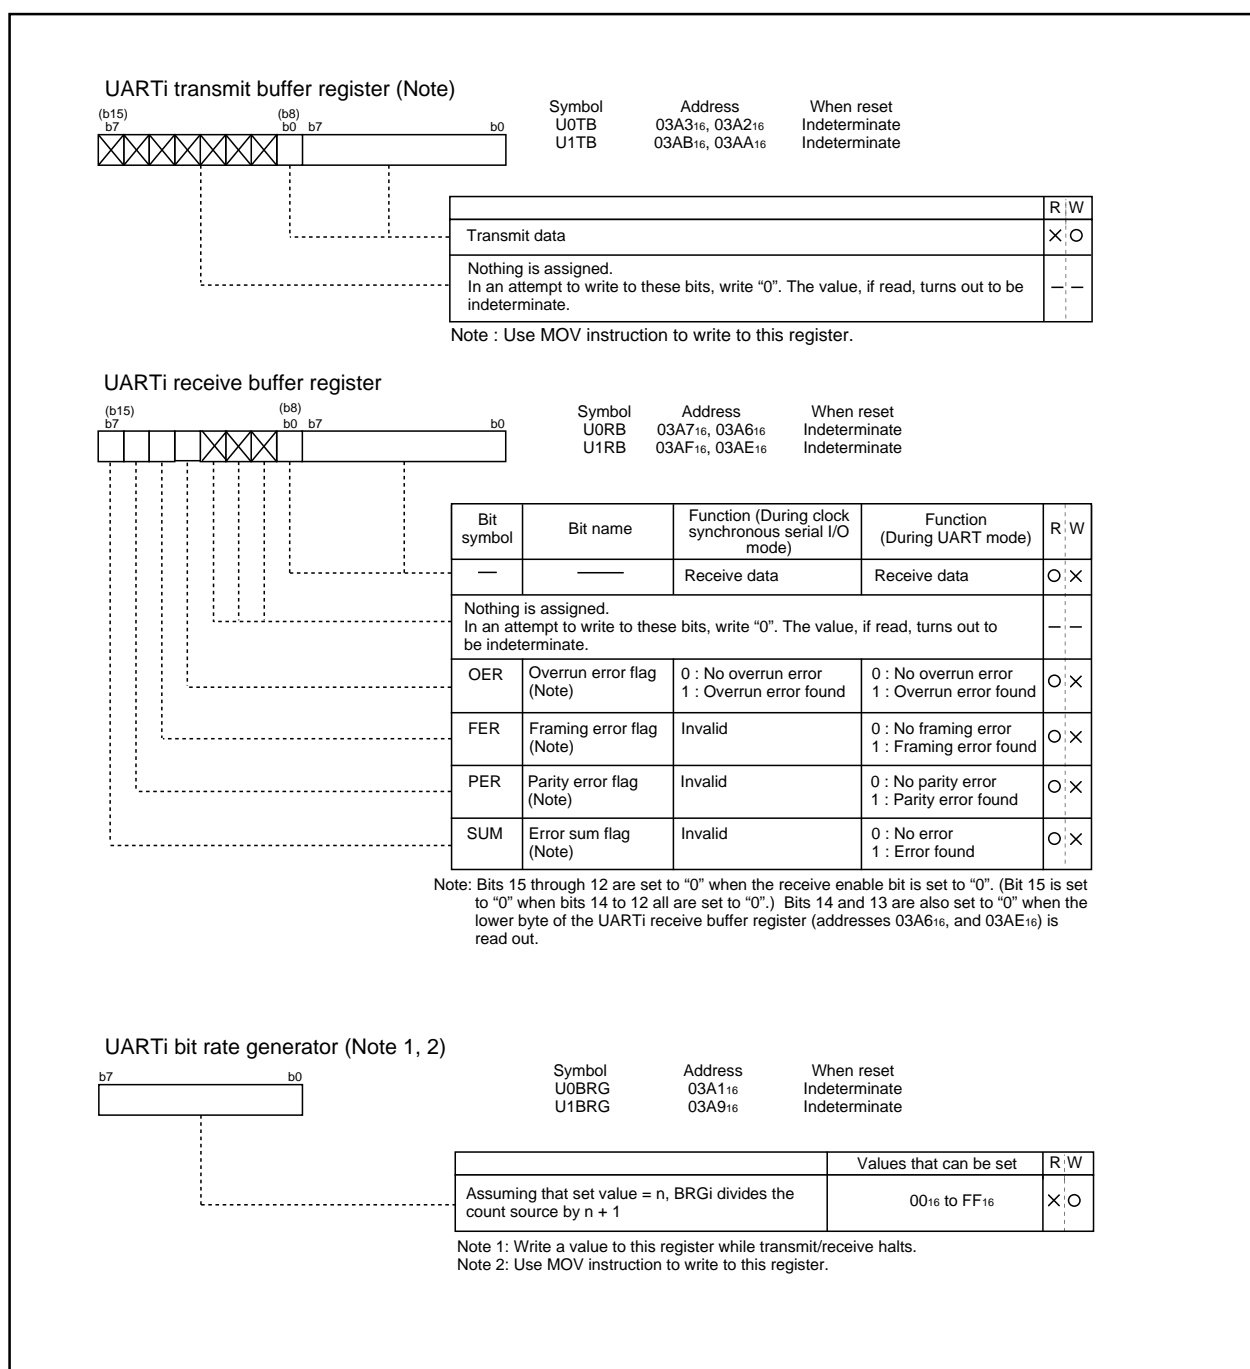


Figure 2.5.2. Serial I/O-related registers (1)

## Clock-Synchronous Serial I/O

UARTi transmit/receive mode register

Bit	Symbol	Address	When reset
b7			
b6			
b5			
b4			
b3			
b2			
b1			
b0			

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
SMD0	Serial I/O mode select bit (Note 1)	Must be fixed to 001 b2 b1 b0 0 0 0 : Serial I/O invalid 0 1 0 : Inhibited 0 1 1 : Inhibited 1 1 1 : Inhibited	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long 0 0 0 : Serial I/O invalid 0 1 0 : Inhibited 0 1 1 : Inhibited 1 1 1 : Inhibited	O	O
SMD1				O	O
SMD2				O	O
CKDIR	Internal/external clock select bit (Note 2)	0 : Internal clock (Note 3) 1 : External clock (Note 4)	0 : Internal clock (Note 3) 1 : External clock (Note 4)	O	O
STPS	Stop bit length select bit	Invalid	0 : One stop bit 1 : Two stop bits	O	O
PRY	Odd/even parity select bit	Invalid	Valid when bit 6 = "1" 0 : Odd parity 1 : Even parity	O	O
PRYE	Parity enable bit	Invalid	0 : Parity disabled 1 : Parity enabled	O	O
SLEP	Sleep select bit	Must always be "0"	0 : Sleep mode deselected 1 : Sleep mode selected	O	O

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: UART1 can use only internal clock. Must set this bit to "1".

Note 3: Set the corresponding port direction register to "1" (output mode).

Note 4: Set the corresponding port direction register to "0" (input mode).

UARTi transmit/receive control register 0

b7	b6	b5	b4	b3	b2	b1	b0
			1		0		

Symbol  
UIC0(i=0,1)

Address  
03A416, 03AC16

When reset  
0816

Bit symbol	Bit name	Function (Note) (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
CLK0	BRG count source select bit	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : fc is selected	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : fc is selected	O	O
CLK1				O	O
Set this bit to "0".				O	O
TXEPT	Transmit register empty flag	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	O	X
Set this bit to "1".				O	O
NCH	Data output select bit	0 : TXDi pin is CMOS output 1 : TXDi pin is N-channel open-drain output	0: TXDi pin is CMOS output 1: TXDi pin is N-channel open-drain output	O	O
CKPOL	CLK polarity select bit	0 : Transmit data is output at falling edge of transfer clock and receive data is input at rising edge 1 : Transmit data is output at rising edge of transfer clock and receive data is input at falling edge	Must always be "0"	O	O
UFORM	Transfer format select bit	0 : LSB first 1 : MSB first	Must always be "0"	O	O

Note: UART1 cannot be used in clock synchronous serial I/O.

Figure 2.5.3. Serial I/O-related registers (2)

## Clock-Synchronous Serial I/O

## UARTi transmit/receive control register 1

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
X	X	X	X					UIC1(i=0,1)	03A5 <sub>16</sub> ,03AD <sub>16</sub>	02 <sub>16</sub>
		</								

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: If you are using clock asynchronous serial I/O mode, you can enable 'receive enable bit' when RxD port input is "H". If RxD port input is "L" and you have enabled 'receive enable bit', then receive operation starts immediately.

## UART transmit/receive control register 2

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
<div><div></div><div></div></div>	<div><div></div><div></div></div>							UCON	03B0 <sub>16</sub>	XX000000 <sub>2</sub>
Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W					
U0IRS	UART0 transmit interrupt cause select bit	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○					
U1IRS	UART1 transmit interrupt cause select bit	Set this bit to "0".	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○					
U0RRM	UART0 continuous receive mode enable bit	0 : Continuous receive mode disabled 1 : Continuous receive mode enable	Must always be "0"	○	○					
Set this bit to "0".				○	○					
CLKMD0	CLK/CLKS select bit 0	Valid when bit 5 = "1" 0 : Clock output to CLK1 1 : Clock output to CLKS1	Must always be "0"	○	○					
CLKMD1	CLK/CLKS select bit 1 (Note 2)	0 : Normal mode (CLK output is CLK0 only) 1 : Transfer clock output from multiple pins function selected	Must always be "0"	○	○					
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.				—	—					

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: When using multiple pins to output the transfer clock, the following requirements must be met:  
• UART0 internal/external clock select bit (bit 3 at address 03A0<sub>16</sub>) = "0".

Figure 2.5.4. Serial I/O-related registers (3)

## Clock-Synchronous Serial I/O

**2.5.2 Operation of Serial I/O (transmission in clock-synchronous serial I/O mode)**

In transmitting data in clock-synchronous serial I/O mode, choose functions from those listed in Table 2.5.1. Operations of the circled items are described below. Figure 2.5.5 shows the operation timing, and Figures 2.5.6 and 2.5.7 show the set-up procedures.

**Table 2.5.1. Chooed functions**


Item	Set-up	
Transfer clock source	<input type="radio"/> Internal clock ( $f_1 / f_8 / f_{32} / f_c$ )	
	<input type="radio"/> External clock (CLK0 pin)	
CLK polarity	<input type="radio"/> Output transmission data at the falling edge of the transfer clock	
	<input type="radio"/> Output transmission data at the rising edge of the transfer clock	
Transfer clock	<input type="radio"/> LSB first	
	<input type="radio"/> MSB first	
Transmission interrupt factor	<input type="radio"/> Transmission buffer empty	
	<input type="radio"/> Transmission complete	
Output transfer clock to multiple pins (Note)	<input type="radio"/> Not selected	
	<input type="radio"/> Selected	

Note: This can be selected only when UART0 is used in combination with the internal clock.

- Operation
- (1) Setting the transmit enable bit to "1" and writing transmission data to the UART0 transmit buffer register makes data transmissible status ready.
  - (2) In synchronization with the first falling edge of the transfer clock, transmission data held in the UART0 transmit buffer register is transmitted to the UART0 transmit register. At this time, the UART0 transmit interrupt request bit goes to "1". Also, the first bit of the transmission data is transmitted from the TxD0 pin. Then the data is transmitted bit by bit from the lower order in synchronization with the falling edges.
  - (3) When transmission of 1-byte data is completed, the transmit register empty flag goes to "1", which indicates that transmission is completed. The transfer clock stops at "H" level.
  - (4) If the next transmission data is set in the UART0 transmit buffer register while transmission is in progress (before the eighth bit has been transmitted), the data is transmitted in succession.

## Clock-Synchronous Serial I/O

## Example of wiring

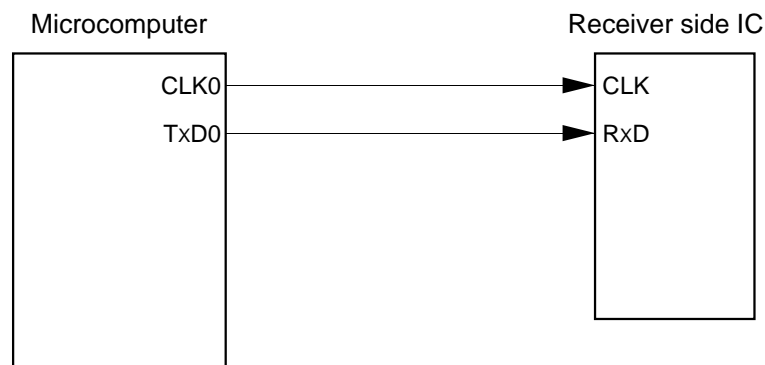

## Example of operation


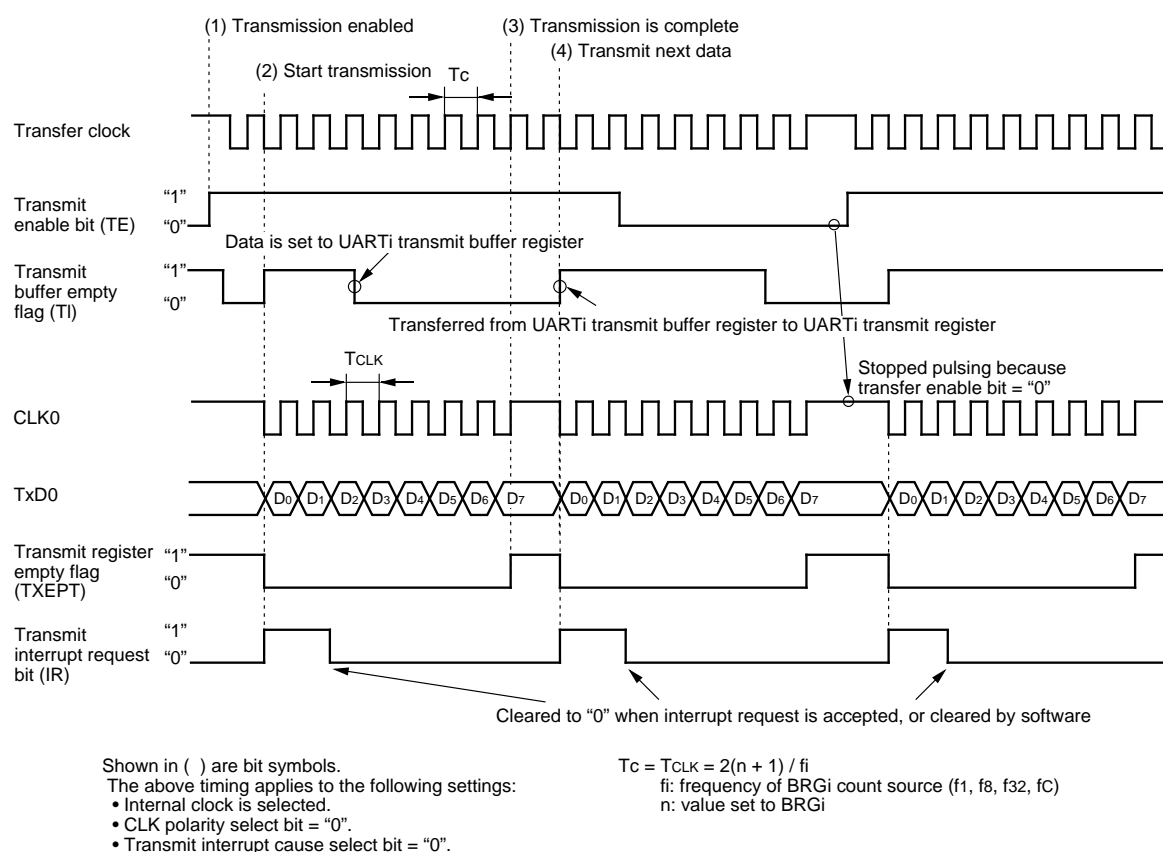



Figure 2.5.5. Operation timing of transmission in clock-synchronous serial I/O mode

## Clock-Synchronous Serial I/O

## Setting UART0 transmit/receive mode register

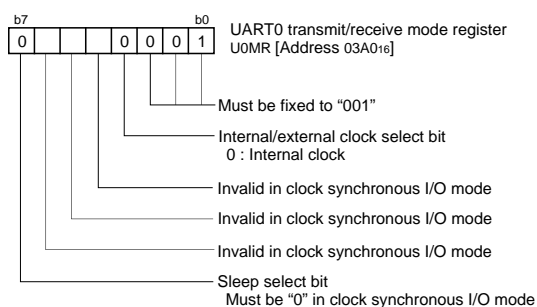


## Setting UART0 transmit/receive control register 0

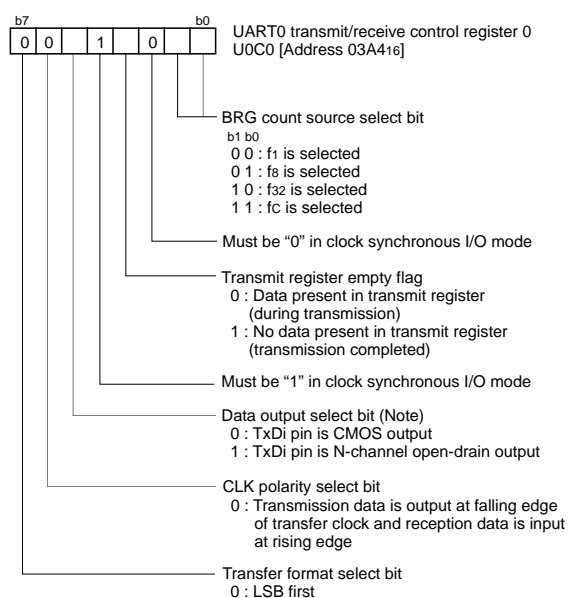

Note: Set the corresponding port direction register to "1" (output mode).

## Setting UART transmit/receive control register 2

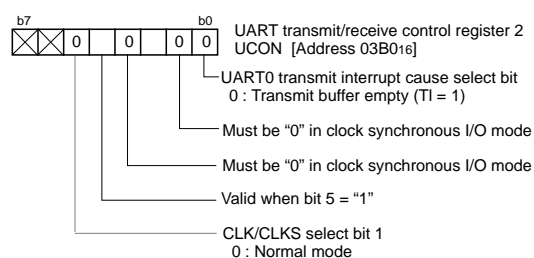

Continued to the next page

Figure 2.5.6. Set-up procedure of transmission in clock-synchronous serial I/O mode (1)

## Clock-Synchronous Serial I/O

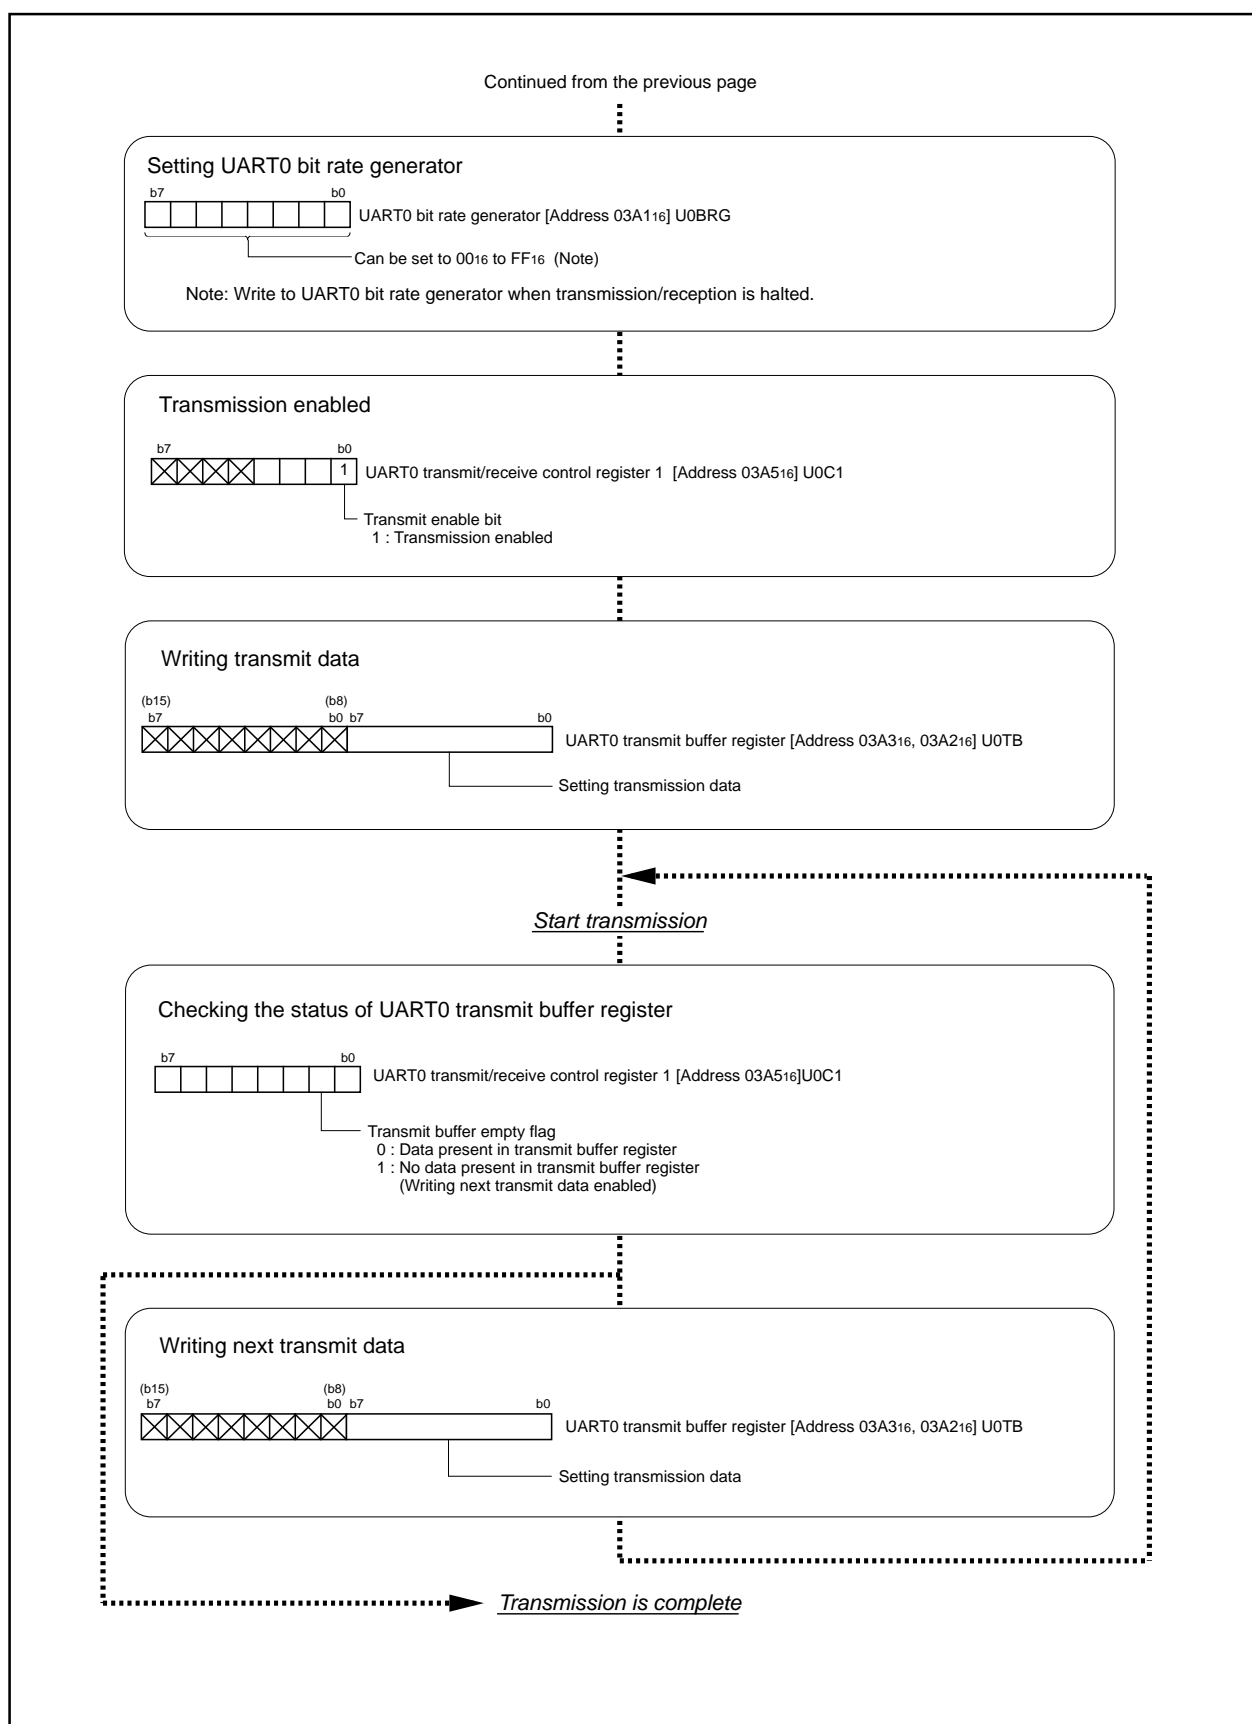


Figure 2.5.7. Set-up procedure of transmission in clock-synchronous serial I/O mode (2)



## Clock-Synchronous Serial I/O

### 2.5.3 Operation of the Serial I/O (transmission in clock-synchronous serial I/O mode, transfer clock output from multiple pins function selected)

In transmitting data in clock-synchronous serial I/O mode, choose functions from those listed in Table 2.5.2. Operations of the circled items are described below. Figure 2.5.8 shows the operation timing, and Figures 2.5.9 and 2.5.10 show the set-up procedures.

**Table 2.5.2. Chooosed functions**


Item	Set-up	
Transfer clock source	<input type="radio"/>	Internal clock ( $f_1 / f_8 / f_{32} / f_c$ )
	<input type="radio"/>	External clock (CLK0 pin)
CLK polarity	<input type="radio"/>	Output transmission data at the falling edge of the transfer clock
	<input type="radio"/>	Output transmission data at the rising edge of the transfer clock
Transfer clock	<input type="radio"/>	LSB first
	<input type="radio"/>	MSB first
Transmission interrupt factor	<input type="radio"/>	Transmission buffer empty
	<input type="radio"/>	Transmission complete
Output transfer clock to multiple pins (Note)	<input type="radio"/>	Not selected
	<input type="radio"/>	Selected

Note: This can be selected only when UART0 is used in combination with the internal clock.

- Operation
- (1) Setting the transmit enable bit to "1" makes data transmissible status ready.
  - (2) When transmission data is written to the UART0 transmit buffer register, transmission data held in the UART0 transmit buffer register is transmitted to the UART0 transmit register in synchronization with the first falling edge of the transfer clock. At this time, the first bit of the transmission data is transmitted from the TxD0 pin. Then the data is transmitted bit by bit from the lower order in synchronization with the falling edges of the transfer clock.
  - (3) When transmission of 1-byte data is completed, the transmit register empty flag goes to "1", which indicates that the transmission is completed. The transfer clock stops at "H" level. At this time, the UART0 transmit interrupt request bit goes to "1".
  - (4) Setting CLK/CLKS select bit 1 to "1" and setting CLK/CLKS select bit 0 to "1" causes the CLKS pin to go to the transfer clock output pin. Change the transfer clock output pin when transmission is halted.

## Clock-Synchronous Serial I/O

## Example of wiring

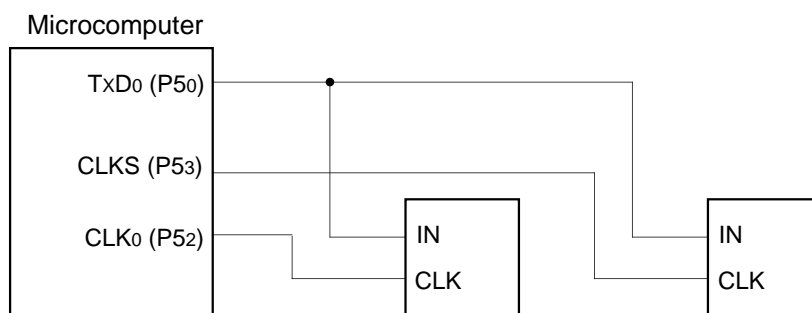

Note: This applies when performing only transmission with an internal clock selected in the clock synchronous serial I/O mode.

## Example of operation


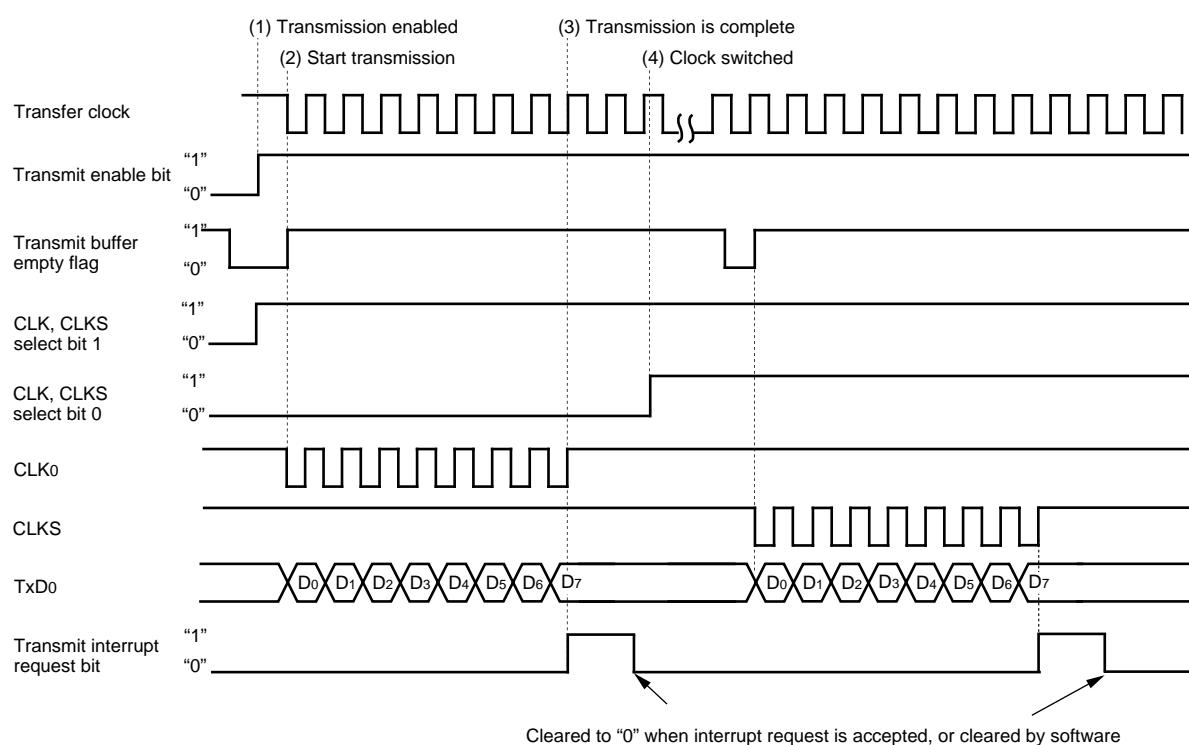


Figure 2.5.8. Operation timing of transmission in clock-synchronous serial I/O mode, transfer clock output from multiple pins function selected

## Clock-Synchronous Serial I/O

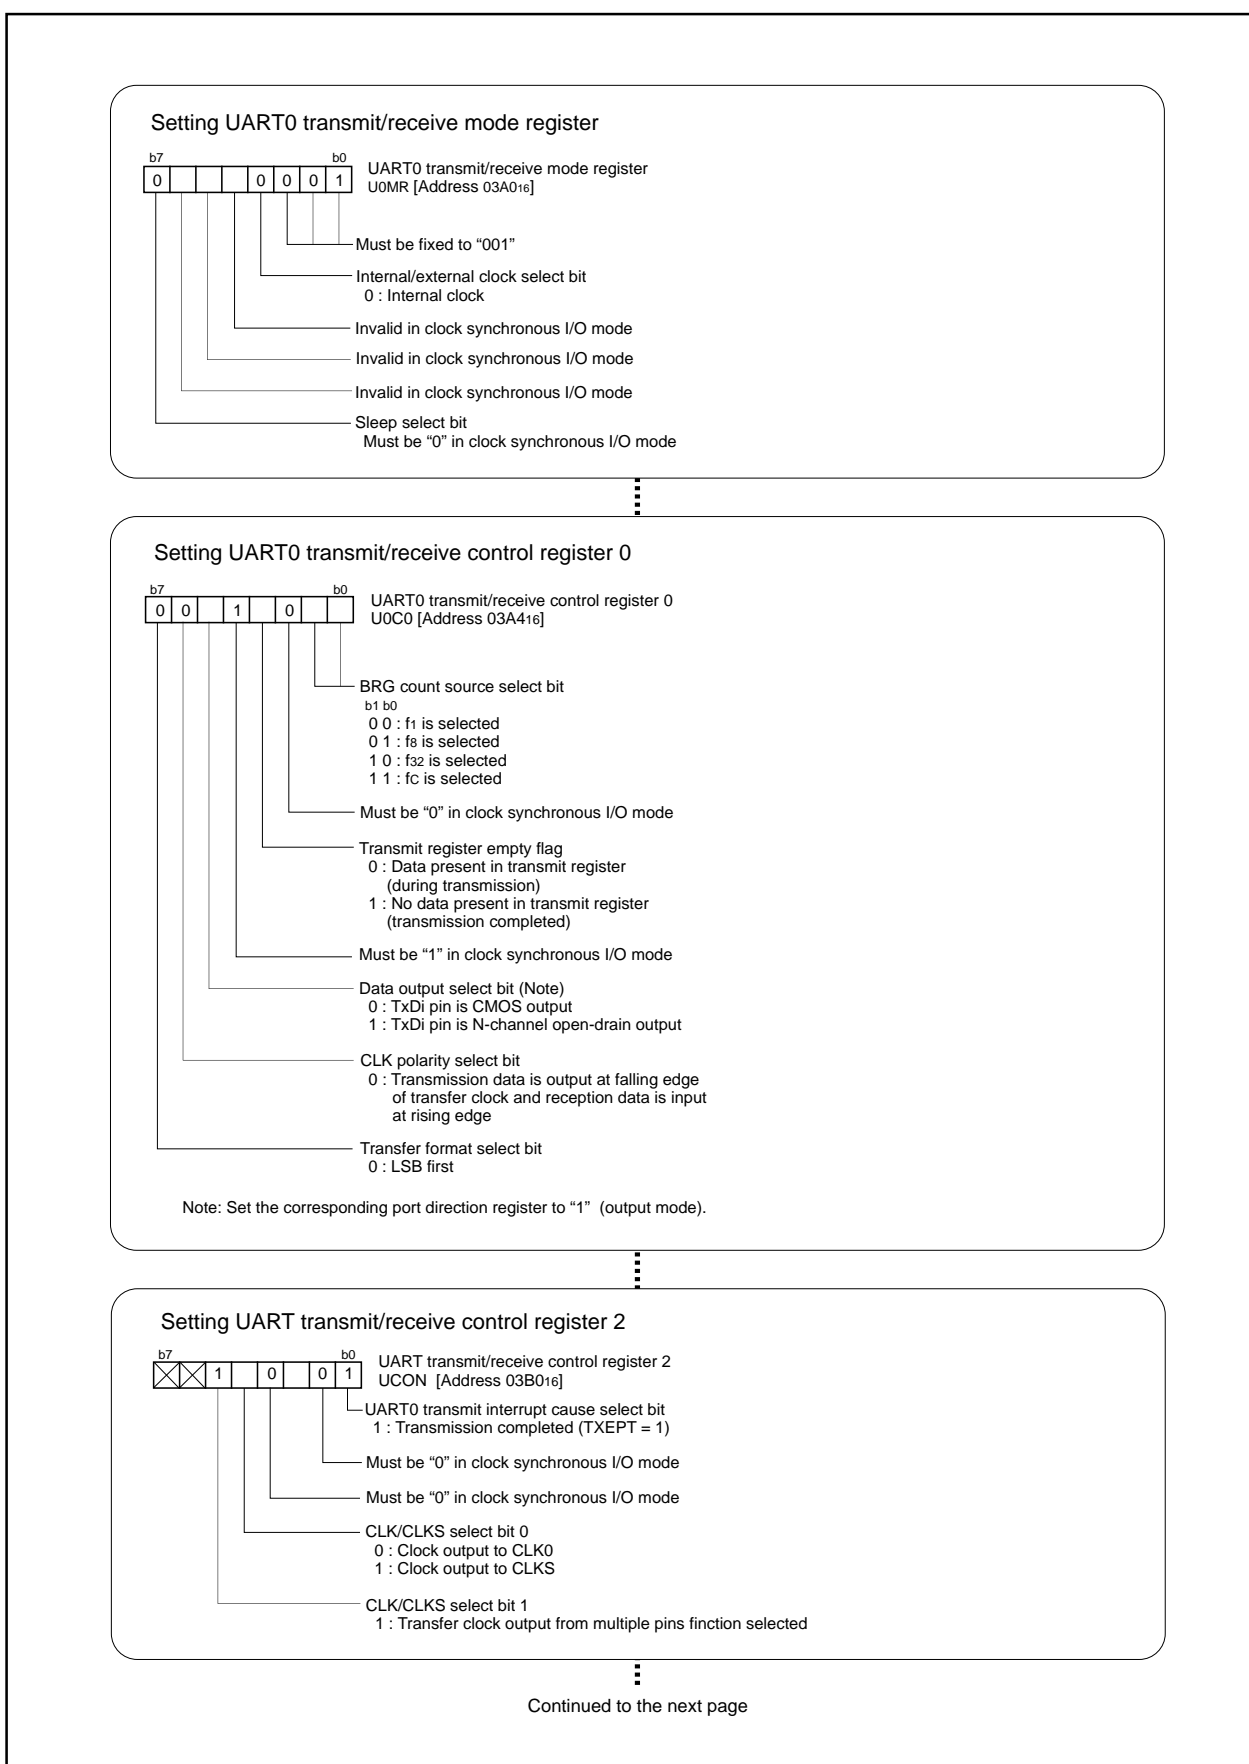

**Figure 2.5.9. Set-up procedure of transmission in clock-synchronous serial I/O mode, transfer clock output from multiple pins function selected (1)**

## Clock-Synchronous Serial I/O

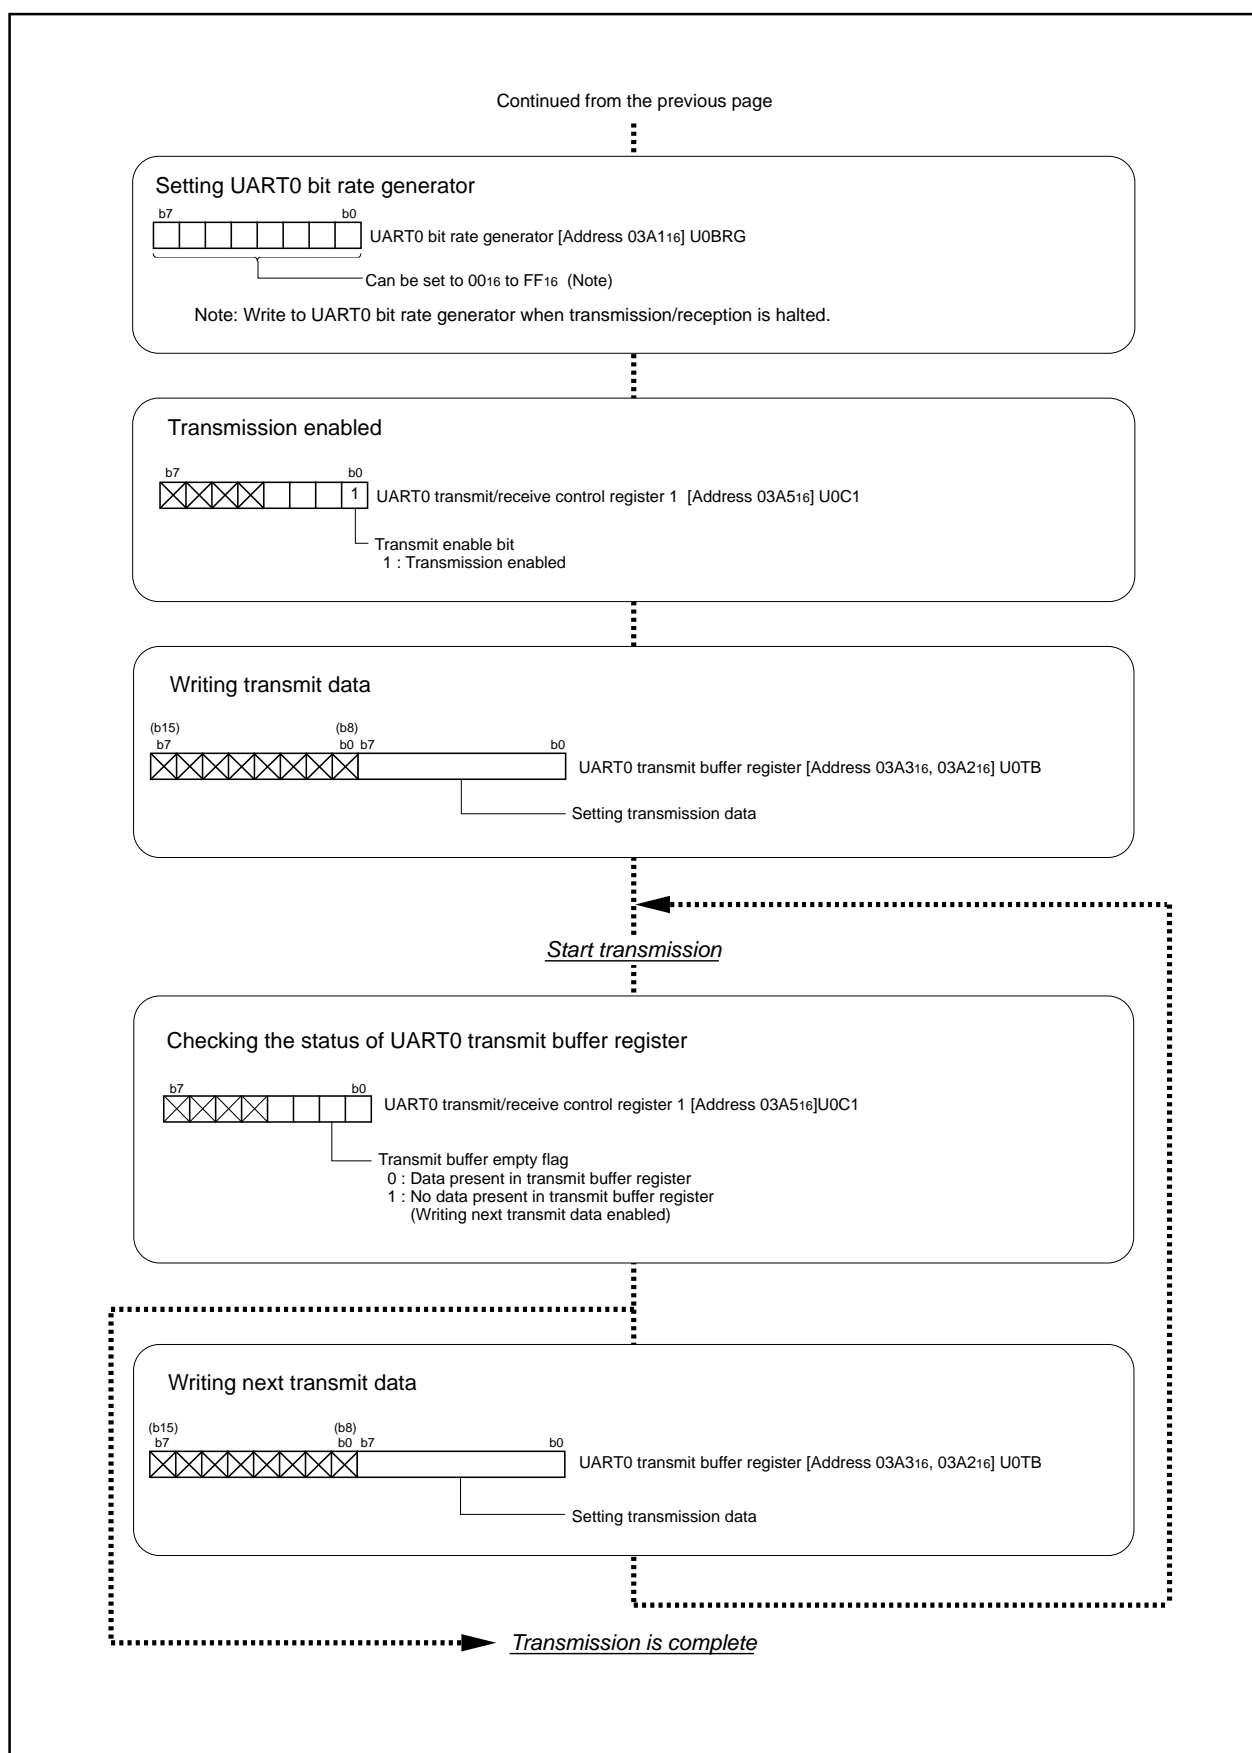


Figure 2.5.10. Set-up procedure of transmission in clock-synchronous serial I/O mode, transfer clock output from multiple pins function selected (2)

## Clock-Synchronous Serial I/O

**2.5.4 Operation of Serial I/O (reception in clock-synchronous serial I/O mode)**

In receiving data in clock-synchronous serial I/O mode, choose functions from those listed in Table 2.5.3. Operations of the circled items are described below. Figure 2.5.11 shows the operation timing, and Figures 2.5.12 and 2.5.13 show the set-up procedures.

**Table 2.5.3. Chooed functions**


Item	Set-up	
Transfer clock source		Internal clock ( $f_1$ / $f_8$ / $f_{32}$ / $f_c$ )
	<input type="radio"/>	External clock (CLK0 pin)
CLK polarity	<input type="radio"/>	Output transmission data at the falling edge of the transfer clock
		Output transmission data at the rising edge of the transfer clock
Transfer clock	<input type="radio"/>	LSB first
		MSB first
Continuous receive mode	<input type="radio"/>	Disabled
		Enabled
Output transfer clock to multiple pins (Note)	<input type="radio"/>	Not selected
		Selected

Note: This can be selected only when UART0 is used in combination with the internal clock.


- Operation
- (1) Writing dummy data to the UART0 transmit buffer register, setting the receive enable bit to "1", and the transmit enable bit to "1", makes the data receivable status ready.
  - (2) In synchronization with the first rising edge of the transfer clock, the input signal to the RxD0 pin is stored in the highest bit of the UART0 receive register. Then, data is taken in by shifting right the content of the UART0 reception data in synchronization with the rising edges of the transfer clock.
  - (3) When 1-byte data lines up in the UART0 receive register, the content of the UART0 receive register is transmitted to the UART0 receive buffer register. The transfer clock stops at "H" level. At this time, the receive complete flag and the UART0 receive interrupt request bit goes to "1".
  - (4) The receive complete flag goes to "0" when the lower-order byte of the UART0 buffer register is read.

## Clock-Synchronous Serial I/O

## Example of wiring

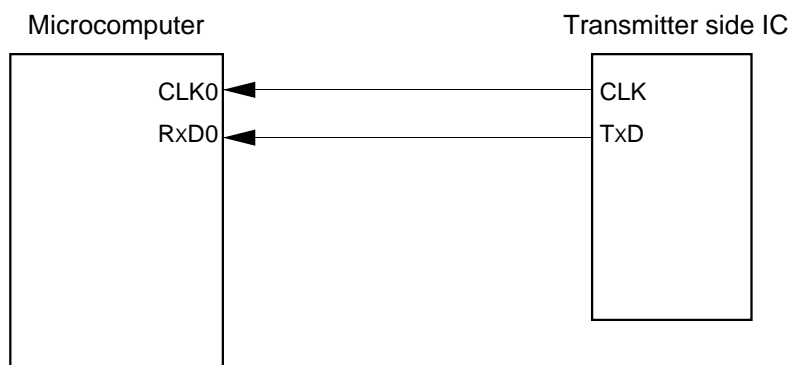

## Example of operation

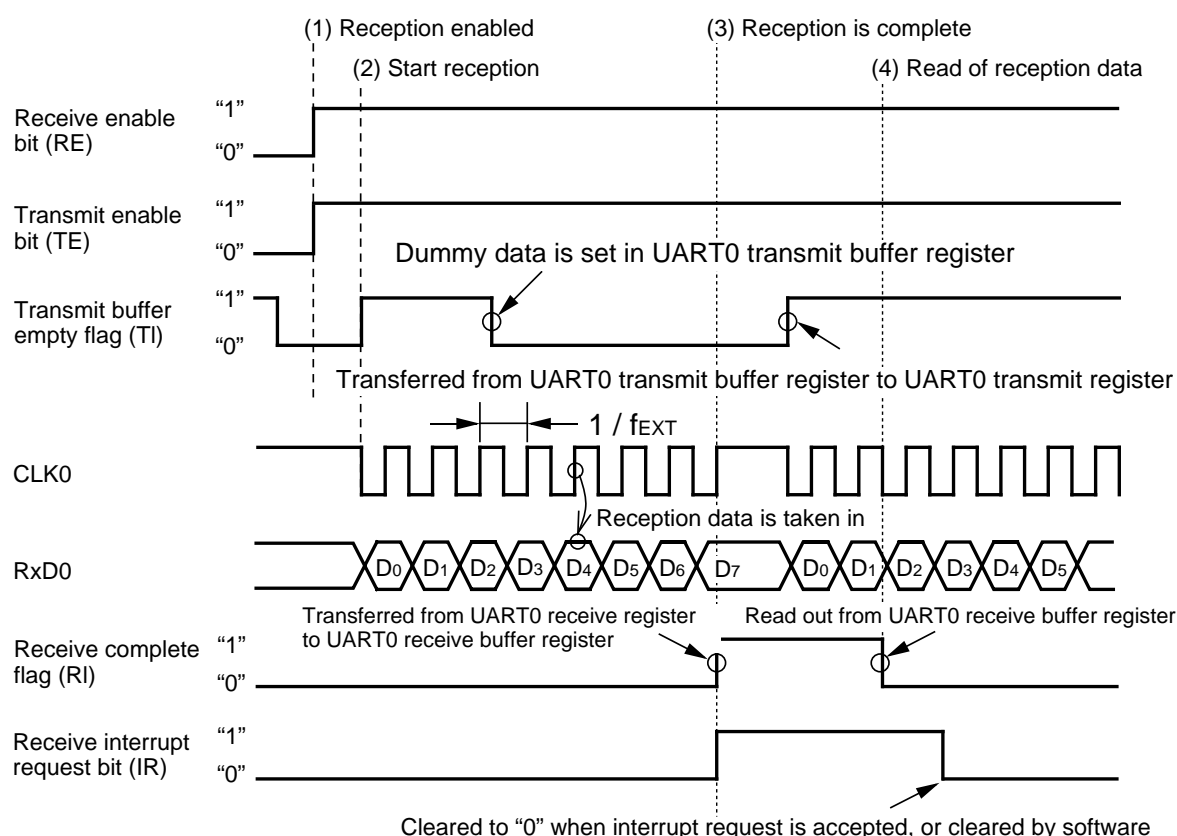

Shown in ( ) are bit symbols.

The above timing applies to the following settings:

- External clock is selected.
- CLK polarity select bit = "0".

fEXT: frequency of external clock



Make sure that the following conditions are met when the CLK0 pin input = "H" before data reception

- Transmit enable bit → "1"
- Receive enable bit → "1"
- Dummy data write to UART0 transmit buffer register

Figure 2.5.11. Operation timing of reception in clock-synchronous serial I/O mode


## Clock-Synchronous Serial I/O

## Setting UART0 transmit/receive mode register

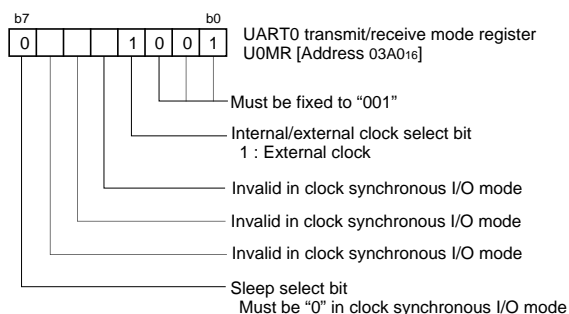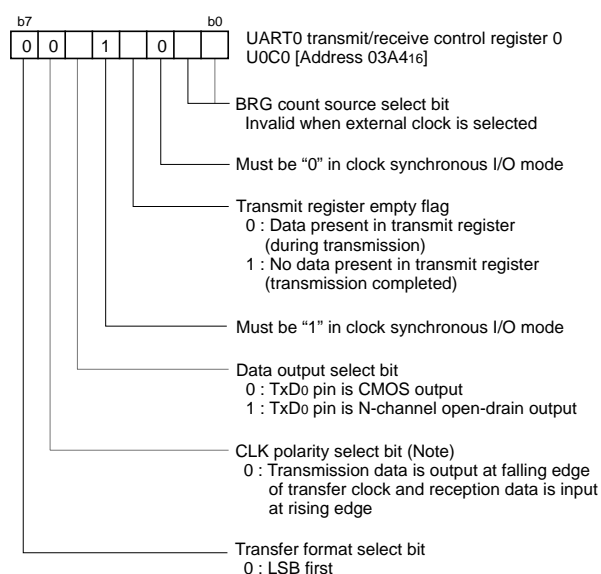Setting UART<sub>i</sub> transmit/receive control register 0 (i=0 to 2)

Note: Set the corresponding port direction register to "0" (input mode).

## Setting UART transmit/receive control register 2

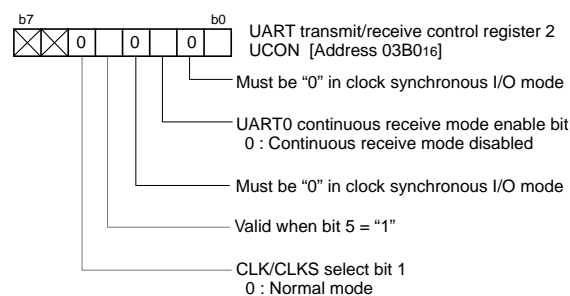

Continued to the next page

Figure 2.5.12. Set-up procedure of reception in clock-synchronous serial I/O mode (1)

## Clock-Synchronous Serial I/O

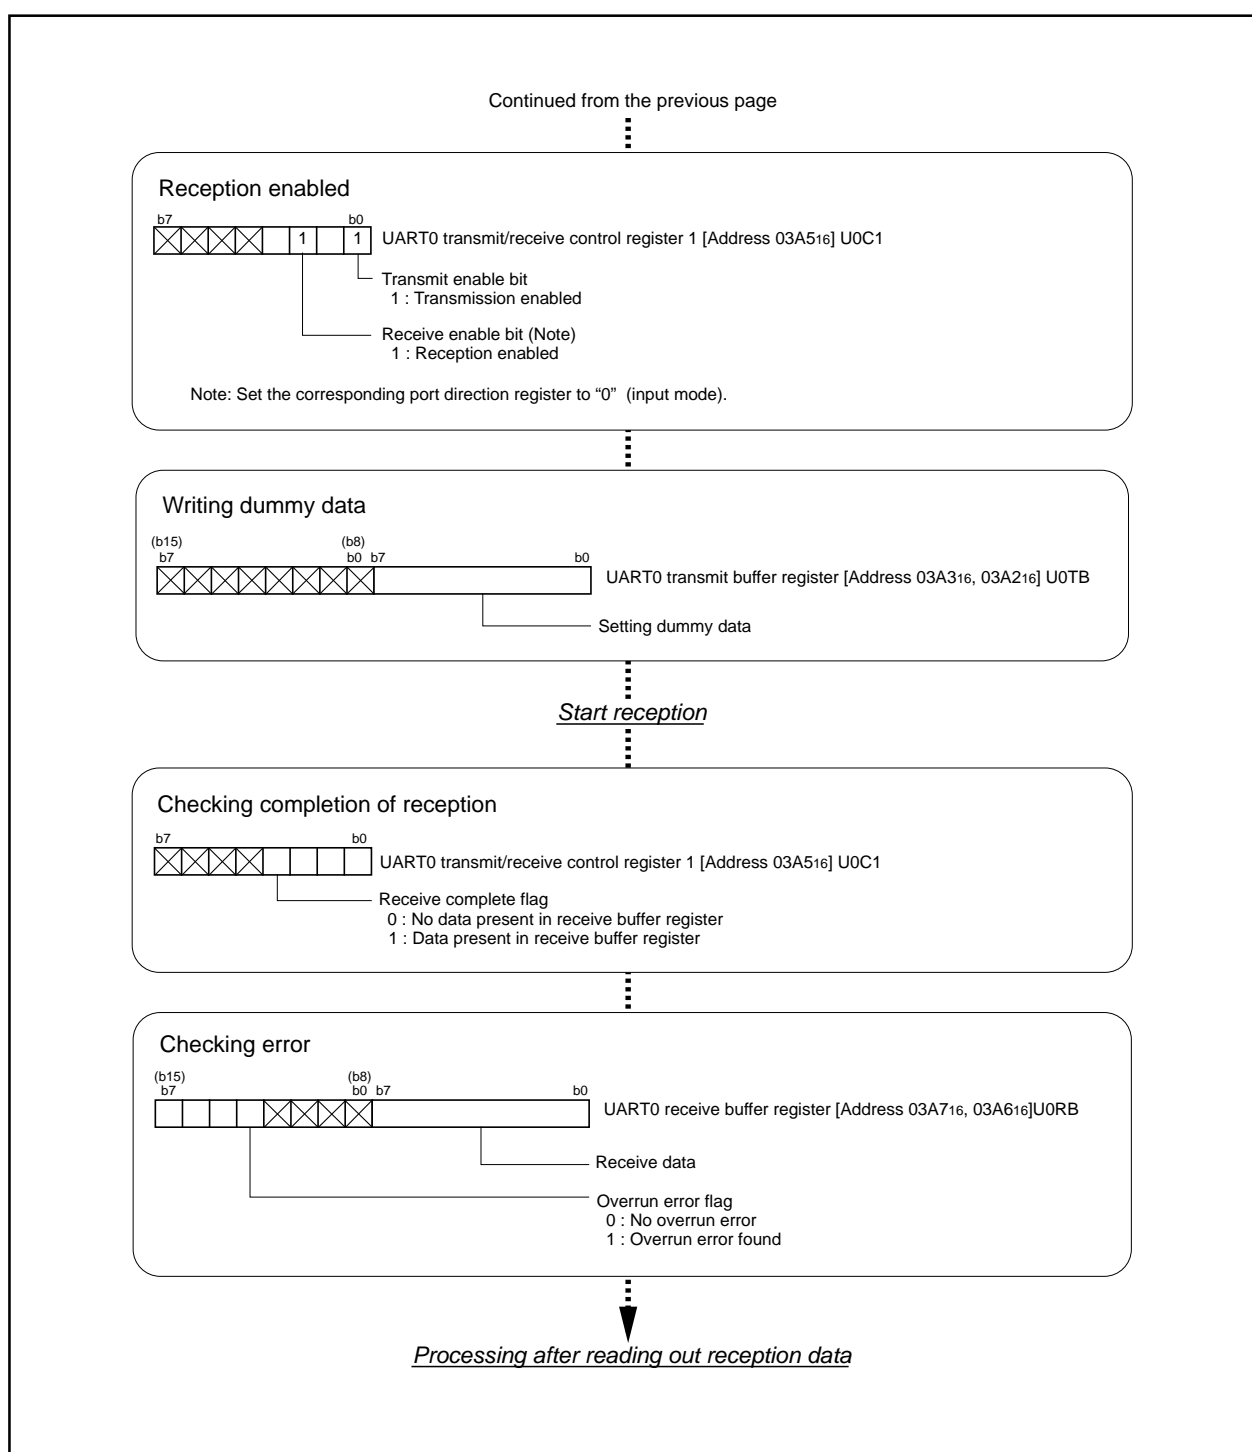


Figure 2.5.13. Set-up procedure of reception in clock-synchronous serial I/O mode (2)



### **2.5.5 Precautions for Serial I/O (in clock-synchronous serial I/O)**

#### Transmission

- (1) With an external clock selected, perform the following set-up procedure with the CLK0 pin input level = "H" if the CLK polarity select bit = "0" or with the CLK0 pin input level = "L" if the CLK polarity select bit = "1":
  1. Set the transmit enable bit (to "1")
  2. Write transmission data to the UART0 transmit buffer register

## Clock-Synchronous Serial I/O

---

Reception (1) In operating the clock-synchronous serial I/O, operating a transmitter generates a shift clock. Fix settings for transmission even when using the device only for reception. Dummy data is output to the outside from the TxD0 pin (transmission pin) when receiving data.

(2) With the internal clock selected, setting the transmit enable bit to "1" (transmission-enabled status) and setting dummy data in the UART0 transmission buffer register generates a shift clock.

With the external clock selected, a shift clock is generated when the transmit enable bit is set to "1", dummy data is set in the UART0 transmit buffer register, and the external clock is input to the CLK0 pin.

(3) In receiving data in succession, an overrun error occurs when the next reception data is made ready in the UART0 receive register with the receive complete flag set to "1" (before the content of the UART0 receive buffer register is read), and overrun error flag is set to "1". In this instance, the next data is written to the UART0 receive buffer register, so handle with this problem by writing programs on transmission side and reception side so that the previous data is transmitted again.

If an overrun error occurs, the UART0 receive interrupt request bit does not go to "1".

(4) To receive data in succession, set dummy data in the lower-order byte of the UART0 transmit buffer register every time reception is made.

(5) With an external clock selected, perform the following set-up procedure with the CLK0 pin input level = "H" if the CLK polarity select bit = "0" or with the CLK0 pin input level = "L" if the CLK polarity select bit = "1":

1. Set receive enable bit (to "1")
2. Set transmit enable bit (to "1")
3. Write dummy data to the UART0 transmit buffer register

## UART

## 2.6 Clock-Asynchronous Serial I/O (UART)

### 2.6.1 Overview

UART handles communications by means of character-by-character synchronization. The transmission side and the reception side are independent of each other, so full-duplex communication is possible. The following is an overview of the clock-asynchronous serial I/O.

#### (1) Transmission/reception format

Figure 2.6.1 shows the transmission/reception format, and Table 2.6.1 shows the names and functions of transmission data.

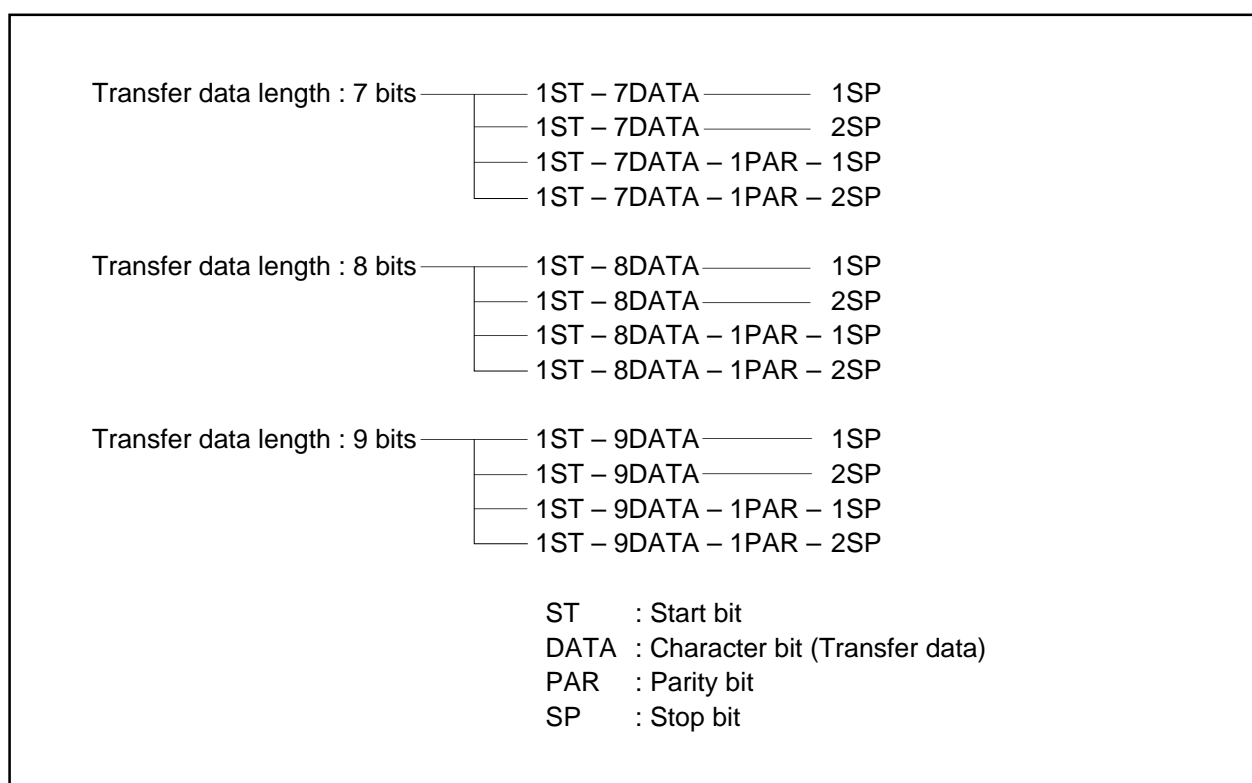


Figure 2.6.1. Transmission/reception format

Table 2.6.1. Transmission data names and functions

Name	Function
ST (start bit)	A 1-bit "L" signal to be added immediately before character bits. This bit signals the start of data transmission.
DATA (character bits)	Transmission data set in the UARTi transmit buffer register.
PAR (parity bit)	A signal to be added immediately after character bits so as to increase data reliability. The level of this signal so varies that the total number of 1's in character bits and this bit always becomes even or odd depending on which parity is chosen, even or odd.
SP (stop bit)	Either 1-bit or 2-bit "H" signal to be added immediately after character bits (after the parity bit if parity is checked). This / they signals the end of data transmission.

## UART

### (2) Transfer rate

The divide-by-16 frequency, resulting from division in the bit rate generator (BRG), becomes the transfer rate. The count source for the transfer rate register can be selected from f<sub>1</sub>, f<sub>8</sub>, f<sub>32</sub>, and the input from the CLK pin. Clocks f<sub>1</sub>, f<sub>8</sub>, f<sub>32</sub> are derived by dividing the CPU's main clock by 1, 8, and 32 respectively.

**Table 2.6.2. Example of baud rate setting**

Baud rate (bps)	BRG's count source	System clock : 10MHz		System clock : 7.3728MHz	
		BRG's set value : n	Actual time (bps)	BRG's set value : n	Actual time (bps)
600	f <sub>8</sub>	129 (81 <sub>16</sub> )	600	95 (5F <sub>16</sub> )	600
1200	f <sub>8</sub>	64 (40 <sub>16</sub> )	1201	47 (2F <sub>16</sub> )	1200
2400	f <sub>8</sub>	32 (20 <sub>16</sub> )	2367	23 (17 <sub>16</sub> )	2400
4800	f <sub>1</sub>	129 (81 <sub>16</sub> )	4807	95 (5F <sub>16</sub> )	4800
9600	f <sub>1</sub>	64 (40 <sub>16</sub> )	9615	47 (2F <sub>16</sub> )	9600
14400	f <sub>1</sub>	42 (2A <sub>16</sub> )	14534	31 (1F <sub>16</sub> )	14400
19200	f <sub>1</sub>	32 (20 <sub>16</sub> )	18939	23 (17 <sub>16</sub> )	19200
28800	f <sub>1</sub>	21 (15 <sub>16</sub> )	28409	15 (F <sub>16</sub> )	28800
31250	f <sub>1</sub>	19 (13 <sub>16</sub> )	31250		

## UART

### (3) An error detection

In clock-asynchronous serial I/O mode, detect errors are shown in Table 2.6.3.

**Table 2.6.3. Error detection**

Type of error	Description	When the flag turns on	How to clear the flag
Overrun error	<ul style="list-style-type: none"> <li>This error occurs when the next data lines up before the content of the UARTi receive buffer register is read.</li> <li>The next data is written to the UARTi receive buffer register.</li> <li>The UARTi receive interrupt request bit does not change.</li> </ul>	The error is detected when data is transferred from the UARTi receive register to the UARTi receive buffer register.	<ul style="list-style-type: none"> <li>Set the receive enable bit to "0".</li> </ul>
Framing error	<ul style="list-style-type: none"> <li>This error occurs when the stop bit falls short of the set number of stop bits.</li> </ul>		<ul style="list-style-type: none"> <li>Set the receive enable bit to "0".</li> <li>Read the lower-order byte of the UARTi receive buffer register.</li> </ul>
Parity error	<ul style="list-style-type: none"> <li>With parity enabled, this error occurs when the total number of 1's in character bits and the parity bit is different from the specified number.</li> </ul>		
Error-sum flag	<ul style="list-style-type: none"> <li>This flag turns on when any error (overrun, framing, or parity) is detected.</li> </ul>		<ul style="list-style-type: none"> <li>When all error (overrun, framing, and parity) are removed, the flag is cleared.</li> </ul>

## UART

---

### (4) Functions selection

In operating UART, the following functions can be used:

#### (a) Sleep mode

Sleep mode is a mode in which data is transferred to a particular microcomputer among those connected by use of clock-asynchronous serial I/O devices.

The following are examples in which functions (a) to (e) are chosen:

- Transmission WITHOUT: other functions ..... P276
- Reception WITHOUT: other functions ..... P280

### (5) Input/output to the serial I/O and the direction register

To input an external signal to the serial I/O, set the direction register of the relevant port to input. To output a signal from the serial I/O, set the direction register of the relevant port to output.

### (6) Pins related to the serial I/O

- CLK0 pins :Input pins for the transfer clock
- RxD0, RxD1 pins :Input pins for data
- TxD0, TxD1 pins :Output pins for data

## UART

**(8) Registers related to the serial I/O**

Figure 2.6.2 shows the memory map of serial I/O-related registers, and Figures 2.6.3 to 2.6.7 show UARTi-related registers.

0051 <sub>16</sub>	UART0 transmit interrupt control register (S0TIC)
0052 <sub>16</sub>	UART0 receive interrupt control register (S0RIC)
0053 <sub>16</sub>	UART1 transmit interrupt control register (S1TIC)
0054 <sub>16</sub>	UART1 receive interrupt control register (S1RIC)
≈	
03A0 <sub>16</sub>	UART0 transmit/receive mode register (U0MR)
03A1 <sub>16</sub>	UART0 bit rate generator (U0BRG)
03A2 <sub>16</sub>	UART0 transmit buffer register (U0TB)
03A3 <sub>16</sub>	
03A4 <sub>16</sub>	UART0 transmit/receive control register 0 (U0C0)
03A5 <sub>16</sub>	UART0 transmit/receive control register 1 (U0C1)
03A6 <sub>16</sub>	UART0 receive buffer register (U0RB)
03A7 <sub>16</sub>	
03A8 <sub>16</sub>	UART1 transmit/receive mode register (U1MR)
03A9 <sub>16</sub>	UART1 bit rate generator (U1BRG)
03AA <sub>16</sub>	UART1 transmit buffer register (U1TB)
03AB <sub>16</sub>	
03AC <sub>16</sub>	UART1 transmit/receive control register 0 (U1C0)
03AD <sub>16</sub>	UART1 transmit/receive control register 1 (U1C1)
03AE <sub>16</sub>	UART1 receive buffer register (U1RB)
03AF <sub>16</sub>	
03B0 <sub>16</sub>	UART transmit/receive control register 2 (UCON)

Figure 2.6.2. Memory map of UARTi-related registers

## UART

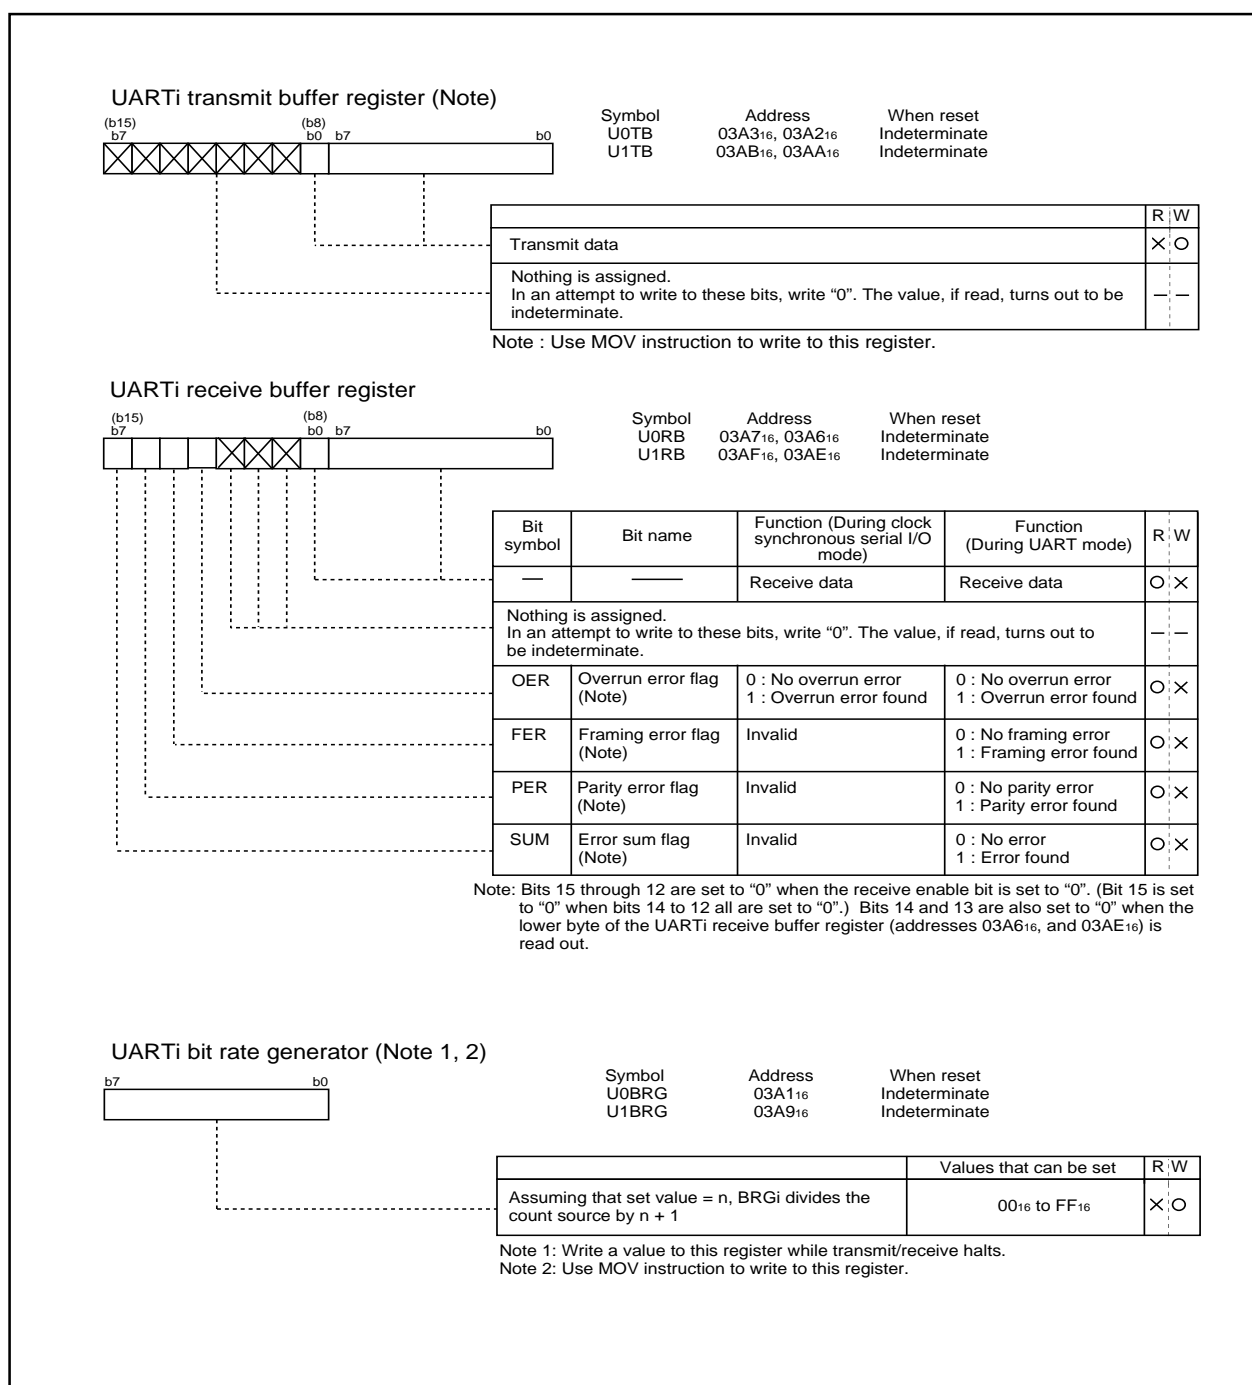


Figure 2.6.3. UARTi-related registers (1)



## UART

## UARTi transmit/receive mode register

Symbol U <i>i</i> MR( <i>i</i> =0,1)								Address 03A0 <sub>16</sub> , 03A8 <sub>16</sub>		When reset 00 <sub>16</sub>			
b7	b6	b5	b4	b3	b2	b1	b0						
								Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
								SMD0	Serial I/O mode select bit (Note 1)	Must be fixed to 001  b2 b1 b0 0 0 0 : Serial I/O invalid 0 1 0 : Inhibited 0 1 1 : Inhibited 1 1 1 : Inhibited	b2 b1 b0 1 0 0 : Transfer data 7 bits long 1 0 1 : Transfer data 8 bits long 1 1 0 : Transfer data 9 bits long 0 0 0 : Serial I/O invalid 0 1 0 : Inhibited 0 1 1 : Inhibited 1 1 1 : Inhibited		
								SMD1					
								SMD2					
								CKDIR	Internal/external clock select bit (Note 2)	0 : Internal clock (Note 3) 1 : External clock (Note 4)	0 : Internal clock (Note 3) 1 : External clock (Note 4)		
								STPS	Stop bit length select bit	Invalid	0 : One stop bit 1 : Two stop bits		
								PRY	Odd/even parity select bit	Invalid	Valid when bit 6 = "1" 0 : Odd parity 1 : Even parity		
								PRYE	Parity enable bit	Invalid	0 : Parity disabled 1 : Parity enabled		
								SLEP	Sleep select bit	Must always be "0"	0 : Sleep mode deselected 1 : Sleep mode selected		

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: UART1 can use only internal clock. Must set this bit to "1".

Note 3: Set the corresponding port direction register to "1" (output mode).

Note 4: Set the corresponding port direction register to "0" (input mode).

## UARTi transmit/receive control register 0


b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
		1		0				UIC0(i=0,1)	03A4 <sub>16</sub> , 03AC <sub>16</sub>	08 <sub>16</sub>
Bit symbol	Bit name	Function (Note) (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W					
CLK0	BRG count source select bit	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : fc is selected	b1 b0 0 0 : f1 is selected 0 1 : f8 is selected 1 0 : f32 is selected 1 1 : fc is selected	0	0					
CLK1				0	0					
Set this bit to "0".				0	0					
TXEPT	Transmit register empty flag	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0 : Data present in transmit register (during transmission) 1 : No data present in transmit register (transmission completed)	0	X					
Set this bit to "1".				0	0					
NCH	Data output select bit	0 : TXDi pin is CMOS output 1 : TXDi pin is N-channel open-drain output	0 : TXDi pin is CMOS output 1 : TXDi pin is N-channel open-drain output	0	0					
CKPOL	CLK polarity select bit	0 : Transmit data is output at falling edge of transfer clock and receive data is input at rising edge 1 : Transmit data is output at rising edge of transfer clock and receive data is input at falling edge	Must always be "0"		0					
UFORM	Transfer format select bit	0 : LSB first 1 : MSB first	Must always be "0"	0	0					

Note: UART1 cannot be used in clock synchronous serial I/O.

Figure 2.6.4. UARTi-related registers (2)

## UART

## UARTi transmit/receive control register 1



Symbol  
UiC1(i=0,1)

Address  
03A516, 03AD16


When reset  
0216

Bit symbol	Bit name	Function (Note 1) (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
TE	Transmit enable bit	0 : Transmission disabled 1 : Transmission enabled	0 : Transmission disabled 1 : Transmission enabled	○	○
TI	Transmit buffer empty flag	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	0 : Data present in transmit buffer register 1 : No data present in transmit buffer register	○	×
RE	Receive enable bit (Note 2)	0 : Reception disabled 1 : Reception enabled	0 : Reception disabled 1 : Reception enabled	○	○
RI	Receive complete flag	0 : No data present in receive buffer register 1 : Data present in receive buffer register	0 : No data present in receive buffer register 1 : Data present in receive buffer register	○	×
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.				—	—

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: If you are using clock asynchronous serial I/O mode, you can enable 'receive enable bit' when RxD port input is "H". If RxD port input is "L" and you have enabled 'receive enable bit', then receive operation starts immediately.

## UART transmit/receive control register 2



Symbol  
UCON

Address  
03B016

When reset  
XX0000002

Bit symbol	Bit name	Function (During clock synchronous serial I/O mode)	Function (During UART mode)	R	W
U0IRS	UART0 transmit interrupt cause select bit	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○
U1IRS	UART1 transmit interrupt cause select bit	Set this bit to "0".	0 : Transmit buffer empty (TI = 1) 1 : Transmission completed (TXEPT = 1)	○	○
U0RRM	UART0 continuous receive mode enable bit	0 : Continuous receive mode disabled 1 : Continuous receive mode enable	Must always be "0"	○	○
Set this bit to "0".				○	○
CLKMD0	CLK/CLKS select bit 0	Valid when bit 5 = "1" 0 : Clock output to CLK1 1 : Clock output to CLK1	Must always be "0"	○	○
CLKMD1	CLK/CLKS select bit 1 (Note 2)	0 : Normal mode (CLK output is CLK0 only) 1 : Transfer clock output from multiple pins function selected	Must always be "0"	○	○
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.				—	—

Note 1: UART1 cannot be used in clock synchronous serial I/O.

Note 2: When using multiple pins to output the transfer clock, the following requirements must be met:

- UART0 internal/external clock select bit (bit 3 at address 03A016) = "0".

Figure 2.6.5. UARTi-related registers (3)

## UART

## 2.6.2 Operation of Serial I/O (transmission in UART mode)

In transmitting data in UART mode, choose functions from those listed in Table 2.6.4. Operations of the circled items are described below. Figure 2.6.6 shows the operation timing, and Figures 2.6.7 and 2.6.8 show the set-up procedures.

**Table 2.6.4. Chooed functions**


Item	Set-up	
Transfer clock source	<input type="radio"/>	Internal clock ( $f_1$ / $f_8$ / $f_{32}$ / $f_c$ )
		External clock (CLK0 pin) (Note)
Transmission interrupt factor		Transmission buffer empty
	<input type="radio"/>	Transmission complete
Sleep mode	<input type="radio"/>	Sleep mode off
		Sleep mode selected

Note: UART1 cannot be selected external clock.

- Operation
- (1) Setting the transmit enable bit to "1" and writing transmission data to the UARTi transmit buffer register readies the data transmissible status.
  - (2) Transmission data held in the UARTi transmit buffer register is transmitted to the UARTi transmit register. At this time, the first bit (the start bit) of the transmission data is transmitted from the TxDi pin. Then, data is transmitted, bit by bit, in sequence: LSB, ..., MSB, parity bit, and stop bit(s).
  - (3) When the stop bit(s) is (are) transmitted, the transmit register empty flag goes to "1", which indicates that transmission is completed. At this time, the UARTi transmit interrupt request bit goes to "1". The transfer clock stops at "H" level.
  - (4) If the transmission condition of the next data is ready when transmission is completed, a start bit is generated following to stop bit(s), and the next data is transmitted.

## UART

## Example of wiring

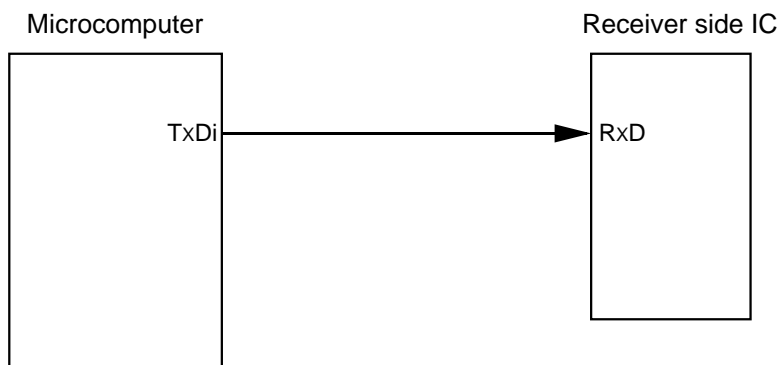

## Example of operation

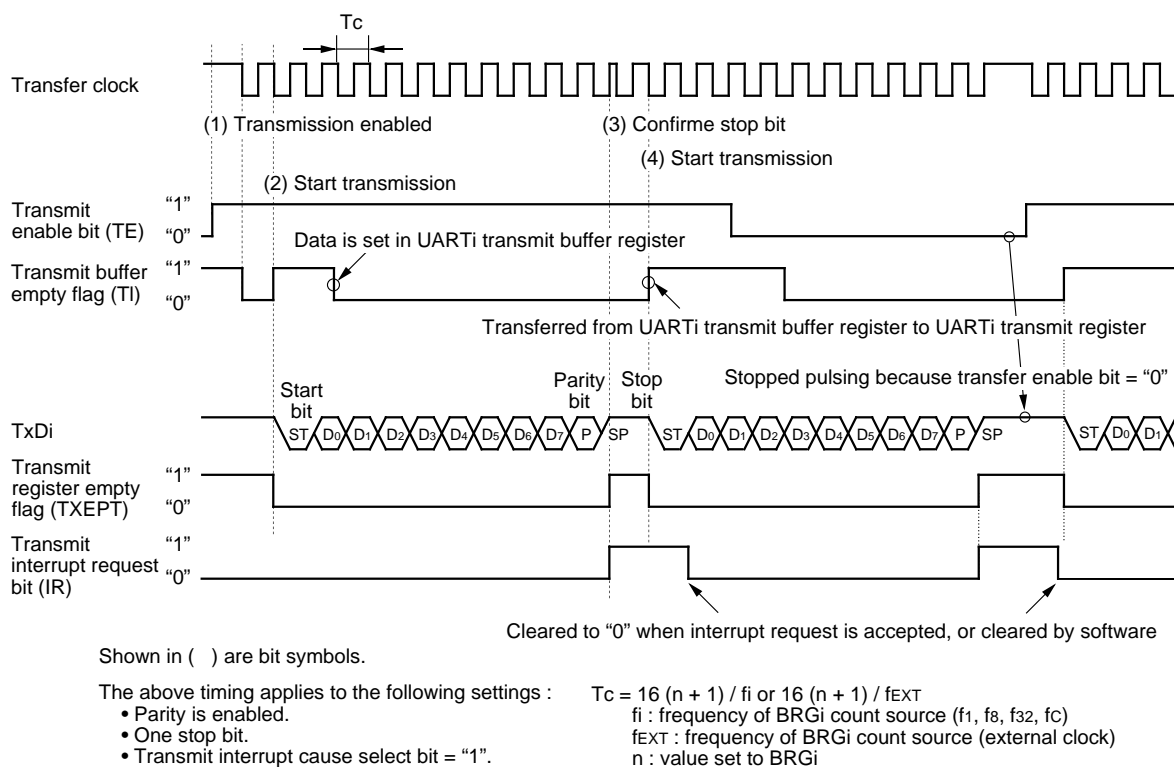


Figure 2.6.6. Operation timing of transmission in UART mode

## UART

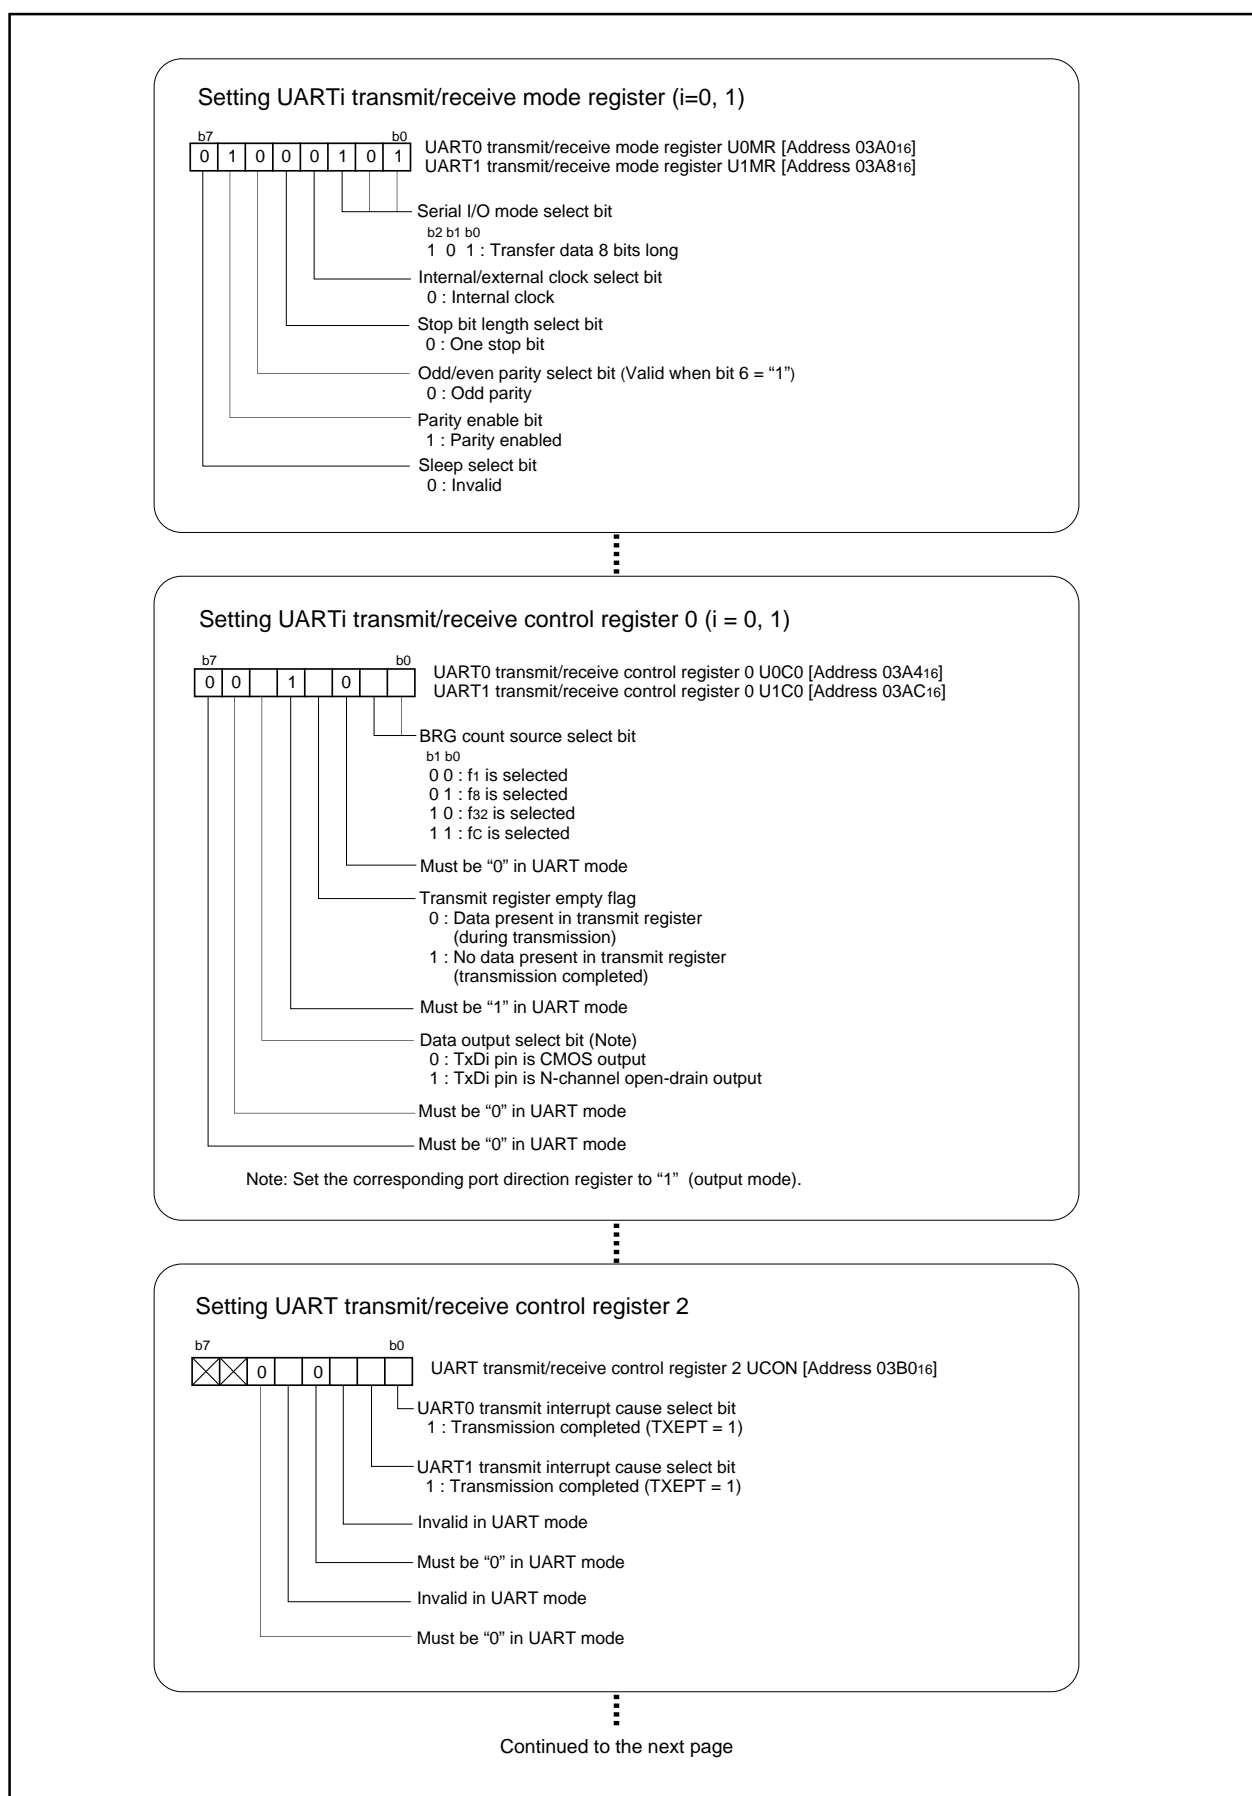


Figure 2.6.7. Set-up procedure of transmission in UART mode (1)

## UART

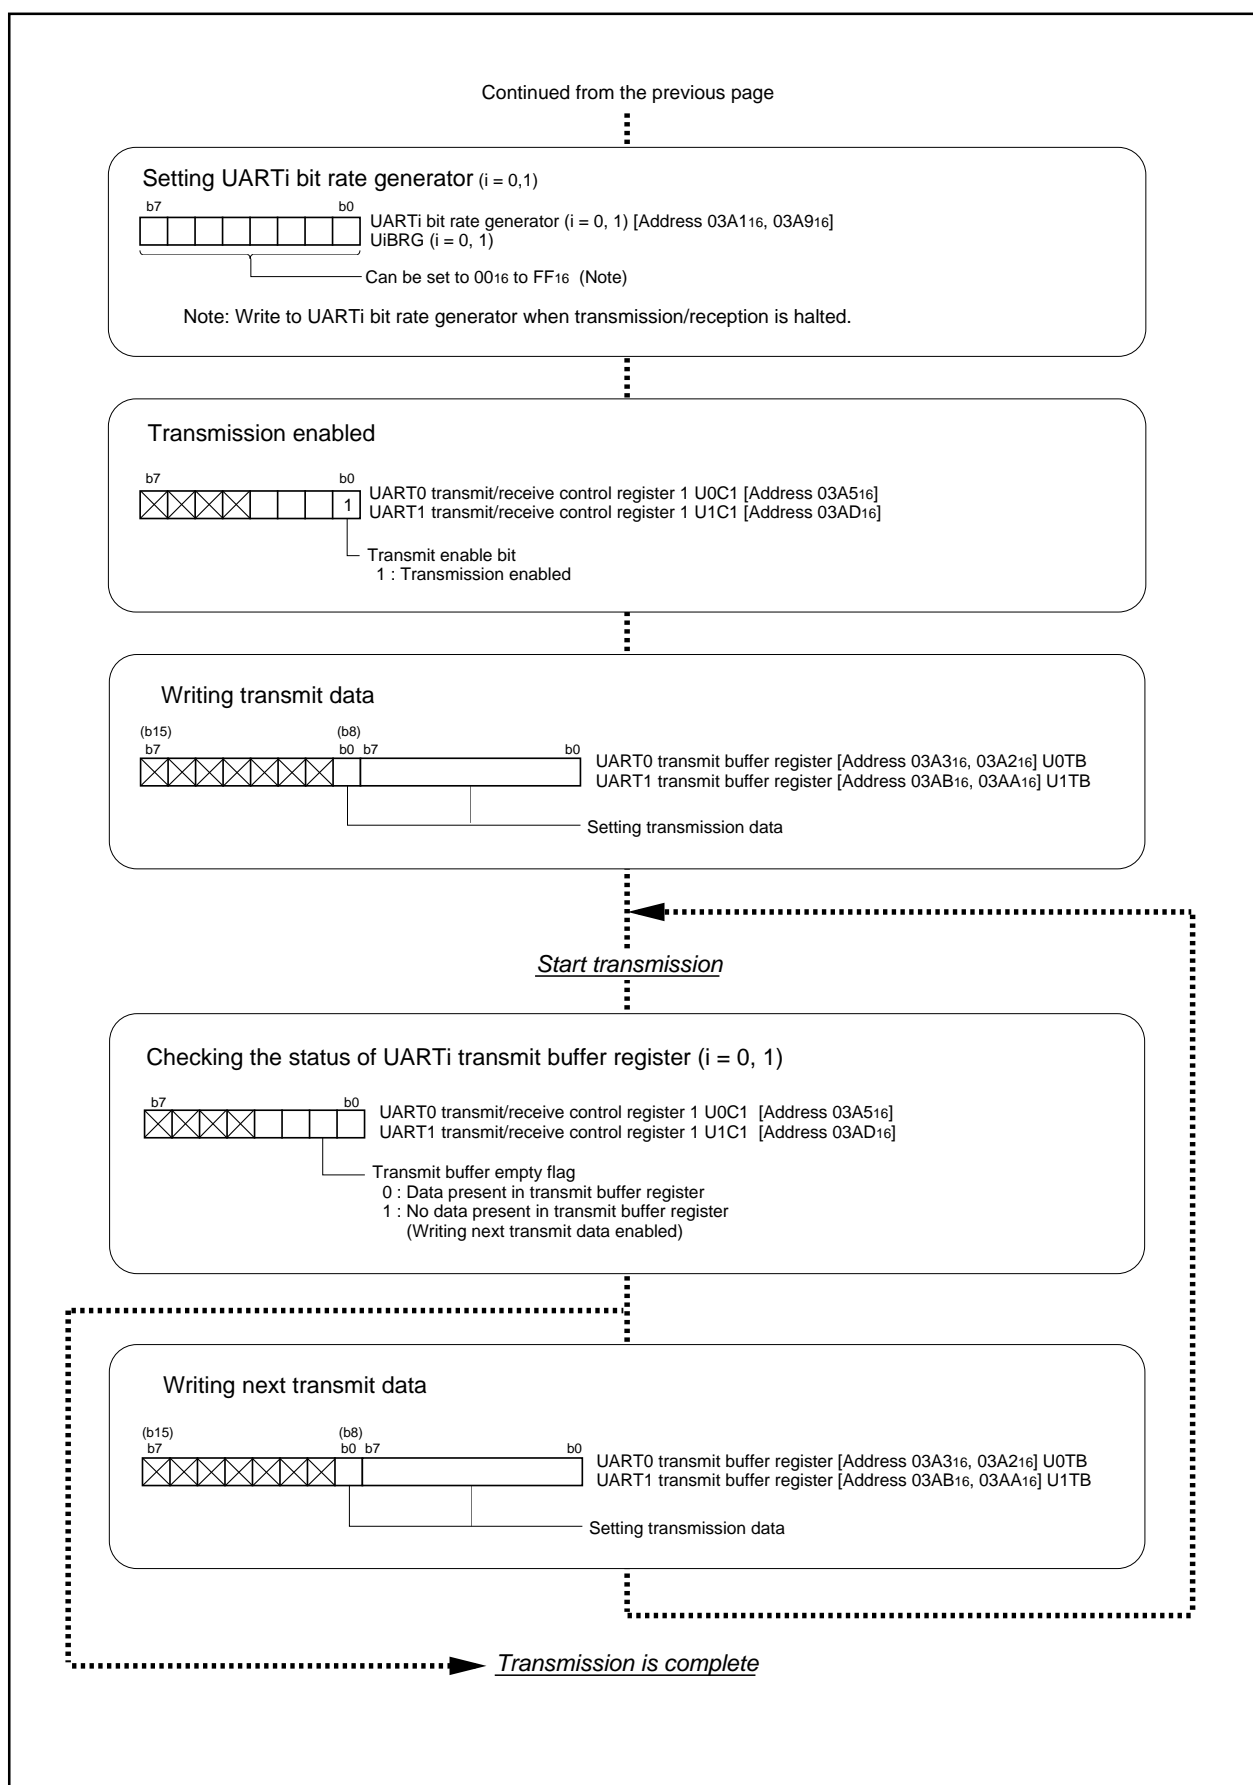


Figure 2.6.8. Set-up procedure of transmission in UART mode (2)

## UART

**2.6.3 Operation of Serial I/O (reception in UART mode)**

In receiving data in UART mode, choose functions from those listed in Table 2.6.5. Operations of the circled items are described below. Figure 2.6.9 shows the operation timing, and Figures 2.6.10 and 2.6.11 show the set-up procedures.

**Table 2.6.5. Chooosed functions**


Item	Set-up	
Transfer clock source		Internal clock ( $f_1$ / $f_8$ / $f_{32}$ / $f_c$ )
	○	External clock (CLK0 pin) (Note)
Sleep mode	○	Sleep mode off
		Sleep mode selected

Note: UART1 cannot be selected external clock.

- Operation
- (1) Setting the receive enable bit to "1" readies data-receivable status.
  - (2) When the first bit (the start bit) of reception data is received from the RxDi pin. Then, data is received, bit by bit, in sequence: LSB, ..., MSB, and stop bit(s).
  - (3) When the stop bit(s) is (are) received, the content of the UARTi receive register is transmitted to the UARTi receive buffer register.  
At this time, the receive complete flag goes to "1" to indicate that the reception is completed, the UARTi receive interrupt request bit goes to "1".
  - (4) The receive complete flag goes to "0" when the lower-order byte of the UARTi buffer register is read.

## UART

## Example of wiring

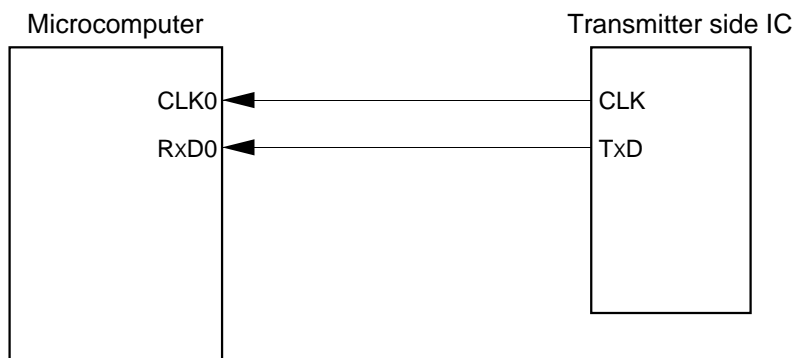

## Example of operation


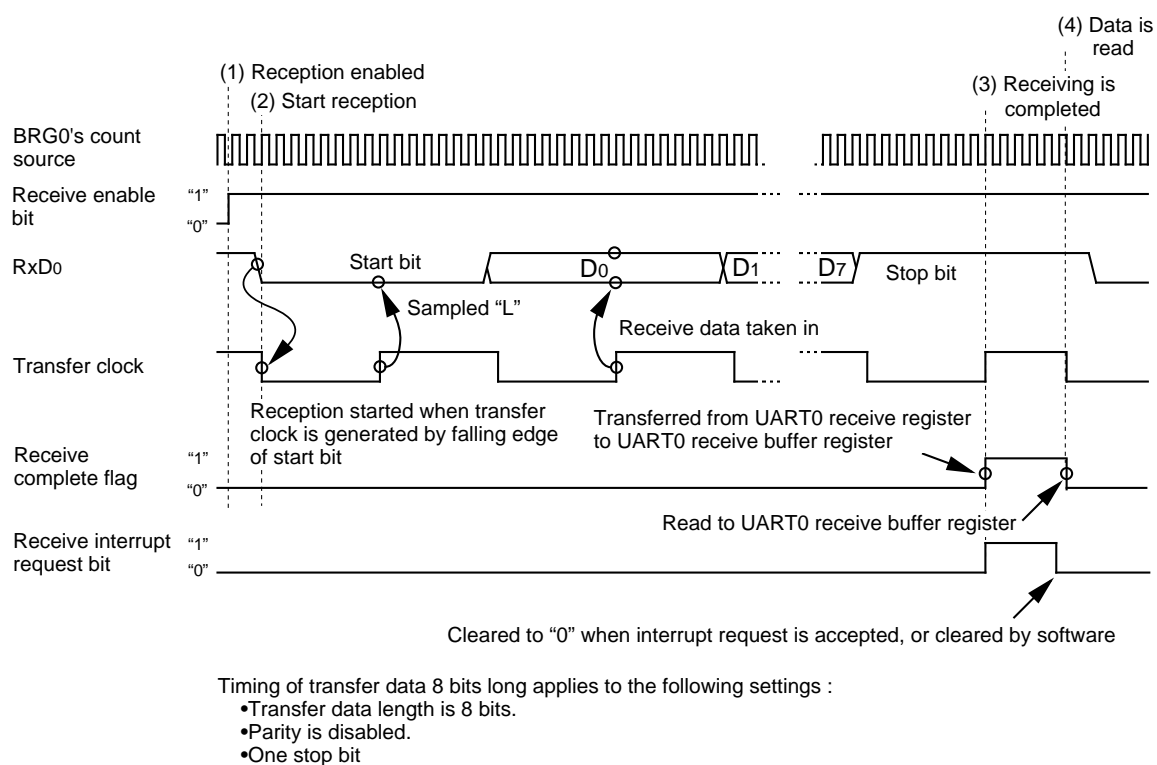


Figure 2.6.9. Operation timing of reception in UART mode




## UART

## Setting UART0 transmit/receive mode register

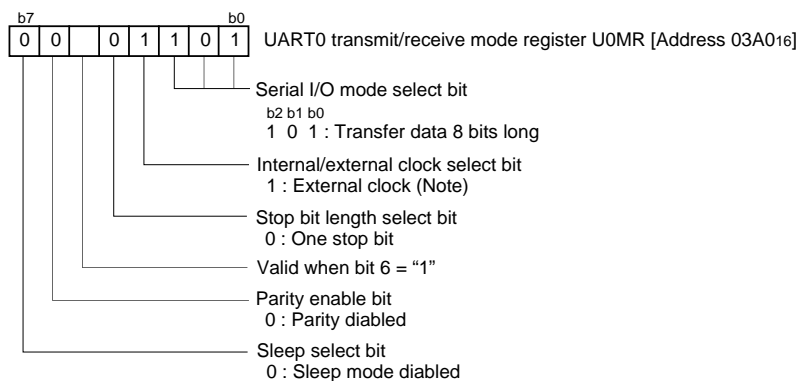


Note: UATRT1 cannot be selected external clock.

## Setting UART0 transmit/receive control register 0

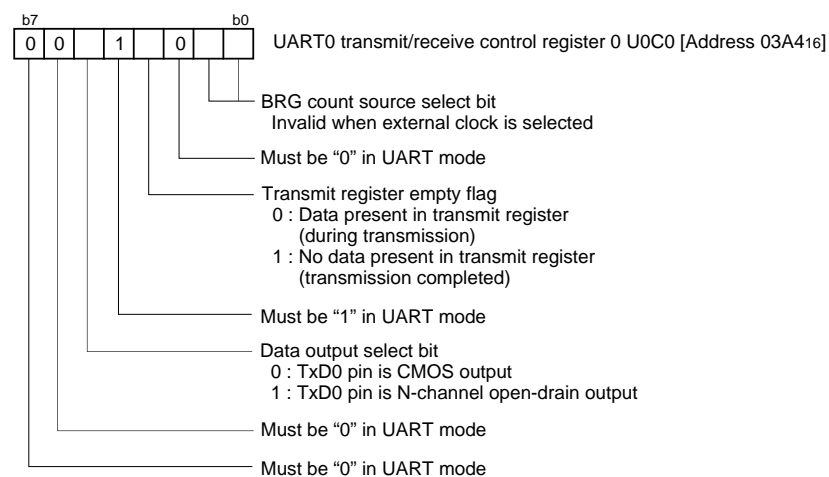

## Setting UART transmit/receive control register 2

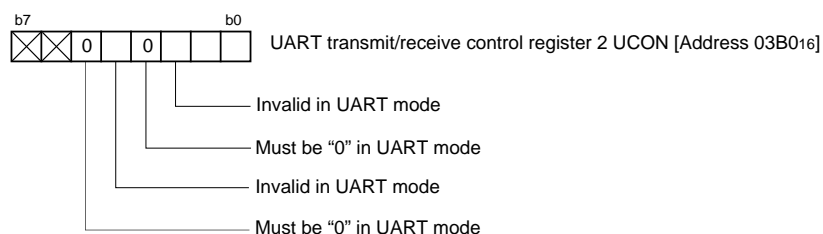

Continued to the next page

Figure 2.6.10. Set-up procedure of reception in UART mode (1)

## UART

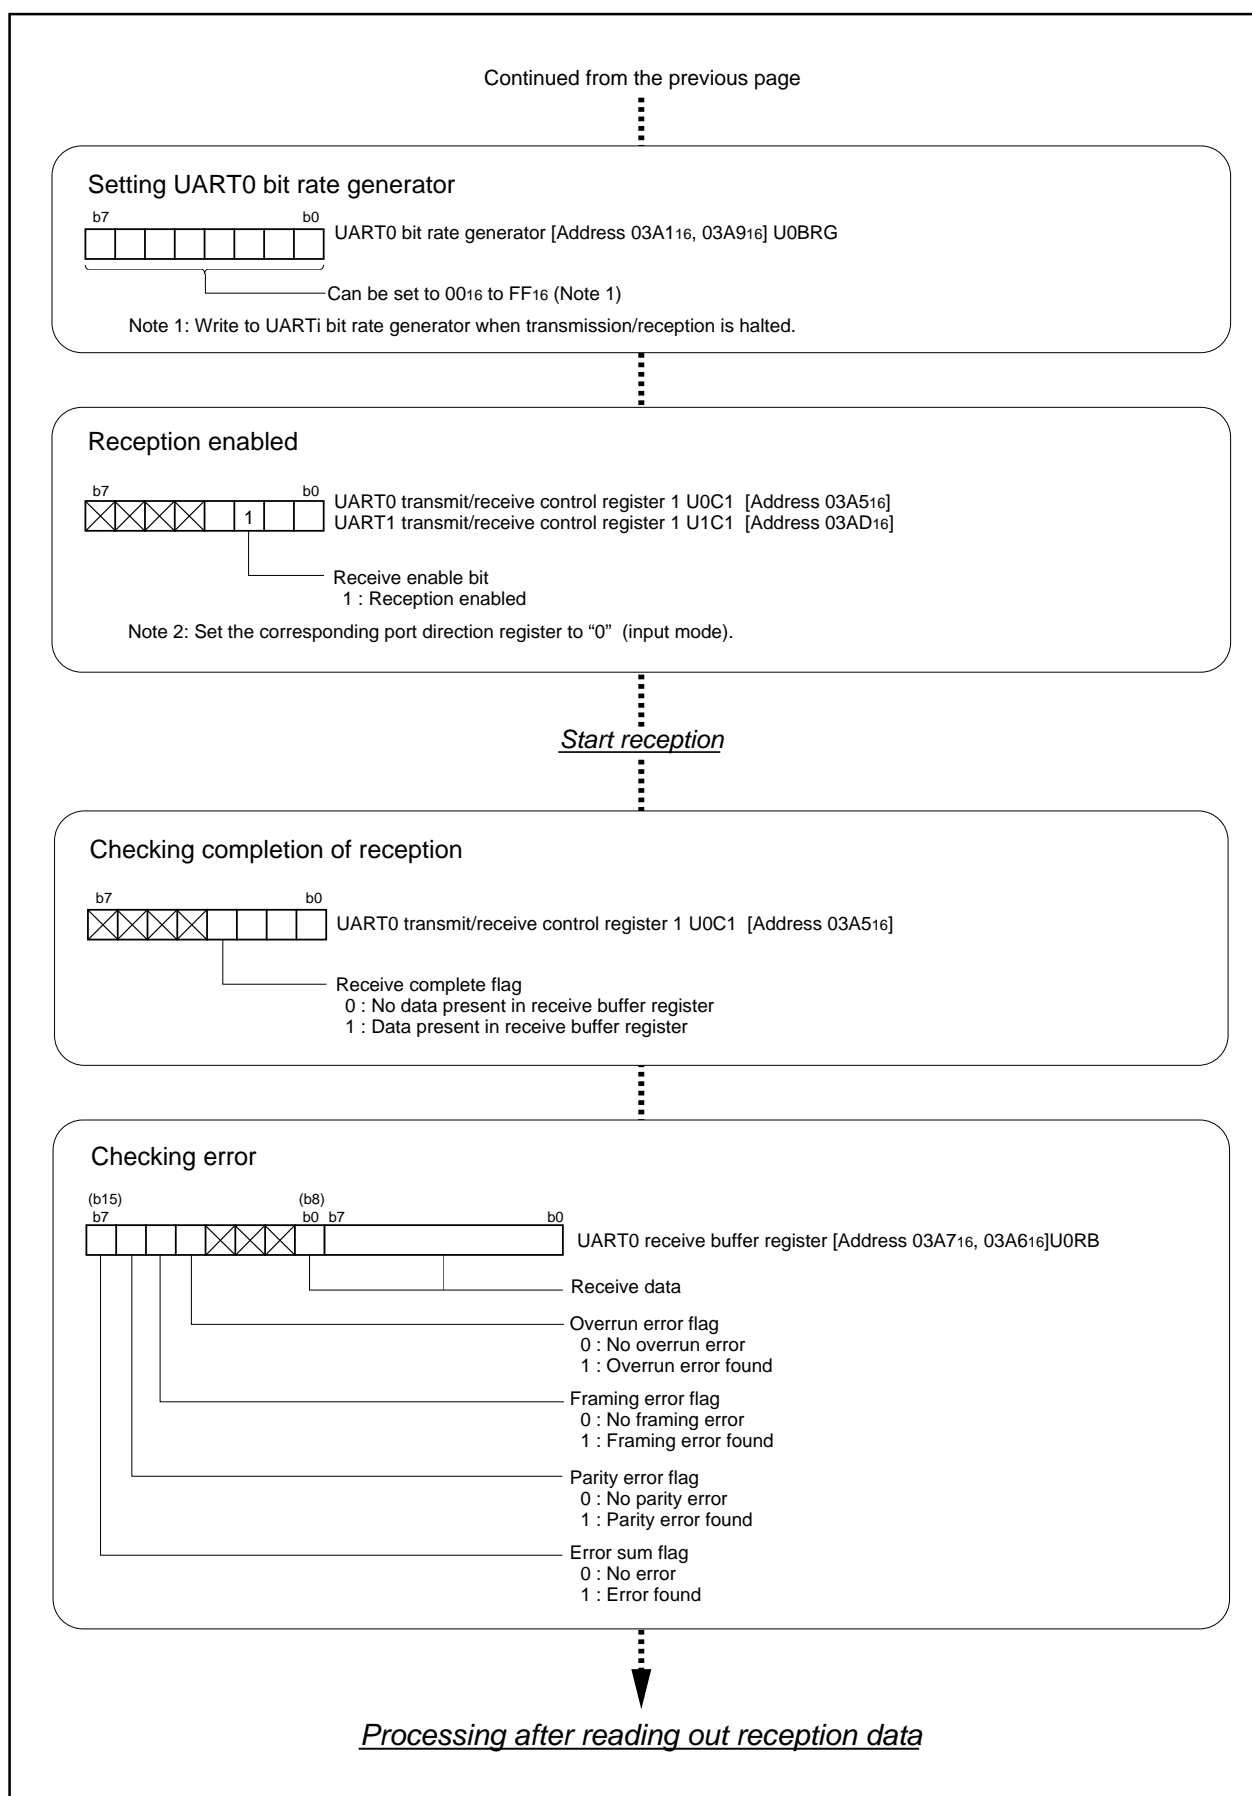


Figure 2.6.11. Set-up procedure of reception in UART mode (2)

## A-D Converter

## 2.7 A-D Converter

## 2.7.1 Overview

The A-D converter used in the M16C/60 group operates on a successive conversion basis. The following is an overview of the A-D converter.

## (1) Mode

The A-D converter operates in one of five modes:

## (a) One-shot mode

Carries out A-D conversion on input level of one specified pin only once.

## (b) Repetition mode

Repeatedly carries out A-D conversion on input level of one specified pin.

## (c) Single sweep mode

Carries out A-D conversion on input level of two or more specified pins only once.

## (d) Repeated sweep mode 0

Repeatedly carries out A-D conversion on input level of two or more pins.

## (e) Repeated sweep mode 1

Repeatedly carries out A-D conversion on input level of two or more pins. This mode is different from the repeated sweep mode 0 in that weights can be assigned to specifying pins control the number of conversion times.

## (2) Operation clock

The operation clock in 5 V operation can be selected from the following:  $f_{AD}$ , divide-by-2  $f_{AD}$ , and divide-by-4  $f_{AD}$ . In 3 V operation, the selection is divide-by-2  $f_{AD}$  or divide-by-4. The  $f_{AD}$  frequency is equal to that of the CPU's main clock.

## (3) Conversion time

Number of conversion for A-D convertor varies depending on resolution as given. Table 2.7.1 shows relation between the A-D converter operation clock and conversion time.

Sample & Hold function selected:

33 cycles for 10-bit resolution, or 28 cycles for 8-bit resolution

No Sample & Hold function:

59 cycles for 10-bit resolution, or 49 cycles for 8-bit resolution

**Table 2.7.1. Conversion time every operation clock**

Frequency selection bit 1		0		1
Frequency selection bit 0		0	1	Invalid
A-D converter's operation clock		$\phi_{AD} = \frac{f_{AD}}{4}$	$\phi_{AD} = \frac{f_{AD}}{2}$	$\phi_{AD} = f_{AD}$
Min. conversion cycles (Note 1)	8-bit mode	28 X $\phi_{AD}$		
	10-bit mode	33 X $\phi_{AD}$		
Min. conversion time (Note 2)	8-bit mode	11.2 $\mu$ s	5.6 $\mu$ s	2.8 $\mu$ s
	10-bit mode	13.2 $\mu$ s	6.6 $\mu$ s	3.3 $\mu$ s

Note 1: The number of conversion cycles per one analog input pin.

Note 2: The conversion time per one analog input pin (when  $f_{AD} = f(XIN) = 10$  MHz)

## A-D Converter

**(4) Functions selection****(a) Sample & Hold function**

Sample & Hold function samples input voltage when A-D conversion starts and carries out A-D conversion on the voltage sampled. When A-D conversion starts, input voltage is sampled for 3 cycles of the operation clock. When the Sample & Hold function is selected, set the operation clock for A-D conversion to 1 MHz or higher.

**(b) 8-bit A-D to 10-bit A-D switching function**

Either 8-bit resolution or 10-bit resolution can be selected. When 8-bit resolution is selected, the 8 higher-order bits of the 10-bit A-D are subjected to A-D conversion. The equations for 10-bit resolution and 8-bit resolution are given below:

$$\text{10-bit resolution} \quad (V_{\text{ref}} \times n / 2^{10}) - (V_{\text{ref}} \times 0.5 / 2^{10}) \quad (n = 1 \text{ to } 1023), 0 (n = 0)$$

$$\text{8-bit resolution} \quad (V_{\text{ref}} \times n / 2^8) - (V_{\text{ref}} \times 0.5 / 2^{10}) \quad (n = 1 \text{ to } 256), 0 (n = 0)$$

**(c) Analog input group function**

The analog input pins can be switched between the port P6 group (AN0 to AN4) and the port P5 group (AN50 to AN54).

**(d) Connecting or cutting Vref**

Cutting Vref allows decrease of the current flowing into the A-D converter. To decrease the microcomputer's power consumption, cut Vref. To carry out A-D conversion, start A-D conversion 1  $\mu$ s or longer after connecting Vref.

The following are examples in which functions (a) through (d) are selected:

- One-shot mode ..... P290
- Repeat mode ..... P292
- Single sweep mode ..... P294
- Repeated sweep mode 0 ..... P296
- Repeated sweep mode 1 ..... P298

**(5) Input to A-D converter and direction register**

To use the A-D converter, set the direction register of the relevant port to input.


**(6) Pins related to A-D converter**

- |                               |  |
|-------------------------------|--|
| (a) AN0 pin through AN7 pin   | Input pins of the A-D converter (Port P6 group ) |
| (b) AN50 pin through AN57 pin | Input pins of the A-D converter (Port P5 group ) |
| (c) AVcc pin                  | Power source pin of the analog section           |
| (d) VREF pin                  | Input pin of reference voltage                   |
| (e) AVss pin                  | GND pin of the analog section                    |

## A-D Converter

**(7) A-D converter and related registers**

Figure 2.7.1 shows the memory map of A-D converter-related registers, and Figures 2.7.2 through 2.7.4 show A-D converter-related registers.

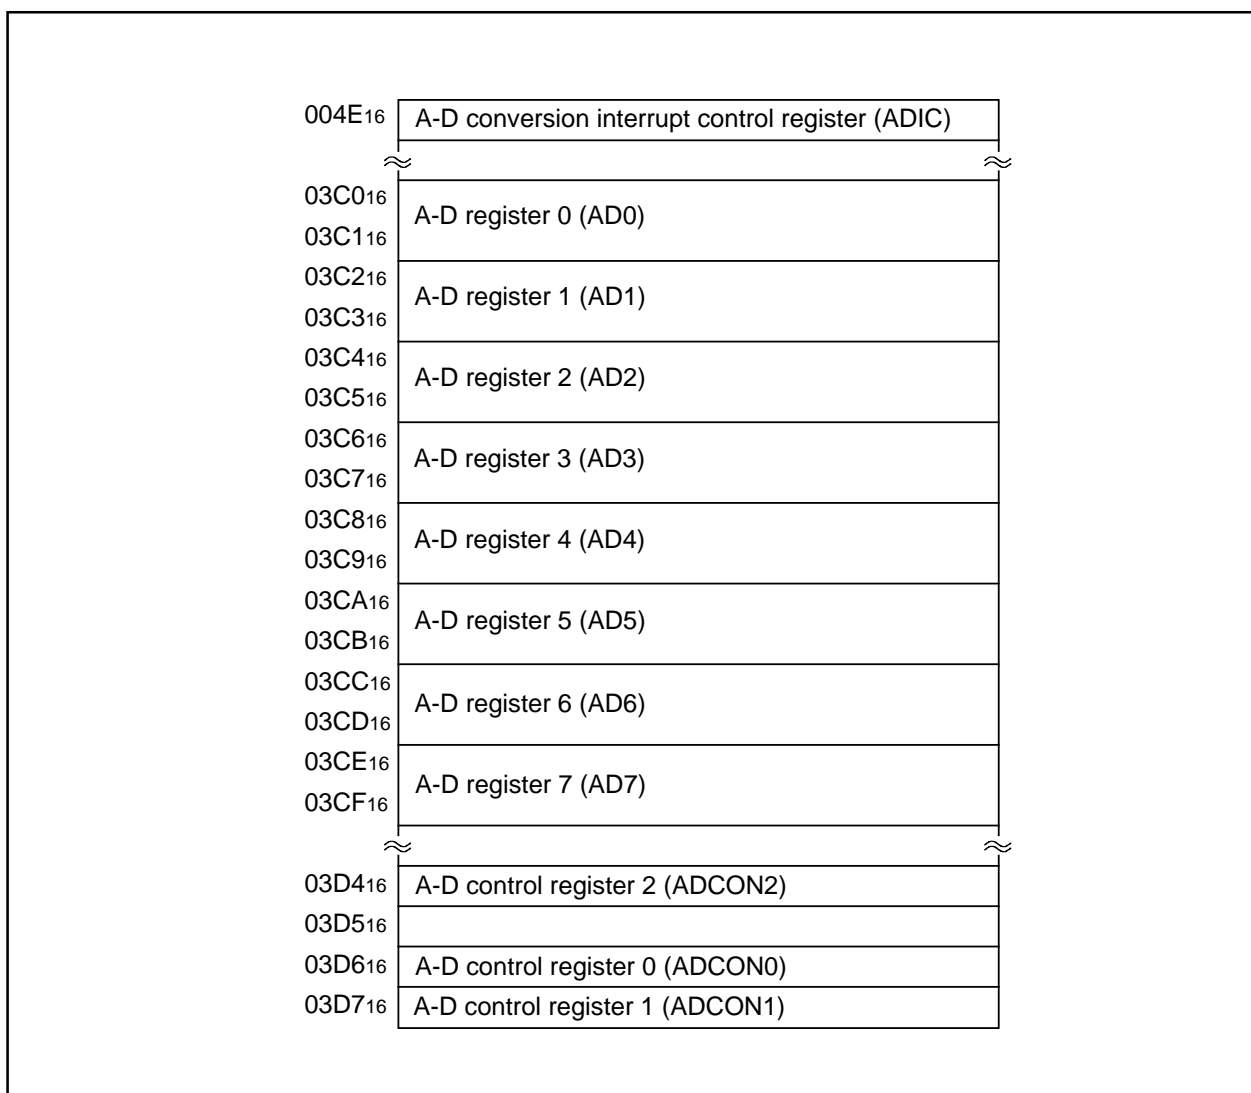

**Figure 2.7.1. Memory map of A-D converter-related registers**

## A-D Converter

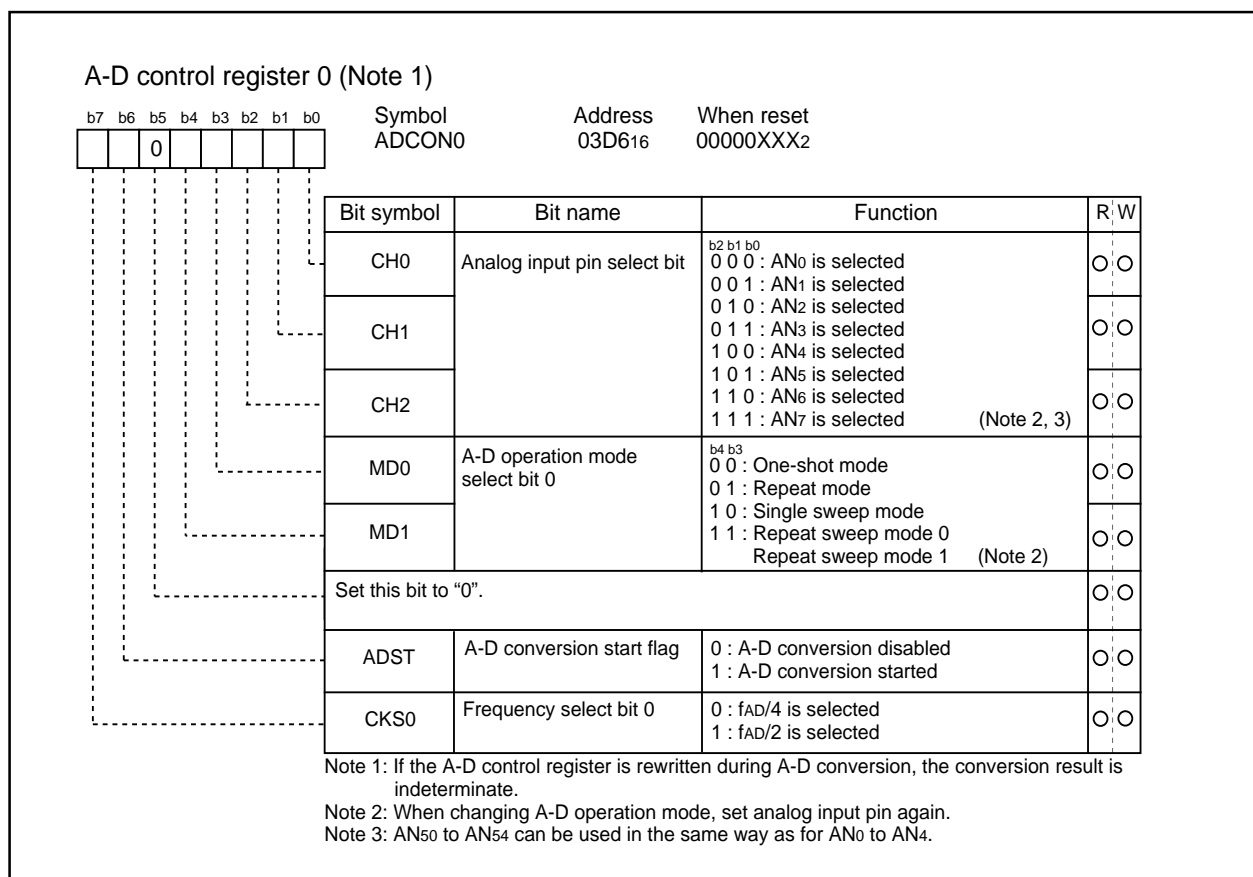


Figure 2.7.2. A-D converter-related registers (1)

## A-D Converter

Note 3: AN50 to AN54 can be used in the same way as for AN0 to AN4.

## A-D control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0
	0						

Symbol  
ADCON1

Address  
03D7<sub>16</sub>

When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
SCAN0	A-D sweep pin select bit	When single sweep and repeat sweep mode 0 are selected b1 b0 0 0 : AN0, AN1 (2 pins) 0 1 : AN0 to AN3 (4 pins) 1 0 : AN0 to AN5 (6 pins) 1 1 : AN0 to AN7 (8 pins)	○	○
SCAN1		When repeat sweep mode 1 is selected b1 b0 0 0 : AN0 (1 pin) 0 1 : AN0, AN1 (2 pins) 1 0 : AN0 to AN2 (3 pins) 1 1 : AN0 to AN3 (4 pins) (Note 2, 3)	○	○
MD2	A-D operation mode select bit 1	0 : Any mode other than repeat sweep mode 1 1 : Repeat sweep mode 1	○	○
BITS	8/10-bit mode select bit	0 : 8-bit mode 1 : 10-bit mode	○	○
CKS1	Frequency select bit 1	0 : fAD/2 or fAD/4 is selected 1 : fAD is selected	○	○
VCUT	Vref connect bit	0 : Vref not connected 1 : Vref connected	○	○
Set this bit to "0".			○	○
ADGSEL0	A-D input group select bit	0 : Port P6 group is selected 1 : Port P5 group is selected	○	○

Note 1: If the A-D control register is rewritten during A-D conversion, the conversion result is indeterminate.

Note 2: AN50 to AN54 can be used in the same way as for AN0 to AN4.

Note 3: If port P5 group is selected, the contents of A-D registers 5 to 7 are indeterminate.  
If port P5 group is selected, do not select 8 pins sweep mode.

Figure 2.7.3. A-D converter-related registers (2)





## A-D Converter

## 2.7.2 Operation of A-D converter (one-shot mode)

In one-shot mode, choose functions from those listed in Table 2.7.2. Operations of the circled items are described below. Figure 2.7.5 shows the operation timing, and Figure 2.7.6 shows the set-up procedure.

Table 2.7.2. Chosen functions

Item	Set-up
Operation clock $\phi_{AD}$	<input type="radio"/> Divided-by-4 $f_{AD}$ / divided-by-2 $f_{AD}$ / $f_{AD}$
Resolution	<input type="radio"/> 8-bit / 10-bit
Analog input pin	<input type="radio"/> One of AN <sub>0</sub> pin to AN <sub>7</sub> pin (Note)
Sample & Hold	<input type="radio"/> Not activated
	<input type="radio"/> Activated

Note : When the port P5 group is selected, analog input pins are changed from AN<sub>0</sub> to AN<sub>4</sub> to pins AN<sub>50</sub> to AN<sub>54</sub>.

- Operation (1) Setting the A-D conversion start flag to "1" causes the A-D converter to begin operating.
- (2) After A-D conversion is completed, the content of the successive comparison register (conversion result) is transmitted to A-D register i. At this time, the A-D conversion interrupt request bit goes to "1". Also, the A-D conversion start flag goes to "0", and the A-D converter stops operating.

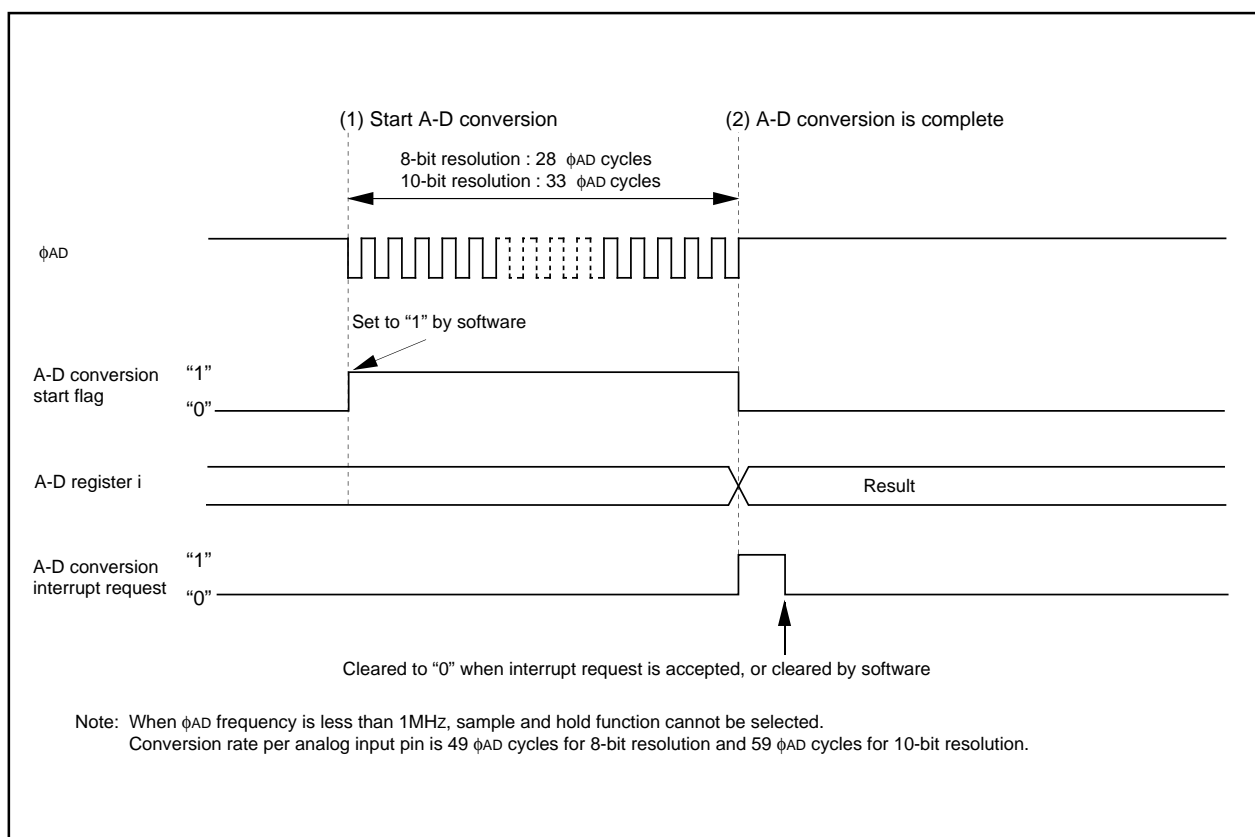


Figure 2.7.5. Operation timing of one-shot mode

## A-D Converter

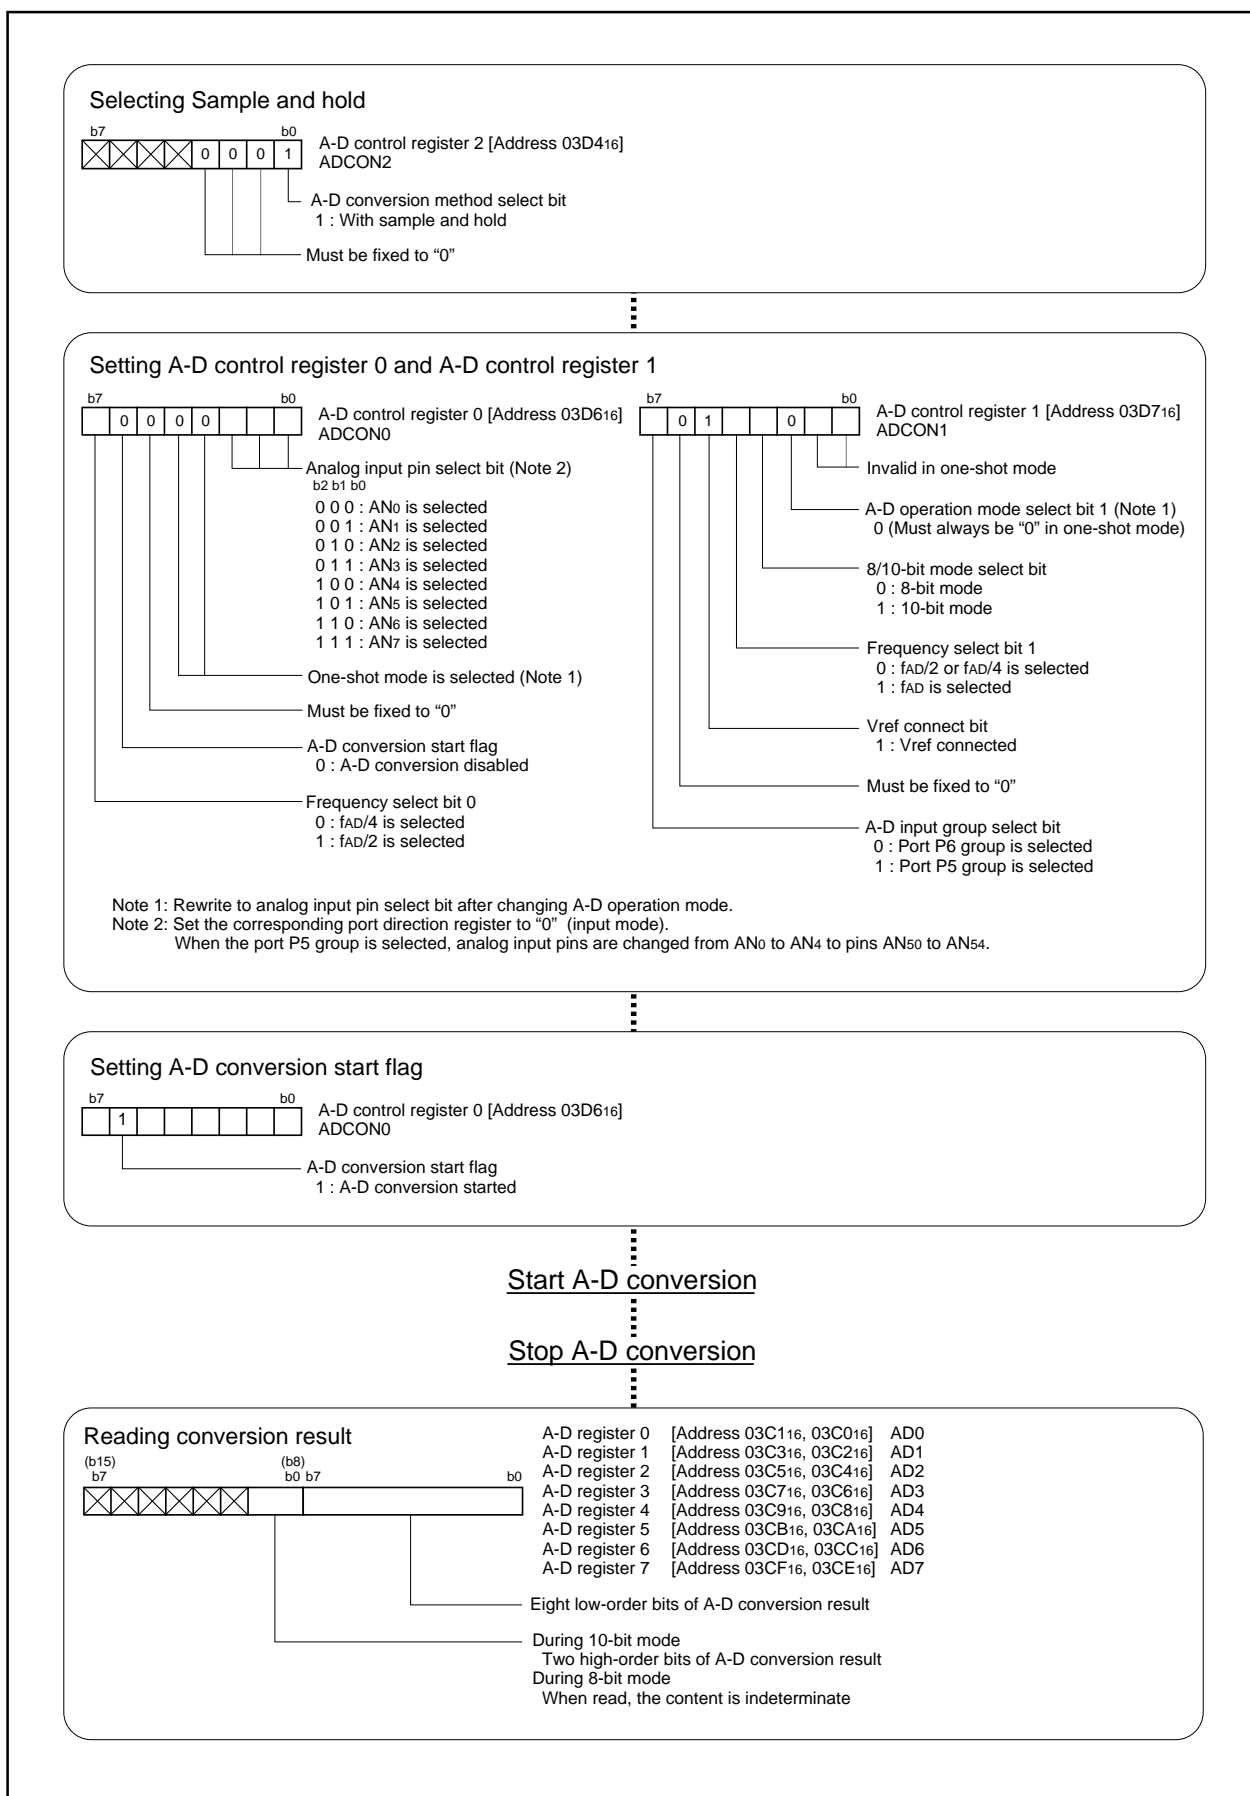


Figure 2.7.6. Set-up procedure of one-shot mode

## A-D Converter

## 2.7.3 Operation of A-D Converter (in repeat mode)

In repeat mode, choose functions from those listed in Table 2.7.3. Operations of the circled items are described below. Figure 2.7.7 shows timing chart, and Figure 2.7.8 shows the set-up procedure.

Table 2.7.3. Chosen functions

Item	Set-up	
Operation clock $\phi_{AD}$	<input type="radio"/> 0	Divided-by-4 $f_{AD}$ / divided-by-2 $f_{AD}$ / $f_{AD}$
Resolution	<input type="radio"/> 0	8-bit / 10-bit
Analog input pin	<input type="radio"/> 0	One of AN0 pin to AN7 pin (Note)
Sample & Hold		Not activated
	<input type="radio"/> 0	Activated

Note : When the port P5 group is selected, analog input pins are changed from AN0 to AN4 to pins AN50 to AN54.

- Operation
- (1) Setting the A-D conversion start flag to "1" causes the A-D converter to start operating.
  - (2) After the first conversion is completed, the content of the successive comparison register (conversion result) is transmitted to A-D register i. The A-D conversion interrupt request bit does not go to "1".
  - (3) The A-D converter continues operating until the A-D conversion start flag is set to "0" by software. The conversion result is transmitted to A-D register i every time a conversion is completed.

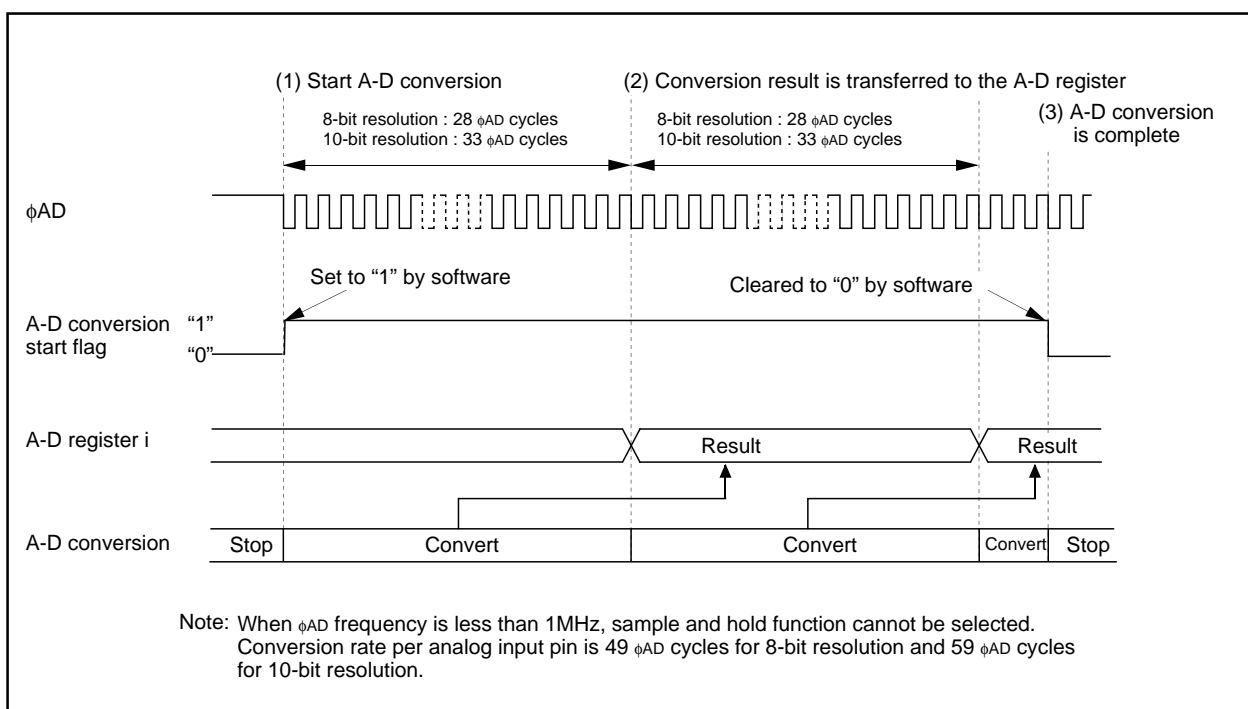


Figure 2.7.7. Operation timing of repeat mode

## A-D Converter

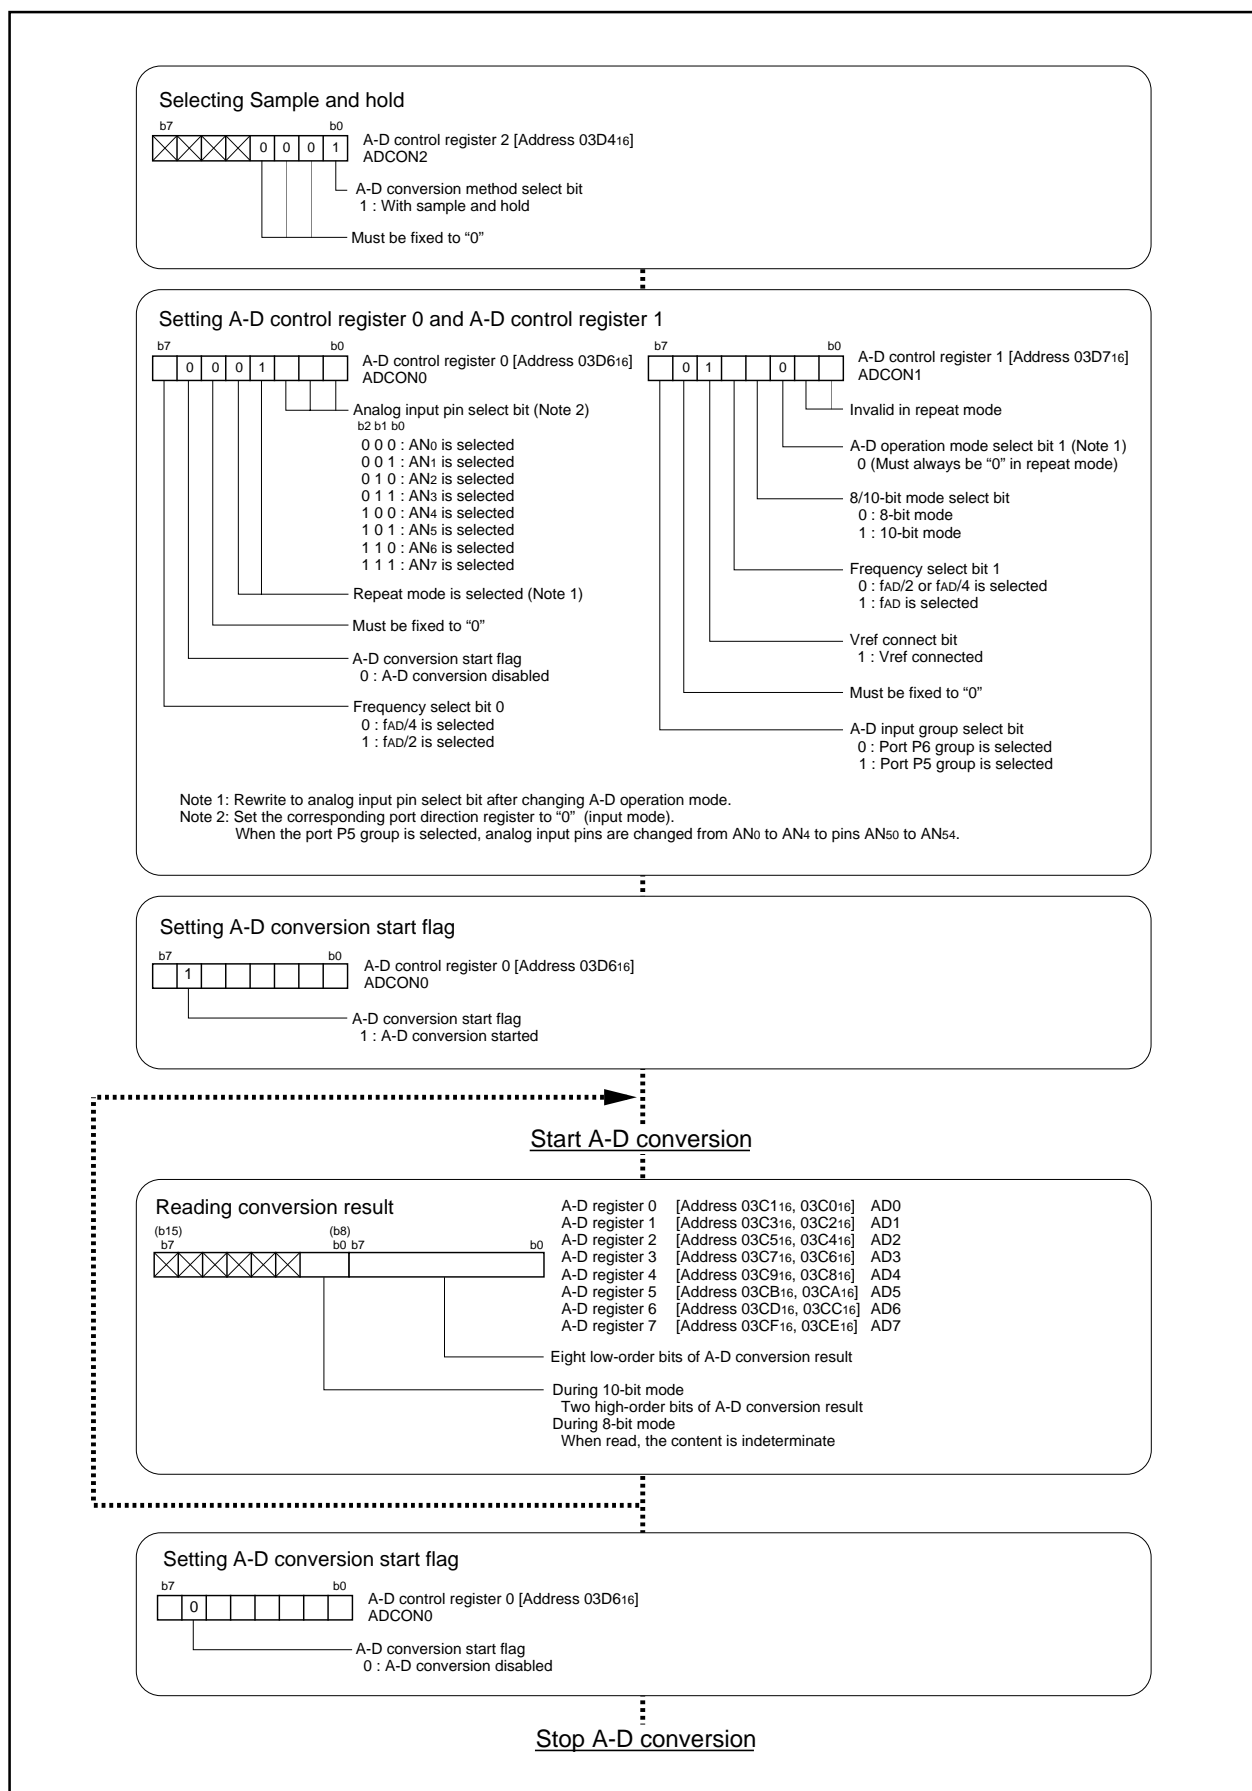


Figure 2.7.8. Set-up procedure of repeat mode

## A-D Converter

## 2.7.4 Operation of A-D Converter (in single sweep mode)

In single sweep mode, choose functions from those listed in Table 2.7.4. Operations of the circled items are described below. Figure 2.7.9 shows timing chart, and Figure 2.7.10 shows the set-up procedure.

Table 2.7.4. Chosed functions

Item	Set-up
Operation clock $\phi_{AD}$	<input type="radio"/> Divided-by-4 $f_{AD}$ / divided-by-2 $f_{AD}$ / $f_{AD}$
Resolution	<input type="radio"/> 8-bit / 10-bit
Analog input pin	<input type="radio"/> AN0 and AN1 (2 pins) / AN0 to AN3 (4 pins) / AN0 to AN5 (6 pins) / AN0 to AN7 (8 pins) (Note)
Sample & Hold	Not activated
	<input type="radio"/> Activated

Note : When the port P5 group is selected, analog input pins are changed from AN0 to AN4 to pins AN50 to AN54.

- Operation
- (1) Setting the A-D conversion start flag to "1" causes the A-D converter to start the conversion on voltage input to the AN0/AN50 pin.
  - (2) After the A-D conversion of voltage input to the AN0/AN50 pin is completed, the content of the successive comparison register (conversion result) is transmitted to A-D register 0. The A-D converter converts all analog input pins selected by the user. The conversion result is transmitted to A-D register i corresponding to each pin, every time conversion on one pin is completed.
  - (3) When the A-D conversion on all the analog input pins selected is completed, the A-D conversion interrupt request bit goes to "1". At this time, the A-D conversion start flag goes to "0". The A-D converter stops operating.

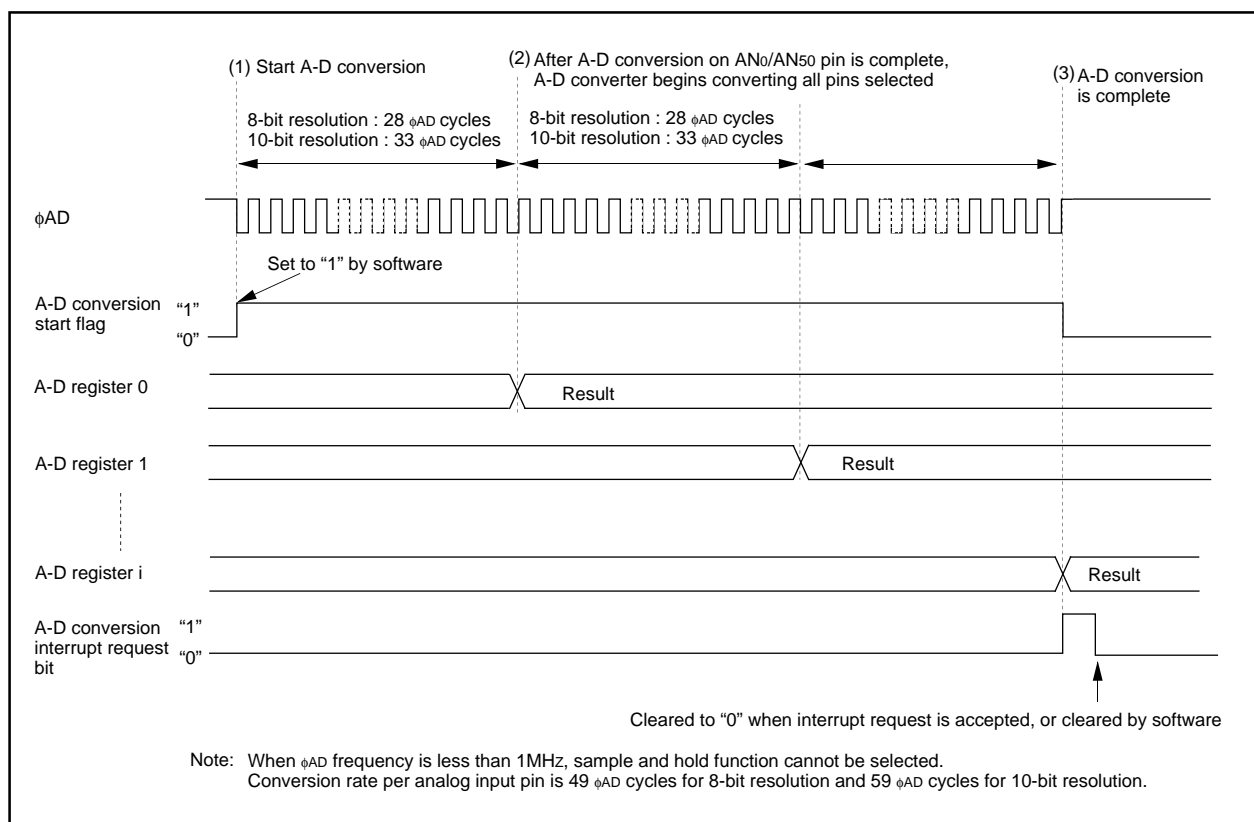


Figure 2.7.9. Operation timing of single sweep mode

## A-D Converter

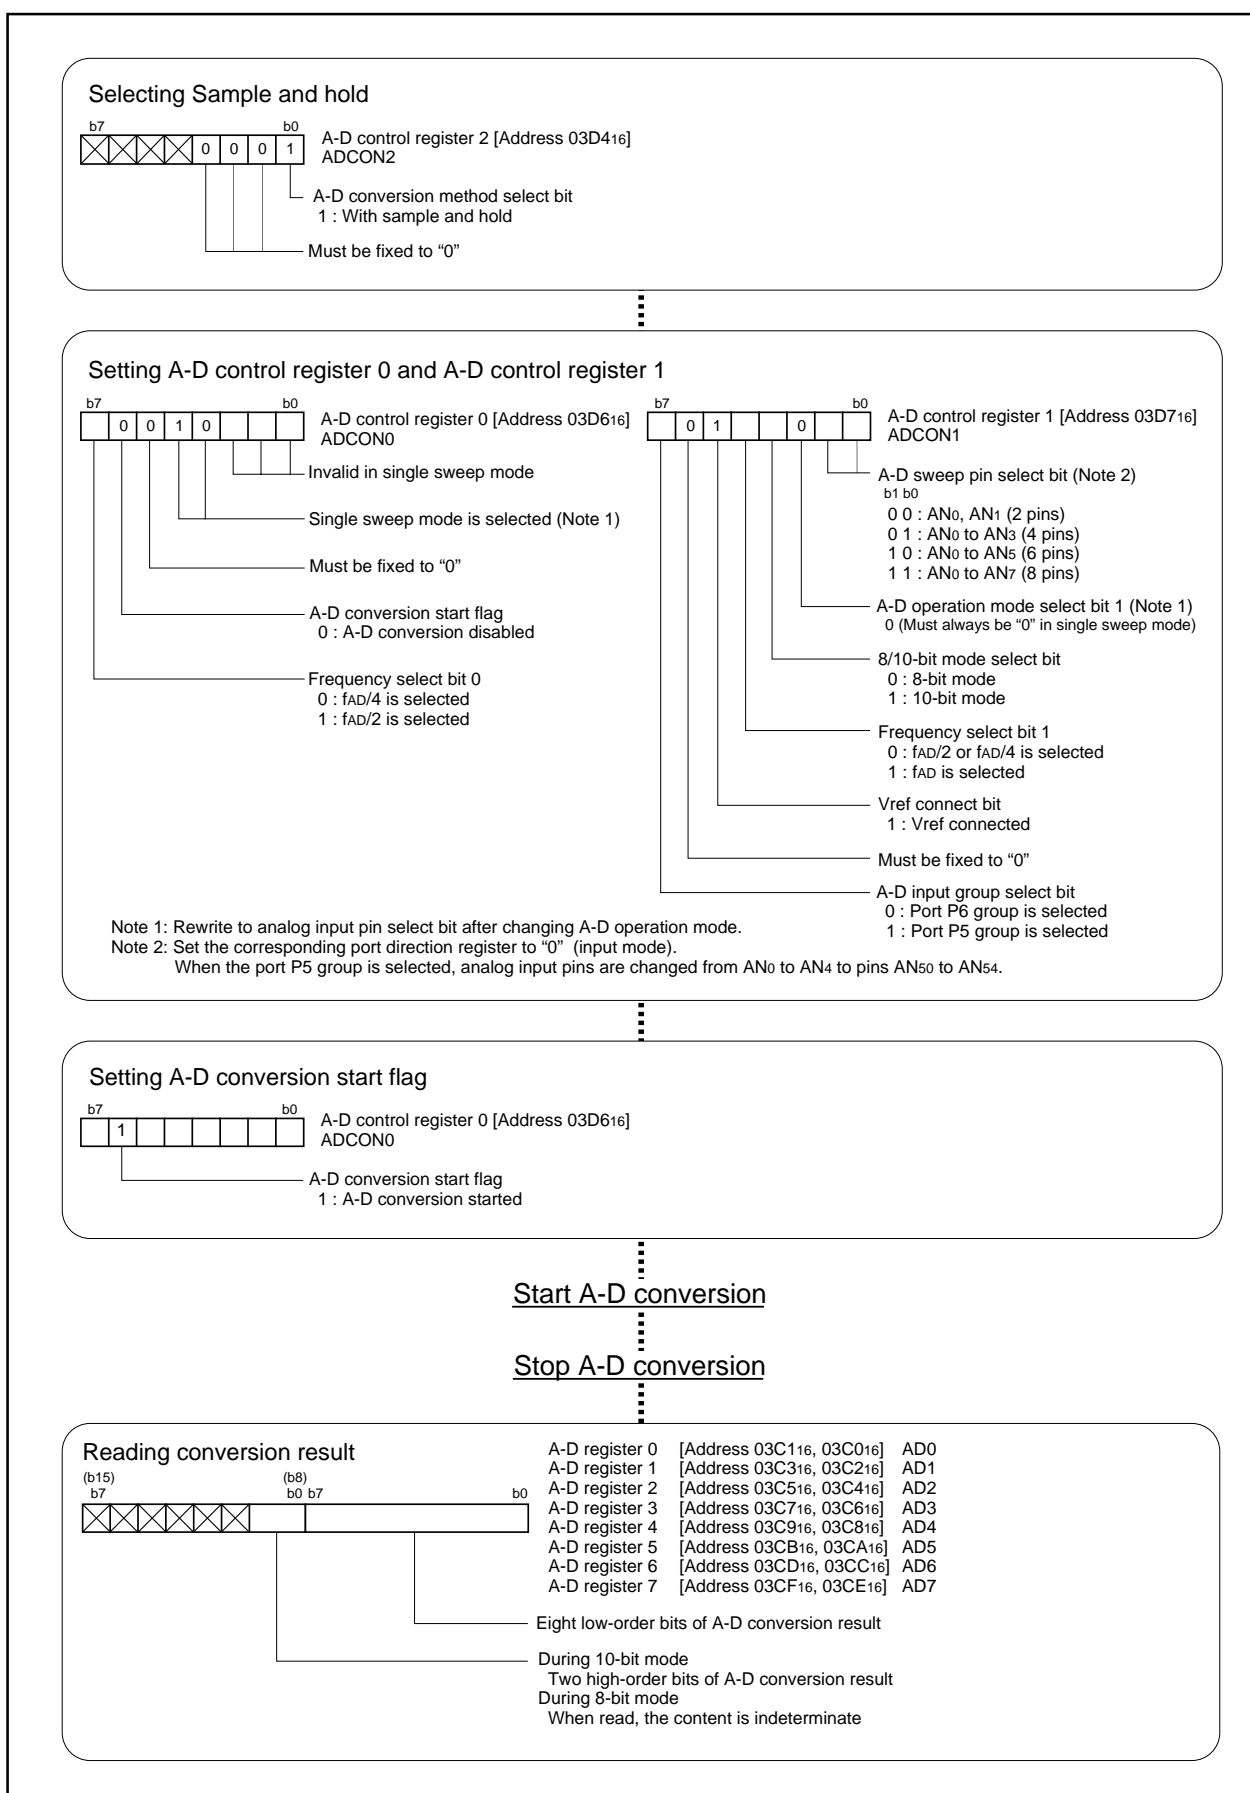


Figure 2.7.10. Set-up procedure of single sweep mode

## A-D Converter

## 2.7.5 Operation of A-D Converter (in repeat sweep mode 0)

In repeat sweep 0 mode, choose functions from those listed in Table 2.7.5. Operations of the circled items are described below. Figure 2.7.11 shows timing chart, and Figure 2.7.12 shows the set-up procedure.

Table 2.7.5. Chosed functions

Item	Set-up	
Operation clock $\phi_{AD}$	<input type="radio"/>	Divided-by-4 $f_{AD}$ / divided-by-2 $f_{AD}$ / $f_{AD}$
Resolution	<input type="radio"/>	8-bit / 10-bit
Analog input pin	<input type="radio"/>	AN <sub>0</sub> and AN <sub>1</sub> (2 pins) / AN <sub>0</sub> to AN <sub>3</sub> (4 pins) / AN <sub>0</sub> to AN <sub>5</sub> (6 pins) / AN <sub>0</sub> to AN <sub>7</sub> (8 pins) (Note)
Sample & Hold		Not activated
	<input type="radio"/>	Activated

Note : When the port P5 group is selected, analog input pins are changed from AN<sub>0</sub> to AN<sub>4</sub> to pins AN<sub>50</sub> to AN<sub>54</sub>.

- Operation
- (1) Setting the A-D conversion start flag to "1" causes the A-D converter to start the conversion on voltage input to the AN<sub>0</sub>/AN<sub>50</sub> pin.
  - (2) After the A-D conversion of voltage input to the AN<sub>0</sub>/AN<sub>50</sub> pin is completed, the content of the successive comparison register (conversion result) is transmitted to A-D register 0.
  - (3) The A-D converter converts all pins selected by the user. The conversion result is transmitted to A-D register i corresponding to each pin every time A-D conversion on the pin is completed. The A-D conversion interrupt request bit does not go to "1".
  - (4) The A-D converter continues operating until the A-D conversion start flag is set to "0" by software.

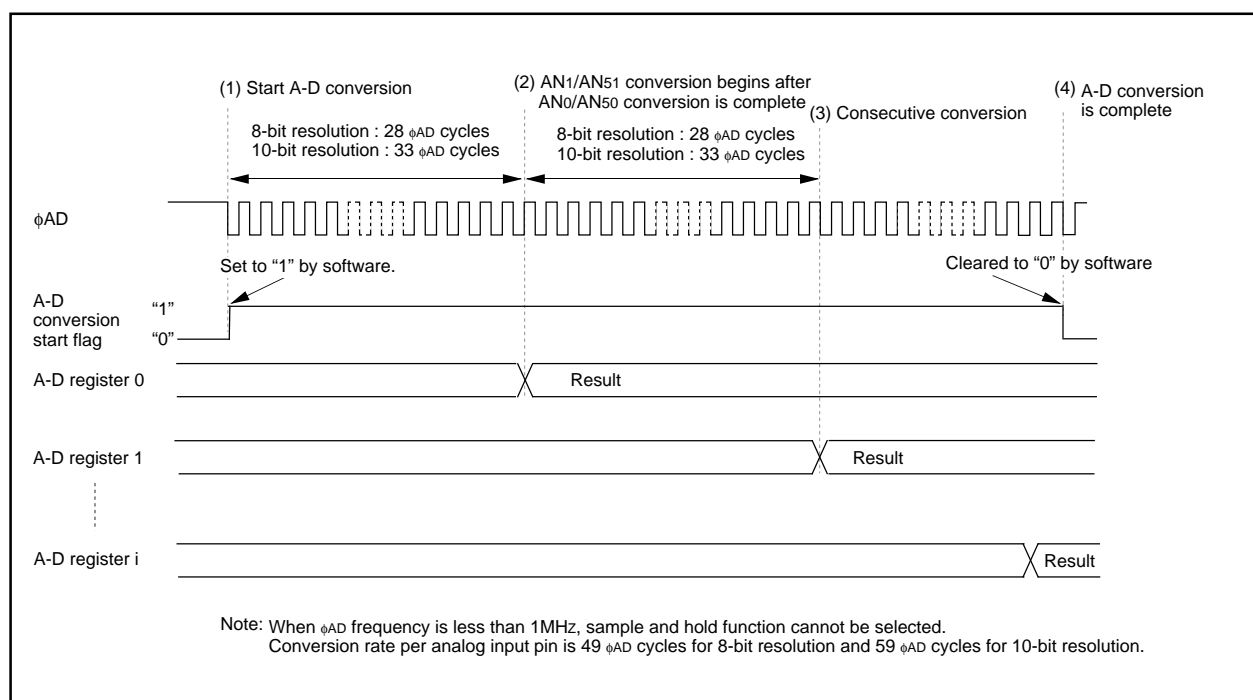


Figure 2.7.11. Operation timing of repeat sweep 0 mode

## A-D Converter

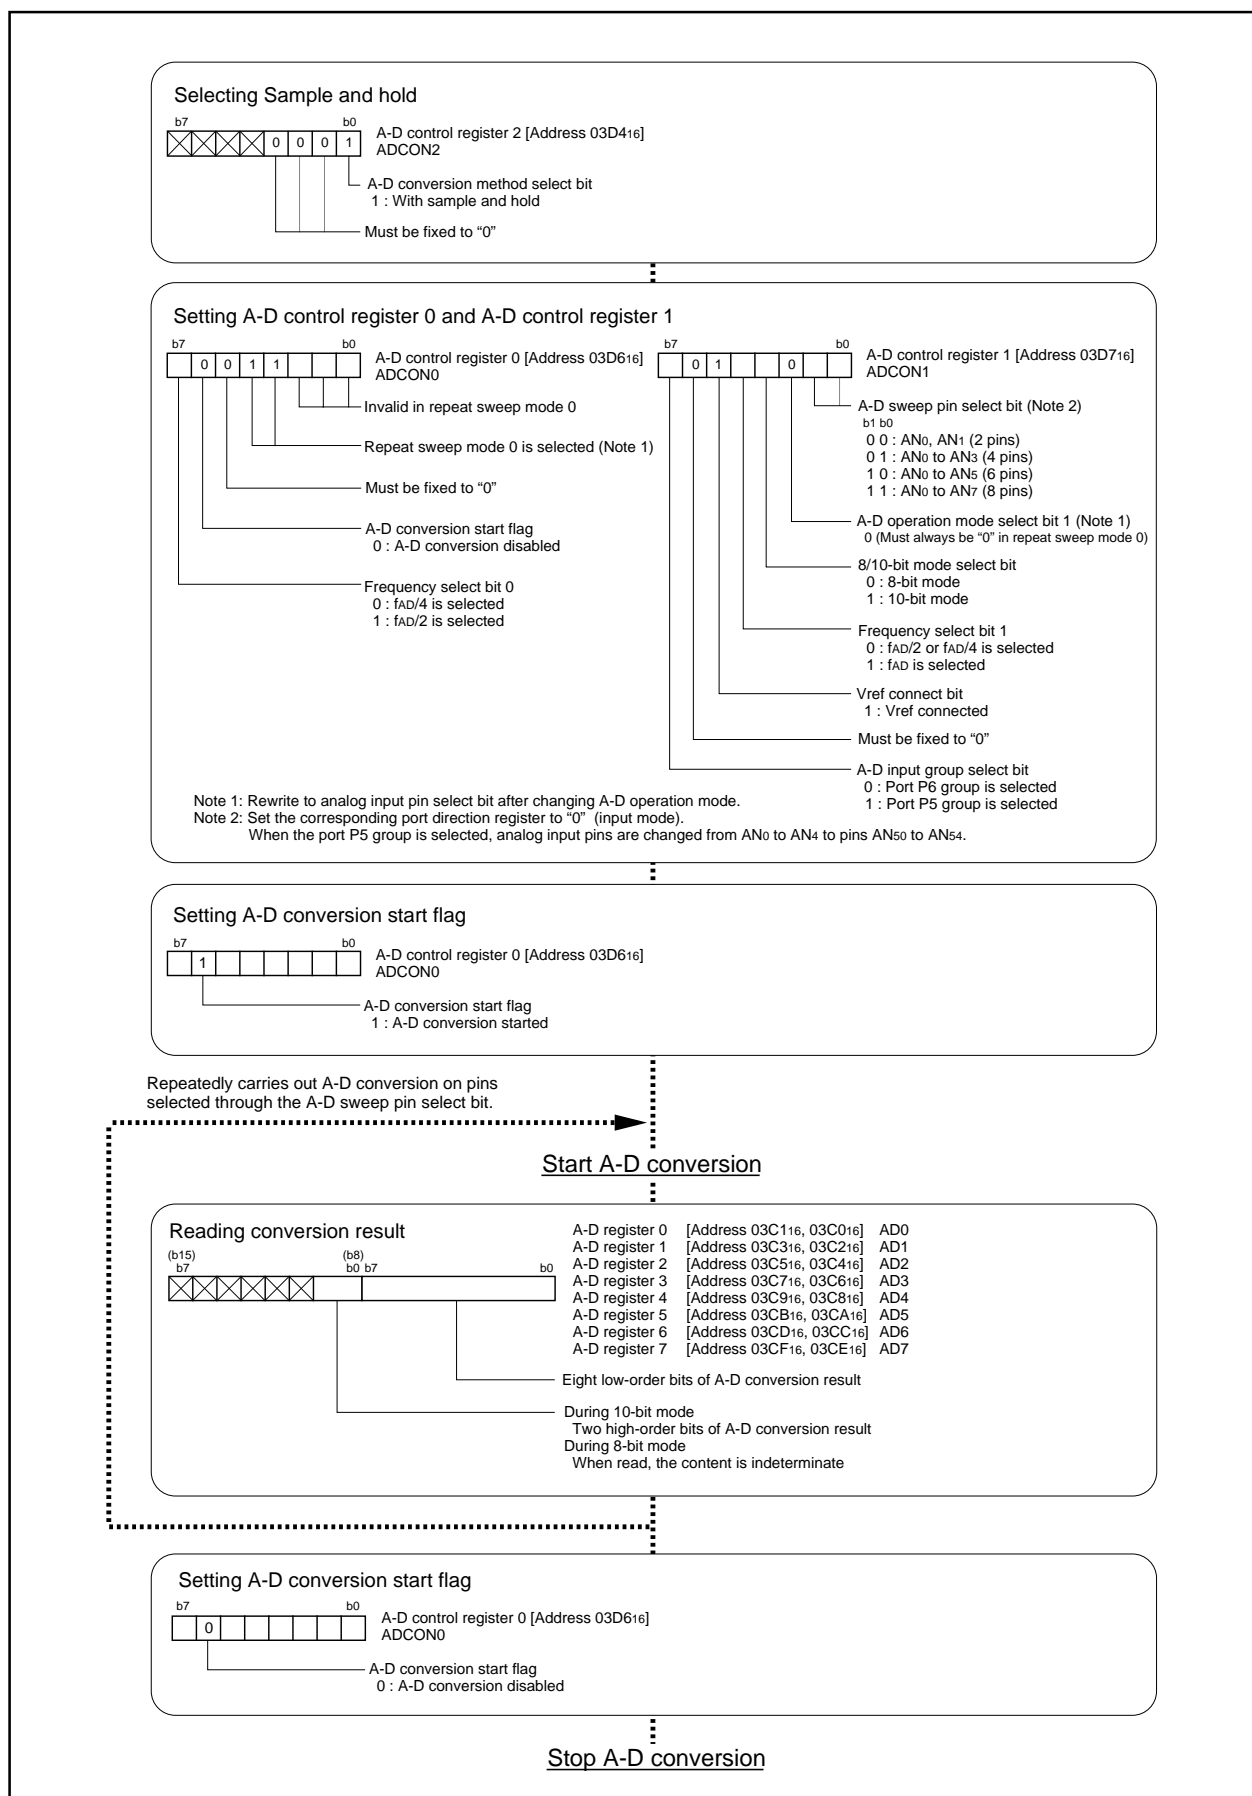


Figure 2.7.12. Set-up procedure of repeat sweep 0 mode



## A-D Converter

## 2.7.6 Operation of A-D Converter (in repeat sweep mode 1)

In repeat sweep 1 mode, choose functions from those listed in Table 2.7.6. Operations of the circled items are described below. Figure 2.7.13 shows ANi pin's sweep sequence, Figure 2.7.14 shows timing chart, and Figure 2.7.15 shows the set-up procedure.

Table 2.7.6. Chooed functions

Item	Set-up	
Operation clock $\phi_{AD}$	<b>O</b>	Divided-by-4 $f_{AD}$ / divided-by-2 $f_{AD}$ / $f_{AD}$
Resolution	<b>O</b>	8-bit / 10-bit
Analog input pin	<b>O</b>	AN0 (1 pins) / AN0 to AN1 (2 pins) / AN0 to AN2 (3 pins) / AN0 to AN3 (4 pins) (Note)
Sample & Hold		Not activated
	<b>O</b>	Activated

Note : When the port P5 group is selected, analog input pins are changed from AN0 to AN4 to pins AN50 to AN54.

- Operation
- (1) Setting the A-D conversion start flag to "1" causes the A-D converter to start the conversion on voltage input to the AN0/AN50 pin.
  - (2) After the A-D conversion on voltage input to the AN0/AN50 pin is completed, the content of the successive comparison register (conversion result) is transmitted to A-D register 0.
  - (3) Every time the A-D converter carries out A-D conversion on a selected analog input pin, the A-D converter carries out A-D conversion on only one unselected pin, and then the A-D converter carries out A-D conversion from the AN0 pin again. (See Figure 2.7.13.) The conversion result is transmitted to A-D register i every time conversion on a pin is completed. The A-D conversion interrupt request bit does not go to "1".
  - (4) The A-D converter continues operating until software goes the A-D conversion start flag to "0".

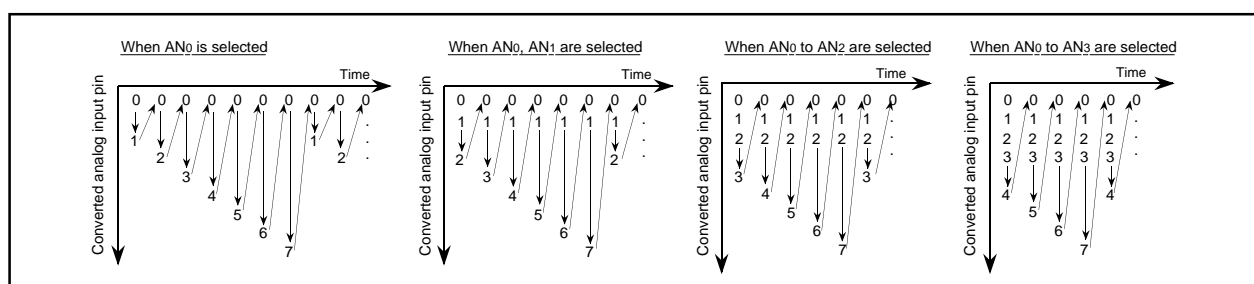


Figure 2.7.13. ANi pin's sweep sequence in repeat sweep mode

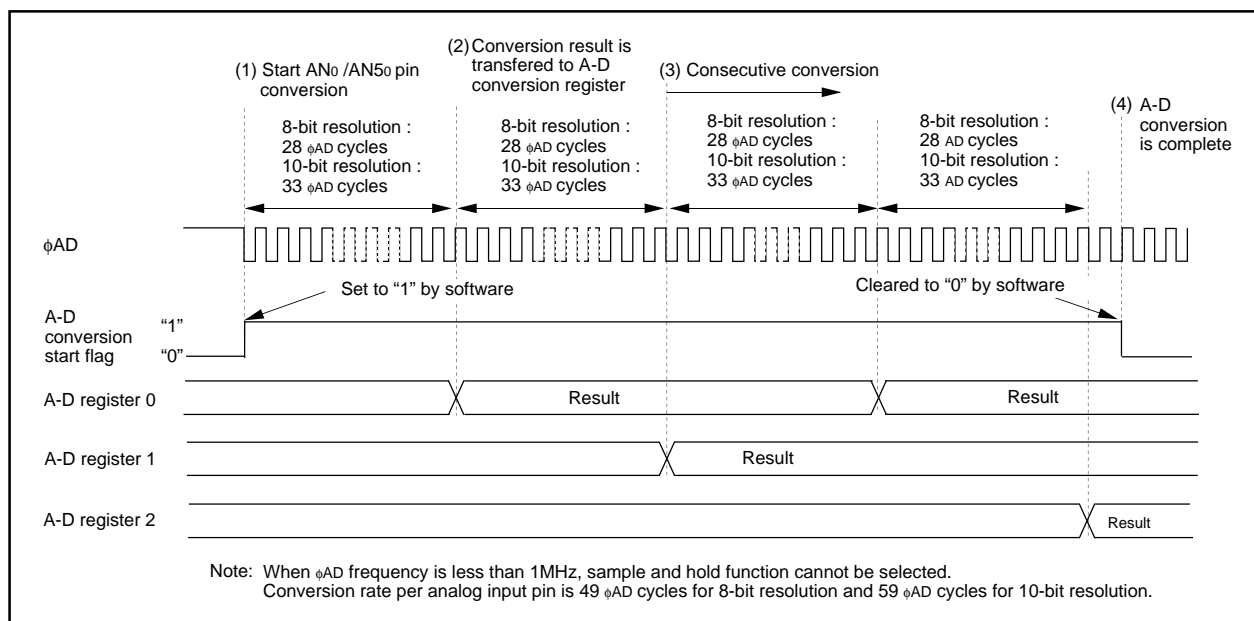


Figure 2.7.14. Operation timing of repeat sweep 1 mode

## A-D Converter

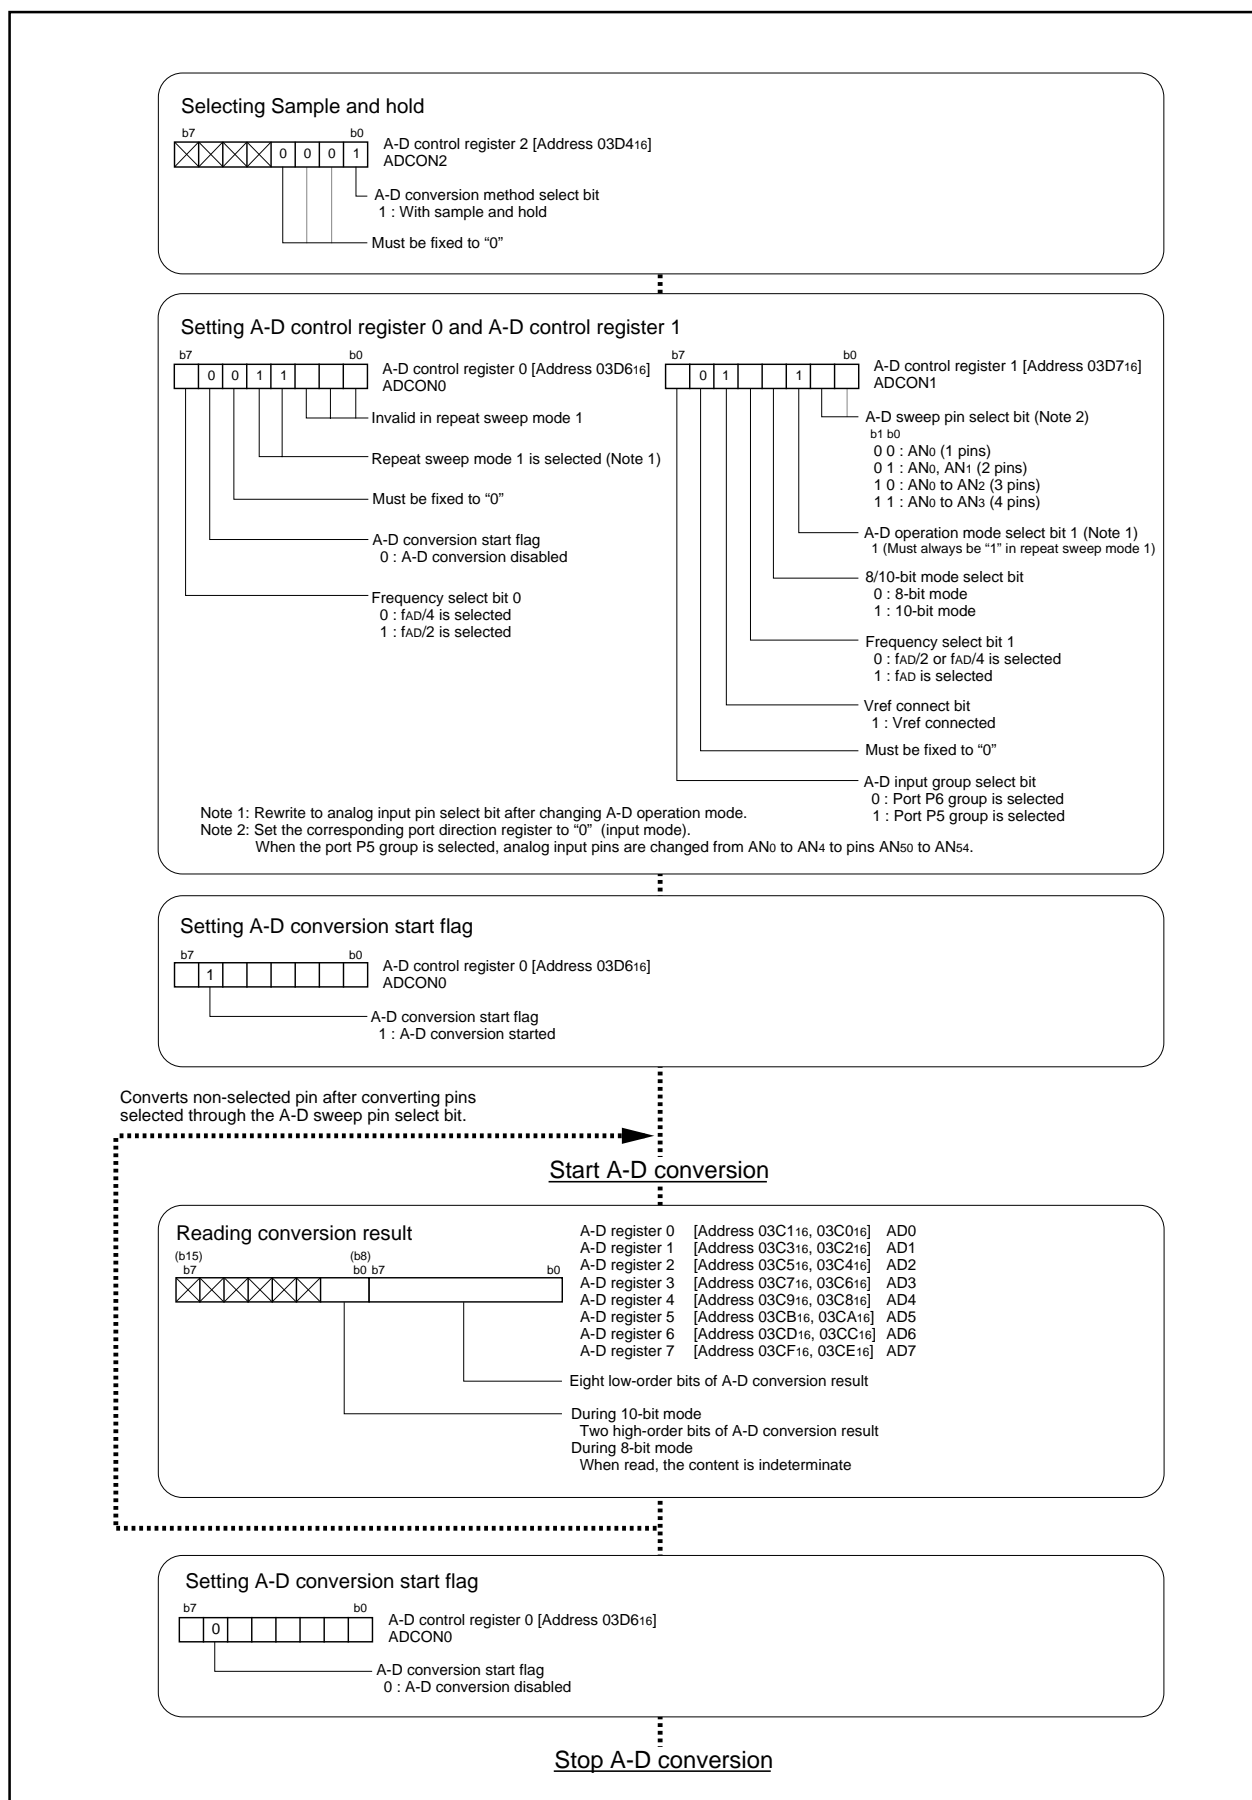


Figure 2.7.15. Set-up procedure of repeat sweep 1 mode

## A-D Converter

## 2.7. 7 Precautions for A-D Converter

- (1) Write to each bit (except bit 6) of A-D control register 0, to each bit of A-D control register 1, and to bit 0 of A-D control register 2 when A-D conversion is stopped (before a trigger occurs).  
In particular, when the Vref connection bit is changed from 0 to 1, start A-D conversion after an elapse of 1  $\mu$ s or longer.
- (2) To reduce conversion error due to noise, connect a voltage to the AVcc pin and to the Vref pin from an independent source. It is recommended to connect a capacitor between the AVss pin and the AVcc pin, between the AVss pin and the Vref pin, and between the AVss pin and the analog input pin (ANi/AN5i). Figure 2.7.16 shows the an example of connecting the capacitors to these pins.

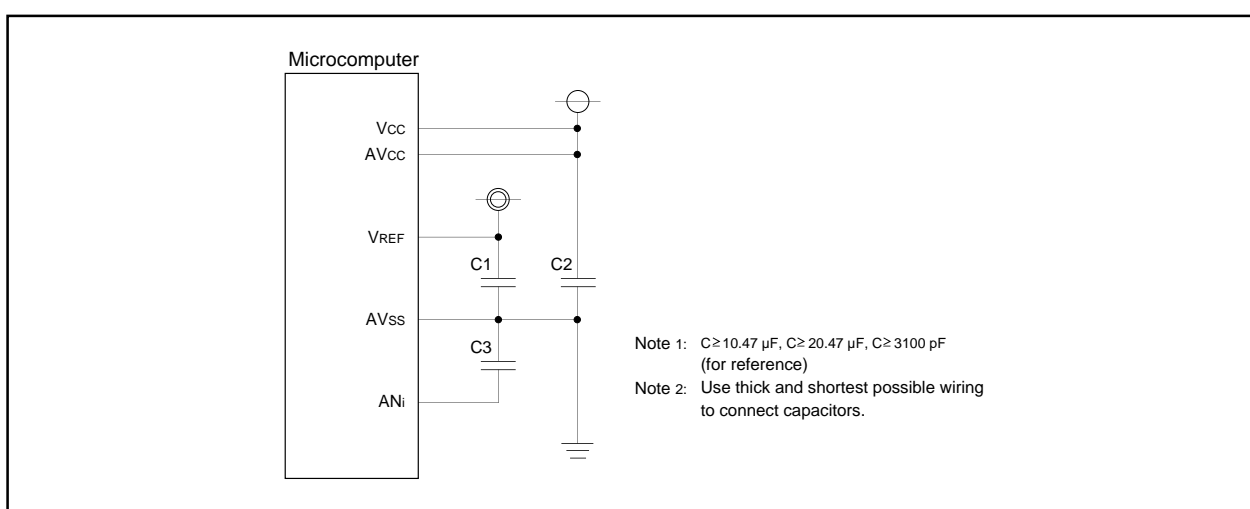


Figure 2.7.16. Use of capacitors to reduce noise

- (3) Set the direction register of the following ports to input: the port corresponding to a pin to be used as an analog input pin and external trigger input pin.
- (4) If using the A-D converter with  $V_{cc} = 2.7\text{V}$  to  $4.0\text{V}$ :  
Use without fAD (no frequency division) for  $\phi_{AD}$ .  
Select without the Sample & Hold feature.  
Select 8-bit mode.
- (5) Rewrite to analog input pin after changing A-D operation mode. The two cannot be set at the same time.
- (6) When using the one-shot or single sweep mode  
Confirm that A-D conversion is complete before reading the A-D register.  
(Note: When A-D conversion interrupt request bit is set, it shows that A-D conversion is completed.)
- (7) When using the repeat mode or repeat sweep mode 0 or 1  
Use the undivided main clock as the internal CPU clock.

## A-D Converter

**2.7.8 Method of A-D Conversion (10-bit mode)**

(1) The A-D converter compares the reference voltage (Vref) generated internally based on the contents of the successive comparison register with the analog input voltage (VIN) input from the analog input pin. Each bit of the comparison result is stored in the successive comparison register until analog-to-digital conversion (successive comparison method) is complete. If a trigger occurs, the A-D converter carries out the following:

1. Fixes bit 9 of the successive comparison register.

Compares Vref with VIN: [In this instance, the contents of the successive comparison register are "1000000002" (default).]

Bit 9 of the successive comparison register varies depending on the comparison result as follows.

If  $V_{ref} < V_{IN}$ , then "1" is assigned to bit 9.

If  $V_{ref} > V_{IN}$ , then "0" is assigned to bit 9.

2. Fixes bit 8 of the successive comparison register.

Sets bit 8 of the successive comparison register to "1", then compares Vref with VIN.

Bit 8 of the successive comparison register varies depending on the comparison result as follows:

If  $V_{ref} < V_{IN}$ , then "1" is assigned to bit 8.

If  $V_{ref} > V_{IN}$ , then "0" is assigned to bit 8.

3. Fixes bit 7 through bit 0 of the successive comparison register.

Carries out step 2 above on bit 7 through bit 0.

After bit 0 is fixed, the contents of the successive comparison register (conversion result) are transmitted to A-D register i.

Vref is generated based on the latest content of the successive comparison register. Table 2.7.7 shows the relationship of the successive comparison register contents and Vref. Table 2.7.8 shows how the successive comparison register and Vref vary while A-D conversion is in progress. Figure 2.7.17 shows theoretical A-D conversion characteristics.


**Table 2.7.7. Relationship of the successive comparison register contents and Vref**

Successive approximation register : n	Vref (V)
0	0
1 to 1023	$\frac{V_{REF}}{1024} \times n - \frac{V_{REF}}{2048}$

## A-D Converter

**Table 2.7.8. Variation of the successive comparison register and Vref while A-D conversion is in progress (10-bit mode)**

	Successive approximation register	Vref change
A-D converter stopped	<div style="text-align: center;">           b9 <span style="float: right;">b0</span>            1 0 0 0 0 0 0 0 0 0         </div>	$\frac{V_{REF}}{2}$ [V]
1st comparison	<div style="text-align: center;">           1 0 0 0 0 0 0 0 0 0         </div>	$\frac{V_{REF}}{2} - \frac{V_{REF}}{2048}$ [V]
2nd comparison	<div style="text-align: center;">           n9 1 0 0 0 0 0 0 0 0            ↑ 1st comparison result         </div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} - \frac{V_{REF}}{2048}$ [V] $\left( \begin{array}{l} n_9 = 1 \\ n_9 = 0 \end{array} \right. \begin{array}{l} + \frac{V_{REF}}{4} \\ - \frac{V_{REF}}{4} \end{array} \right)$
3rd comparison	<div style="text-align: center;">           n9 n8 1 0 0 0 0 0 0 0            ↑ 2nd comparison result         </div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} \pm \frac{V_{REF}}{8} - \frac{V_{REF}}{2048}$ [V] $\left( \begin{array}{l} n_8 = 1 \\ n_8 = 0 \end{array} \right. \begin{array}{l} + \frac{V_{REF}}{8} \\ - \frac{V_{REF}}{8} \end{array} \right)$
10th comparison	<div style="text-align: center;">           n9 n8 n7 n6 n5 n4 n3 n2 n1 0         </div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} \pm \frac{V_{REF}}{8} \pm \dots \pm \frac{V_{REF}}{1024} - \frac{V_{REF}}{2048}$ [V]
Conversion complete	<div style="text-align: center;">           n9 n8 n7 n6 n5 n4 n3 n2 n1 n0            This data transfers to the bit 0 to bit 9 of A-D register.         </div>	

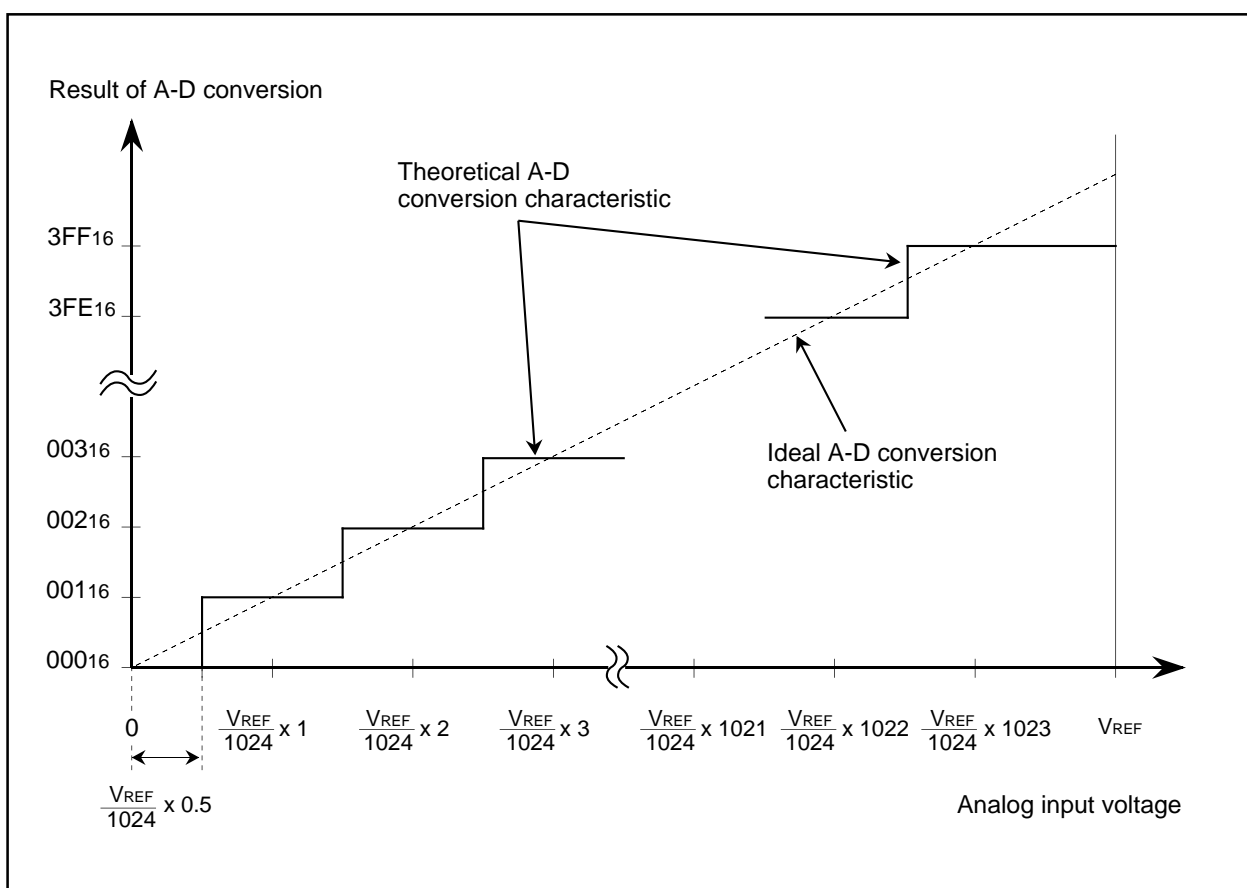**Figure 2.7.17. Theoretical A-D conversion characteristics (10-bit mode)**



## A-D Converter

## 2.7.9 Method of A-D Conversion (8-bit mode)

- (1) In 8-bit mode, 8 higher-order bits of the 10-bit successive comparison register becomes A-D conversion result. Hence, if compared to a result obtained by using an 8-bit A-D converter, the voltage compared is different by  $3 V_{REF}/2048$  (see what are underscored in Table 2.7.9), and differences in stepping points of output codes occur as shown in Figure 2.7.18.

Table 2.7.9. The comparison voltage in 8-bit mode compared to 8-bit A-D converter

		8-bit mode	8-bit A-D converter
Comparison voltage $V_{REF}$	$n = 0$	0	0
	$n = 1 \text{ to } 255$	$\frac{V_{REF}}{2^8} \times n - \frac{V_{REF}}{2^{10}} \times 0.5$	$\frac{V_{REF}}{2^8} \times n - \frac{V_{REF}}{2^8} \times 0.5$

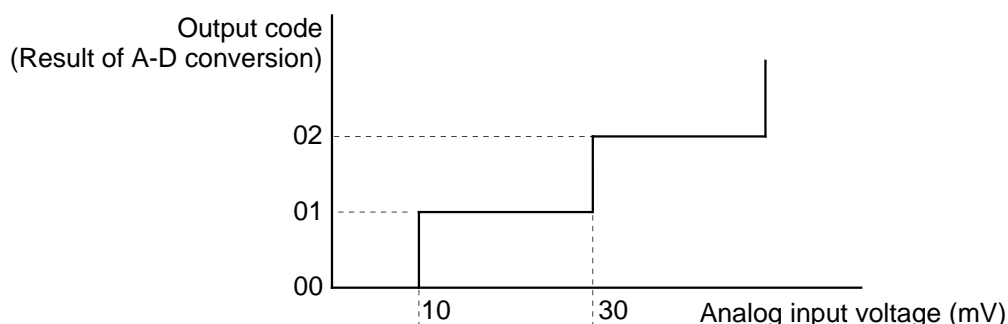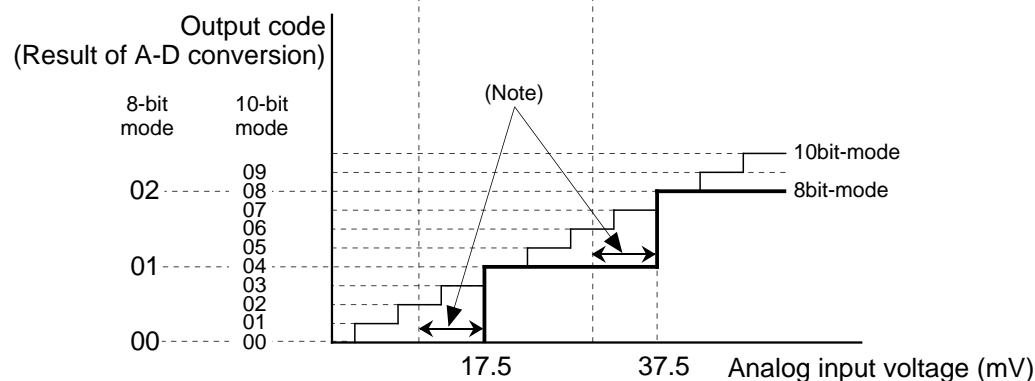Optimal conversion characteristics of 8-bit A-D converter ( $V_{REF} = 5.12 \text{ V}$ )Optimal conversion characteristics in 8-bit mode ( $V_{REF} = 5.12 \text{ V}$ )

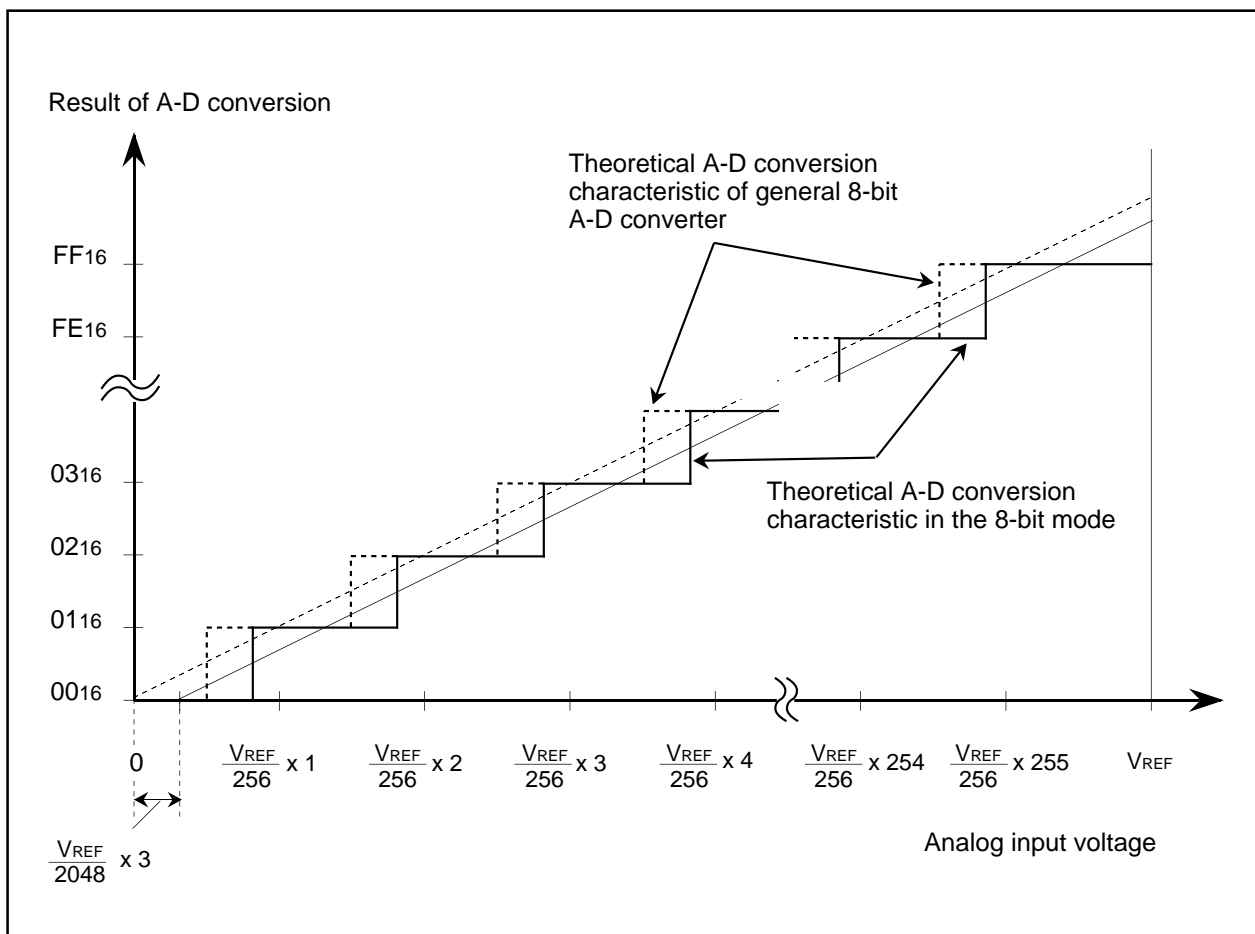
Note: Differences in stepping points of output code for analog input voltage.

Figure 2.7.18. The level conversion characteristics of 8-bit mode and 8-bit A-D converter

## A-D Converter

**Table 2.7.10. Variation of the successive comparison register and Vref while A-D conversion is in progress (8-bit mode)**

	Successive approximation register	Vref change
A-D converter stopped	<div style="text-align: center;">b9 <span style="float: right;">b0</span></div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">1 0 0 0 0 0 0 0 0 0</div>	$\frac{V_{REF}}{2}$ [V]
1st comparison	<div style="border: 1px solid black; padding: 2px; display: inline-block;">1 0 0 0 0 0 0 0 0 0</div>	$\frac{V_{REF}}{2} - \frac{V_{REF}}{2048}$ [V]
2nd comparison	<div style="border: 1px solid black; padding: 2px; display: inline-block;">n9 1 0 0 0 0 0 0 0 0</div> <div style="text-align: center;">↑ 1st comparison result</div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} - \frac{V_{REF}}{2048}$ [V] $\begin{cases} n9 = 1 & + \frac{V_{REF}}{4} \\ n9 = 0 & - \frac{V_{REF}}{4} \end{cases}$
3rd comparison	<div style="border: 1px solid black; padding: 2px; display: inline-block;">n9 n8 1 0 0 0 0 0 0 0</div> <div style="text-align: center;">↑ 2nd comparison result</div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} \pm \frac{V_{REF}}{8} - \frac{V_{REF}}{2048}$ [V] $\begin{cases} n8 = 1 & + \frac{V_{REF}}{8} \\ n8 = 0 & - \frac{V_{REF}}{8} \end{cases}$
⋮	⋮	⋮
8th comparison	<div style="border: 1px solid black; padding: 2px; display: inline-block;">n9 n8 n7 n6 n5 n4 n3 1 0 0</div>	$\frac{V_{REF}}{2} \pm \frac{V_{REF}}{4} \pm \frac{V_{REF}}{8} \pm \dots \pm \frac{V_{REF}}{256} - \frac{V_{REF}}{2048}$ [V]
Conversion complete	<div style="border: 1px solid black; padding: 2px; display: inline-block;">n9 n8 n7 n6 n5 n4 n3 n2 0 0</div> <div style="text-align: center;">This data transfers to bit 0 to bit 7 of A-D register.</div>	

**Figure 2.7.19. Theoretical A-D conversion characteristics (8-bit mode)**

## A-D Converter

## 2.7.10 Absolute Accuracy and Differential Non-Linearity Error

## • Absolute accuracy

Absolute accuracy is the difference between output code based on the theoretical A-D conversion characteristics, and actual A-D conversion result. When measuring absolute accuracy, the voltage at the middle point of the width of analog input voltage (1-LSB width), that can meet the expectation of outputting an equal code based on the theoretical A-D conversion characteristics, is used as an analog input voltage. For example, if 10-bit resolution is used and if  $V_{REF}$  (reference voltage) = 5.12 V, then 1-LSB width becomes 5 mV, and 0 mV, 5 mV, 10 mV, 15 mV, 20 mV, ... are used as analog input voltages. If analog input voltage is 25 mV, "absolute accuracy =  $\pm 3\text{LSB}$ " refers to the fact that actual A-D conversion falls on a range from "002<sub>16</sub>" to "008<sub>16</sub>" though an output code, "005<sub>16</sub>", can be expected from the theoretical A-D conversion characteristics. Zero error and full-scale error are included in absolute accuracy.

Also, all the output codes for analog input voltage between  $V_{REF}$  and  $V_{CC}$  becomes "3FF<sub>16</sub>".

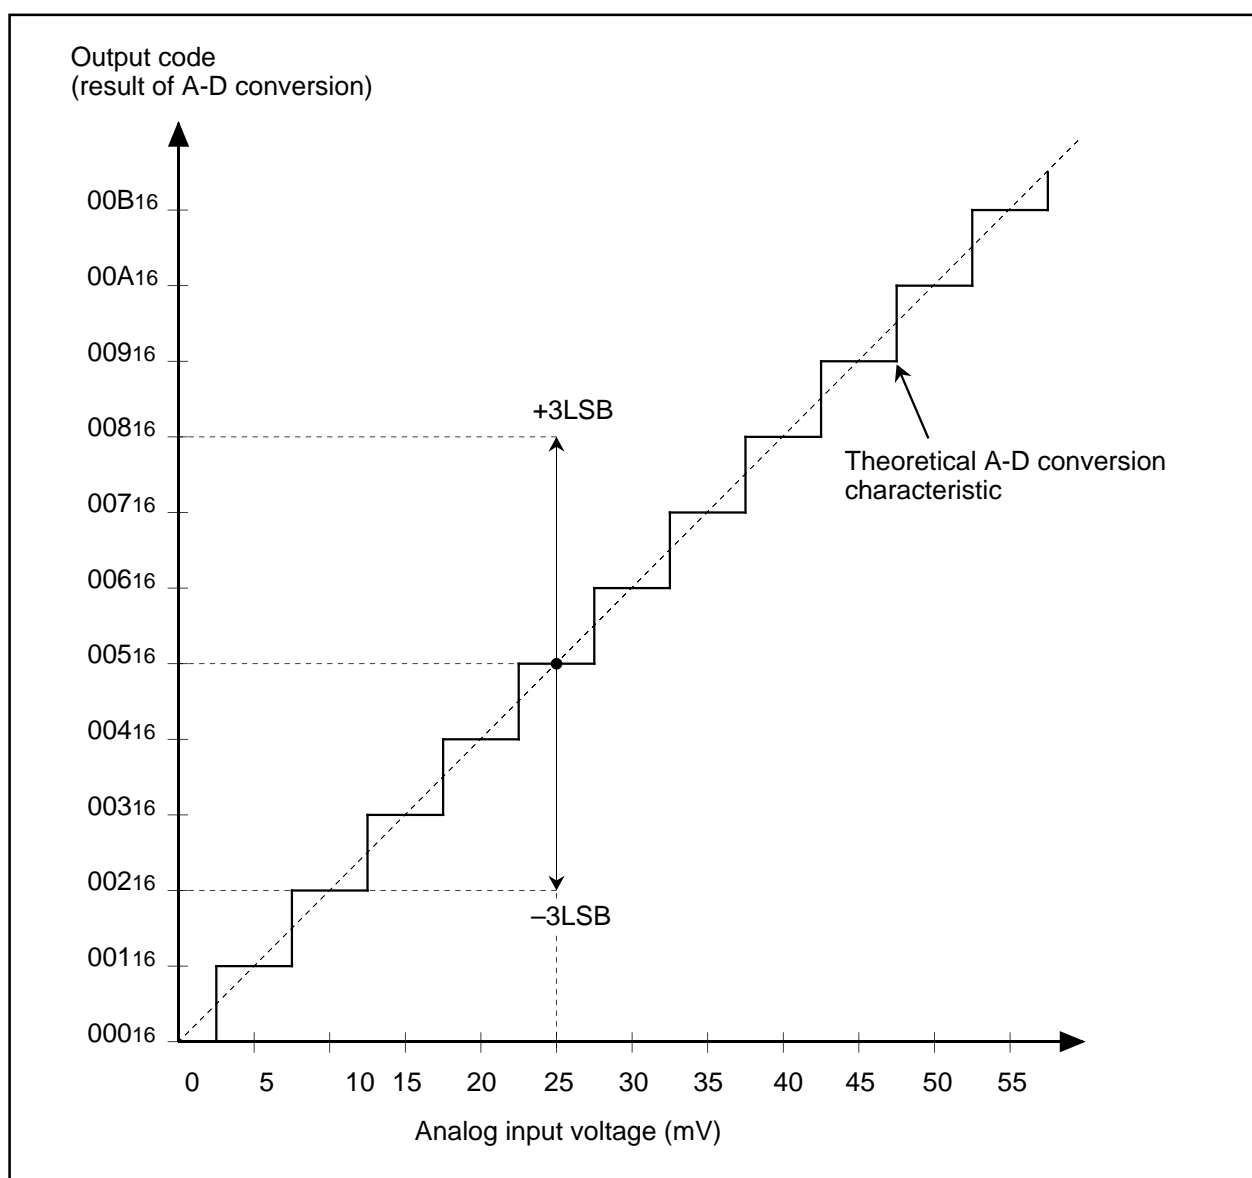


Figure 2.7.20. Absolute accuracy (10-bit resolution)



## A-D Converter

### • Differential non-linearity error

Differential non-linearity error refers to the difference between 1-LSB width based on the theoretical A-D conversion characteristics (an analog input width that can meet the expectation of outputting an equal code) and an actually measured 1-LSB width (analog input voltage width that outputs an equal code). If 10-bit resolution is used and if  $V_{REF}$  (reference voltage) = 5.12 V, “differential non-linearity error =  $\pm 1\text{LSB}$ ” refers to the fact that 1-LSB width actually measured falls on a range from 0 mV to 10 mV though 1-LSB width based on the theoretical A-D conversion characteristics is 5 mV (see 5.2 A-D converter's standard characteristics).

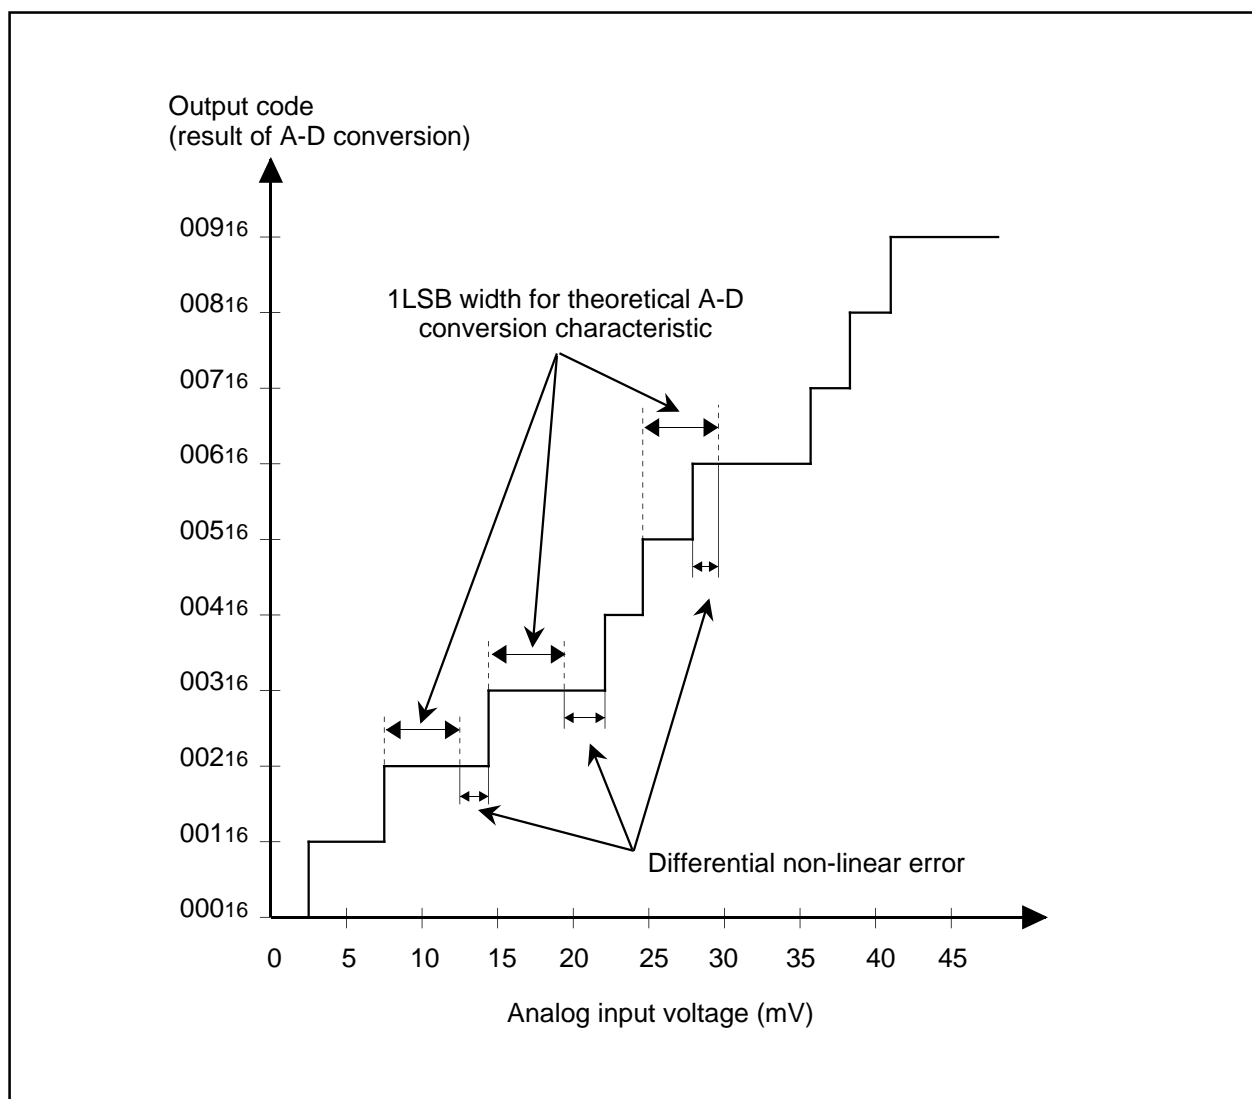


Figure 2.7.21. Differential non-linearity error (10-bit resolution)

## A-D Converter

## 2.7.11 Internal Equivalent Circuit of Analog Input

Figure 2.7.22 shows the internal equivalent circuit of analog input.

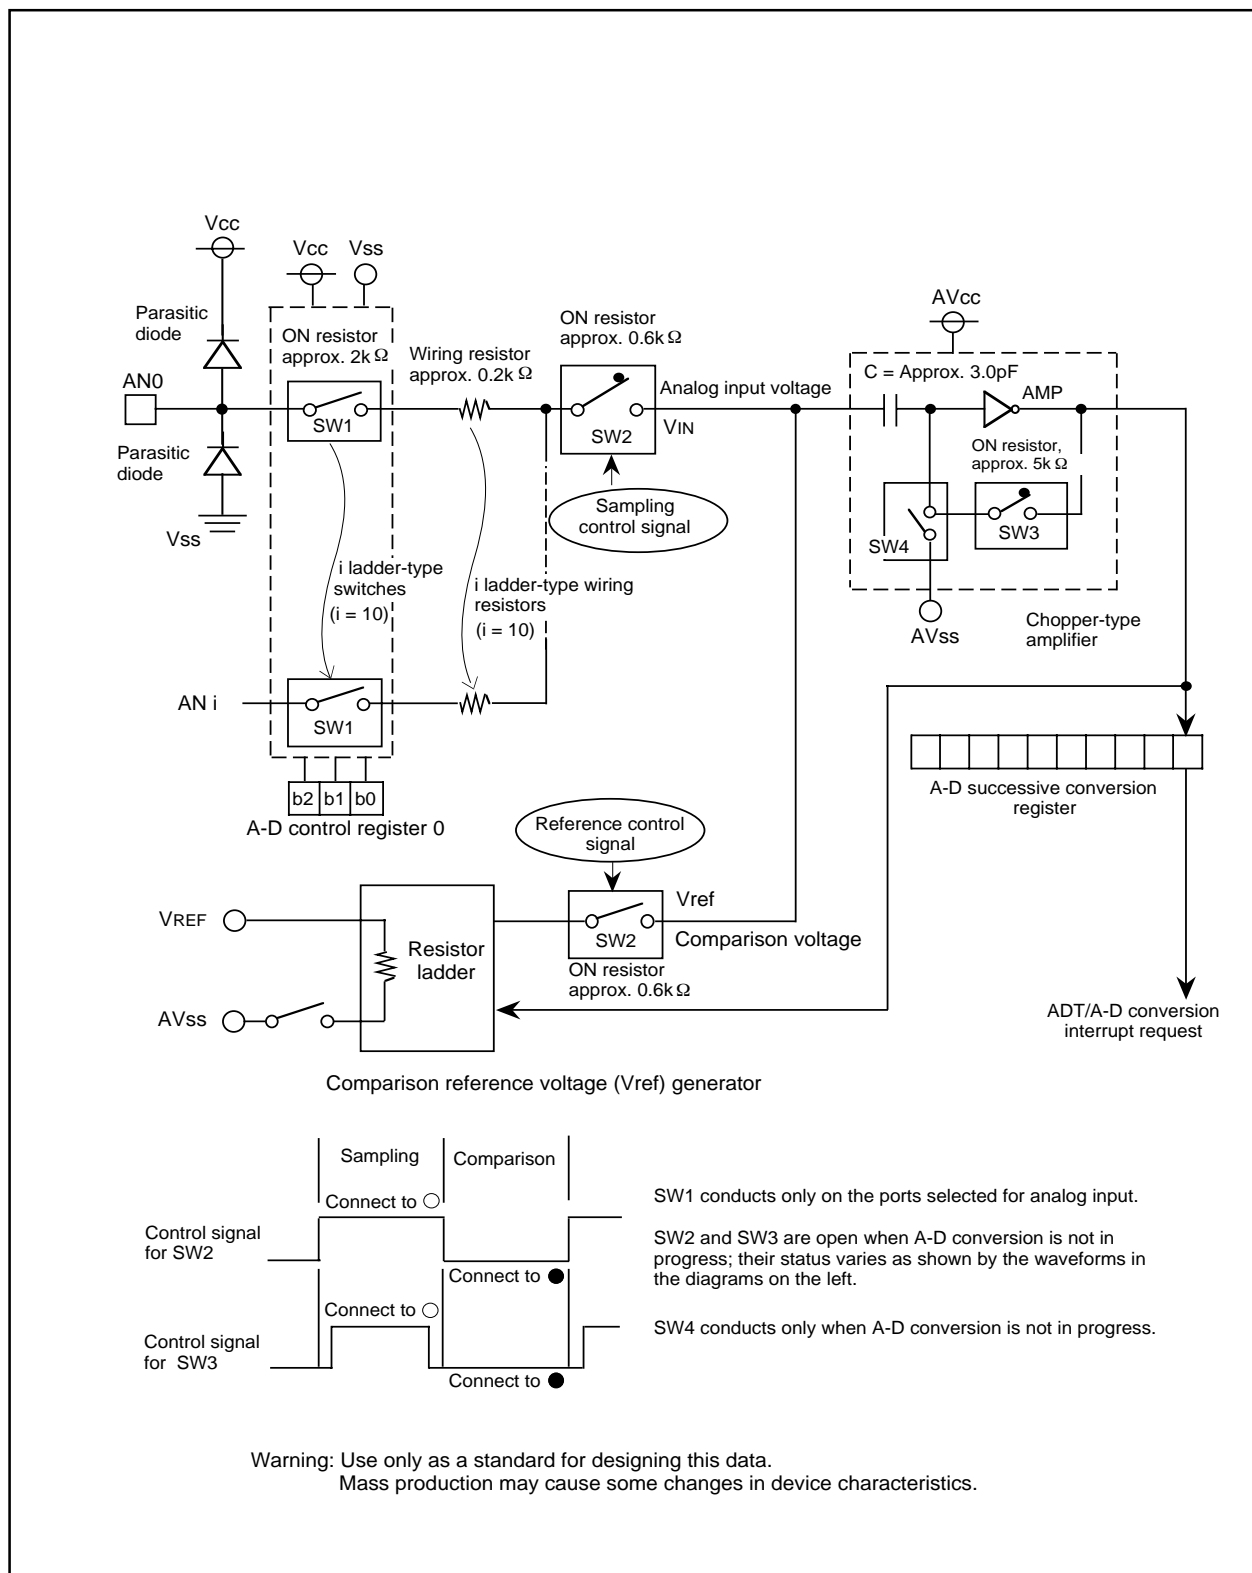


Figure 2.7.22. Internal equivalent circuit to analog input

## A-D Converter

## 2.7.12 Sensor's Output Impedance under A-D Conversion

To carry out A-D conversion properly, charging the internal capacitor C shown in Figure 2.7.23 has to be completed within a specified period of time. With T as the specified time, time T is the time that switches SW2 and SW3 are connected to O in Figure 2.7.22. Let output impedance of sensor equivalent circuit be  $R_0$ , microcomputer's internal resistance be R, precision (error) of the A-D converter be X, and the A-D converter's resolution be Y (Y is 1024 in the 10-bit mode, and 256 in the 8-bit mode).

$$V_c \text{ is generally } V_c = V_{IN} \left\{ 1 - e^{-\frac{t}{C(R_0 + R)}} \right\}$$

$$\text{And when } t = T, \quad V_c = V_{IN} - \frac{X}{Y} V_{IN} = V_{IN} \left( 1 - \frac{X}{Y} \right)$$

$$e^{-\frac{T}{C(R_0 + R)}} = \frac{X}{Y}$$

$$-\frac{T}{C(R_0 + R)} = \ln \frac{X}{Y}$$

$$\text{Hence, } R_0 = -\frac{T}{C \cdot \ln \frac{X}{Y}} - R$$

With the model shown in Figure 2.7.29 as an example, when the difference between  $V_{IN}$  and  $V_c$  becomes 0.1LSB, we find impedance  $R_0$  when voltage between pins  $V_c$  changes from 0 to  $V_{IN} - (0.1/1024) V_{IN}$  in time T. (0.1/1024) means that A-D precision drop due to insufficient capacitor charge is held to 0.1LSB at time of A-D conversion in the 10-bit mode. Actual error however is the value of absolute precision added to 0.1LSB. When  $f(X_{IN}) = 10 \text{ MHz}$ ,  $T = 0.3 \mu\text{s}$  in the A-D conversion mode with sample & hold. Output impedance  $R_0$  for sufficiently charging capacitor C within time T is determined as follows.

$T = 0.3 \mu\text{s}$ ,  $R = 7.8 \text{ k}\Omega$ ,  $C = 3 \text{ pF}$ ,  $X = 0.1$ , and  $Y = 1024$ . Hence,

$$R_0 = -\frac{0.3 \times 10^{-6}}{3.0 \times 10^{-12} \cdot \ln \frac{0.1}{1024}} - 7.8 \times 10^3 \approx 3.0 \times 10^3$$

Thus, the allowable output impedance of the sensor circuit capable of thoroughly driving the A-D converter turns out to be approximately 3.0 k $\Omega$ . Tables 2.7.11 and 2.7.12 show output impedance values based on the LSB values.

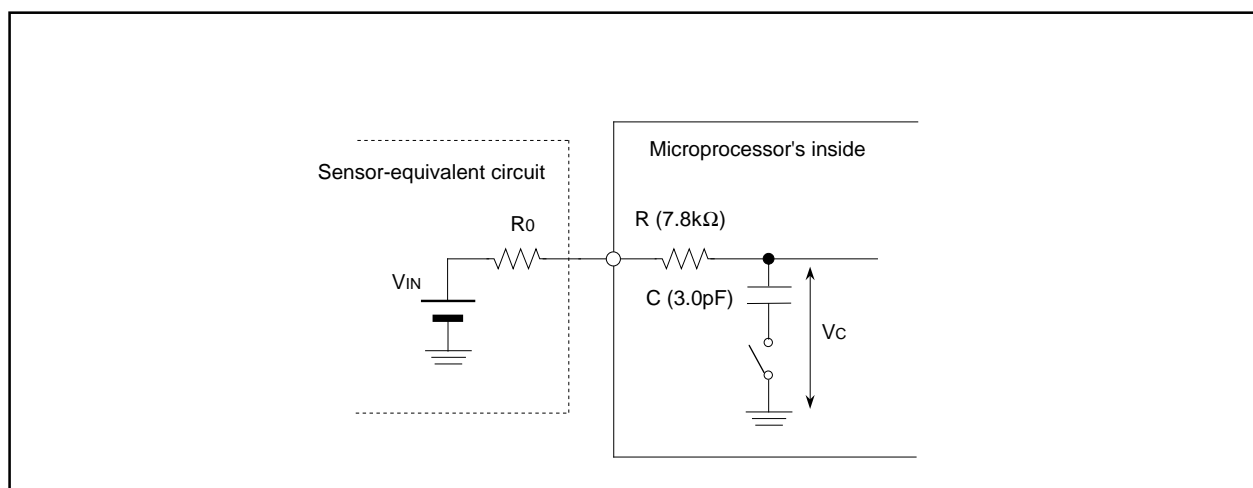


Figure 2.7.23 A circuit equivalent to the A-D conversion terminal

## A-D Converter

**Tables 2.7.11. Relation between output impedance and precision (error) of A-D converter (10-bit mode) Reference value**

f(Xin) (MHz)	Cycle	Sampling time	R	C (pF)	Resolution (LSB)	R0
10	0.1	0.3 (3 x cycle, Sample & hold bit is enabled)	7.8	3.0	0.1	3.0
					0.3	4.5
					0.5	5.3
					0.7	5.9
					0.9	6.4
					1.1	6.8
					1.3	7.2
					1.5	7.5
					1.7	7.8
					1.9	8.1
10	0.1	0.2 (2 x cycle, Sample & hold bit is disabled)	7.8	3.0	0.3	0.4
					0.5	0.9
					0.7	1.3
					0.9	1.7
					1.1	2.0
					1.3	2.2
					1.5	2.4
					1.7	2.6
					1.9	2.8

**Tables 2.7.12. Relation between output impedance and precision (error) of A-D converter (8-bit mode) Reference value**

f(Xin) (MHz)	Cycle	Sampling time	R	C (pF)	Resolution (LSB)	R0
10	0.1	0.3 (3 x cycle, Sample & hold bit is enabled)	7.8	3.0	0.1	4.9
					0.3	7.0
					0.5	8.2
					0.7	9.1
					0.9	9.9
					1.1	10.5
					1.3	11.1
					1.5	11.7
					1.7	12.1
					1.9	12.6
10	0.1	0.2 (2 x cycle, Sample & hold bit is disabled)	7.8	3.0	0.1	0.7
					0.3	2.1
					0.5	2.9
					0.7	3.5
					0.9	4.0
					1.1	4.4
					1.3	4.8
					1.5	5.2
					1.7	5.5
					1.9	5.8

## Watchdog Timer

### 2.8 Watchdog Timer

#### 2.8.1 Overview

The watchdog timer can detect a runaway program using its 15-bit timer prescaler. The following is an overview of the watchdog timer.

##### (1) Watchdog timer start procedure

When reset, the watchdog timer is in stopped state. Writing to the watchdog timer start register initializes the watchdog timer to 7FFF<sub>16</sub> and causes it to start performing a down count. The watchdog timer, once started operating, cannot be stopped by any means other than stopping conditions.

##### (2) Watchdog timer stop conditions

The watchdog timer stops in any one of the following states:

- (a) Period in which the CPU is in stopped state
- (b) Period in which the CPU is in waiting state

##### (3) Watchdog timer initialization

The watchdog timer is initialized to 7FFF<sub>16</sub> in the cases given below, and begins a down count.

- (a) When the watchdog timer writes to the watchdog timer start register while a count is in progress
- (b) When the watchdog timer underflows

##### (4) Runaway detection

When the watchdog timer underflows, a watchdog timer interrupt occurs. In writing a program, write to the watchdog timer start register before the watchdog timer underflows. The watchdog timer interrupt occurs regardless of the status of the interrupt enable flag (I flag). In processing a watchdog timer interrupt, set the software reset bit to "1" to reset software.

##### (5) Watchdog timer cycle

The watchdog timer cycle varies depending on the BCLK and the frequency division ratio of the prescaler selected.

**Table 2.8.1. The watchdog timer cycle**

CM07	CM06	CM17	CM16	BCLK	WDC7	Period
0	0	0	0	10MHz	0	Approx. 52.4ms (Note)
					1	Approx. 419.2ms (Note)
0	0	0	1	5MHz	0	Approx. 104.9ms (Note)
					1	Approx. 838.8ms (Note)
0	0	1	0	2.5MHz	0	Approx. 209.7ms (Note)
					1	Approx. 1.68s (Note)
0	0	1	1	0.625MHz	0	Approx. 838.8ms (Note)
					1	Approx. 6.71s (Note)
0	1	Invalid	Invalid	1.25MHz	0	Approx. 419.2ms (Note)
					1	Approx. 3.35s (Note)
1	Invalid	Invalid	Invalid	32kHz	Invalid	Approx. 2s (Note)

Note: An error due to the prescaler occurs.

## Watchdog Timer

### (6) Registers related to the watchdog timer

Figure 2.8.1 shows the memory map of watchdog timer-related registers, and Figure 2.8.2 shows watchdog timer-related registers.

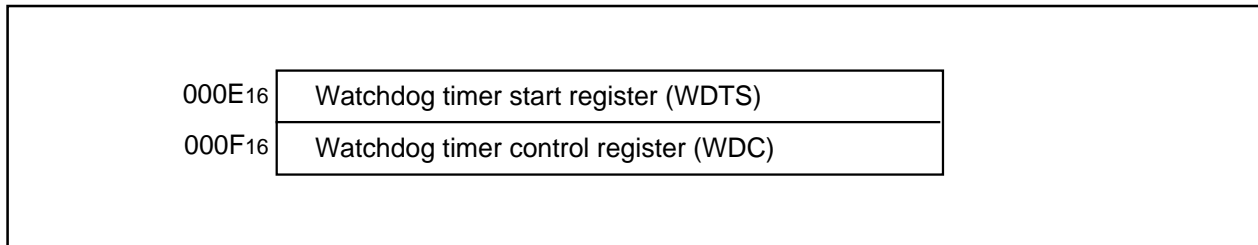


Figure 2.8.1. Memory map of watchdog timer-related registers

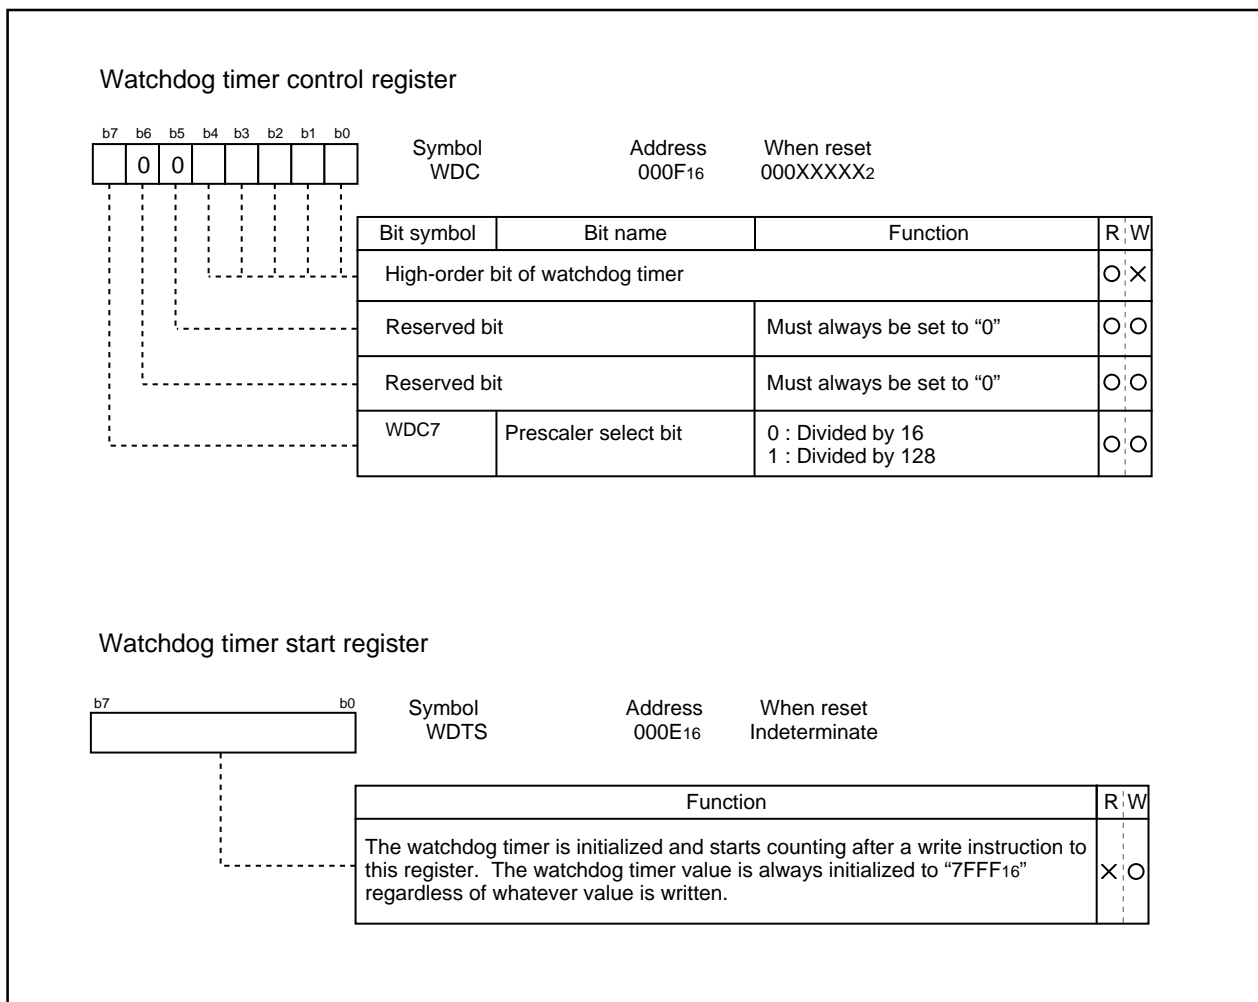



Figure 2.8.2. Watchdog timer-related registers

## Watchdog Timer

### 2.8.2 Operation of Watchdog Timer

The following is an operation of the watchdog timer. Figure 2.8.3 shows the operation timing, and Figure 2.8.4 shows the set-up procedure.

- Operation
- (1) Writing to the watchdog timer start register initializes the watchdog timer to  $7FFF_{16}$  and causes it to start a down count.
  - (2) With a count in progress, writing to the watchdog timer start register again initializes the watchdog timer to  $7FFF_{16}$  and causes it to resume counting.
  - (3) Either executing the WAIT instruction or going to the stopped state causes the watchdog timer to hold the count in progress and to stop counting. The watchdog timer resumes counting after returning from the execution of the WAIT instruction or from the stopped state.
  - (4) If the watchdog timer underflows, it is initialized to  $7FFF_{16}$  and continues counting. At this time, a watchdog timer interrupt occurs.

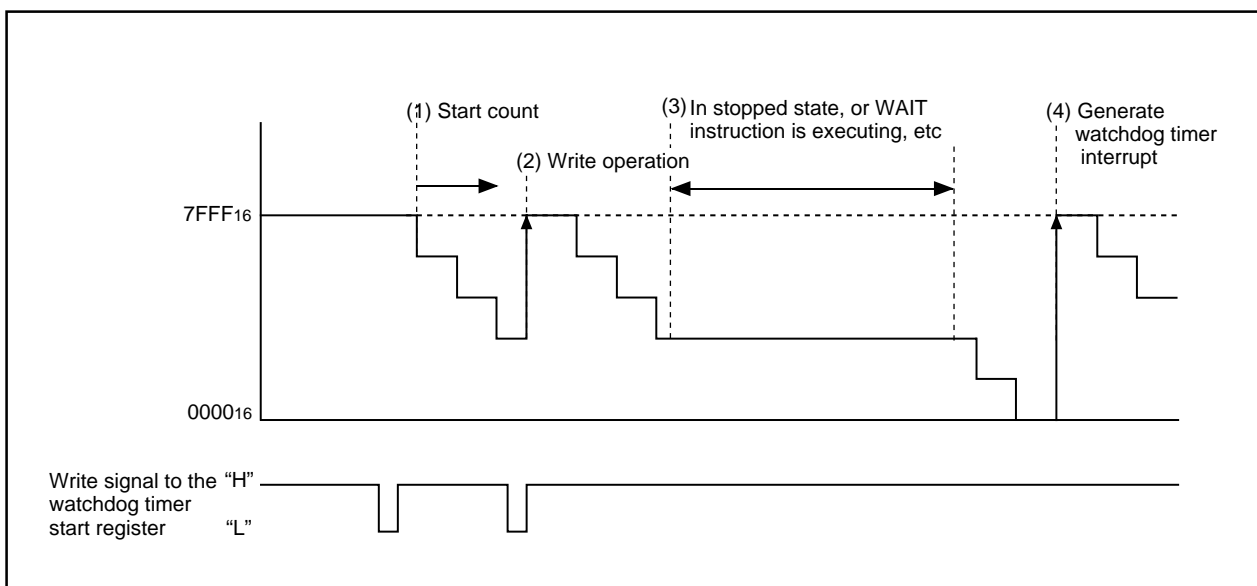

**Figure 2.8.3. Operation timing of watchdog timer**

## Watchdog Timer

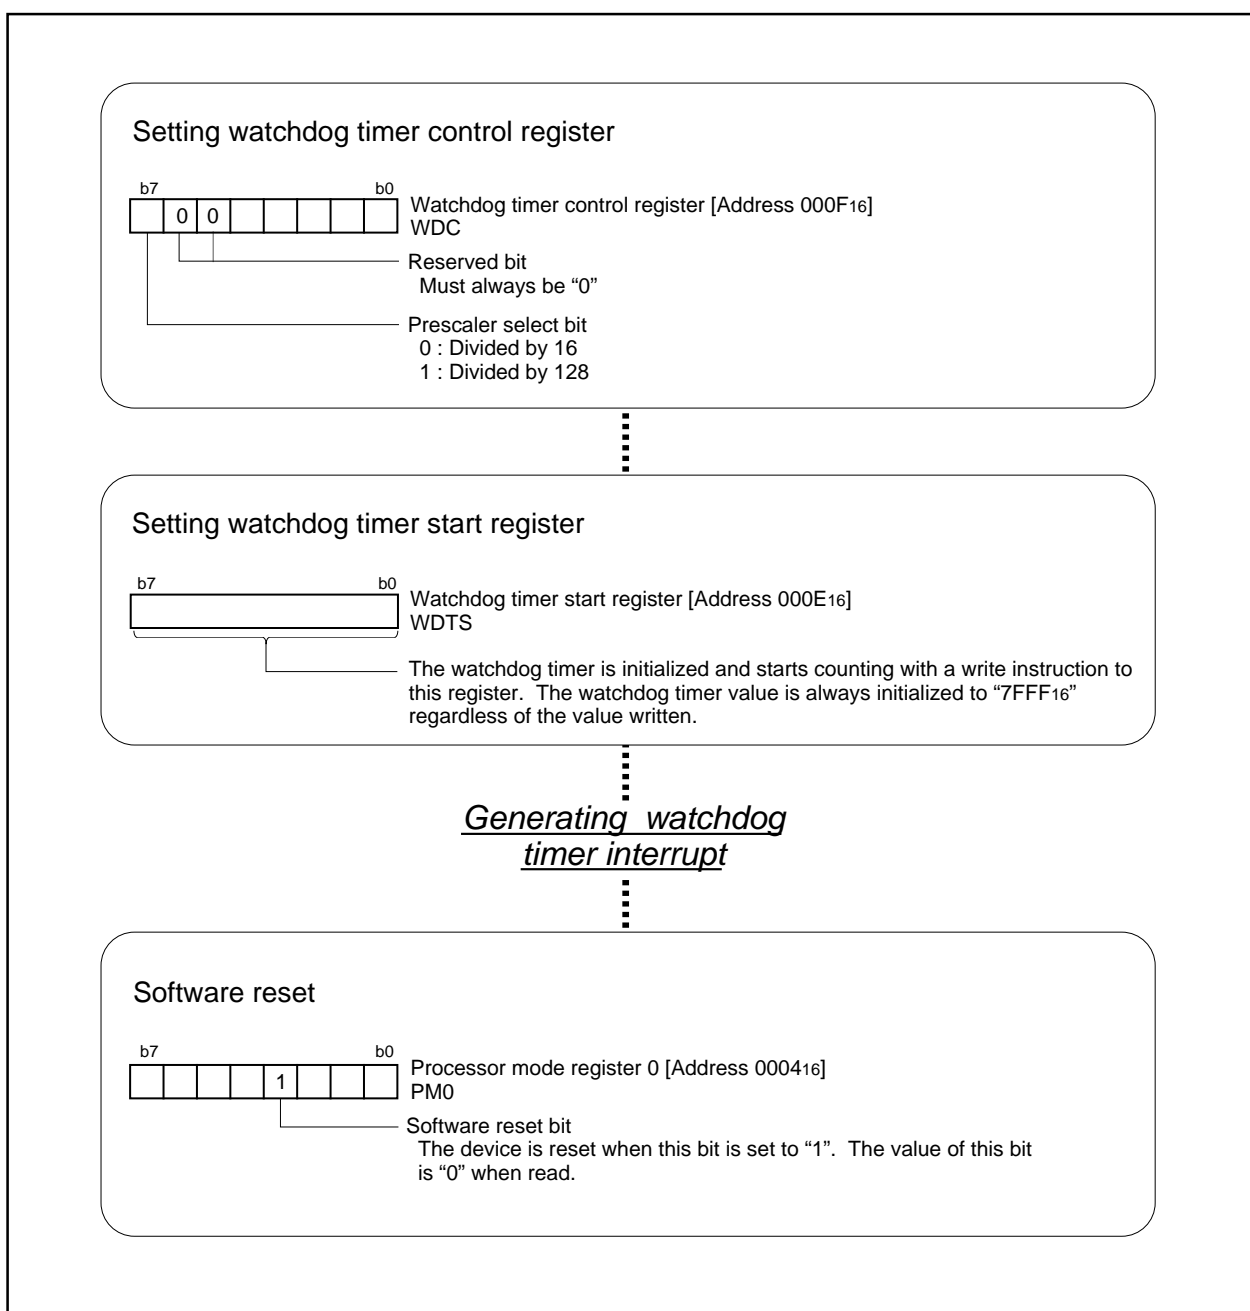


Figure 2.8.4. Set-up procedure of watchdog timer



## Address Match Interrupt

### 2.9 Address Match Interrupt

#### 2.9.1 Overview

The address match interrupt is used for correcting a ROM or for a simplified debugging-purpose monitor. The following is an overview of the address match interrupt.

##### (1) Enabling/disabling the address match interrupt

The address match interrupt enable bit can be used to enable and disable an address match interrupt. It is affected neither by the processor interrupt priority level (IPL) nor the interrupt enable flag (I flag).

##### (2) Timing of the address match interrupt


An interrupt occurs immediately before executing the instruction in the address indicated by the address match interrupt register. Set the first address of the instruction in the address match interrupt register. Setting a half address of an instruction or an address of tabulated data does not generate an address match interrupt.

The first instruction of an interrupt routine does not generate an address match interrupt either.

##### (3) Returning from an address match interrupt

The return address put in the stack when an address match interrupt occurs depends on the instruction not yet executed (the instruction the address match interrupt register indicates). The return address is not put in the stack. For this reason, to return from an address match interrupt, either rewrite the content of the stack and use the REIT instruction or use the POP instruction to restore the stack to the state as it was before the interrupt occurred and return by use of a jump instruction.

Figure 2.9.1 shows unexecuted instructions and corresponding the stacked addresses.

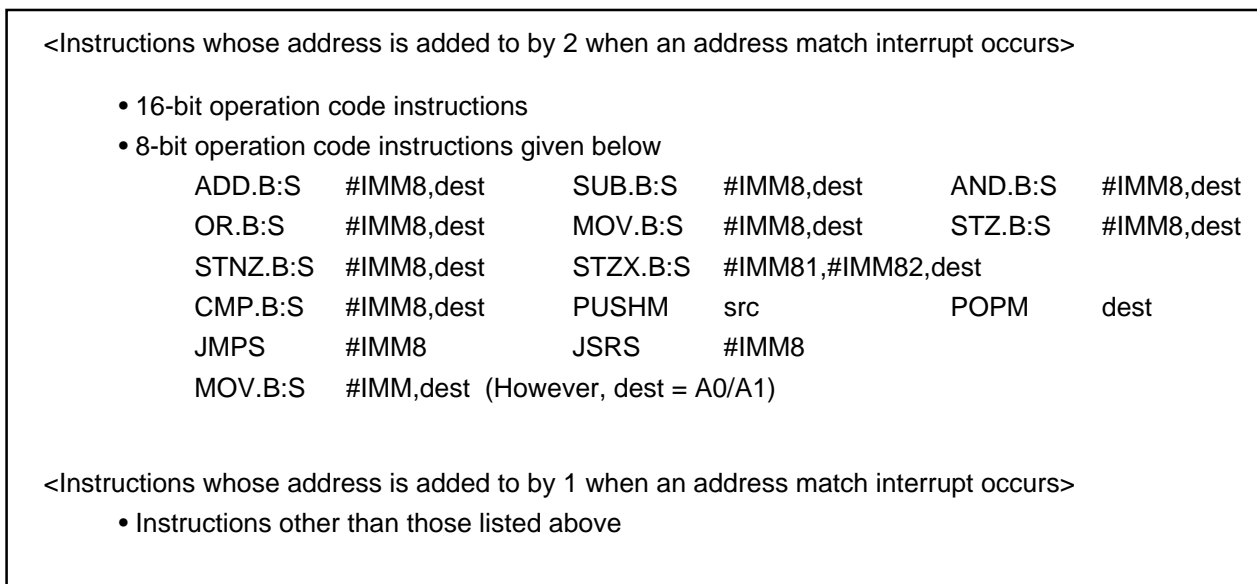

**Figure 2.9.1. Unexecuted instructions and corresponding stacked addresses**


##### (4) How to determine an address match interrupt

Address match interrupts can be set at two different locations. However, both location will have the same vector address. Therefore, it is necessary to determine which interrupt has occurred; address match interrupt 0 or address match interrupt 1. Using the content of the stack, etc., determine which interrupt has occurred according to the first part of the address match interrupt routine.


## Address Match Interrupt

**(5) Registers related to the address match interrupt**

Figure 2.9.2 shows the memory map of address match interrupt-related registers, and Figure 2.9.3 shows address match interrupt-related registers.

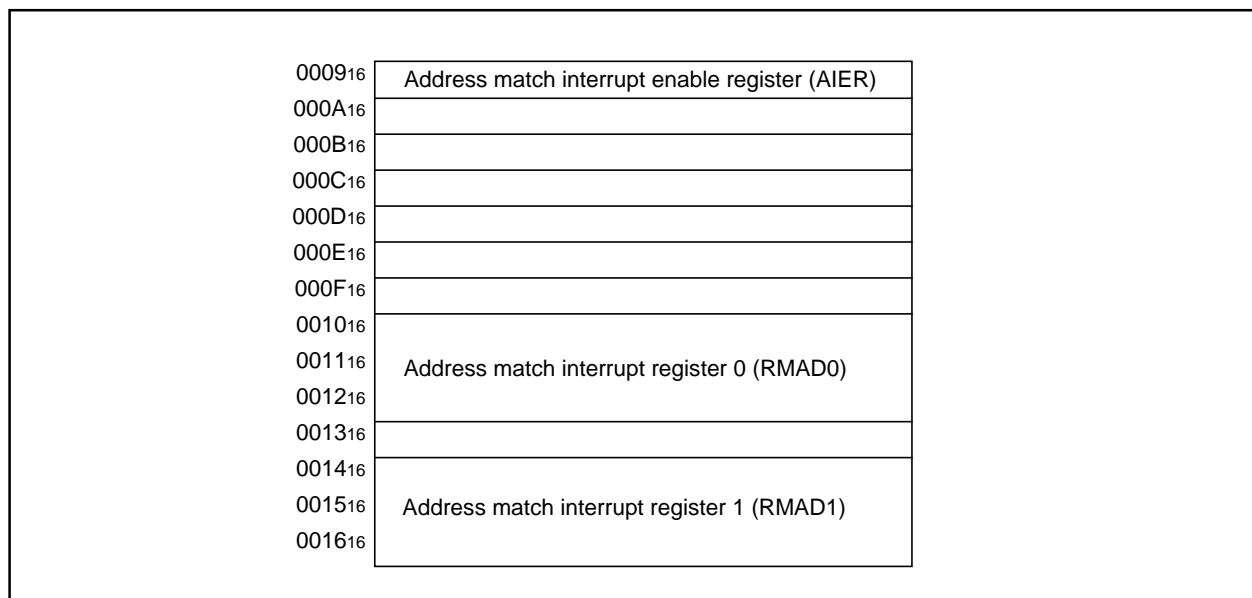

**Figure 2.9.2. Memory map of address match interrupt-related registers**

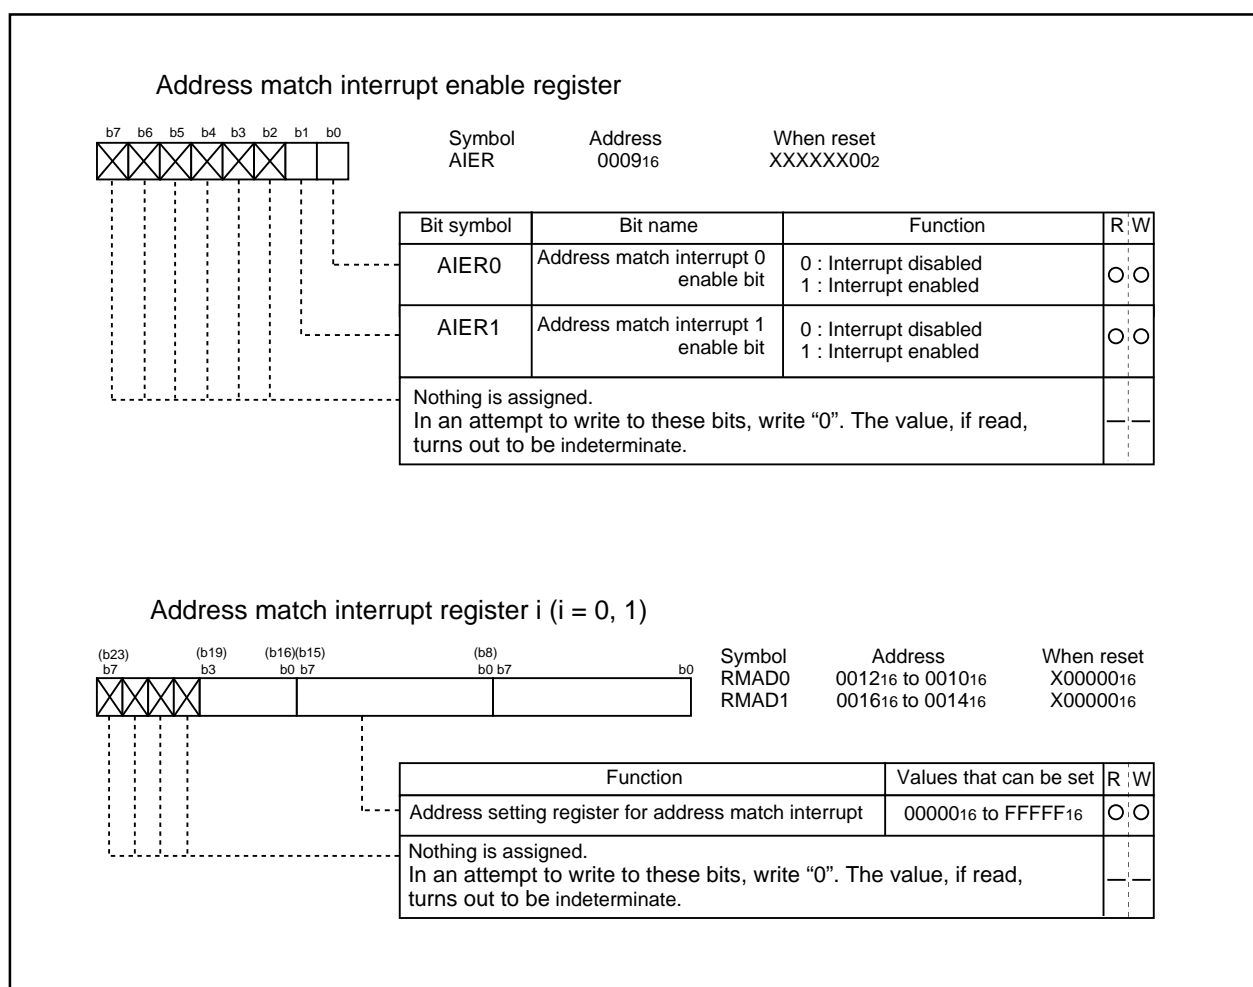

**Figure 2.9.3. Address match interrupt-related registers**

## Address Match Interrupt

### 2.9.2 Operation of Address Match Interrupt

The following is an operation of address match interrupt. Figure 2.9.4 shows the set-up procedure of address match interrupt, and Figure 2.9.5 shows the overview of the address match interrupt handling routine.

- Operation
- (1) The address match interrupt handling routine sets an address to be used to cause the address match interrupt register to generate an interrupt.
  - (2) Setting the address match enable flag to "1" enables an interrupt to occur.
  - (3) An address match interrupt occurs immediately before the instruction in the address indicated by the address match interrupt register as a program is executed.


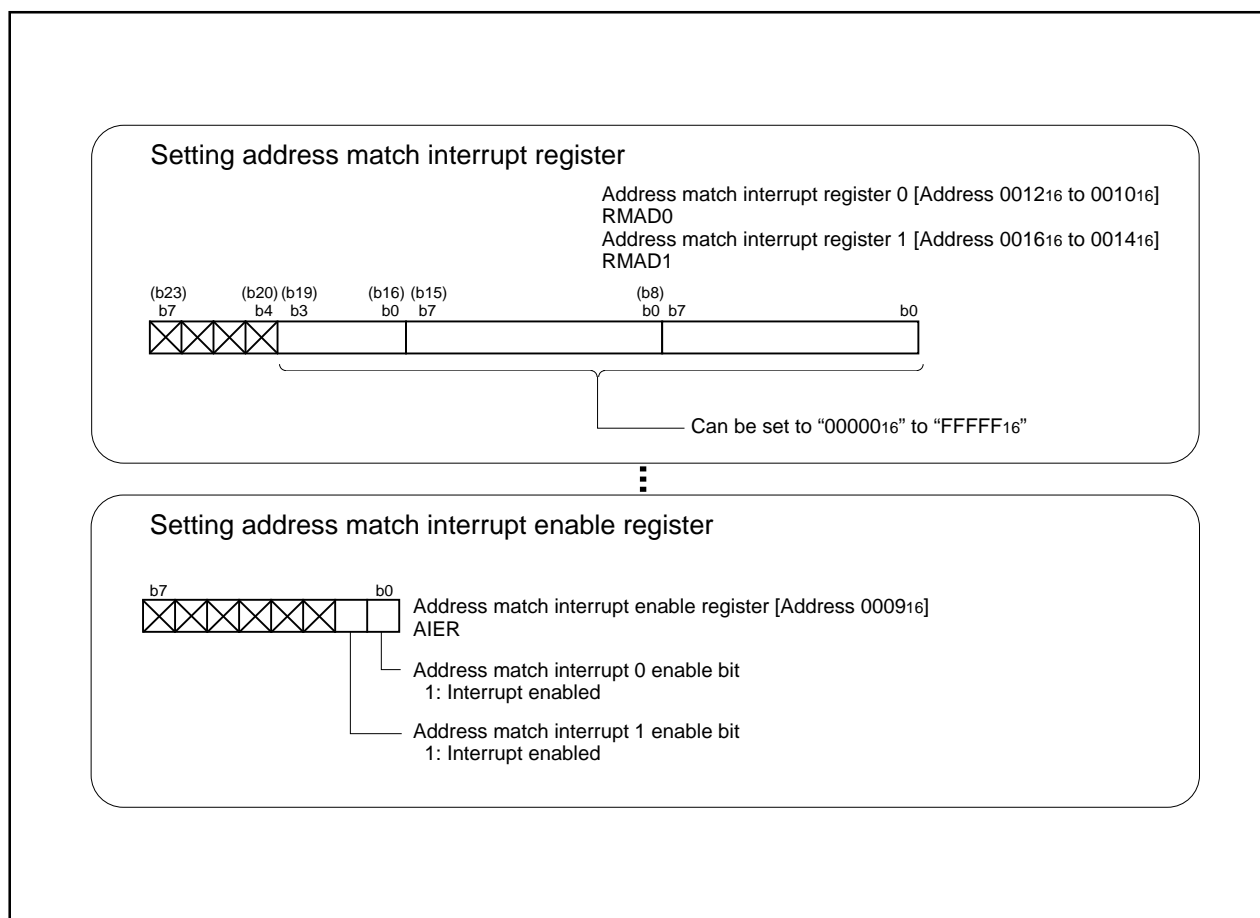


Figure 2.9.4. Set-up procedure of address match interrupt

## Address Match Interrupt

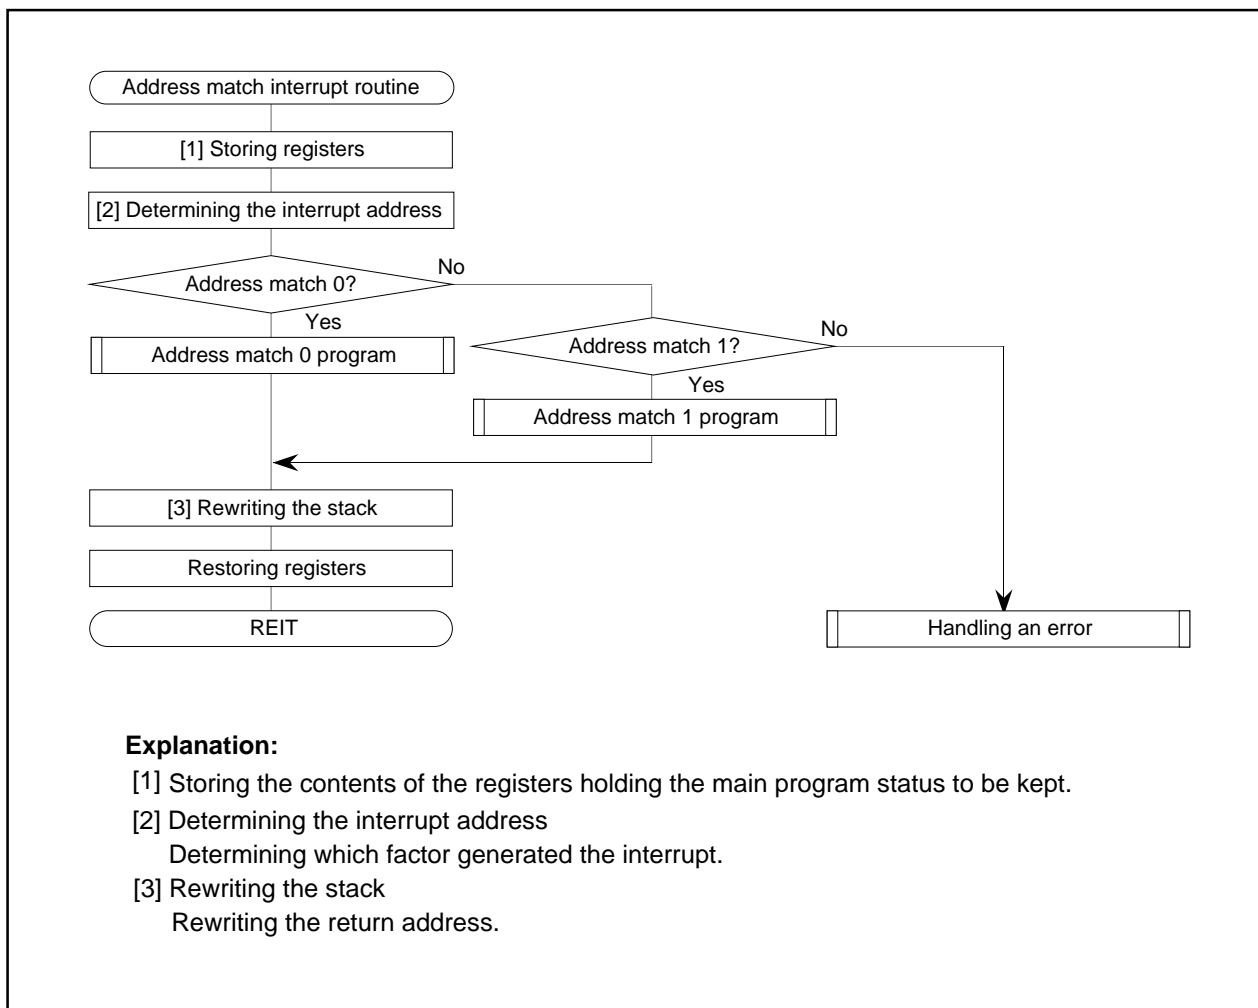

**Figure 2.9.5. Overview of the address match interrupt handling routine**

## Key-Input Interrupt

### 2.10 Key-Input Interrupt

#### 2.10.1 Overview

Key-input interrupt occurs when a falling edge is input to P00 through P07. The following is an overview of the key-input interrupt:

##### (1) Enabling/disabling the key-input interrupt

The key-input interrupt can be enabled and disabled using the key-input interrupt register. The key-input interrupt is affected by the interrupt priority level (IPL) and the interrupt enable flag (I flag).

##### (2) Occurrence timing of the key-input interrupt

With key-input interrupt acceptance enabled, pins P00 through P07, which are set to input, become key-input interrupt pins ( $\overline{KI0}$  through  $\overline{KI7}$ ). A key-input interrupt occurs when a falling edge is input to a key-input interrupt pin. At this moment, the level of other key-input interrupt pins must be "H". No interrupt occurs when the level of other key-input interrupt pins is "L".

##### (3) How to determine a key-input interrupt

A key-input interrupt occurs when a falling edge is input to one of eight pins, but each pin has the same vector address.

Therefore, read the input level of pins P00 through P07 in the key-input interrupt routine to determine the interrupted pin.

##### (4) Registers related to the key-input interrupt

Figure 2.10.1 shows the memory map of key-input interrupt-related registers, and Figure 2.10.2 shows key-input interrupt-related registers.

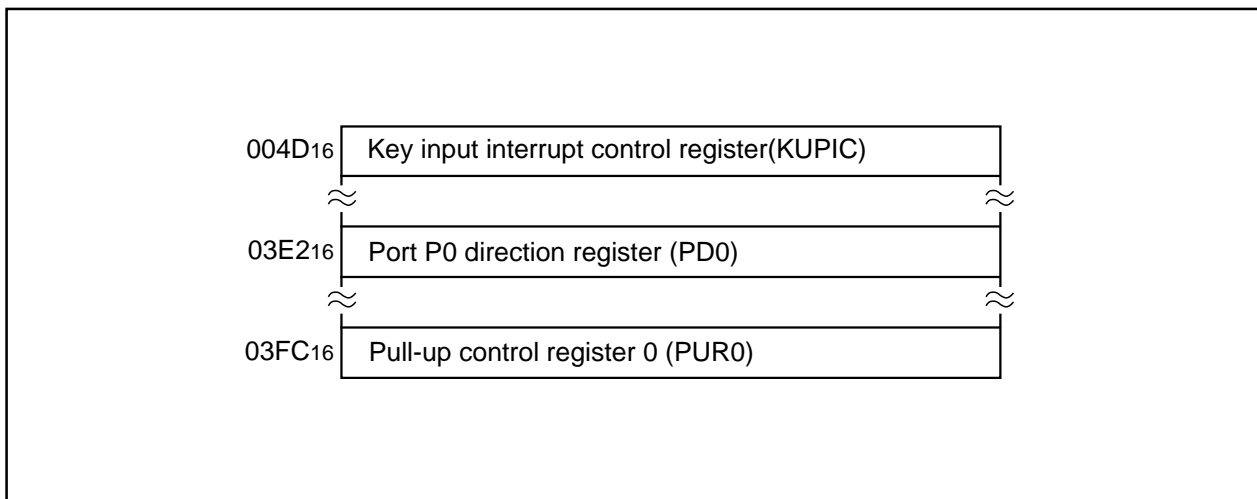



Figure 2.10.1. Memory map of key-input interrupt-related registers

## Key-Input Interrupt

## Interrupt control register (Note 2)


Symbol  
KUPICAddress  
004D<sub>16</sub>When reset  
XXXXX000<sub>2</sub>

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0 : Interrupt not requested 1 : Interrupt requested	○	○ (Note1)
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).


Note 2: To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. For details, see the precautions for interrupts.

## Port P0 direction register

Symbol  
PD0Address  
03E2<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
PD0_0	Port P0 <sub>0</sub> direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port)	○	○
PD0_1	Port P0 <sub>1</sub> direction register		○	○
PD0_2	Port P0 <sub>2</sub> direction register		○	○
PD0_3	Port P0 <sub>3</sub> direction register		○	○
PD0_4	Port P0 <sub>4</sub> direction register		○	○
PD0_5	Port P0 <sub>5</sub> direction register		○	○
PD0_6	Port P0 <sub>6</sub> direction register		○	○
PD0_7	Port P0 <sub>7</sub> direction register		○	○

## Pull-up control register 0

Symbol  
PUR0Address  
03FC<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
PU00	P0 <sub>0</sub> to P0 <sub>3</sub> pull-up	The corresponding port is pulled high with a pull-up resistor 0 : Not pulled high 1 : Pulled high	○	○
PU01	P0 <sub>4</sub> to P0 <sub>7</sub> pull-up		○	○
PU02	P1 <sub>0</sub> to P1 <sub>3</sub> pull-up		○	○
PU03	P1 <sub>4</sub> to P1 <sub>7</sub> pull-up		○	○
—	—		○	○
—	—		○	○
PU06	P3 <sub>0</sub> to P3 <sub>3</sub> pull-up		○	○
PU07	P3 <sub>4</sub> to P3 <sub>5</sub> pull-up		○	○

Figure 2.10.2. key-input interrupt-related registers

## Key-Input Interrupt

## 2.10.2 Operation of Key-Input Interrupt

The following is an operation of key-input interrupt. Figure 2.10.3 shows an example of a circuit that uses the key-input interrupt, Figure 2.10.4 shows an example of operation of key-input interrupt, and Figure 2.10.5 shows the setting procedure of key-input interrupt.

- Operation
- (1) Set the direction register of the ports to be changed to key-input interrupt pins to input, and set the pull-up function.
  - (2) Setting the key-input interrupt control register and setting the interrupt enable flag makes the interrupt-enabled state ready.
  - (3) If a falling edge is input to either  $\overline{KI0}$  through  $\overline{KI7}$ , the key-input interrupt request bit goes to "1".

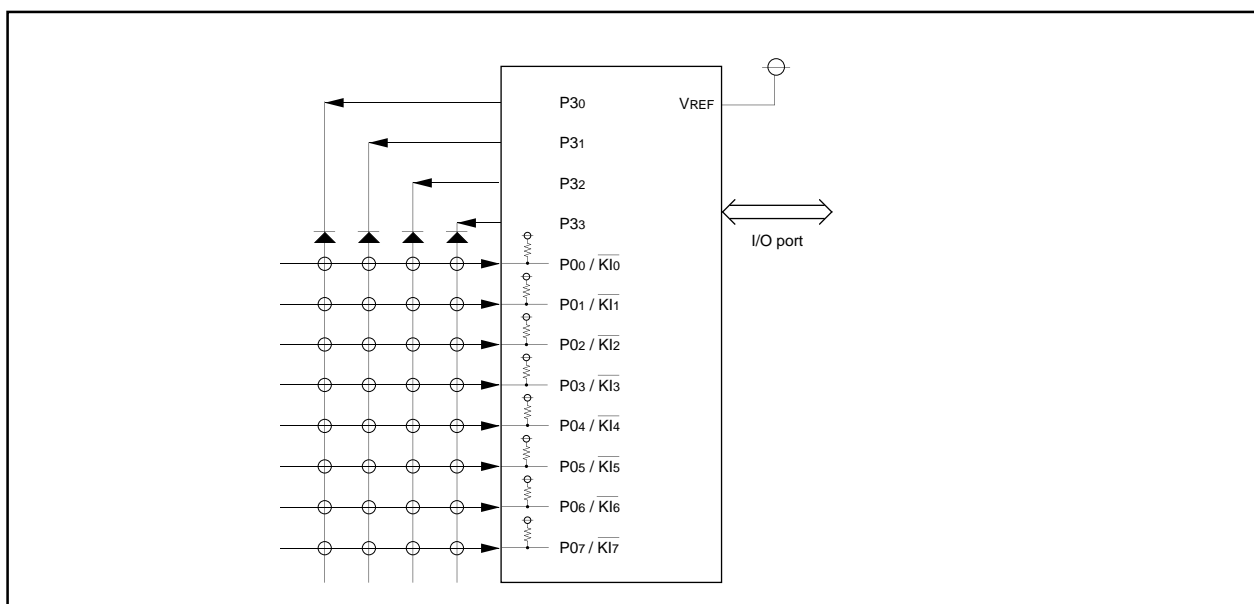


Figure 2.10.3. Example of circuit using the key-input interrupt

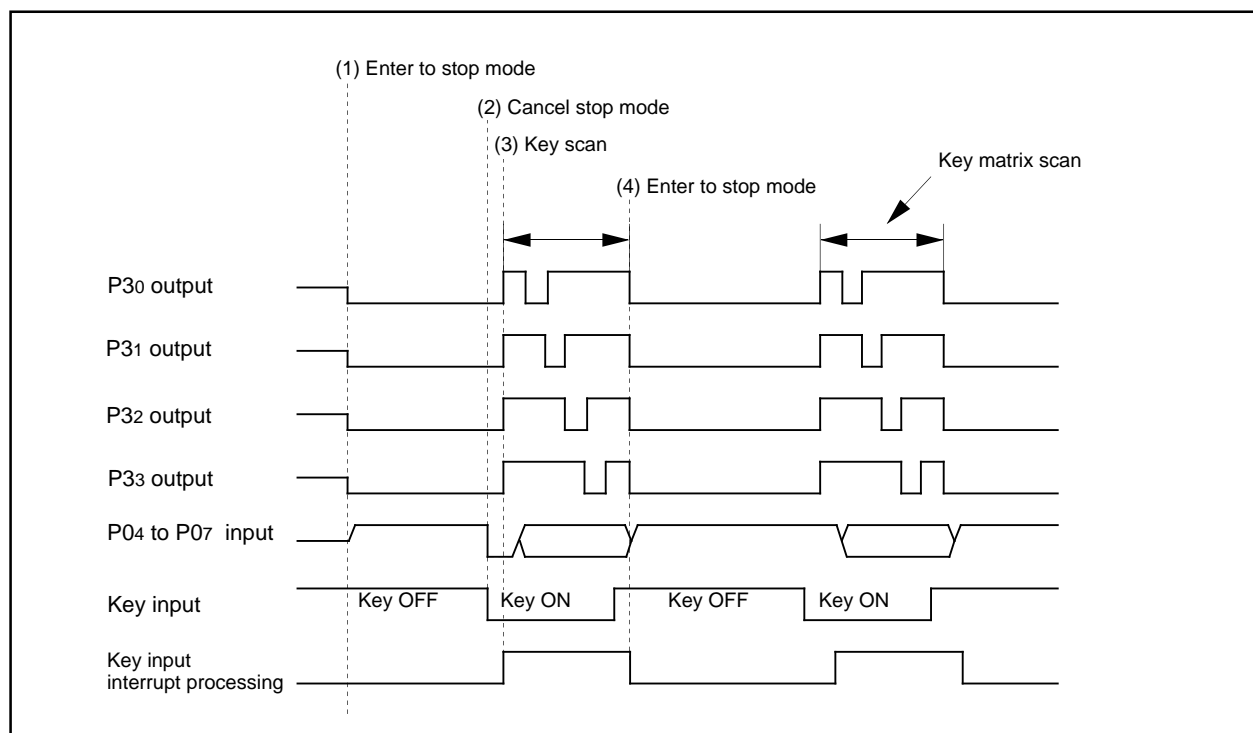


Figure 2.10.4. Example of operation of key-input interrupt

## Key-Input Interrupt

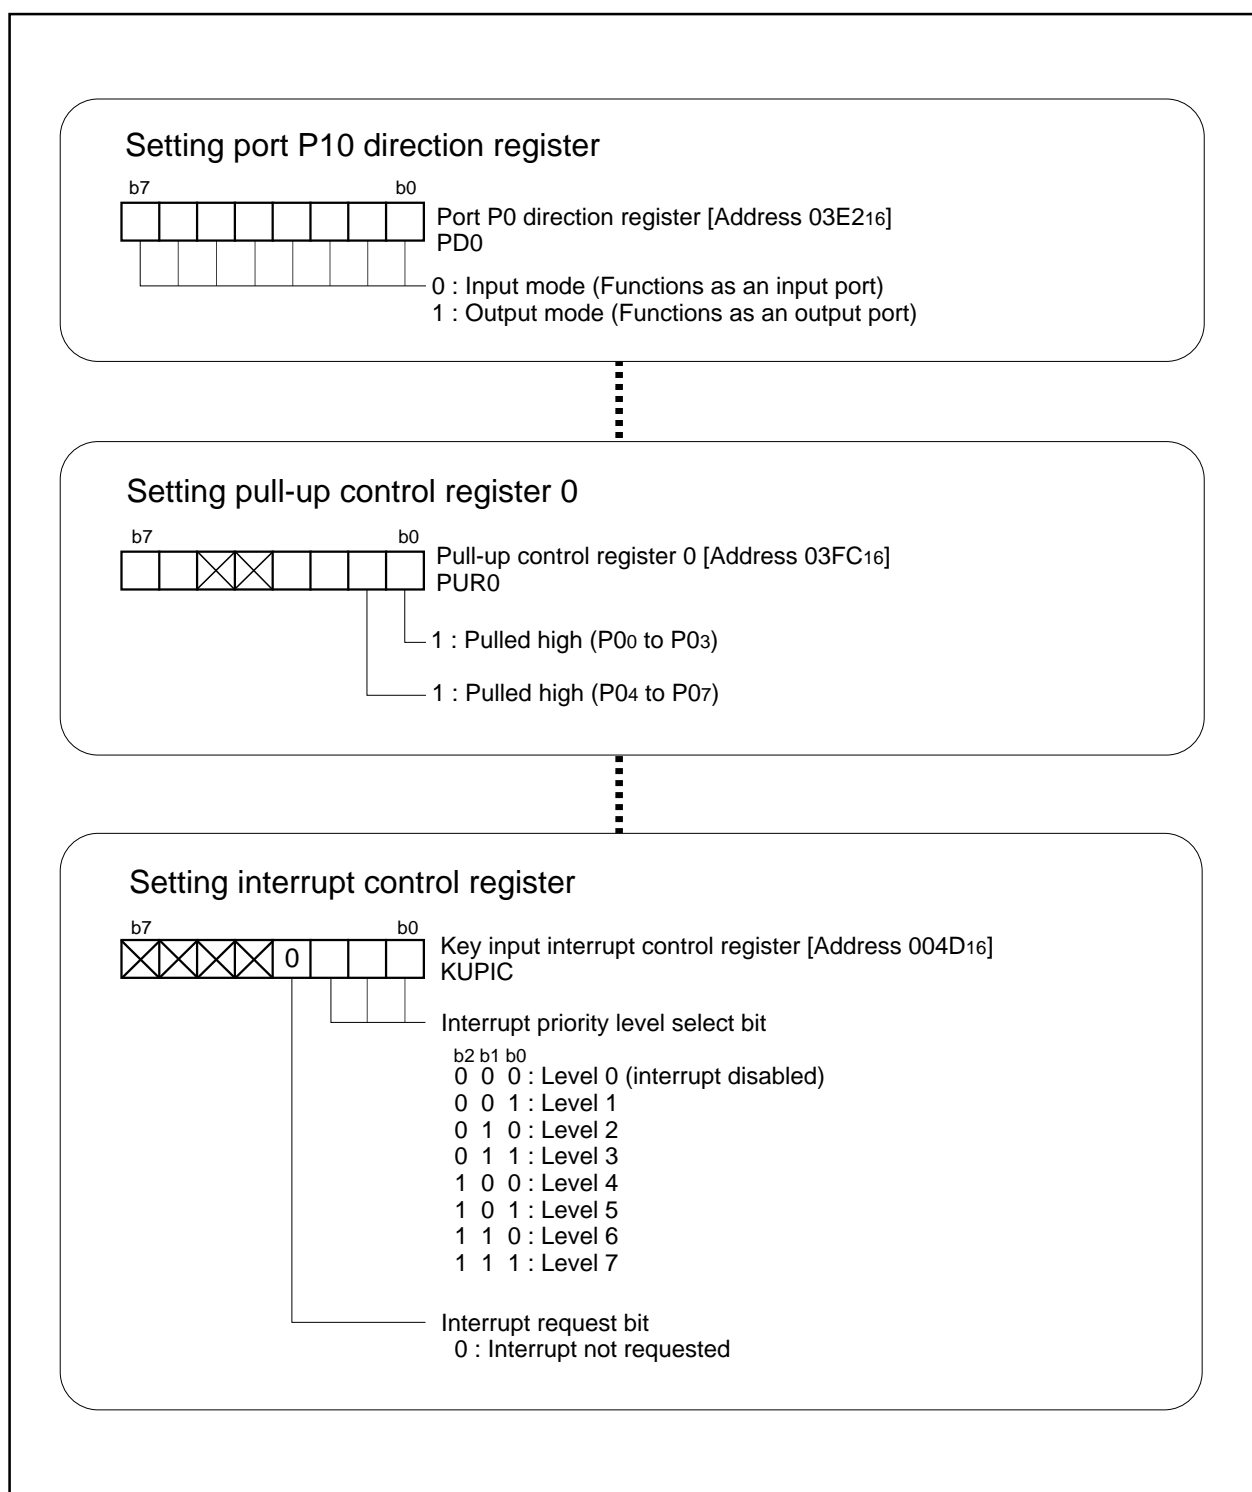


Figure 2.10.5. Set-up procedure of key-input interrupt



## 2.11 Power Control

### 2.11.1 Overview

'Power Control' refers to the reduction of CPU power consumption by stopping the CPU and oscillators, or decreasing the operation clock. The following is a description of the three available power control modes:

#### (1) Modes

Power control is available in three modes.

##### (a) Normal operation mode

- **High-speed mode**

Divide-by-1 frequency of the main clock becomes the BCLK. The CPU operates with the BCLK selected. Each peripheral function operates according to its assigned clock.

- **Medium-speed mode**

Divide-by-2, divide-by-4, divide-by-8, or divide-by-16 frequency of the main clock becomes the BCLK. The CPU operates according to the BCLK selected. Each peripheral function operates according to its assigned clock.

- **Low-speed mode**

fc becomes the BCLK. The CPU operates according to the fc clock. The fc clock is supplied by the secondary clock. Each peripheral function operates according to its assigned clock.

- **Low power consumption mode**

The main clock operating in low-speed mode is stopped. The CPU operates according to the fc clock. The fc clock is supplied by the secondary clock. The only peripheral functions that operate are those with the sub-clock selected as the count source.

##### (b) Wait mode


The CPU operation is stopped. The oscillators do not stop.

##### (c) Stop mode


All oscillators stop. The CPU and all built-in peripheral functions stop. This mode, among the three modes listed here, is the most effective in decreasing power consumption.

Figure 2.11.1 is the state transition diagram of the above modes.

## Transition of stop mode, wait mode

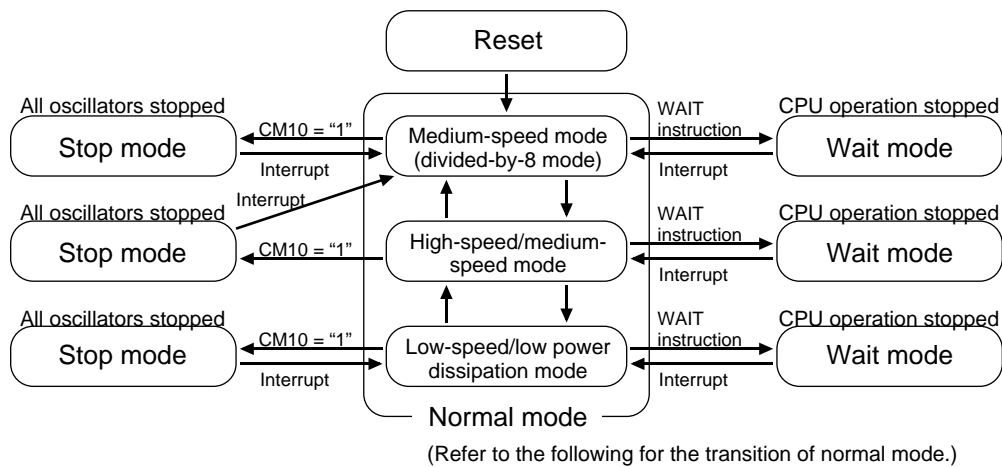

## Transition of normal mode

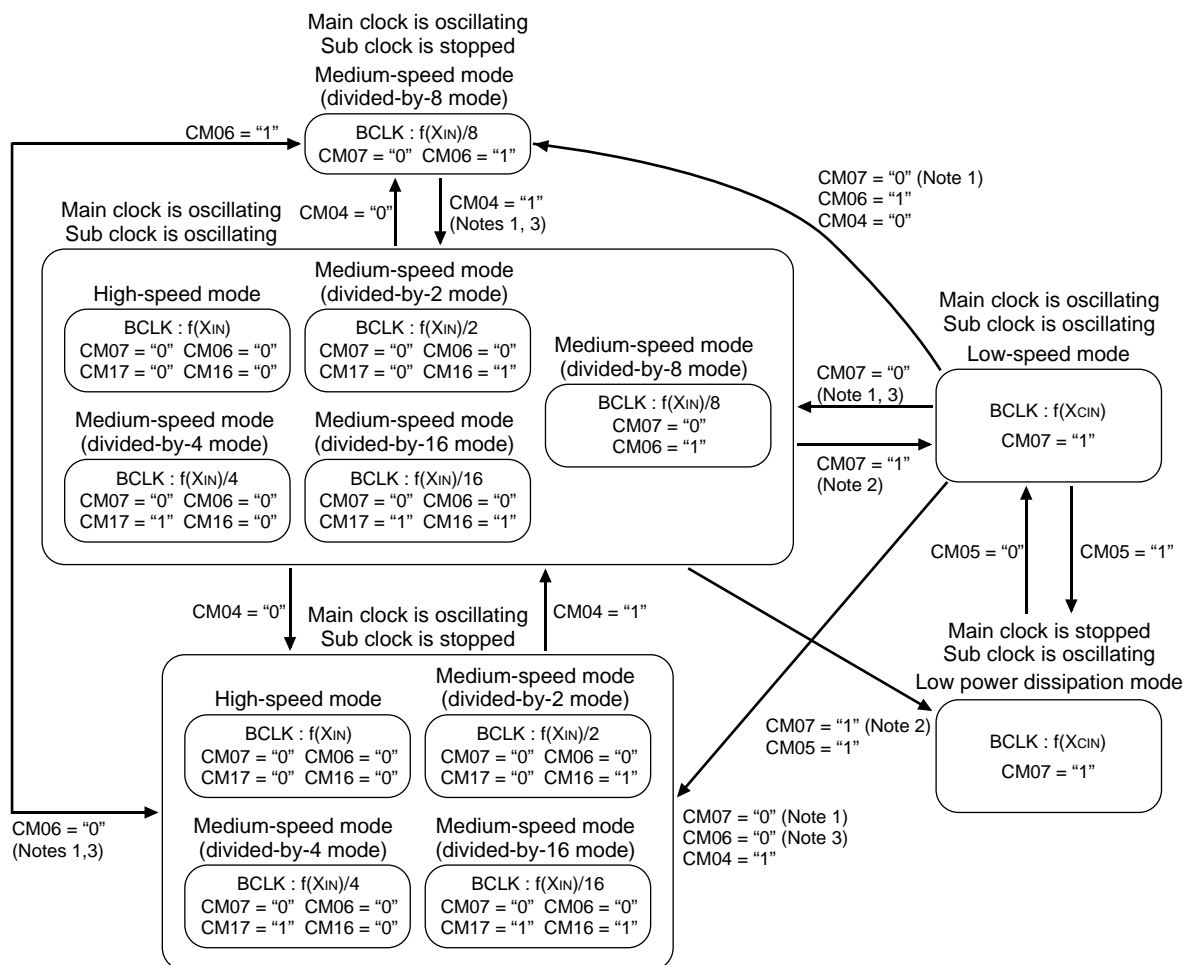

Note 1: Switch clock after oscillation of main clock is sufficiently stable.  
 Note 2: Switch clock after oscillation of sub clock is sufficiently stable.  
 Note 3: Change CM06 after changing CM17 and CM16.  
 Note 4: Transit in accordance with arrow.

**Figure 2.11.1. State transition diagram of power control mode**

## Power Control

**(2) Switching the driving capacity of the oscillation circuit**

Both the main clock and the secondary clock have the ability to switch the driving capacity. Reducing the driving capacity after the oscillation stabilizes allows for further reduction in power consumption.

**(3) Clearing stop mode and wait mode**

The stop mode and wait mode can be cleared by generating an interrupt request, or by resetting hardware. Set the priority level of the interrupt to be used for clearing, higher than the processor interrupt priority level (IPL), and enable the interrupt enable flag (I flag). When an interrupt clears a mode, that interrupt is processed. Table 2.11.1 shows the interrupts that can be used for clearing a stop mode and wait mode.

**(4) BCLK in returning from wait mode or stop mode****(a) Returning from wait mode**

The processor immediately returns to the BCLK, which was in use before entering wait mode.

**(b) Returning from stop mode**

If operation was performed in the high speed mode or medium speed mode prior to engaging the stop mode, CM06 will change to "1" when operation shifts to the stop mode. CM17, CM16 and CM07 do not change. Accordingly, when operation is restored from the stop mode, operation starts in the 8 division mode.

Also, if operation was performed in the low speed mode prior to engaging the stop mode, CM06, CM17, CM16 and CM07 do not change. When operation is restored from the stop mode, operation starts in the low speed mode.

**Table 2.11.1. Interrupts available for clearing stop mode and wait mode**

Interrupt for clearing	Wait mode		Stop mode
	CM02 = 0	CM02 = 1(Note 4), CM07=0, CM05=0	
Key input interrupt	Possible	Possible	Possible
A-D interrupt	Note 3	Impossible	Impossible
UART0 transmit interrupt	Possible	Note 1	Note 1
UART0 receive interrupt	Possible	Note 1	Note 1
UART1 transmit interrupt	Possible	Impossible	Impossible
UART1 receive interrupt	Possible	Impossible	Impossible
Timer A0 interrupt	Possible	Note 2	Note 2
Timer B0 interrupt	Possible	Note 2	Note 2
Timer B1 interrupt	Possible	Note 2	Note 2
Timer X0 interrupt	Possible	Note 2	Note 2
Timer X1 interrupt	Possible	Note 2	Note 2
Timer X2 interrupt	Possible	Note 2	Note 2
INT0 interrupt	Possible	Possible	Possible
INT1 interrupt	Possible	Possible	Possible

Note 1: Can be used when an external clock in clock synchronous serial I/O mode is selected.

Note 2: Can be used when the external signal is being counted in event counter mode.

Note 3: Can be used in one-shot mode and one-shot sweep mode.

Note 4: When the MCU running in low-speed or low power dissipation mode, do not enter WAIT mode with CM02 set to 1.

## Power Control

### (5) Sequence of returning from stop mode

Sequence of returning from stop mode is oscillation start-up time and interrupt sequence.

When interrupt is generated in stop mode, CM10 becomes "0" and clearing stop mode.

Starting oscillation and supplying BCLK execute the interrupt sequence as follow:

In the interrupt sequence, the processor carries out the following in sequence given:

- CPU gets the interrupt information (the interrupt number and interrupt request level) by reading address 00000<sub>16</sub>. The interrupt request bit of the interrupt written in address 00000<sub>16</sub> will then be set to "0".
- Saves the content of the flag register (FLG) as it was immediately before the start of interrupt sequence in the temporary register (Note) within the CPU.
- Sets the interrupt enable flag (I flag), the debug flag (D flag), and the stack pointer assignment flag (U flag) to "0" (the U flag, however does not change if the INT instruction, in software interrupt numbers 32 through 63, is executed)
- Saves the content of the temporary register (Note) within the CPU in the stack area.
- Saves the content of the program counter (PC) in the stack area.
- Sets the interrupt priority level of the accepted instruction in the IPL.

Note: This register cannot be utilized by the user.

After the interrupt sequence is completed, the processor resumes executing instructions from the first address of the interrupt routine.

Figure 2.11.2 shows the sequence of returning from stop mode.

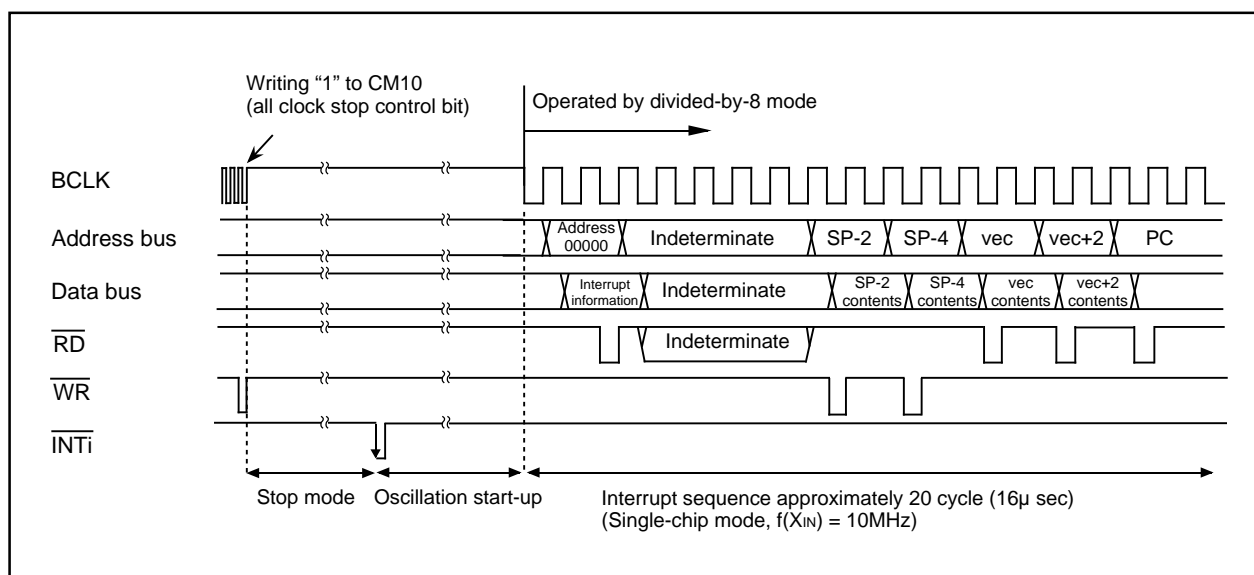


Figure 2.11.2. Sequence of returning from stop mode

### (6) Registers related to power control

Figure 2.11.3 shows the memory map of power control-related registers, and Figure 2.11.4 shows power control-related registers.

## Power Control

000616	System clock control register 0 (CM0)
000716	System clock control register 1 (CM1)

Figure 2.11.3. Memory map of power control-related registers

System clock control register 0 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
								CM0	000616	4816

Note 1: Set bit 0 of the protect register (address 000A16) to "1" before writing to this register.

Note 2: Changes to "1" when shifting to stop mode and at a reset.

Note 3: This bit is used to stop the main clock when placing the device in a low-power mode. If you want to operate with XIN after exiting from the stop mode, set this bit to "0". When operating with a self-excited oscillator, set the system clock select bit (CM07) to "1" before setting this bit to "1".

Note 4: When inputting external clock, only clock oscillation buffer is stopped and clock input is acceptable.

Note 5: If this bit is set to "1", XOUT turns "H". The built-in feedback resistor remains being connected, so XIN turns pulled up to XOUT ("H") via the feedback resistor.

Note 6: Set port Xc select bit (CM04) to "1" and stabilize the sub-clock oscillating before setting to this bit from "0" to "1".

Do not write to both bits at the same time. And also, set the main clock stop bit (CM05) to "0" and stabilize the main clock oscillating before setting this bit from "1" to "0".

Note 7: This bit changes to "1" when shifting from high-speed/medium-speed mode to stop mode and at a reset. When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained.

Note 8: fc32 is not included. Do not set to "1" when using low-speed or low power dissipation mode.

System clock control register 1 (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset
			0	0	0			CM1	000716	2016

Note 1: Set bit 0 of the protect register (address 000A16) to "1" before writing to this register.

Note 2: This bit changes to "1" when shifting from high-speed/medium-speed mode to stop mode and at a reset. When shifting from low-speed/low power dissipation mode to stop mode, the value before stop mode is retained.

Note 3: Can be selected when bit 6 of the system clock control register 0 (address 000616) is "0". If "1", division mode is fixed at 8.

Note 4: If this bit is set to "1", XOUT turns "H", and the built-in feedback resistor is cut off. XCIN and XCOUT turn high-impedance state.

Figure 2.11.4. Power control-related registers

## Power Control

## 2.11.2 Stop Mode Set-Up

Settings and operation for entering stop mode are described here.

Operation (1) Enables the interrupt used for returning from stop mode.

(2) Sets the interrupt enable flag (I flag) to "1".

(3) Clearing the protection and setting every-clock stop bit to "1" stops oscillation and causes the processor to go into stop mode.

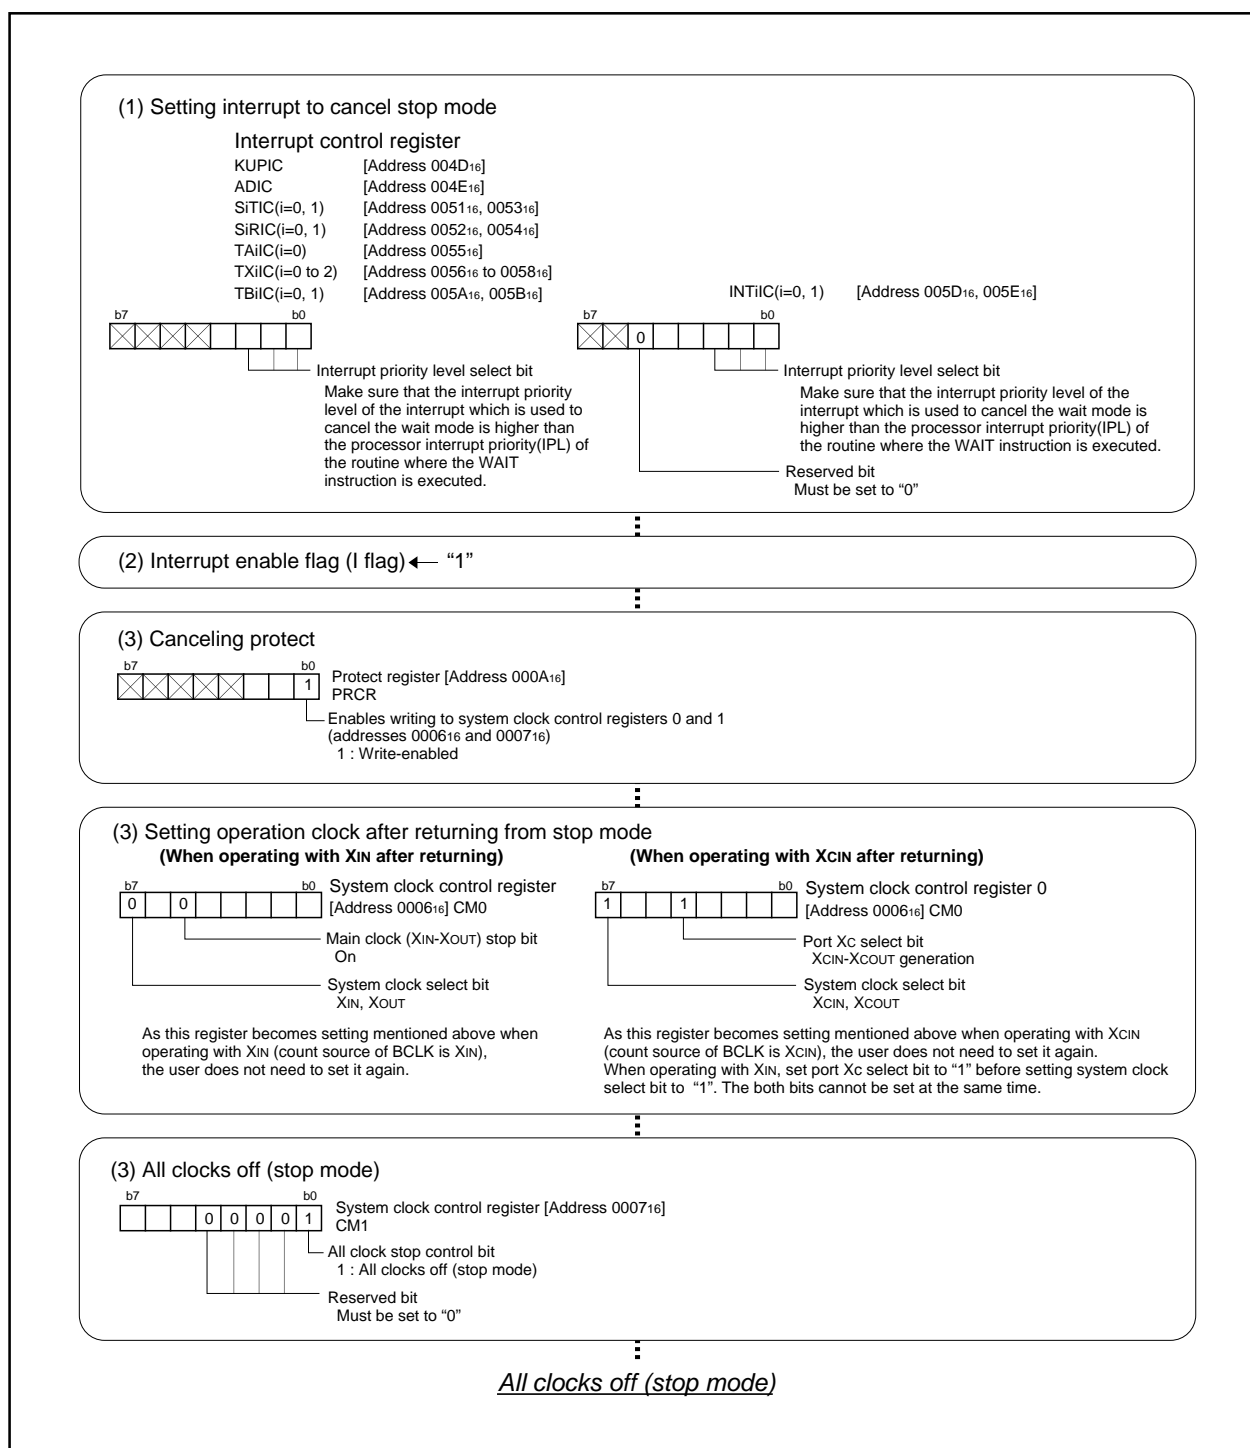


Figure 2.11.5. Example of stop mode set-up

## Power Control

## 2.11.3 Wait Mode Set-Up

Settings and operation for entering wait mode are described here.

- Operation
- (1) Enables the interrupt used for returning from wait mode.
  - (2) Sets the interrupt enable flag (I flag) to "1".
  - (3) Clears the protection and changes the content of the system clock control register.
  - (4) Executes the WAIT instruction.

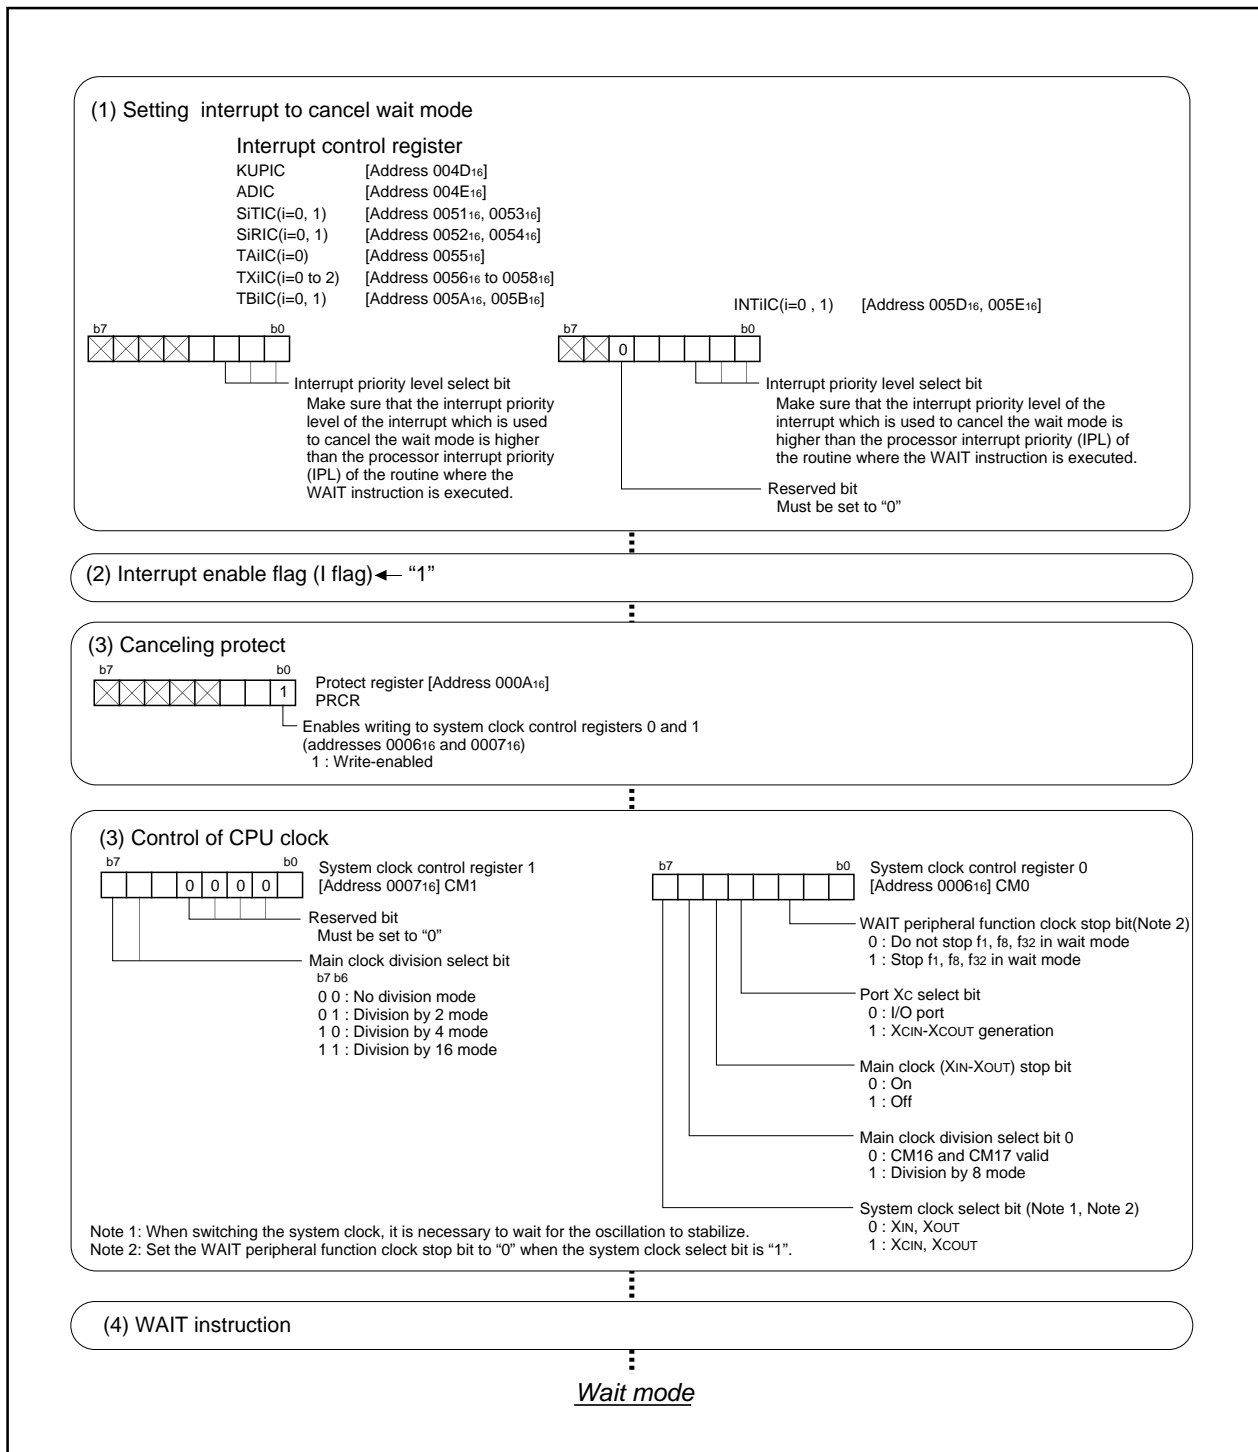


Figure 2.11.6. Example of wait mode set-up

### 2.11.4 Precautions in Power Control

- (1) When returning from stop mode by hardware reset,  $\overline{\text{RESET}}$  pin must be set to "L" level until main clock oscillation is stabilized.
- (2) When switching to either wait mode or stop mode, instructions occupying four bytes either from the WAIT instruction or from the instruction that sets the every-clock stop bit to "1" within the instruction queue are prefetched and then the program stops. So put at least four NOPs in succession either to the WAIT instruction or to the instruction that sets the every-clock stop bit to "1".
- (3) Suggestions to reduce power consumption

- **Ports**

The processor retains the state of each programmable I/O port even when it goes to wait mode or to stop mode. A current flows in active I/O ports. A pass current flows in input ports that float. When entering wait mode or stop mode, set non-used ports to input and stabilize the potential.

- (a) **A-D converter**

A current always flows in the VREF pin. When entering wait mode or stop mode, set the Vref connection bit to "0" so that no current flows into the VREF pin.

- (b) **Stopping peripheral functions**

In wait mode, stop non-used wait peripheral functions using the peripheral function clock stop bit. However, peripheral function clock fc32 does not stop so that the peripherals using fc32 do not contribute to the power saving. When the MCU running in low-speed or low power dissipation mode, do not enter WAIT mode with this bit set to "1".

- (c) **Switching the oscillation-driving capacity**

Set the driving capacity to "LOW" when oscillation is stable.

- (d) **External clock**

When using an external clock input for the CPU clock, set the main clock stop bit to "1". Setting the main clock stop bit to "1" causes the XOUT pin not to operate and the power consumption goes down (when using an external clock input, the clock signal is input regardless of the content of the main clock stop bit).



## 2.12 Programmable I/O Ports

### 2.12.1 Overview

Forty-three programmable I/O ports. I/O pins also serve as I/O pins for built-in peripheral functions. Each port has a direction register that defines the I/O direction and also has a port register for I/O data. In addition, each port has a pull-up control register that defines pull-up in terms of 4 bits. Port P1 can be set to N-channel output transistor drive capacity.

The following is an overview of the programmable I/O ports:

#### (1) Writing to a port register

With the direction register set to output, the level of the written values from each relevant pin is output by writing to a port register. The output level conforms to CMOS output. Writing to the port register, with the direction register set to input, inputs a value to the port register, but nothing is output to the relevant pins. The output level remains floating.

#### (2) Reading a port register

With the direction register set to output, reading a port register takes out the content of the port register, not the content of the pin. With the direction register set to input, reading the port register takes out the content of the pin.

#### (3) Effect of the protection register

Data written to the direction register of P4 is affected by the protection register. The direction register of P4 cannot be easily rewritten.

#### (4) Setting pull-up

The pull-up control bit allows setting of the pull-up, in terms of 4 bits, either in use or not in use. For the four bits chosen, pull-up is effective only in the ports whose direction register is set to input. Pull-up is not effective in ports whose direction register is set to output.

Do not set pull-up of corresponding pin when XCIN/XCOUT is set or a port is used as A-D input.

#### (5) Drive capacity control

The drive capacity of the N channel output transistor on P1 can be set between "LOW" and "HIGH" in units of 1 bit. One bit corresponds to one pin.

## Programmable I/O Ports

### (6) I/O functions of built-in peripheral devices

Table 2.12.1 shows relation between ports and I/O functions of built-in peripheral devices.

**Table 2.12.1. Relation between ports and I/O functions of built-in peripheral devices**

Port	Internal peripheral device I/O pins
P0	key-input interrupt function input pins
P40	I/O pin for serial I/O communication/Timer A input pin
P41	Timer A output pin
P42	Serial I/O input pin
P43, P44	Input pins for external interrupt/Timer X I/O pins
P45	Timer X I/O pin
P50 to P54	I/O pins for serial I/O communication/A-D converter input pins
P6	A-D converter input pins
P70, P71	Timer B input pins

### (7) Examples of working on non-used pins

Table 2.12.2 contains examples of working on non-used pins. There are shown here for mere examples. In practical use, make suitable changes and perform sufficient evaluation in compliance with you application.

**Table 2.12.2. Examples of working on unused pins in single-chip mode**

Pin name	Connection
Ports P0, P1, P3 to P7	After setting for input mode, connect every pin to VSS or VCC via a resistor; or after setting for output mode, leave these pins open. (Note 1)
XOUT (Note 2)	Open
AVCC	Connect to VCC
AVSS, VREF, BYTE	Connect to VSS

Note 1: If setting these pins in output mode and opening them, ports are in input mode until switched into output mode by use of software after reset. Thus the voltage levels of the pins become unstable, and there can be instances in which the power source current increases while the ports are in input mode.

In view of an instance in which the contents of the direction registers change due to a runaway generated by noise or other causes, setting the contents of the direction registers periodically by use of software increases program reliability.

Note 2: When an external clock is input to the XIN pin.

## Programmable I/O Ports

### (8) Registers related to the programmable I/O ports

Figure 2.12.1 shows the memory map of programmable I/O ports-related registers, and Figures 2.12.2 to 2.12.4 show programmable I/O ports-related registers.

03E0 <sub>16</sub>	Port P0 (P0)
03E1 <sub>16</sub>	Port P1 (P1)
03E2 <sub>16</sub>	Port P0 direction register (PD0)
03E3 <sub>16</sub>	Port P1 direction register (PD1)
03E4 <sub>16</sub>	
03E5 <sub>16</sub>	Port P3 (P3)
03E6 <sub>16</sub>	
03E7 <sub>16</sub>	Port P3 direction register (PD3)
03E8 <sub>16</sub>	Port P4 (P4)
03E9 <sub>16</sub>	Port P5 (P5)
03EA <sub>16</sub>	Port P4 direction register (PD4)
03EB <sub>16</sub>	Port P5 direction register (PD5)
03EC <sub>16</sub>	Port P6 (P6)
03ED <sub>16</sub>	Port P7 (P7)
03EE <sub>16</sub>	Port P6 direction register (PD6)
03EF <sub>16</sub>	Port P7 direction register (PD7)
≈	
03FC <sub>16</sub>	Pull-up control register 0 (PUR0)
03FD <sub>16</sub>	Pull-up control register 1 (PUR1)
03FE <sub>16</sub>	Port P1 drive control register (DRR)

Figure 2.12.1. Memory map of programmable I/O ports-related registers

## Programmable I/O Ports

## Port Pi direction register (Note 1)

b7	b6	b5	b4	b3	b2	b1	b0	Symbol	Address	When reset	
								PD <sub>i</sub> (i = 0 to 7)	03E2 <sub>16</sub> , 03E3 <sub>16</sub> , 03E7 <sub>16</sub> , 03EA <sub>16</sub> , 03EB <sub>16</sub> , 03EE <sub>16</sub> , 03EF <sub>16</sub>	00 <sub>16</sub> 00 <sub>16</sub>	
								Bit symbol	Bit name	Function	R:W
								PD <sub>i_0</sub>	Port Pi0 direction register	0 : Input mode (Functions as an input port) 1 : Output mode (Functions as an output port) (i = 0 to 7 except 2)	○ ○
								PD <sub>i_1</sub>	Port Pi1 direction register		○ ○
								PD <sub>i_2</sub>	Port Pi2 direction register		○ ○
								PD <sub>i_3</sub>	Port Pi3 direction register		○ ○
								PD <sub>i_4</sub>	Port Pi4 direction register		○ ○
								PD <sub>i_5</sub>	Port Pi5 direction register		○ ○
								PD <sub>i_6</sub>	Port Pi6 direction register		○ ○
								PD <sub>i_7</sub>	Port Pi7 direction register		○ ○

Note 1: Set bit 2 of protect register (address 000A<sub>16</sub>) to "1" before rewriting to the port P4 direction register.

Note 2: Nothing is assigned in direction register of P3<sub>6</sub>, P3<sub>7</sub>, P4<sub>6</sub>, P4<sub>7</sub>, P5<sub>5</sub> to p5<sub>7</sub>, P7<sub>2</sub> to P7<sub>7</sub>. These bits can either be set nor reset. When read, its contents are indeterminate.

## Port Pi register


b7	b6	b5	b4	b3	b2	b1	b0	Symbol Pi (i = 0 to 7)	Address 03E0 <sub>16</sub> , 03E1 <sub>16</sub> , 03E5 <sub>16</sub> , 03E8 <sub>16</sub> , 03E9 <sub>16</sub> , 03EC <sub>16</sub> , 03ED <sub>16</sub>	When reset Indeterminate Indeterminate

Note: Nothing is assigned in direction register of P3<sub>6</sub>, P3<sub>7</sub>, P4<sub>6</sub>, P4<sub>7</sub>, P5<sub>5</sub> to p5<sub>7</sub>, P7<sub>2</sub> to P7<sub>7</sub>. This bit can either be set nor reset. When read, its content is indeterminate.

Figure 2.12.2. Programmable I/O ports-related registers (1)


## Programmable I/O Ports

## Pull-up control register 0

Symbol  
PUR0Address  
03FC<sub>16</sub>When reset  
00<sub>16</sub>


Bit symbol	Bit name	Function	R	W
PU00	P00 to P03 pull-up	The corresponding port is pulled high with a pull-up resistor 0 : Not pulled high 1 : Pulled high	○	○
PU01	P04 to P07 pull-up		○	○
PU02	P10 to P13 pull-up		○	○
PU03	P14 to P17 pull-up		○	○
—	—		○	○
—	—		○	○
—	—		○	○
PU06	P30 to P33 pull-up		○	○
PU07	P34 to P35 pull-up		○	○

## Pull-up control register 1

Symbol  
PUR1Address  
03FD<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
PU10	P40 to P43 pull-up	The corresponding port is pulled high with a pull-up resistor 0 : Not pulled high 1 : Pulled high	○	○
PU11	P44 to P47 pull-up		○	○
PU12	P50 to P53 pull-up		○	○
PU13	P54 pull-up		○	○
PU14	P60 to P63 pull-up		○	○
PU15	P64 to P67 pull-up		○	○
PU16	P70 to P71 pull-up		○	○
—	—		○	○

## Port P1 drive capacity control register

Symbol  
DRRAddress  
03FE<sub>16</sub>When reset  
00<sub>16</sub>

Bit symbol	Bit name	Function	R	W
DRR0	Port P10 drive capacity	Set P1 N-channel output transistor drive capacity 0 : LOW 1 : HIGH	○	○
DRR1	Port P11 drive capacity		○	○
DRR2	Port P12 drive capacity		○	○
DRR3	Port P13 drive capacity		○	○
DRR4	Port P14 drive capacity		○	○
DRR5	Port P15 drive capacity		○	○
DRR6	Port P16 drive capacity		○	○
DRR7	Port P17 drive capacity		○	○

Figure 2.12.3. Programmable I/O ports-related registers (2)

## Chapter 3

---

### Examples of Peripheral functions Applications

## Applications

---

This chapter presents applications in which peripheral functions built in the M16C/20 are used. They are shown here as examples. In practical use, make suitable changes and perform sufficient evaluation. For basic use, see Chapter 2 How to Use Peripheral Functions.

Here follows the list of applications that appear in this chapter.

- 3.1 Long-period timers ..... P338
- 3.2 Variable-period variable-duty PWM output ..... P342
- 3.3 Delayed one-shot output ..... P346
- 3.4 Buzzer output ..... P350
- 3.5 Solution for external interrupt pins shortage ..... P352
- 3.6 Controlling power using stop mode ..... P354
- 3.7 Controlling power using wait mode ..... P358

## Applications

---

[MEMO]



## Timer X Applications

### 3.1 Long-Period Timers

**Overview** In this process, Timer X0 and Timer X1 are connected to make a 16-bit timer with a 16-bit prescaler. Figure 3.1.1 shows the operation timing, Figure 3.1.2 shows the connection diagram, and Figures 3.1.3 and 3.1.4 show the set-up procedure.


Use the following peripheral functions:

- Timer mode of timer X
- Event counter mode of timer X

#### Specifications


- (1) Set timer X0 to timer mode, and set timer X1 to event counter mode.
- (2) Perform a count on count source f1 using timer X0 to count for 1 ms, and perform a count on timer X0 using timer X1 to count for 1 second.
- (3) Connect a 10-MHz oscillator to XIN.

- Operation**
- (1) Setting the count start flag to "1" causes the counter to begin counting. The counter of timer X0 performs a down count on count source f1.
  - (2) If the counter of timer X0 underflows, the counter reloads the content of the reload register and continues counting. At this time, the timer X0 interrupt request bit goes to "1". The counter of timer X1 performs a down count on underflows in timer X0.
  - (3) If the counter of timer X1 underflows, the counter reloads the content of the reload register and continues counting. At this time, the timer X1 interrupt request bit goes to "1".

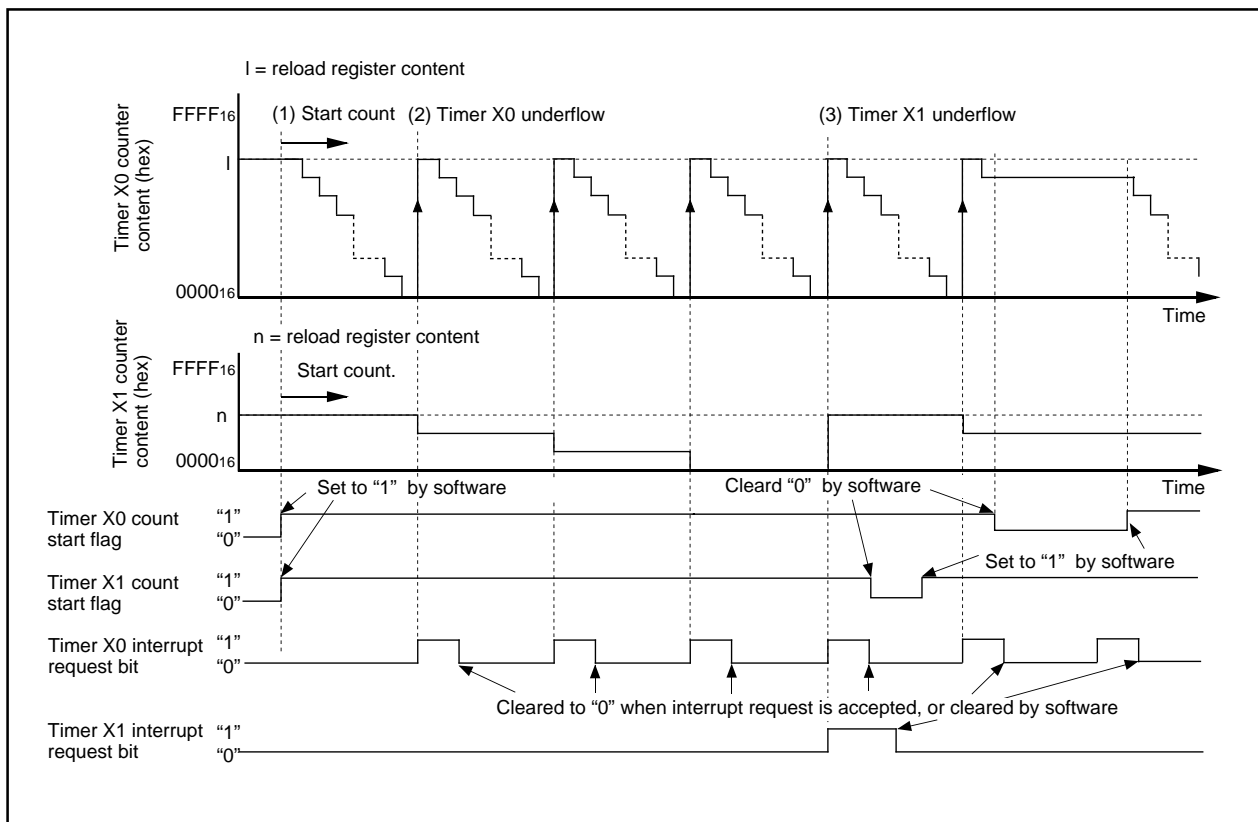

**Figure 3.1.1. Operation timing of long-period timers**


## Timer X Applications

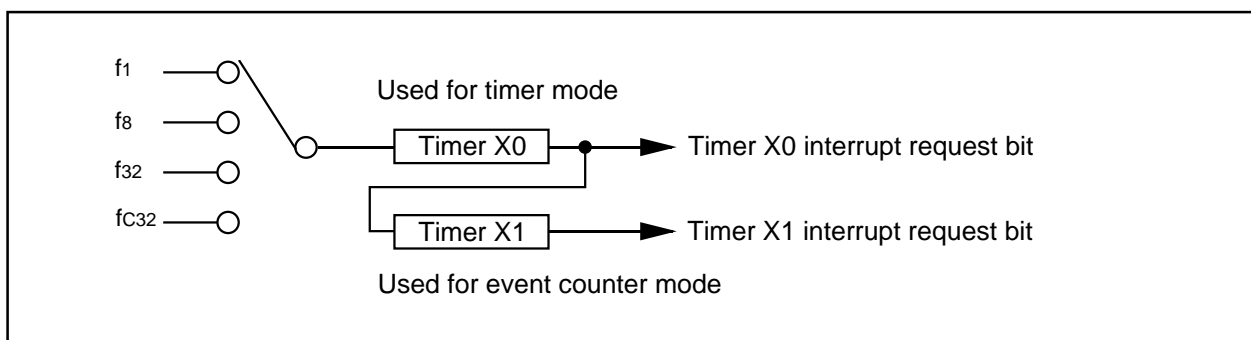**Figure 3.1.2. Connection diagram of long-period timers**


## Timer X Applications

## Setting timer X0

## Selecting timer mode and functions

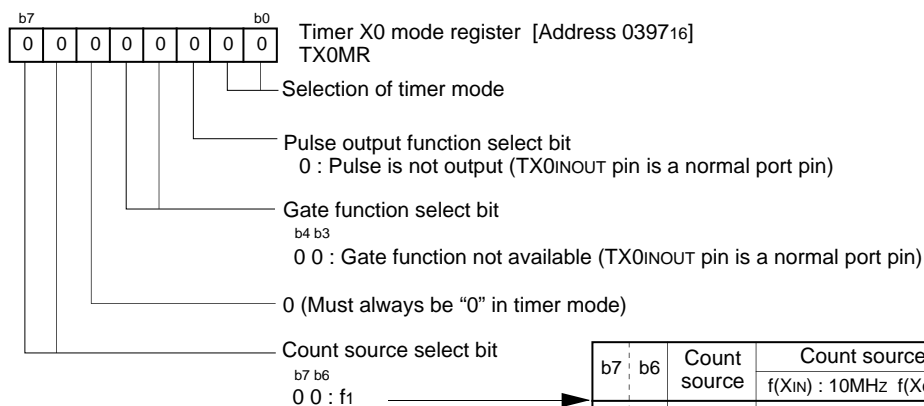


## Setting divide ratio



## Setting timer X1

## Selecting event counter mode and each function

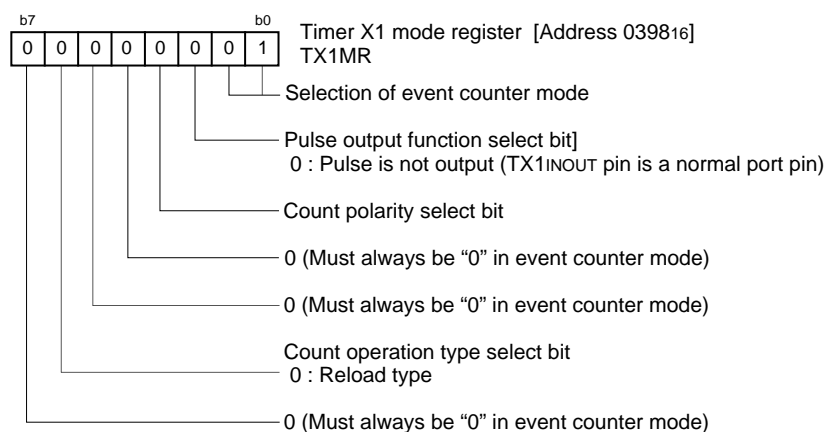

Continued to the next page

Figure 3.1.3. Set-up procedure of long-period timers (1)

## Timer X Applications

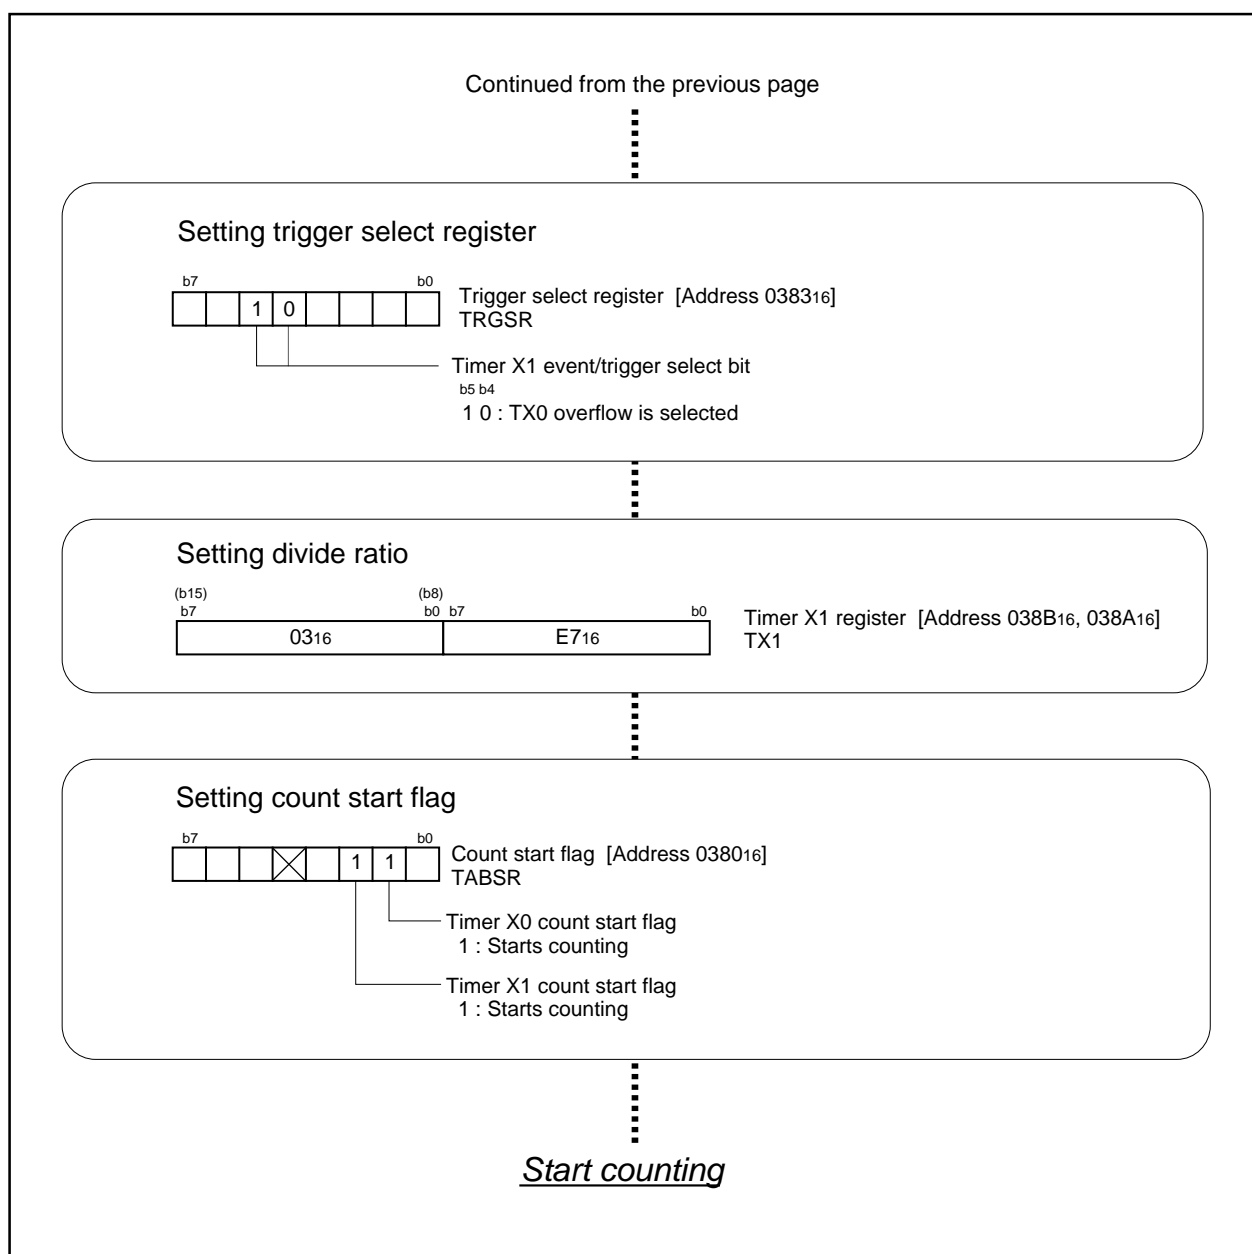


Figure 3.1.4. Set-up procedure of long-period timers (2)

### 3.2 Variable-Period Variable-Duty PWM Output

**Overview** In this process, Timer X0 and A1 are used to generate variable-period, variable-duty PWM output. Figure 3.2.1 shows the operation timing, Figure 3.2.2 shows the connection diagram, and Figures 3.2.3 and 3.2.4 show the set-up procedure.

Use the following peripheral functions:

- Timer mode of timer X
- One-shot timer mode of timer X

#### Specifications

- (1) Set timer X0 in timer mode, and set timer X1 in one-shot timer mode with pulse-output function.
- (2) Set 1 ms, the PWM period, to timer X0. Set 500  $\mu$ s, the width of PWM "H" pulse, to timer X1.  
Both timer X0 and timer X1 use f1 for the count source.
- (3) Connect a 10-MHz oscillator to XIN.

- Operation**
- (1) Setting the count start flag to "1" causes the counter of timer X0 to begin counting. The counter of timer X0 performs a down count on count source f1.
  - (2) If the counter of timer X0 underflows, the counter reloads the content of the reload register and continues counting. At this time, the timer X0 interrupt request bit goes to "1".
  - (3) An underflow in timer X0 triggers the counter of timer X1 and causes it to begin counting. When the counter of timer X1 begins counting, the output level of the TX1INOUT pin goes to "H".
  - (4) As soon as the count of the counter of timer X1 becomes "000016", the output level of TX1INOUT pin goes to "L", and the counter reloads the content of the reload register and stops counting. At the same time, the timer X1 interrupt request bit goes to "1".

## Timer X Applications

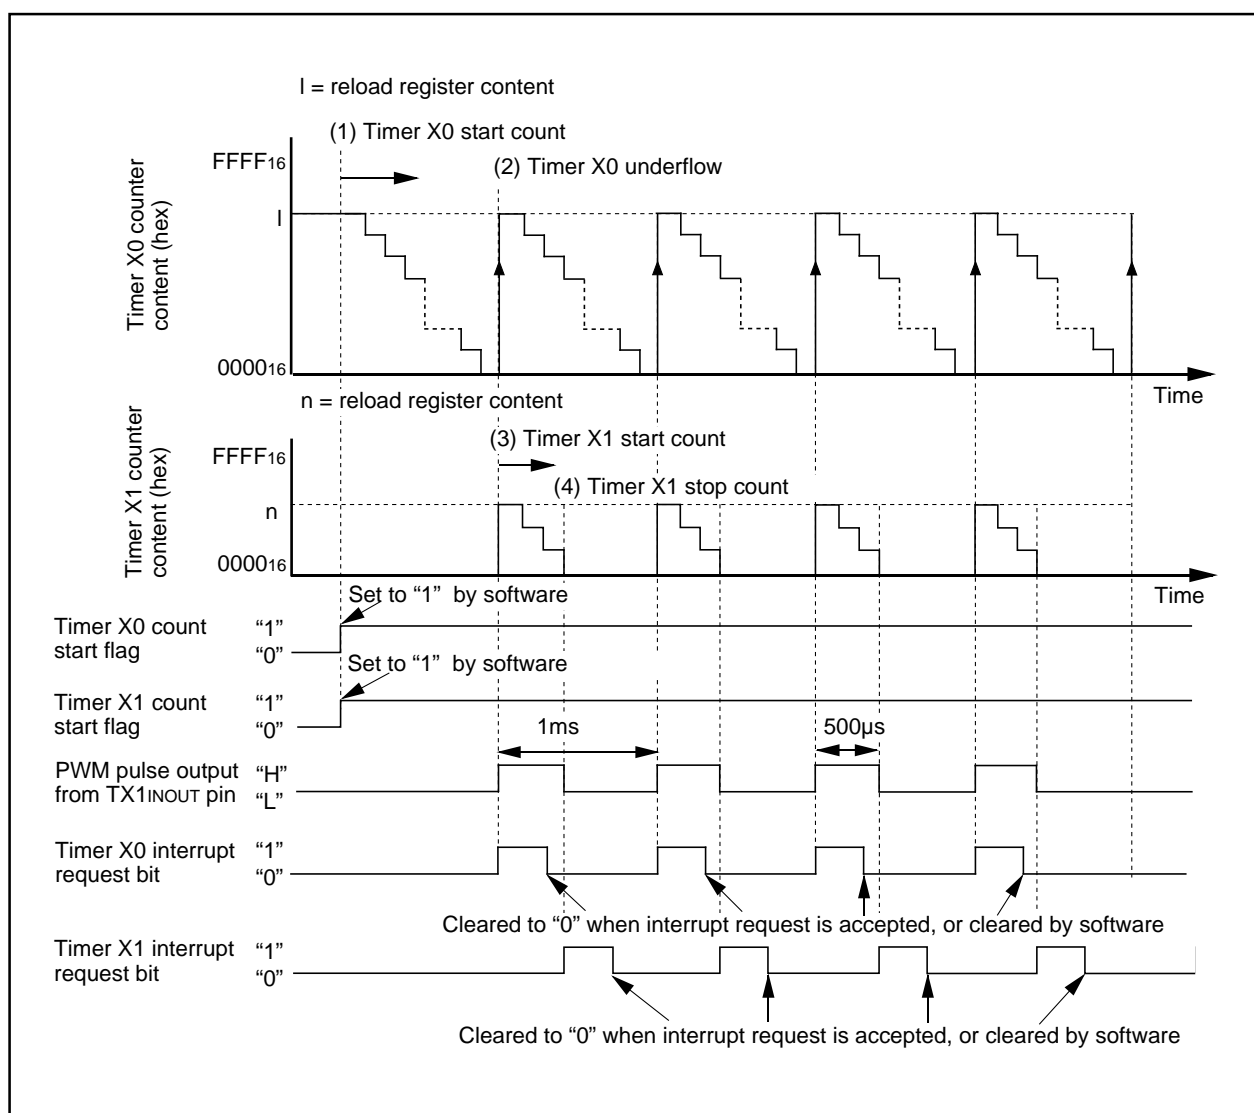


Figure 3.2.1. Operation timing of variable-period variable-duty PWM output


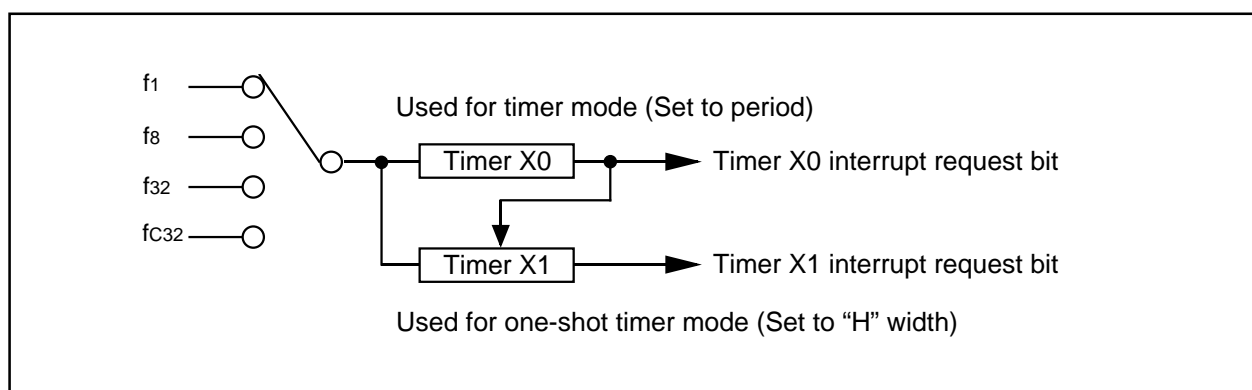


Figure 3.2.2. Connection diagram of variable-period variable-duty PWM output

## Timer X Applications


## Setting timer X0

## Selecting timer mode and functions

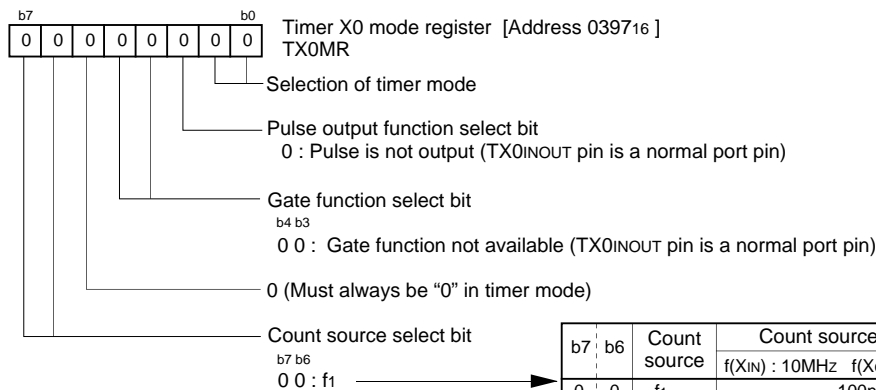


b7	b6	Count source	Count source period	
			f(X <sub>IN</sub> ) : 10MHz	f(X <sub>CIN</sub> ) : 32.768kHz
0	0	f <sub>1</sub>	100ns	
0	1	f <sub>8</sub>	800ns	
1	0	f <sub>32</sub>	3.2μs	
1	1	f <sub>C32</sub>	976.56μs	

## Setting divide ratio



## Setting timer X1

## Selecting one-shot timer mode and functions

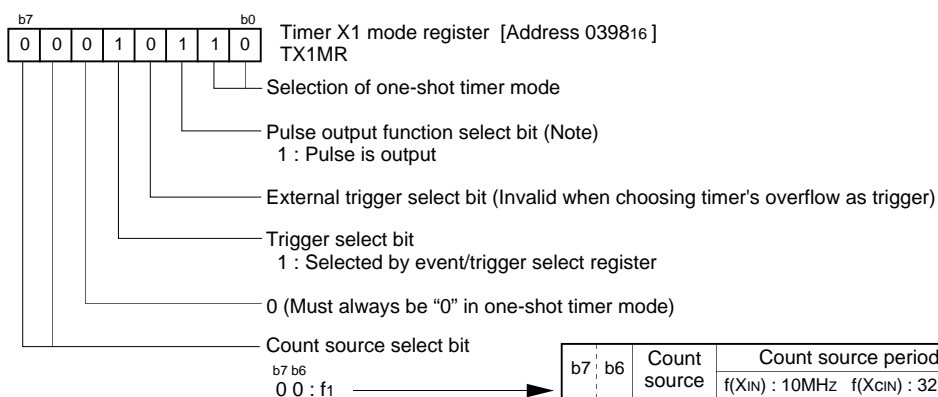

b7	b6	Count source	Count source period	
			f(X <sub>IN</sub> ) : 10MHz	f(X <sub>CIN</sub> ) : 32.768kHz
0	0	f <sub>1</sub>	100ns	
0	1	f <sub>8</sub>	800ns	
1	0	f <sub>32</sub>	3.2μs	
1	1	f <sub>C32</sub>	976.56μs	

Note: Set the corresponding port direction register to "1" (output mode).

Continued to the next page

Figure 3.2.3. Set-up procedure of variable-period variable-duty PWM output (1)

## Timer X Applications

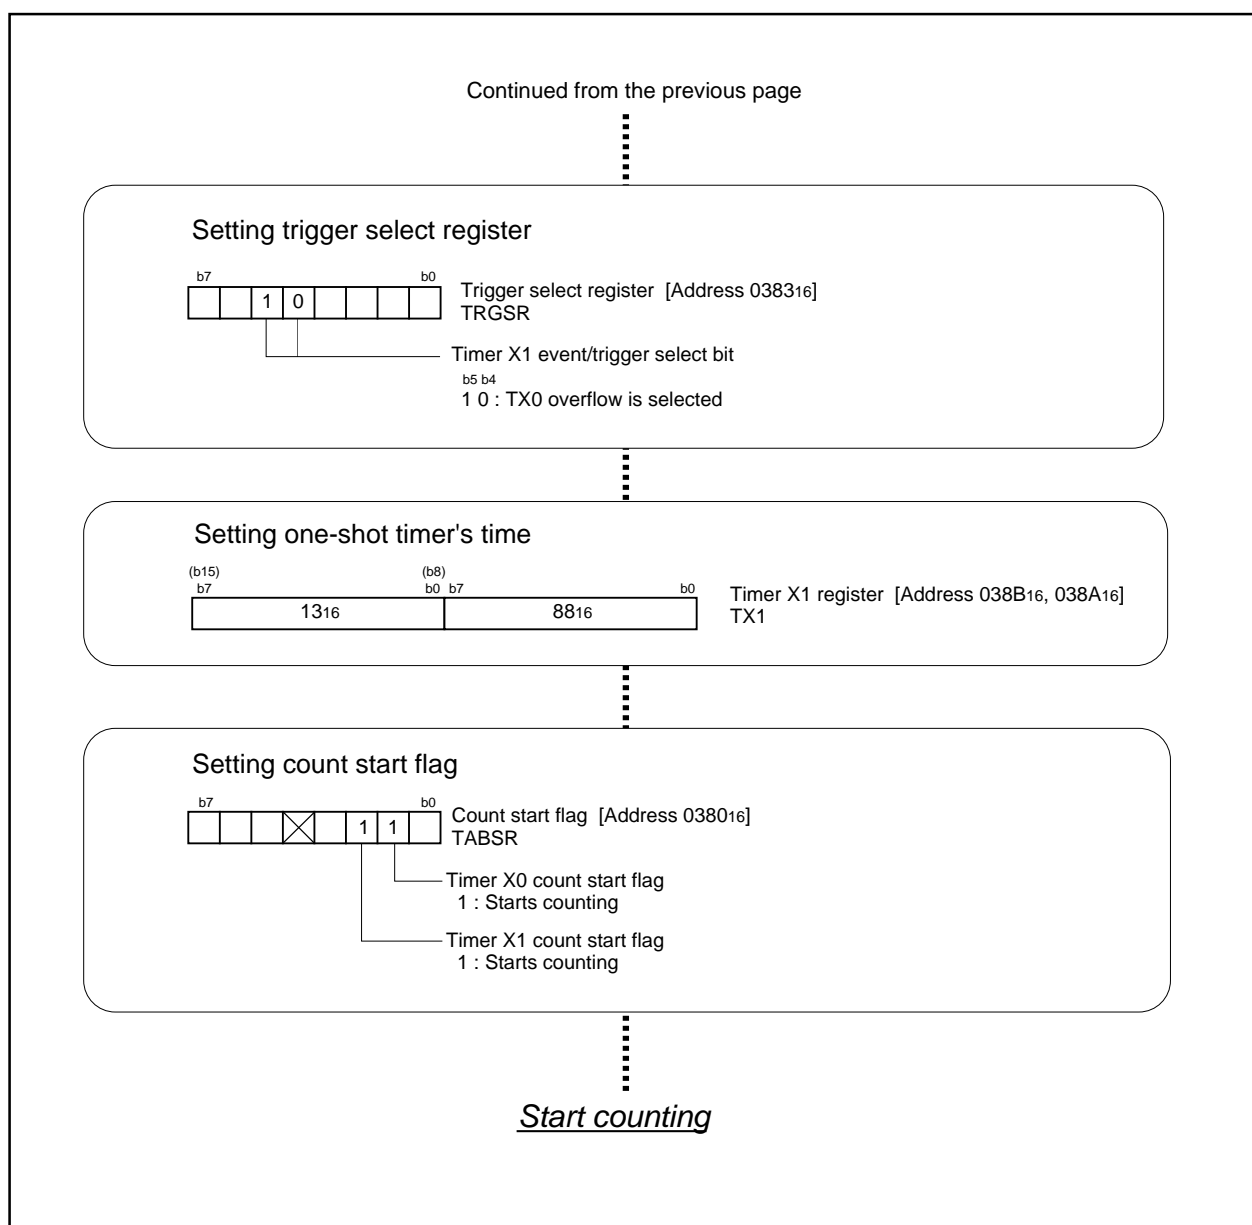


Figure 3.2.4. Set-up procedure of variable-period variable-duty PWM output (2)



## Timer X Applications

---

### 3.3 Delayed One-Shot Output

**Overview** The following are steps of outputting a pulse only once after a specified elapse since an external trigger is input. Figure 3.3.1 shows the operation timing, Figure 3.3.2 shows the connection diagram, and Figures 3.3.3 and 3.3.4 show the set-up procedure.

Use the following peripheral function:

- One-shot timer mode of timer X

#### Specifications

- (1) Set timer X0 in one-shot timer mode, and set timer X1 in one-shot timer mode with pulse-output function.
- (2) Set 1 ms, an interval before a pulse is output, in timer X0; and set 50  $\mu$ s, a pulse width, in timer X1. Both timer X0 and timer X1 use f1 for the count source.
- (3) Connect a 10-MHz oscillator to XIN.

- Operation**
- (1) Setting the trigger select bit to "1" and setting the count start flag to "1" enables the counter of timer X0 to count.
  - (2) If an effective edge, selected by use of the external trigger select bit, is input to the TX0INOUT pin, the counter begins a down count. The counter of timer X0 performs a down count on count source f1.
  - (3) As soon as the counter of timer X0 becomes "0000<sub>16</sub>", the counter reloads the content of the reload register and stops counting. At this time, the timer X0 interrupt request bit goes to "1".
  - (4) An underflow in timer X0 triggers the counter of timer X1 and causes it to begin counting. When timer X1 begins counting, the output level of the TX1INOUT pin goes to "H".
  - (5) As soon as the counter of timer X1 becomes "0000<sub>16</sub>", the output level of the TX1INOUT pin goes to "L", the counter reloads the content of the reload register, and stops counting. At this time, timer X1 interrupt request bit goes to "1".

## Timer X Applications

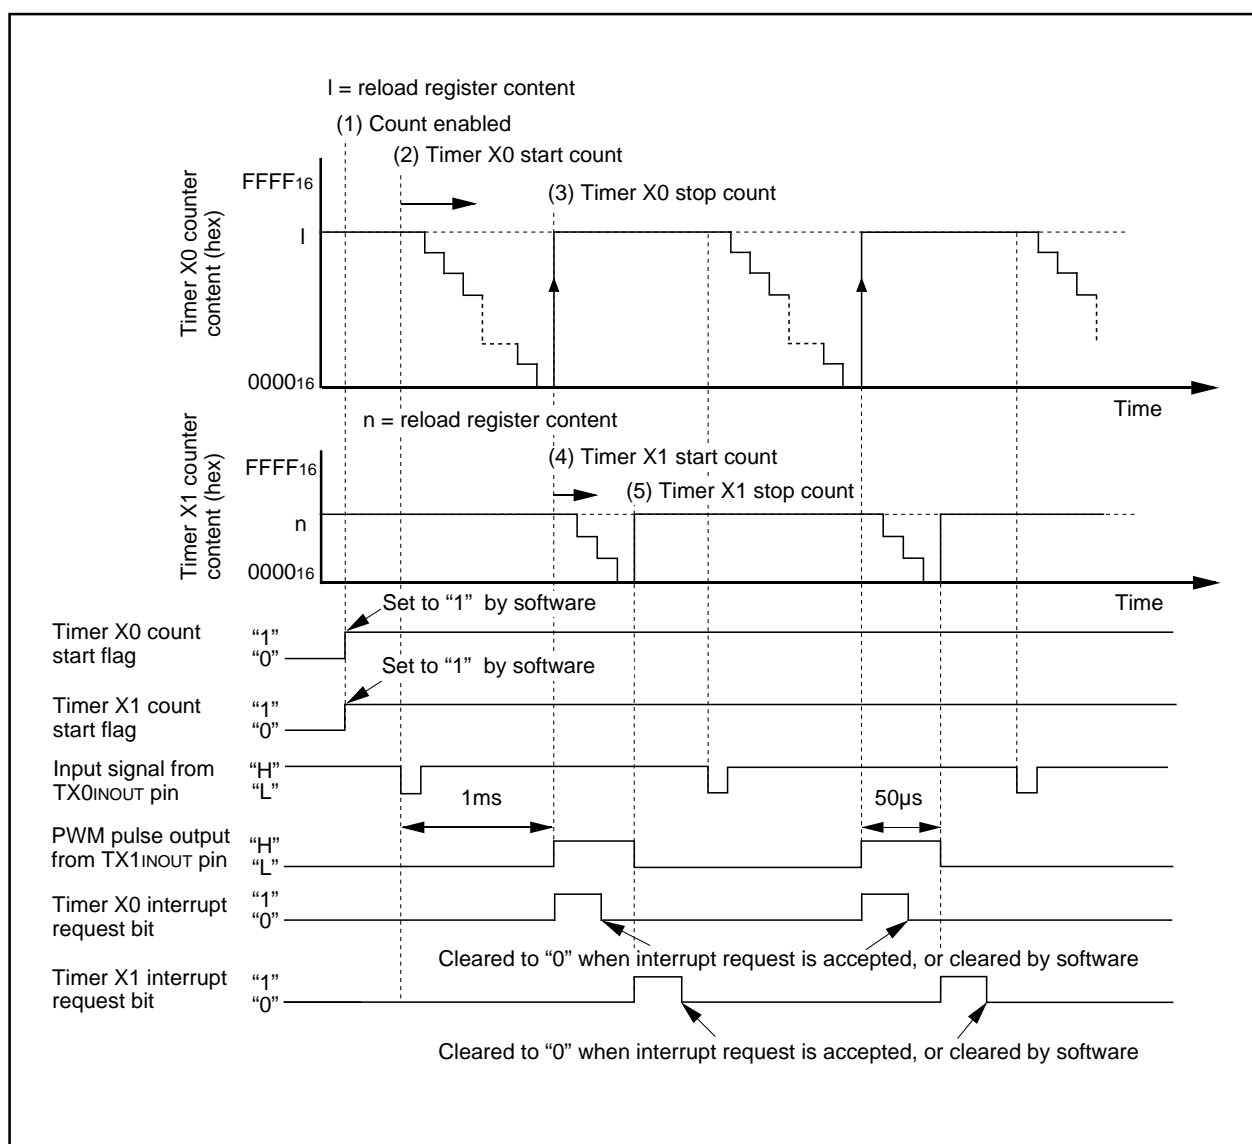


Figure 3.3.1. Operation timing of delayed one-shot output


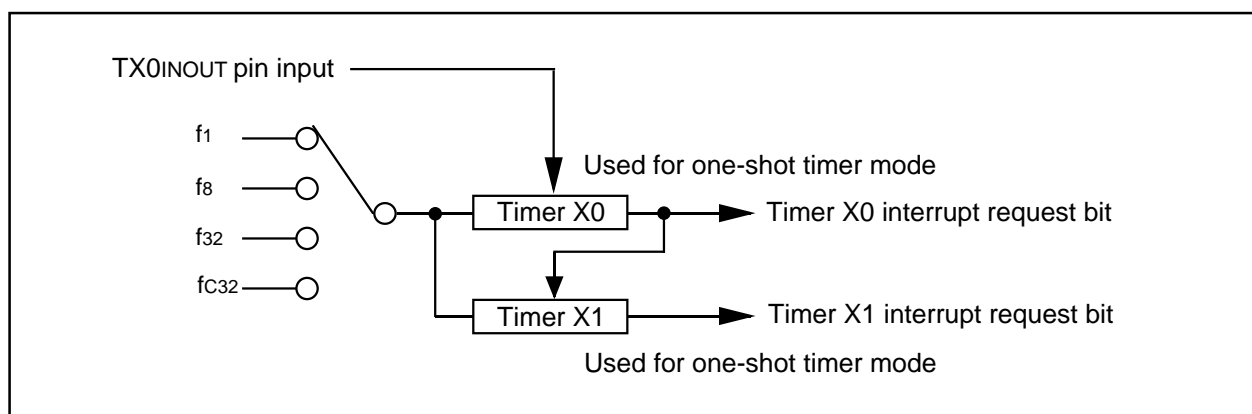


Figure 3.3.2. Connection diagram of delayed one-shot output

## Timer X Applications

## Setting timer X0


## Selecting one-shot timer mode and functions

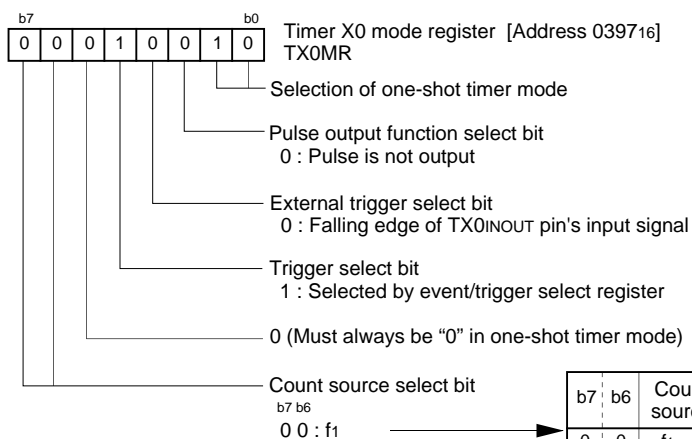

b7	b6	Count source	Count source period
0	0	f <sub>1</sub>	f(X <sub>IN</sub> ) : 10MHz f(X <sub>CIN</sub> ) : 32.768kHz 100ns
0	1	f <sub>8</sub>	800ns
1	0	f <sub>32</sub>	3.2μs
1	1	f <sub>C32</sub>	976.56μs


### Setting trigger select register

(Select TX0INOUT pin to input TX0 trigger)

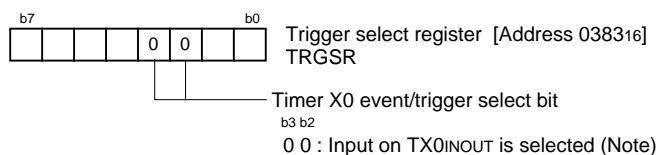

Note: Set the corresponding port direction register to "0" (input mode).

## Setting delay time



Continued to the next page


Figure 3.3.3. Set-up procedure of delayed one-shot output (1)

## Timer X Applications

Continued from the previous page

## Setting timer X1


## Selecting one-shot timer mode and functions

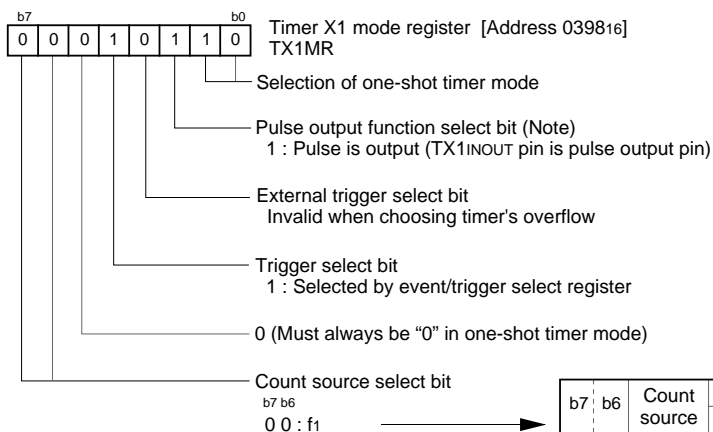

Note: Set the corresponding port direction register to "1" (output mode).

Setting trigger select register  
(Set timer X0 to trigger timer X1)

## Setting one-shot timer's time



## Setting count start flag

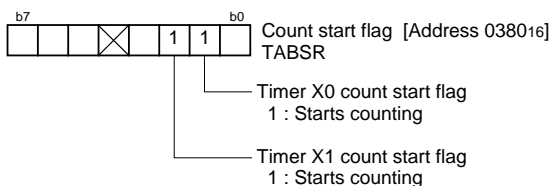
Start counting

Figure 3.3.4. Set-up procedure of delayed one-shot output (2)

## Timer X Applications

### 3.4 Buzzer Output

**Overview** The timer mode is used to make the buzzer ring. Figure 3.4.1 shows the operation timing, and Figure 3.4.2 shows the set-up procedure.

Use the following peripheral function:

- The pulse-outputting function in timer mode of timer X.

#### Specifications

- (1) Sound a 2-kHz buzz beep by use of timer X0.
- (2) Effect pull-up in the relevant port by use of a pull-up resistor. When the buzzer is off, set the port high-impedance, and stabilize the potential resulting from pulling up.
- (3) Connect a 10-MHz oscillator to XIN.

**Operation** (1) The microcomputer begins performing a count on timer X0. Timer X0 has disabled interrupts.  
 (2) P43 is TX0INOUT pin. Setting the port P43 direction register to "1" (output mode) and outputs 2-kHz pulses.  
 (3) The microcomputer stops outputting pulses by setting the port P43 direction register to "0" (input mode). P43 goes to an input pin, and the output from the pin becomes high-impedance.

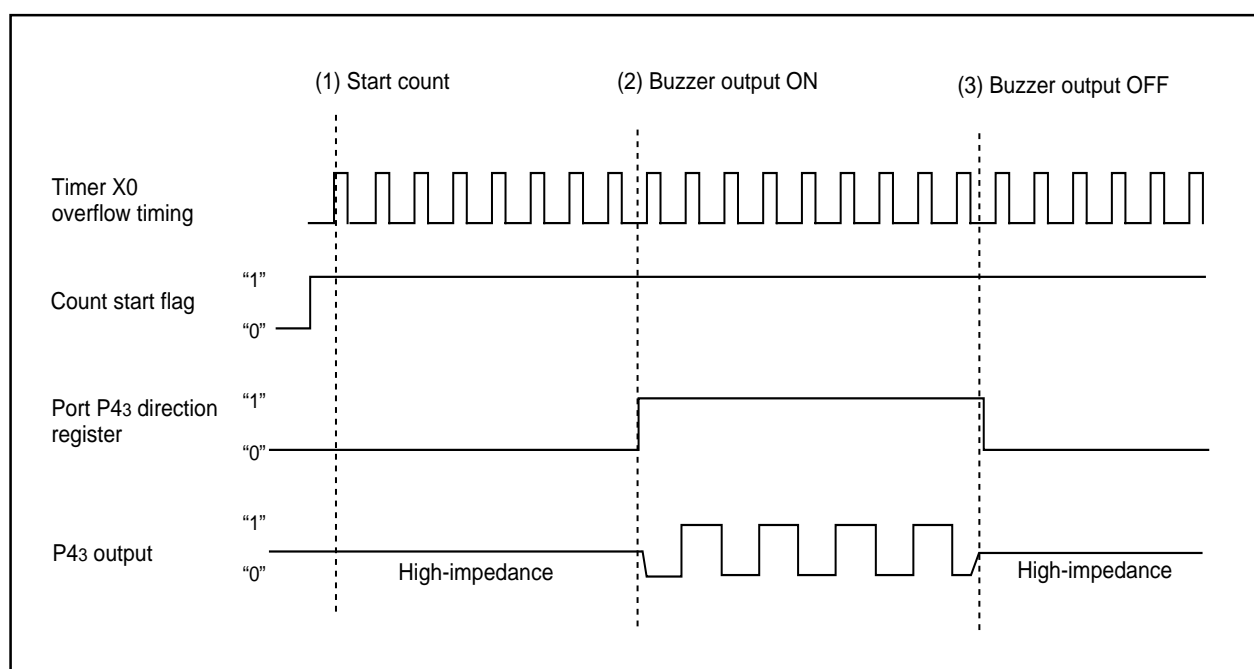


Figure 3.4.1. Operation timing of buzzer output

## Timer X Applications

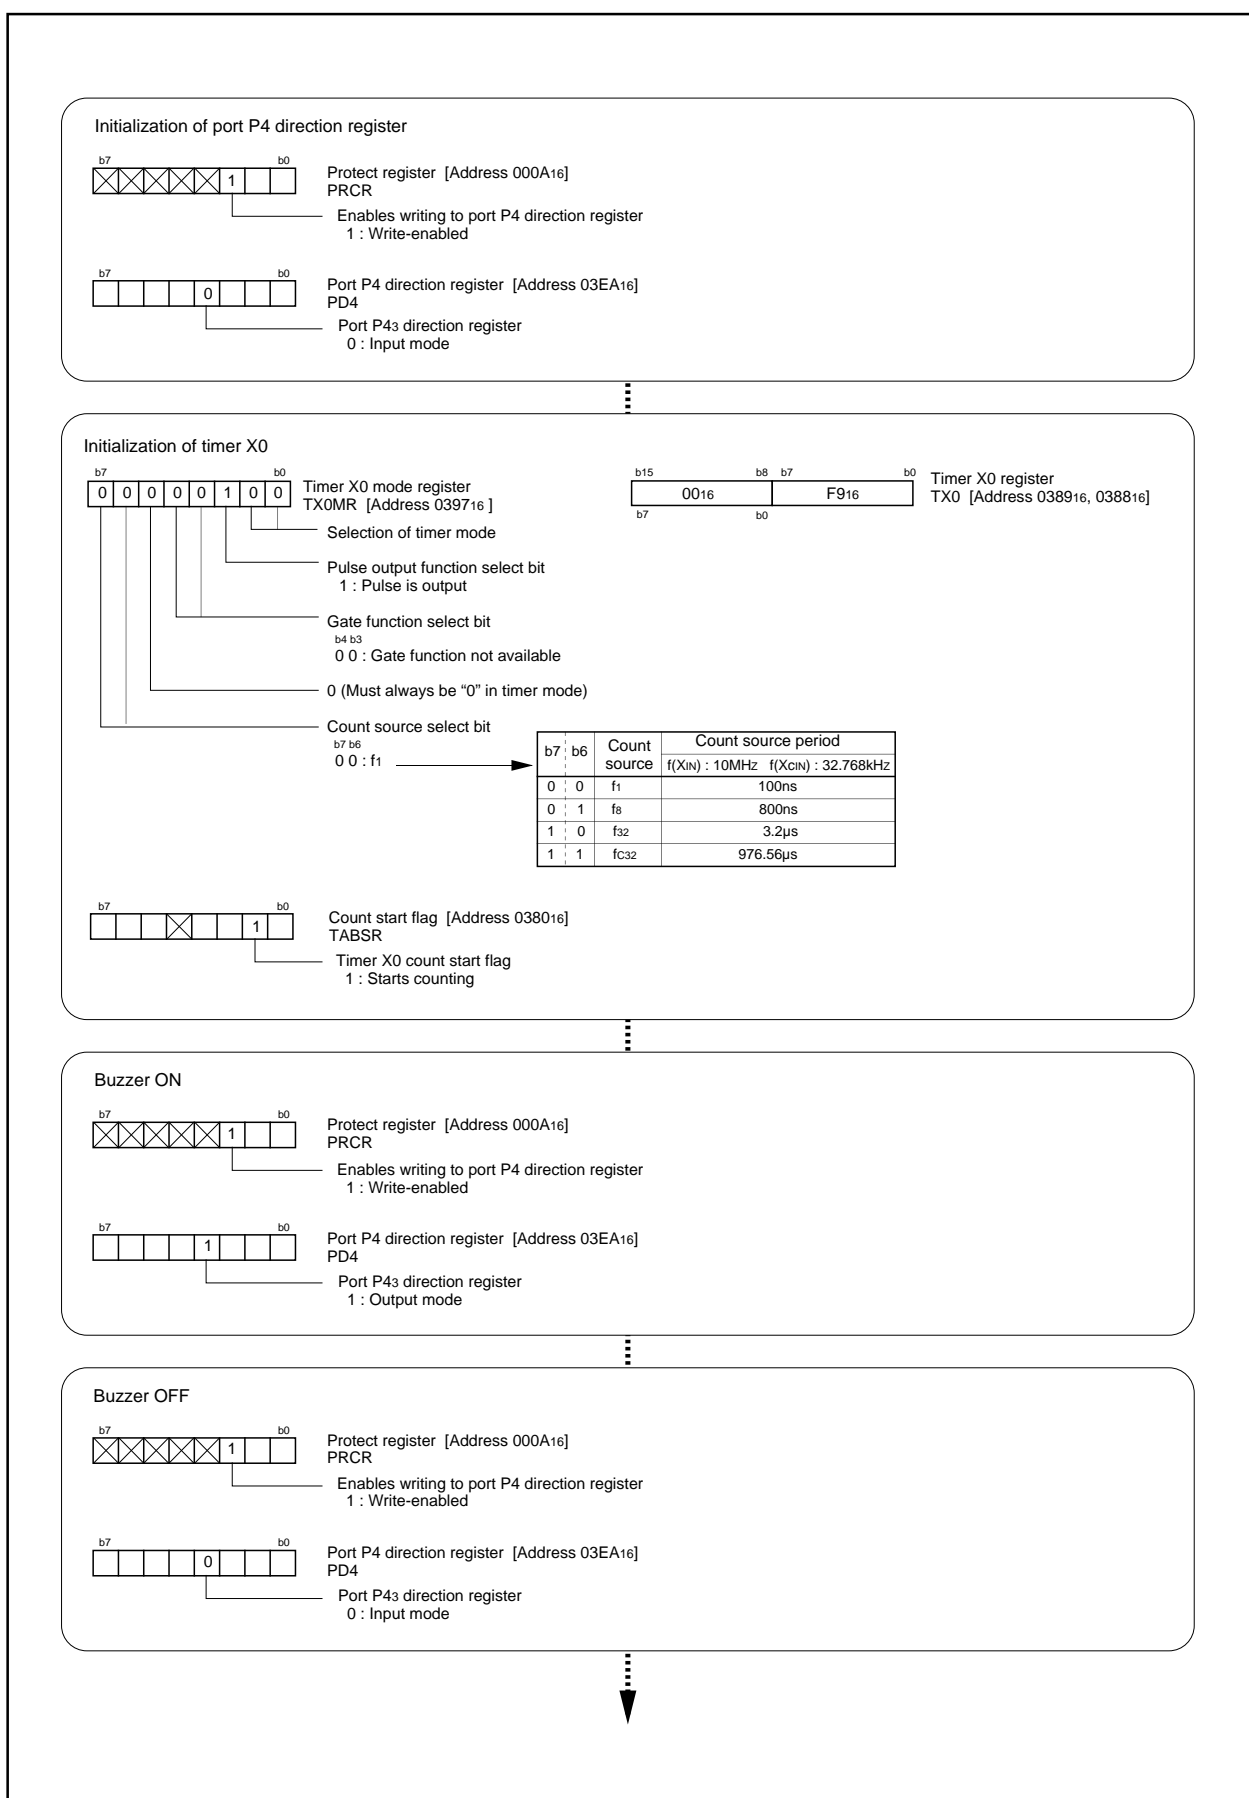


Figure 3.4.2. Set-up procedure of buzzer output

### 3.5 Solution for External Interrupt Pins Shortage

**Overview** The following are solution for external interrupt pins shortage. Figure 3.5.1 shows the set-up procedure.

Use the following peripheral function:

- Event counter mode of timer X

**Specifications**

(1) Inputting a falling edge to the TX0INOUT pin generates a timer X0 interrupt.

**Operation** (1) Set timer X0 to event counter mode, set timer to "0", and set interrupt priority levels in timer X0.

(2) Inputting a falling edge to the TX0INOUT pin generates a timer X0 interrupt.

## Timer X Applications

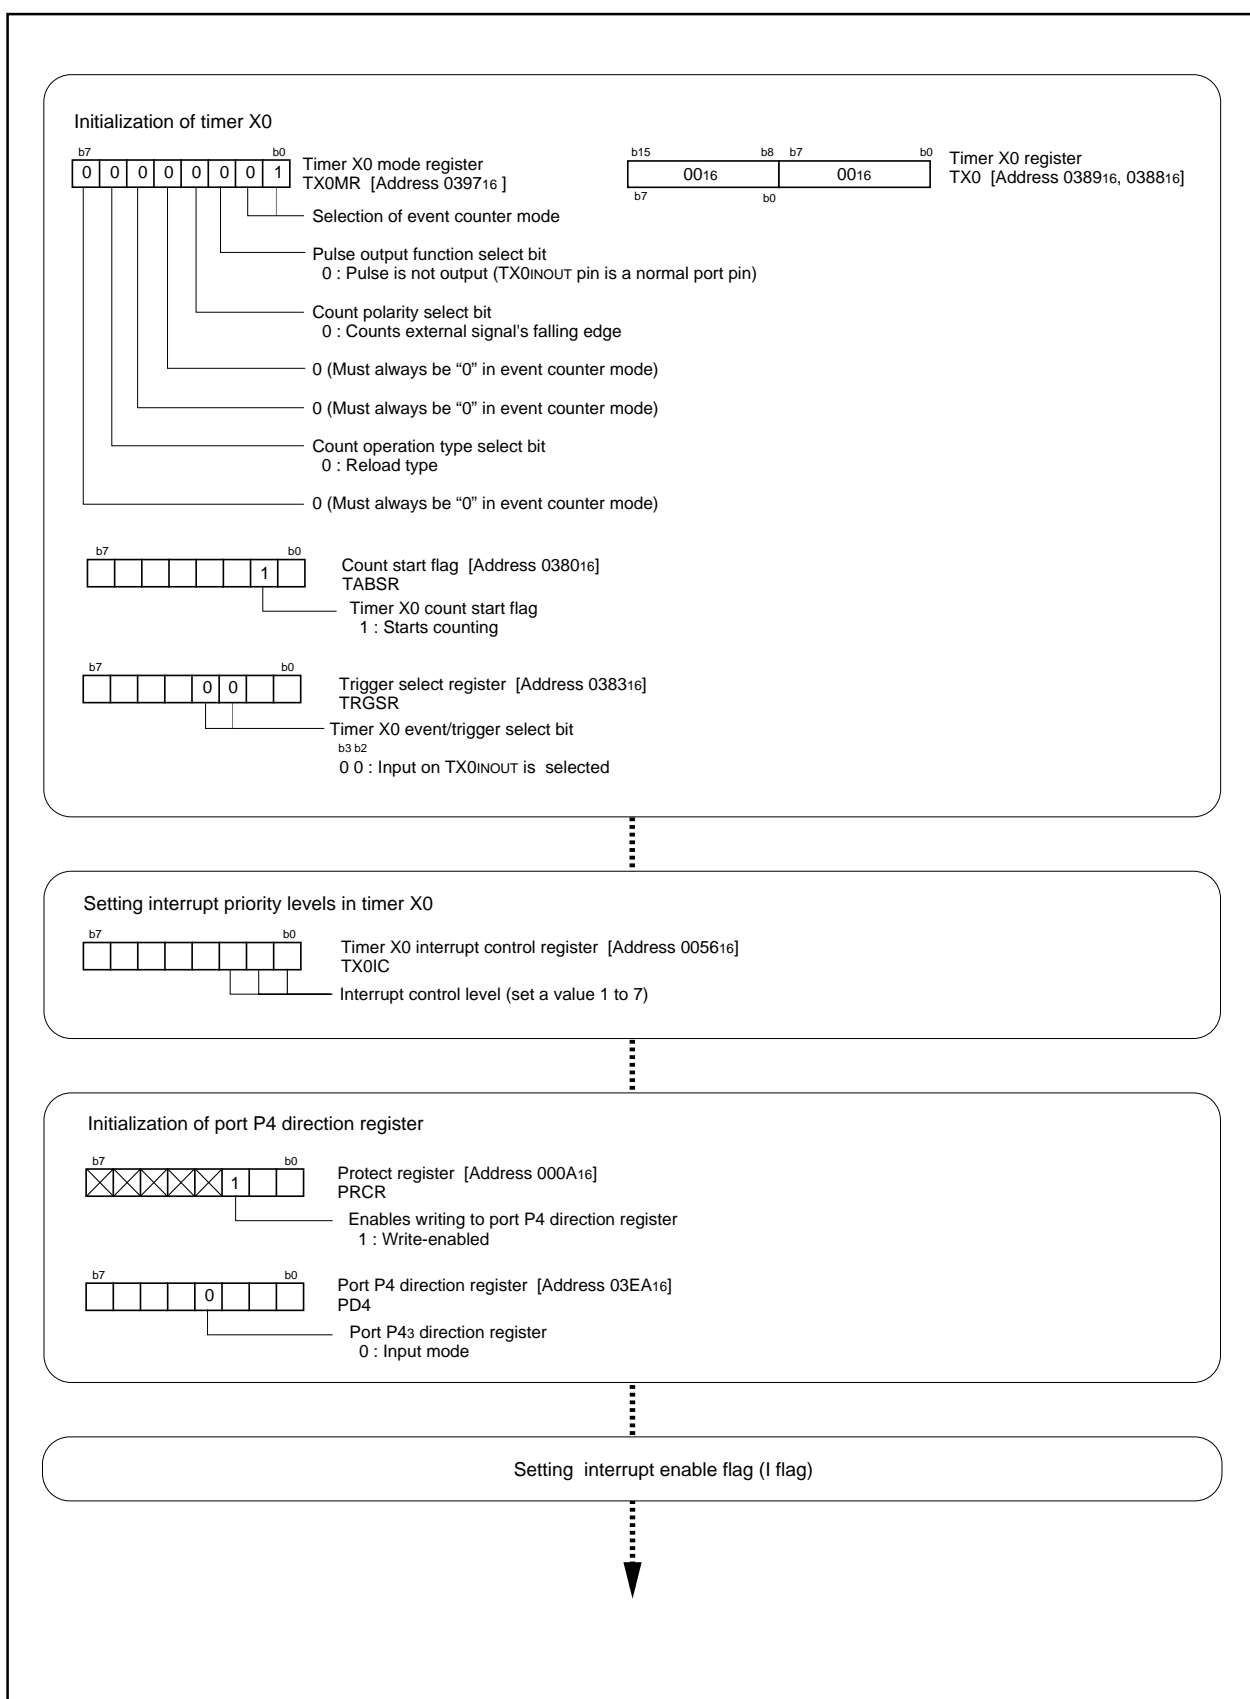


Figure 3.5.1. Set-up procedure of solution for a shortage of external interrupt pins



## Controlling Power Applications

### 3.6 Controlling Power Using Stop Mode

**Overview** The following are steps for controlling power using stop mode. Figure 3.6.1 shows the operation timing, Figure 3.6.2 shows an example of circuit, and Figures 3.6.3 and 3.6.4 show the set-up procedure.

Use the following peripheral functions:

- Key-input interrupts
- Stop mode
- Pull-up function

#### Specifications

- (1) Use P30 through P33 for the scan output pins of a key matrix. Use the input pins ( $\overline{KI0}$  through  $\overline{KI7}$ ) of the key-input interrupt function for the key-input reading pins. The pull-up function is also used.
- (2) If a key-input interrupt request occurs, clear the stop mode and read a key.

- Operation**
- (1) Enable a key-input interrupt and set the pull-up function to pins  $\overline{KI0}$  through  $\overline{KI7}$ . Change the output of P30 through P33 to "L" and enter stop mode.
  - (2) If a key is pressed, "L" is input to one of pins  $\overline{KI0}$  through  $\overline{KI7}$  to clear stop mode. A key-input interrupt occurs to execute the key-input interrupt handling routine.
  - (3) Sequentially set P30 through P33 to "L" to determine which key was pressed.
  - (4) When the process to determine the key pressed is completed, change the output from P30 through P33 to "L" again and enter stop mode.

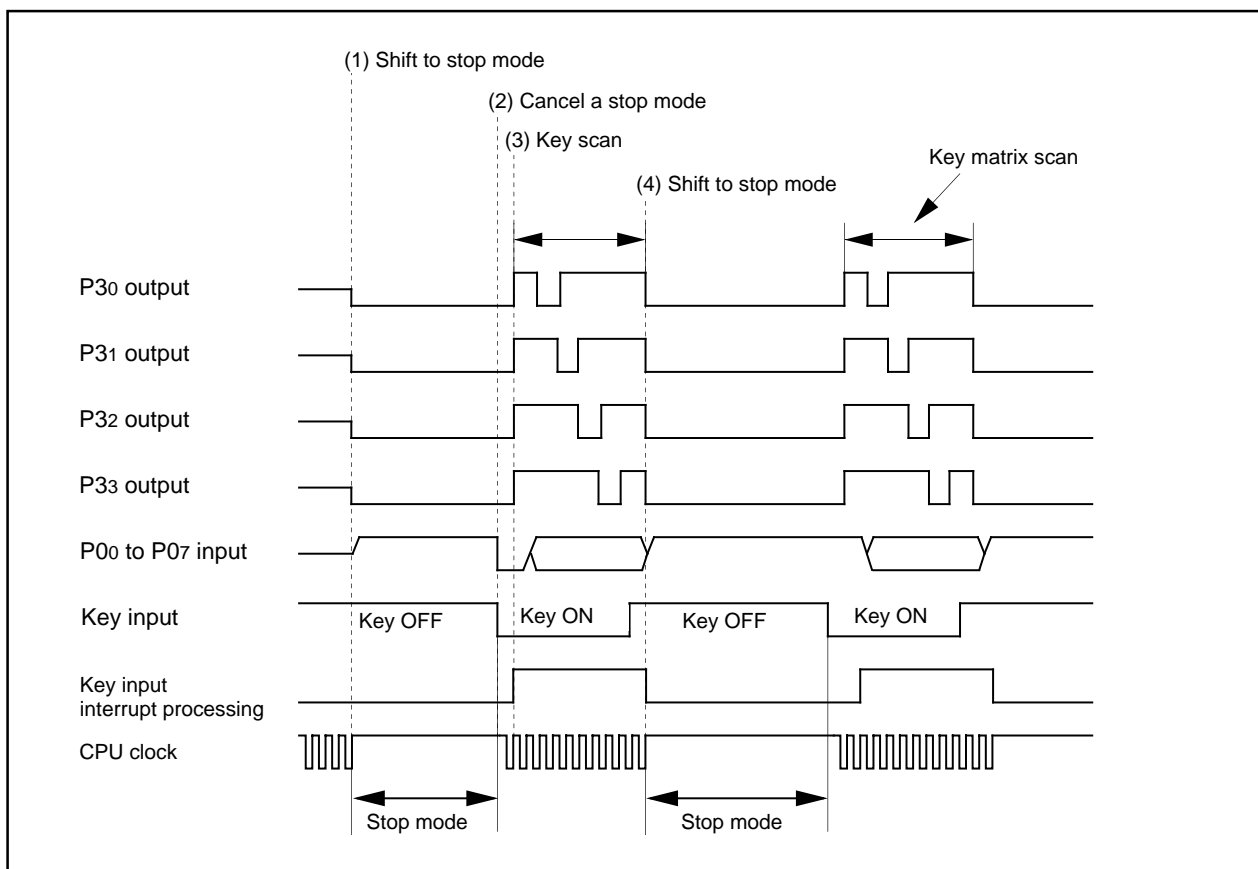


Figure 3.6.1. Operation timing of controlling power using stop mode

## Controlling Power Applications

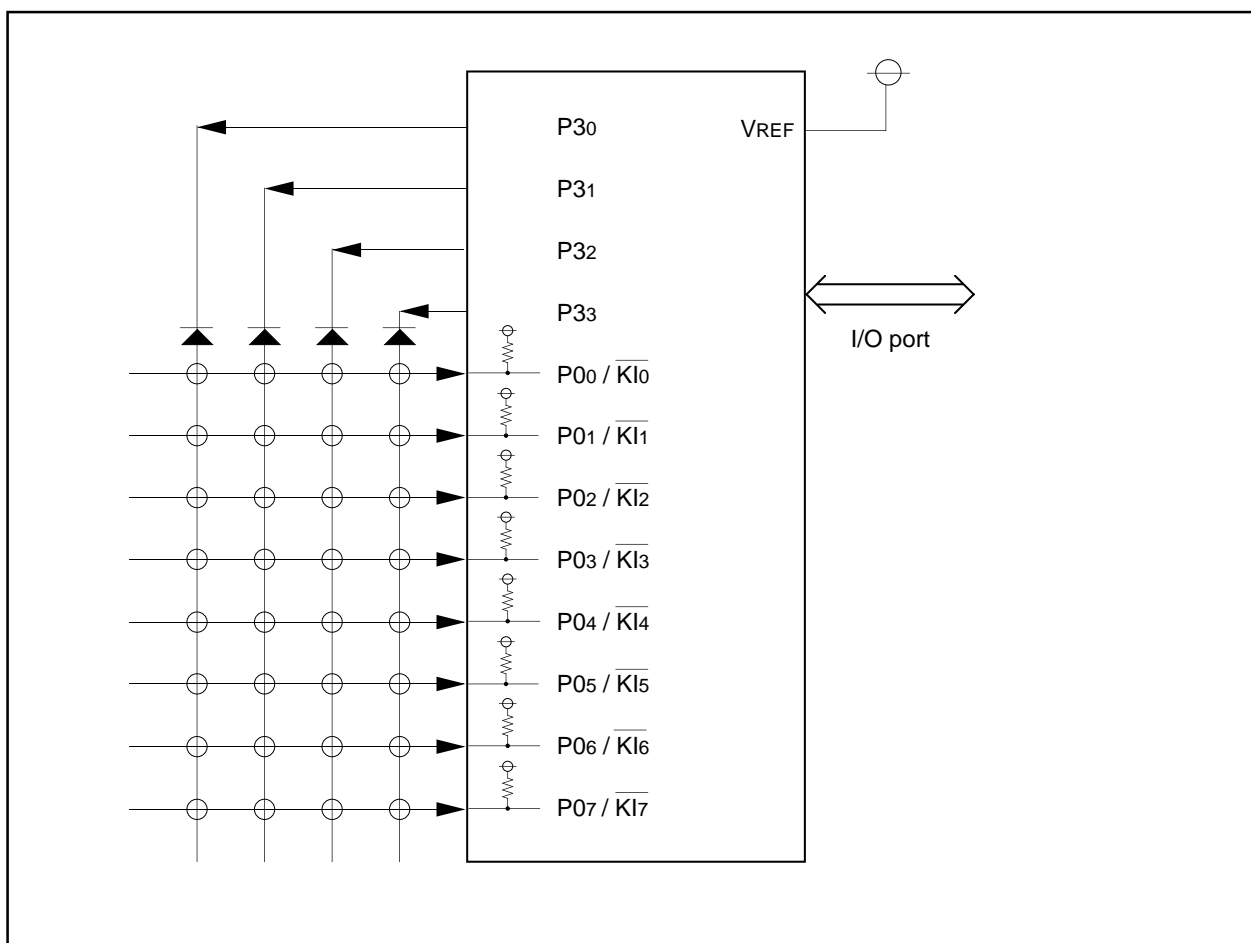


Figure 3.6.2. Example of circuit of controlling power using stop mode

## Controlling Power Applications

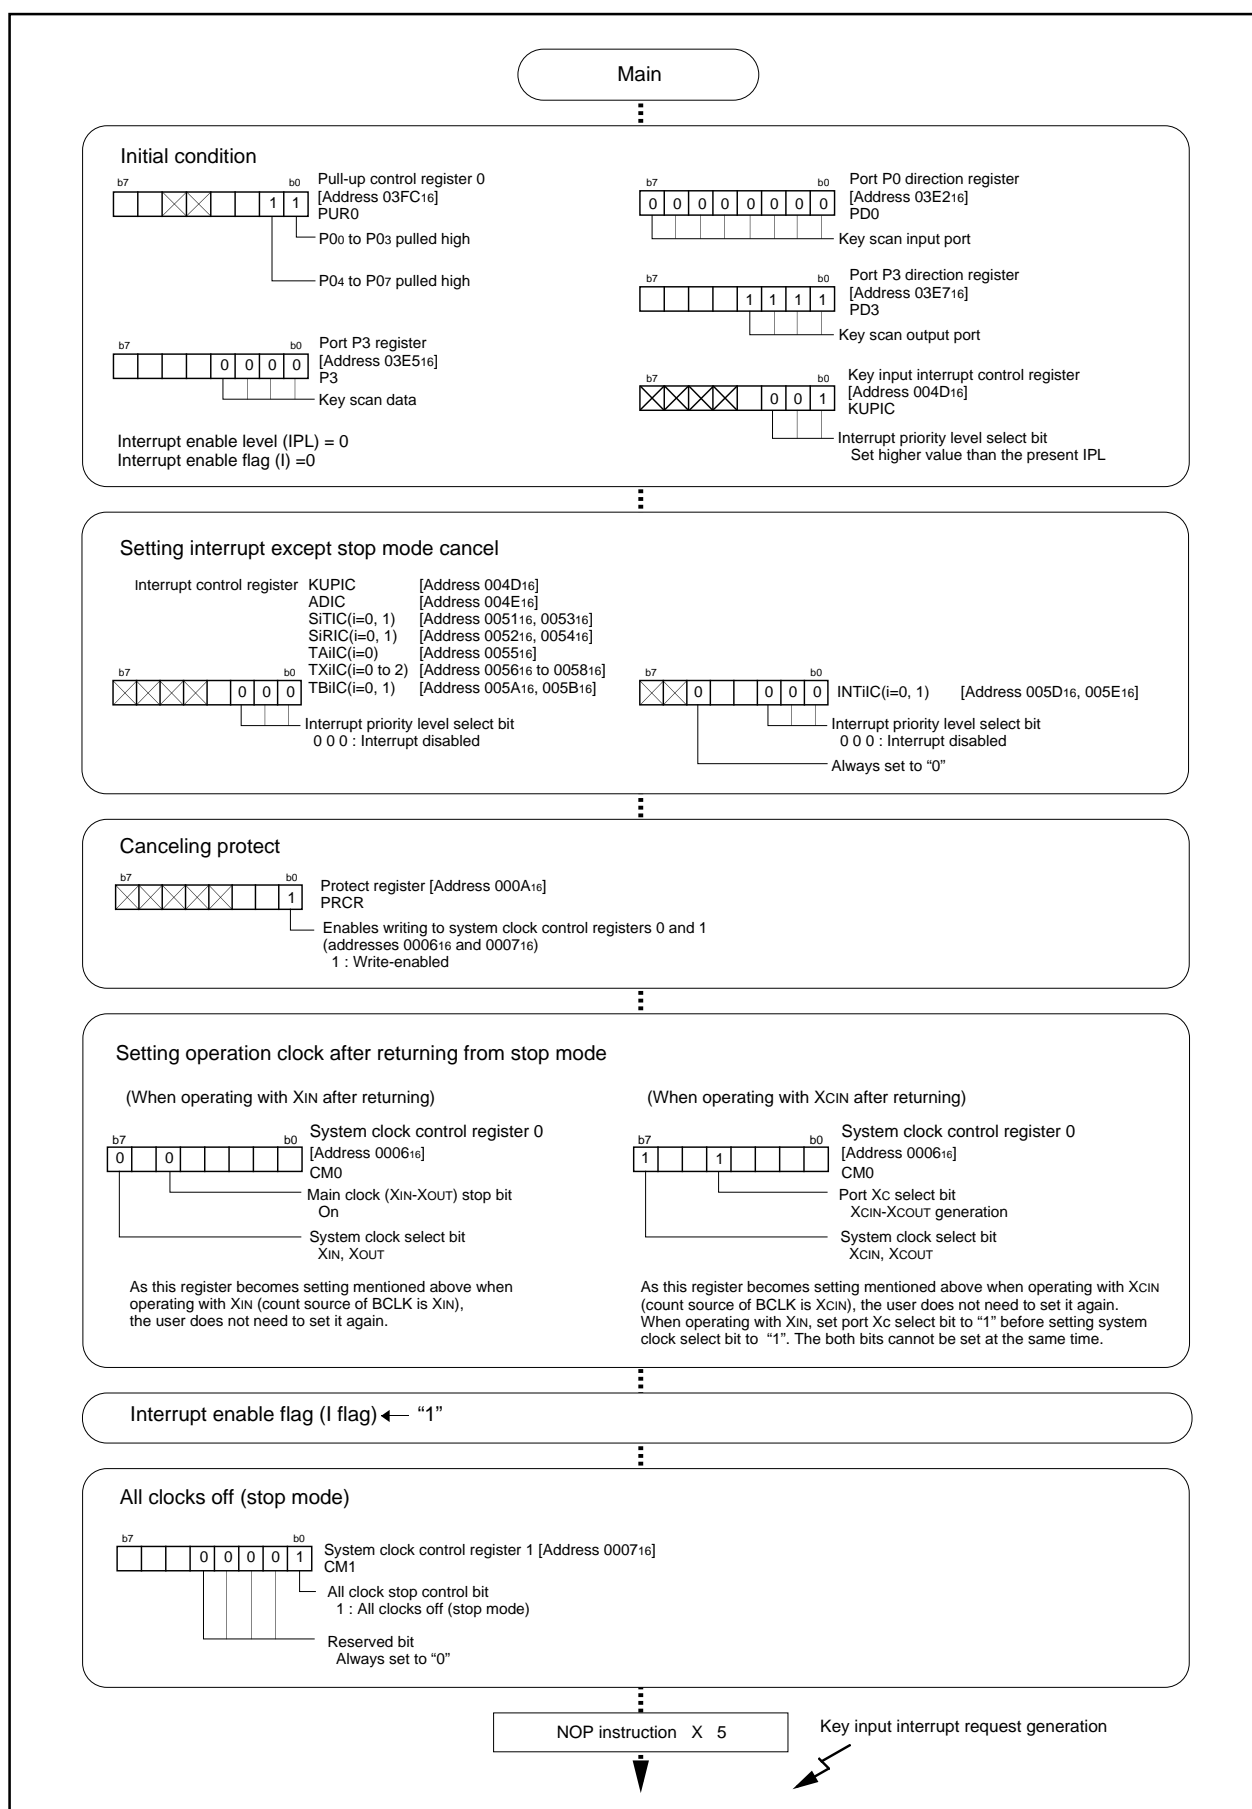


Figure 3.6.3. Set-up procedure of controlling power using stop mode (1)

## Controlling Power Applications

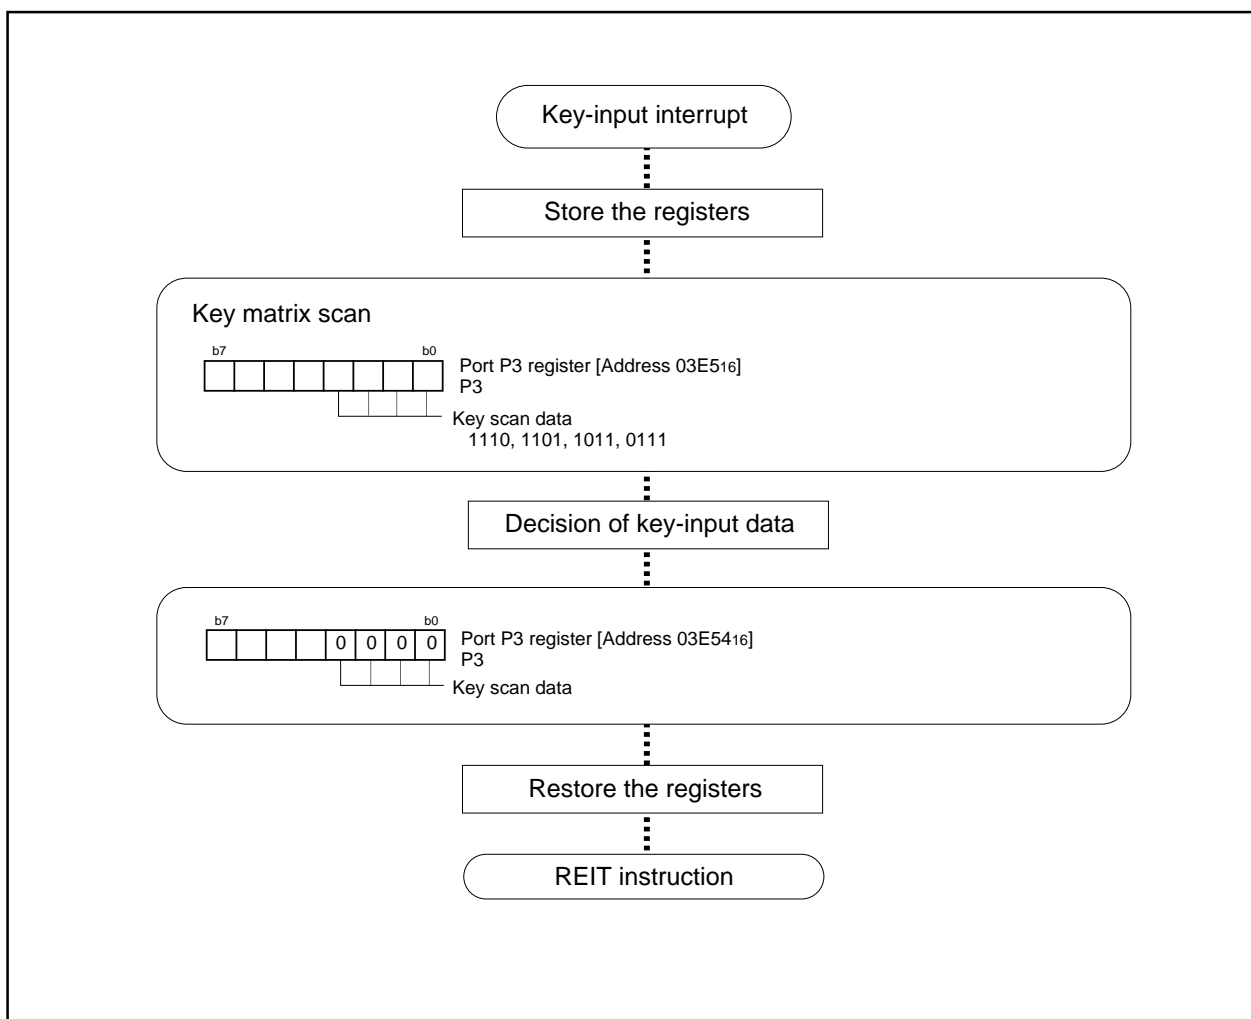


Figure 3.6.4. Set-up procedure of controlling power using stop mode (2)

## Controlling Power Applications

### 3.7 Controlling Power Using Wait Mode

**Overview** The following are steps for controlling power using wait mode. Figure 3.7.1 shows the operation timing, and Figures 3.7.2 to 3.7.4 show the set-up procedure.

Use the following peripheral functions:

- Timer mode of timer B
- Wait mode

A flag named "F-WIT" is used in the set-up procedure. The purpose of this flag is to decide whether or not to clear wait mode. If F\_WIT = "1" in the main program, the wait mode is entered; if F\_WIT = "0", the wait mode is cleared.

#### Specifications

- (1) Connect a 32.768-kHz oscillator to XCIN to serve as the timer count source. As interrupts occur every one second, which is a count the timer reaches, the controller returns from wait mode and count the clock using a program.
- (2) Clear wait mode if a  $\overline{\text{INT0}}$  interrupt request occurs.

- Operation**
- (1) Switch the system clock from XIN to XCIN to get low-speed mode.
  - (2) Stop XIN and enter wait mode. In this instance, enable the timer B0 interrupt and the  $\overline{\text{INT0}}$  interrupt.
  - (3) When a timer B0 interrupt request occurs (at 1-second intervals), start supplying the BCLK from XCIN.  
 At this time, count the clock within the routine that handles the timer B0 interrupts and enter wait mode again.
  - (4) If a  $\overline{\text{INT0}}$  interrupt occurs, start supplying the BCLK from XCIN. Start the XIN oscillation within the  $\overline{\text{INT0}}$  interrupt, and switch the system clock to XIN.


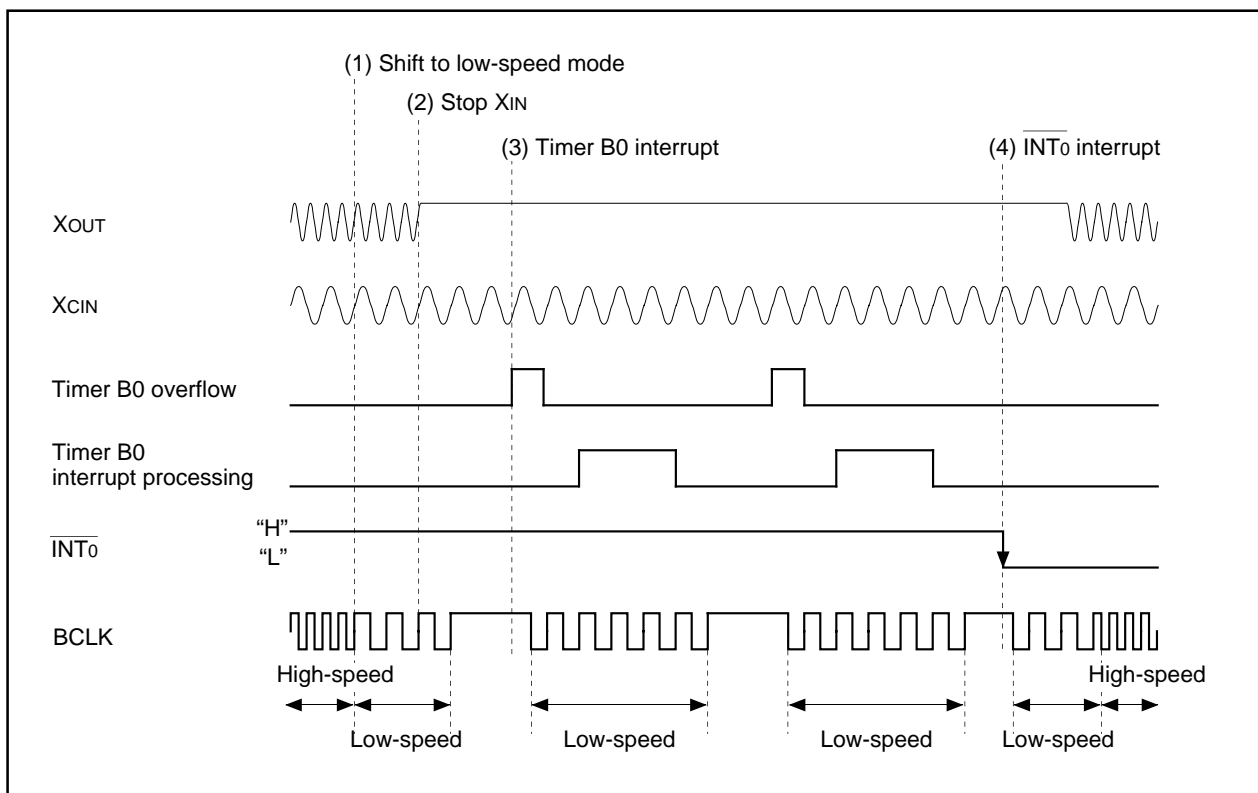


Figure 3.7.1. Operation timing of controlling power using wait mode

## Controlling Power Applications

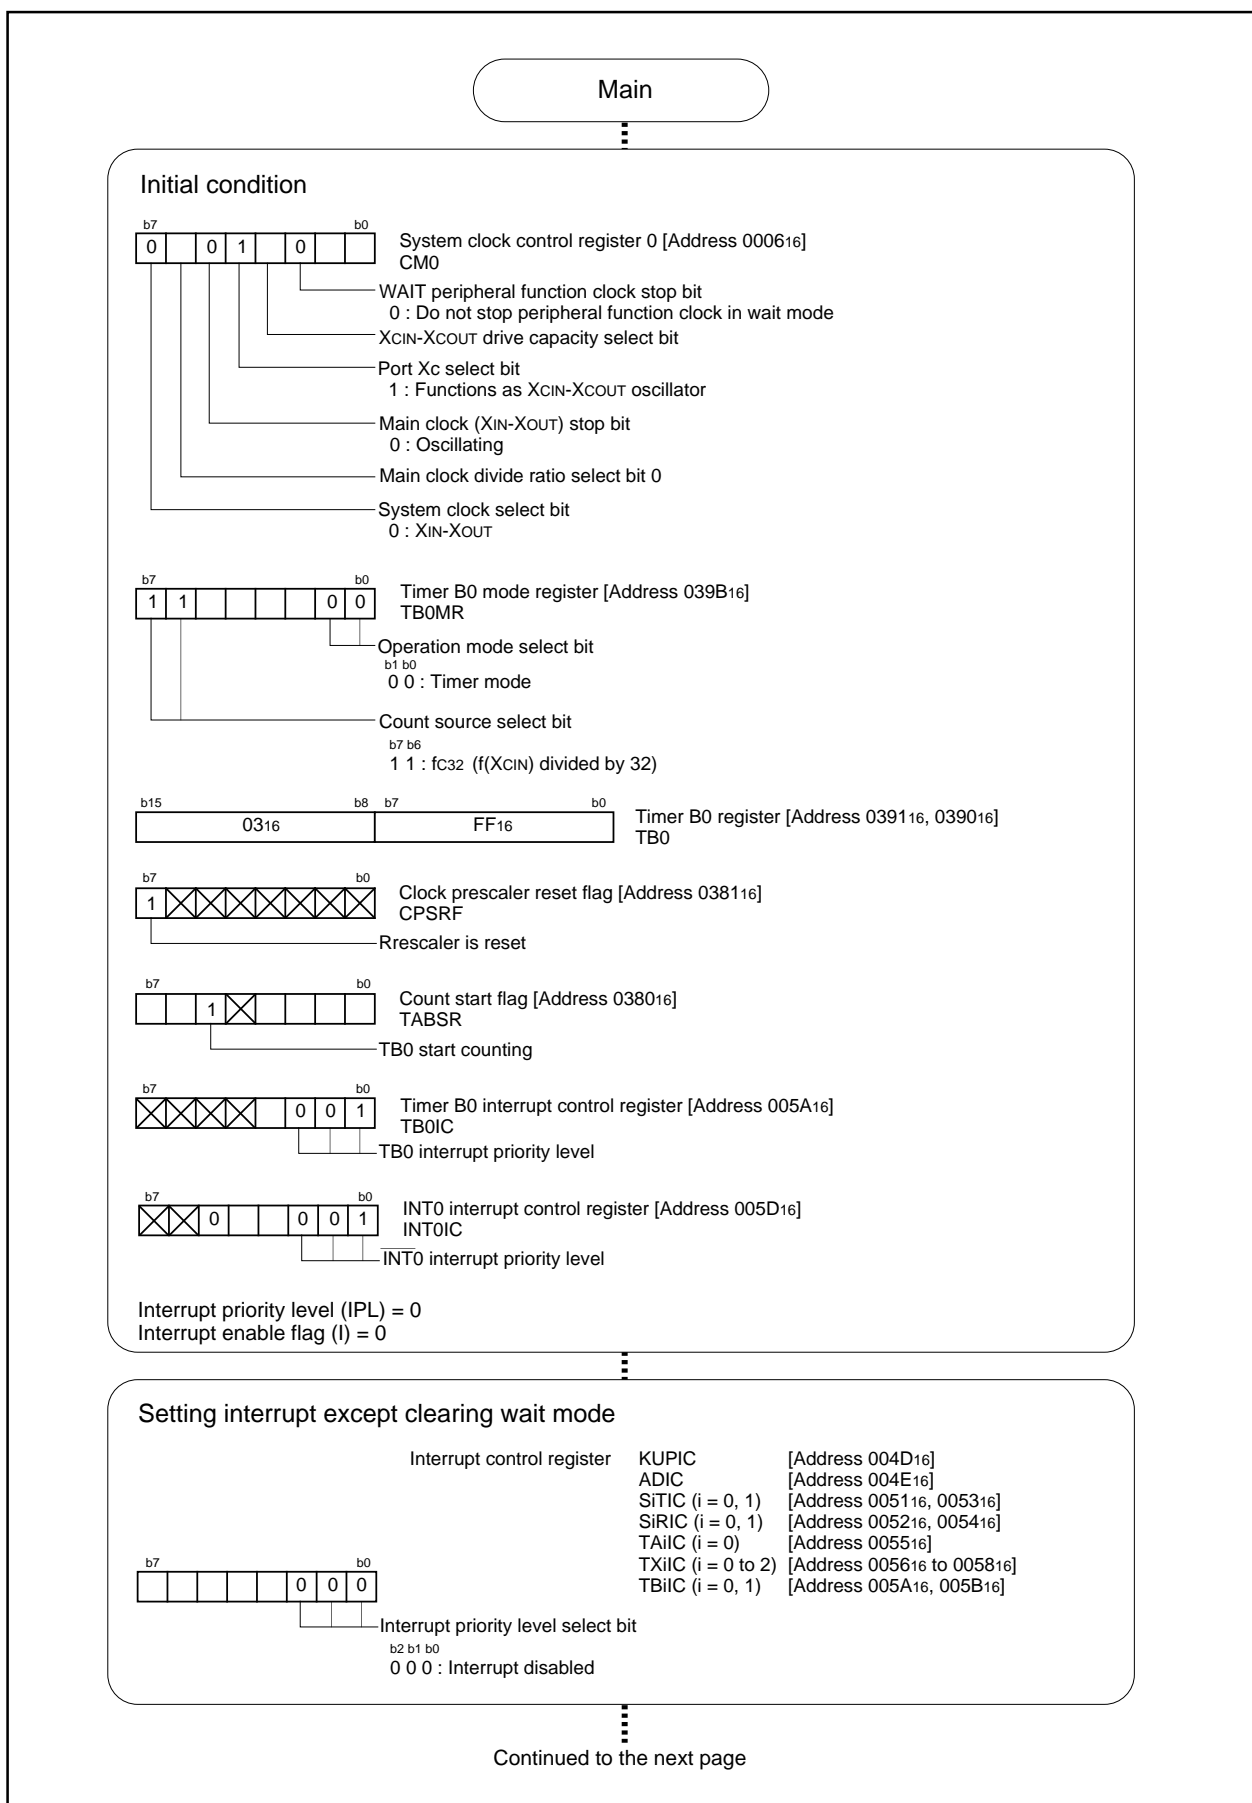

**Figure 3.7.2. Set-up procedure of controlling power using wait mode (1)**

## Controlling Power Applications

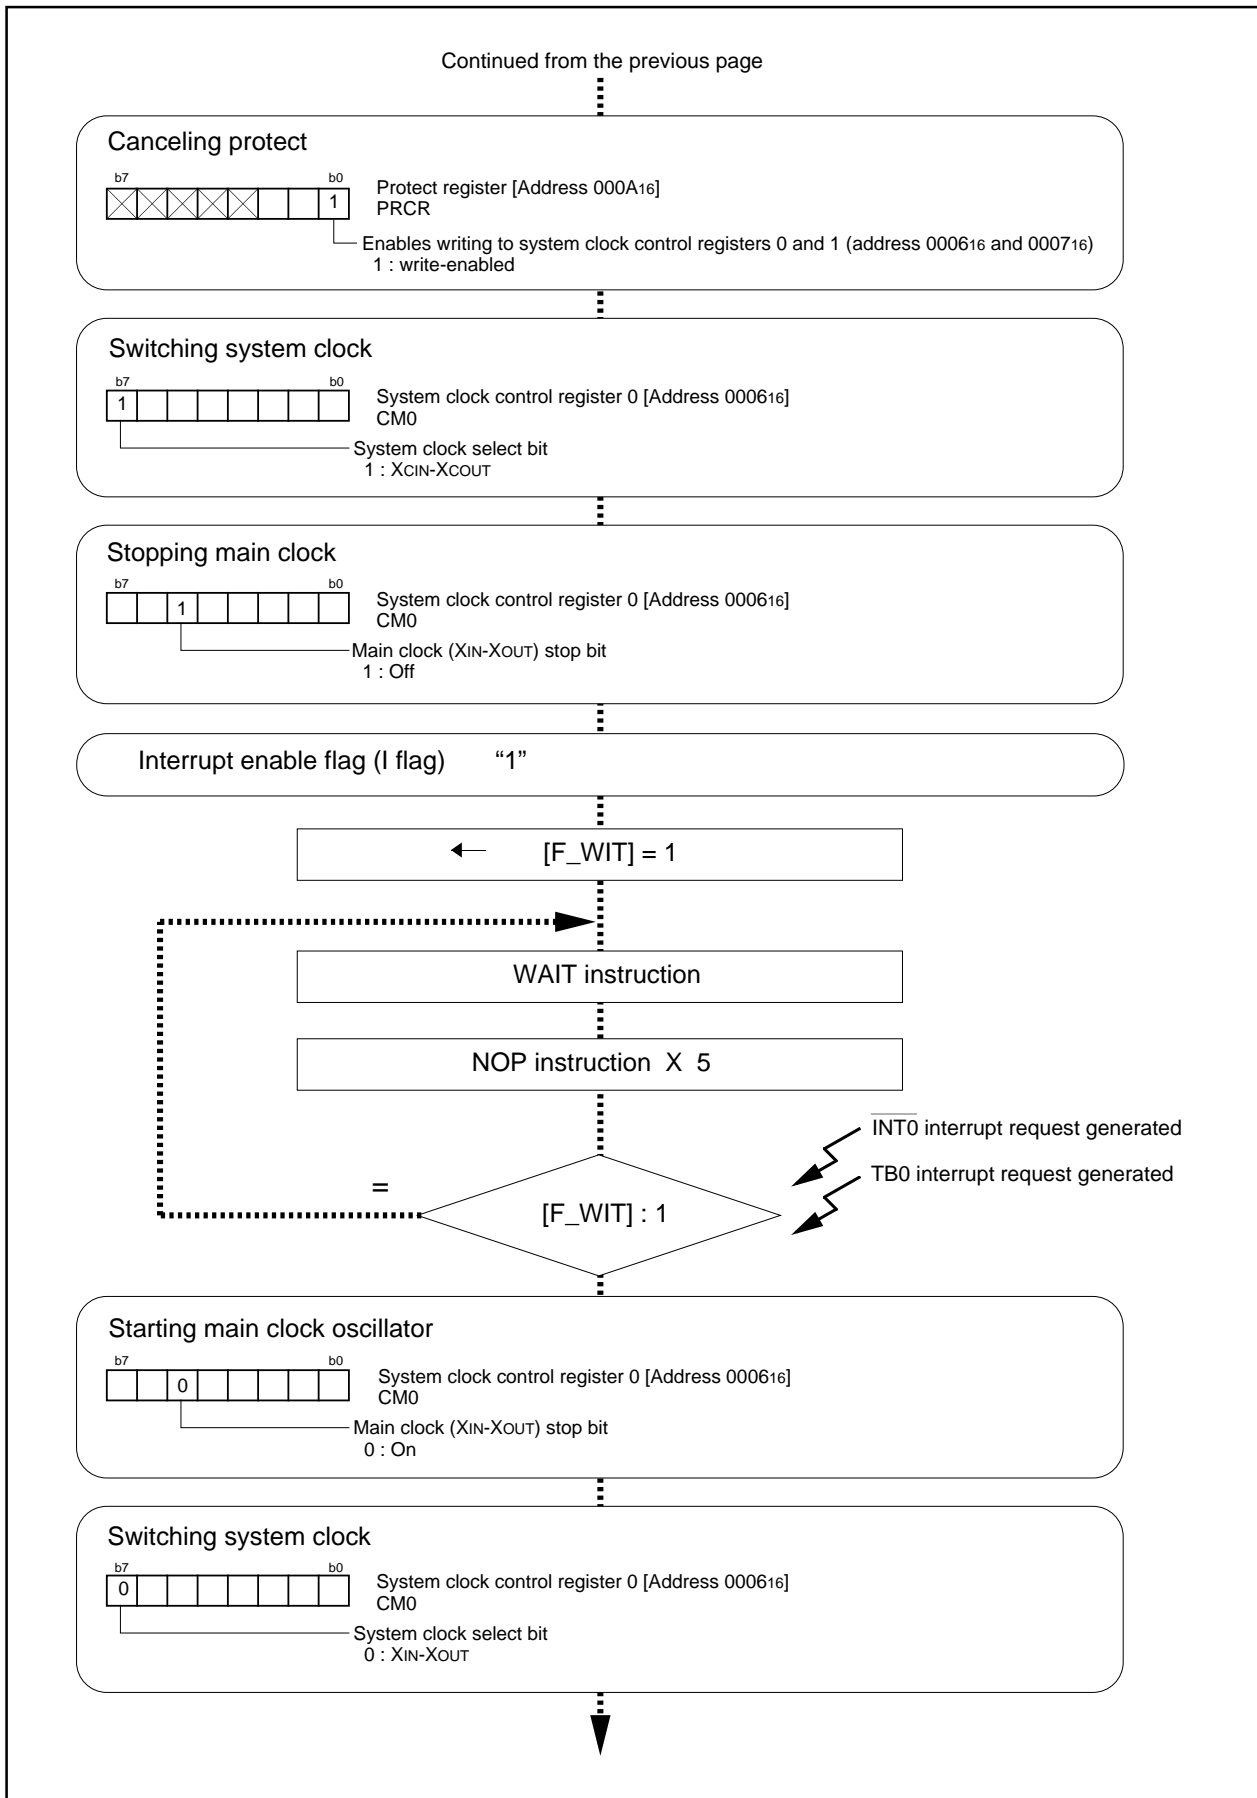


Figure 3.7.3. Set-up procedure of controlling power using wait mode (2)

## Controlling Power Applications

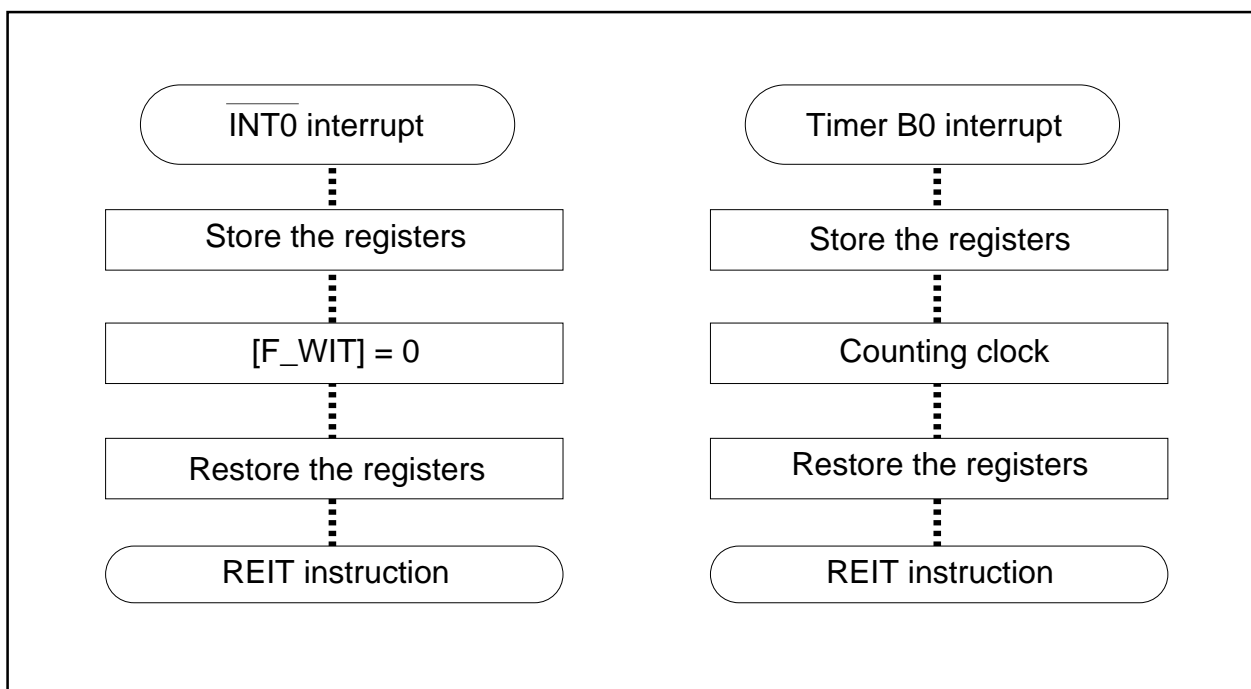


Figure 3.7.4. Set-up procedure of controlling power using wait mode (3)



## Controlling Power Applications

---

**[MEMO]**

## Chapter 4

---


Interrupt

## Interrupt

### 4.1 Overview of Interrupt

#### 4.1.1 Type of Interrupts

Figure 4.1.1 lists the types of interrupts.

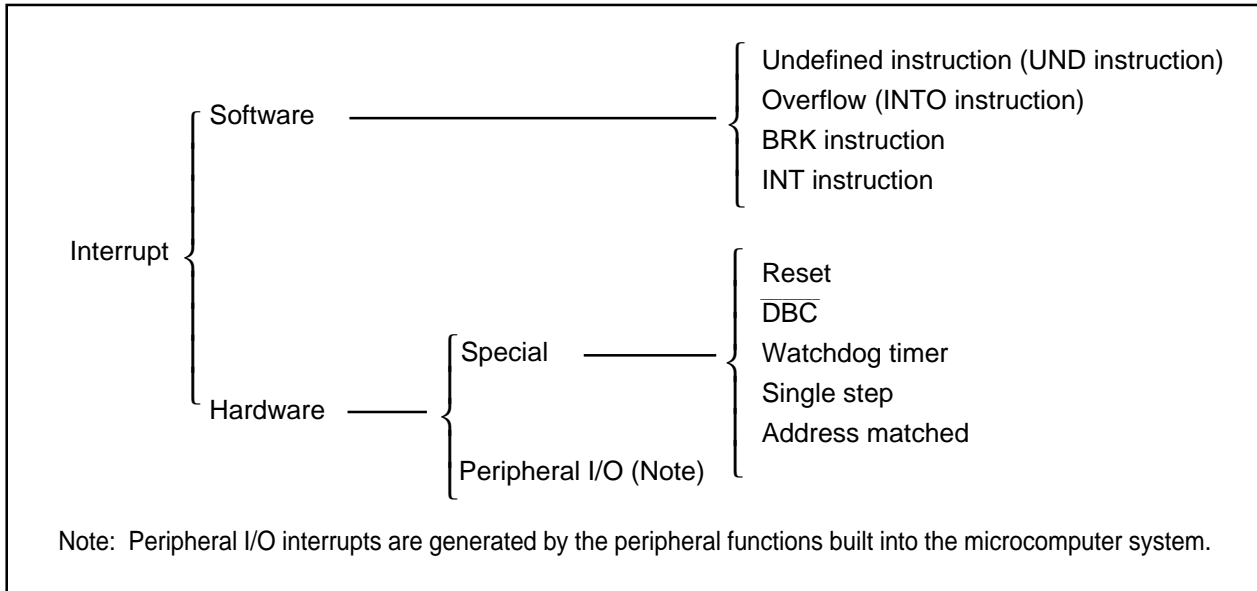

**Figure 4.1.1. Classification of interrupts**

- Maskable interrupt : An interrupt which can be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority **can be changed** by priority level.
- Non-maskable interrupt : An interrupt which cannot be enabled (disabled) by the interrupt enable flag (I flag) or whose interrupt priority **cannot be changed** by priority level.

#### 4.1.2 Software Interrupts

A software interrupt occurs when executing certain instructions. Software interrupts are non-maskable interrupts.

- **Undefined instruction interrupt**

An undefined instruction interrupt occurs when executing the UND instruction.

- **Overflow interrupt**

An overflow interrupt occurs when executing the INTO instruction with the overflow flag (O flag) set to "1". The following are instructions whose O flag changes by arithmetic:

ABS, ADC, ADCF, ADD, CMP, DIV, DIVU, DIVX, NEG, RMPA, SBB, SHA, SUB

- **BRK interrupt**

A BRK interrupt occurs when executing the BRK instruction.

- **INT interrupt**

An INT interrupt occurs when assigning one of software interrupt numbers 0 through 63 and executing the INT instruction. Software interrupt numbers 0 through 31 are assigned to peripheral I/O interrupts, so executing the INT instruction allows executing the same interrupt routine that a peripheral I/O interrupt does.

The stack pointer (SP) used for the INT interrupt is dependent on which software interrupt number is involved.

So far as software interrupt numbers 0 through 31 are concerned, the microcomputer saves the stack pointer assignment flag (U flag) when it accepts an interrupt request. If change the U flag to "0" and select the interrupt stack pointer (ISP), and then execute an interrupt sequence. When returning from the interrupt routine, the U flag is returned to the state it was before the acceptance of interrupt request. So far as software numbers 32 through 63 are concerned, the stack pointer does not make a shift.

### 4.1.3 Hardware Interrupts

Hardware interrupts are classified into two types — special interrupts and peripheral I/O interrupts.

#### (1) Special interrupts

Special interrupts are non-maskable interrupts.

- **Reset**

Reset occurs if an “L” is input to the  $\overline{\text{RESET}}$  pin.

- **DBC interrupt**

This interrupt is exclusively for the debugger, do not use it in other circumstances.

- **Watchdog timer interrupt**

Generated by the watchdog timer.

- **Single-step interrupt**

This interrupt is exclusively for the debugger, do not use it in other circumstances. With the debug flag (D flag) set to “1”, a single-step interrupt occurs after one instruction is executed.

- **Address match interrupt**

An address match interrupt occurs immediately before the instruction held in the address indicated by the address match interrupt register is executed with the address match interrupt enable bit set to “1”. If an address other than the first address of the instruction in the address match interrupt register is set, no address match interrupt occurs. For address match interrupt, see 2.9 Address match Interrupt.

#### (2) Peripheral I/O interrupts

A peripheral I/O interrupt is generated by one of built-in peripheral functions. Built-in peripheral functions are dependent on classes of products, so the interrupt factors too are dependent on classes of products. The interrupt vector table is the same as the one for software interrupt numbers 0 through 31 the INI instruction uses. Peripheral I/O interrupts are maskable interrupts.

- **Key-input interrupt**

A key-input interrupt occurs if an “L” is input to the  $\overline{\text{KI}}$  pin.

- **A-D conversion interrupt**

This is an interrupt that the A-D converter generates.

- **UART0 and UART1 transmission interrupt**

These are interrupts that the serial I/O transmission generates.

- **UART0 and UART1 reception interrupt**

These are interrupts that the serial I/O reception generates.

- **Timer A0 interrupt**

This is an interrupt that timer A generates.

- **Timer B0 interrupt and timer B1 interrupt**

These are interrupts that timer B generates.

- **Timer X0 interrupt through timer X2 interrupt**

- **$\overline{\text{INT0}}$  interrupt and  $\overline{\text{INT1}}$  interrupt**

An  $\overline{\text{INT}}$  interrupt occurs if either a rising edge or a falling edge is input to the  $\overline{\text{INT}}$  pin.

## Interrupt

**4.1.4 Interrupts and Interrupt Vector Tables**

If an interrupt request is accepted, a program branches to the interrupt routine set in the interrupt vector table. Set the first address of the interrupt routine in each vector table. Two types of interrupt vector tables are available — fixed vector table in which addresses are fixed and variable vector table in which addresses can be varied by the setting.

- **Fixed vector tables**

The fixed vector table is a table in which addresses are fixed. The vector tables are located in an area extending from FFFDC<sub>16</sub> to FFFFF<sub>16</sub>. One vector table comprises four bytes. Set the first address of interrupt routine in each vector table. Table 4.1.1 shows the interrupts assigned to the fixed vector tables and addresses of vector tables.

**Table 4.1.1. Interrupts assigned to the fixed vector tables and addresses of vector tables**

Interrupt source	Vector table addresses Address (L) to address (H)	Remarks
Undefined instruction	FFFD <sub>C16</sub> to FFFD <sub>F16</sub>	Interrupt on UND instruction
Overflow	FFFE <sub>016</sub> to FFFE <sub>316</sub>	Interrupt on INTO instruction
BRK instruction	FFFE <sub>416</sub> to FFFE <sub>716</sub>	If the vector contains FF <sub>16</sub> , program execution starts from the address shown by the vector in the variable vector table
Address match	FFFE <sub>816</sub> to FFFE <sub>B16</sub>	There is an address-matching interrupt enable bit
Single step (Note)	FFFE <sub>C16</sub> to FFFE <sub>F16</sub>	Do not use
Watchdog timer	FFFF <sub>016</sub> to FFFF <sub>316</sub>	
DBC (Note)	FFFF <sub>416</sub> to FFFF <sub>716</sub>	Do not use
—	FFFF <sub>816</sub> to FFFF <sub>B16</sub>	—
Reset	FFFF <sub>C16</sub> to FFFF <sub>F16</sub>	

Note: Interrupts used for debugging purposes only.

## Interrupt

### • Variable vector tables

The addresses in the variable vector table can be modified, according to the user's settings. Indicate the first address using the interrupt table register (INTB). The 256-byte area subsequent to the address the INTB indicates becomes the area for the variable vector tables. One vector table comprises four bytes. Set the first address of the interrupt routine in each vector table. Table 4.1.2 shows the interrupts assigned to the variable vector tables and addresses of vector tables.

**Table 4.1.2. Interrupts assigned to the variable vector tables and addresses of vector tables**

Software interrupt number	Vector table address Address (L) to address (H)	Interrupt source	Remarks
Software interrupt number 0	+0 to +3 (Note)	BRK instruction	Cannot be masked by I flag
—		—	
Software interrupt number 11	+44 to +47 (Note)	—	
Software interrupt number 12	+48 to +51 (Note)	—	
Software interrupt number 13	+52 to +55 (Note)	Key input interrupt	
Software interrupt number 14	+56 to +59 (Note)	A-D	
—		—	
Software interrupt number 17	+68 to +71 (Note)	UART0 transmit	
Software interrupt number 18	+72 to +75 (Note)	UART0 receive	
Software interrupt number 19	+76 to +79 (Note)	UART1 transmit	
Software interrupt number 20	+80 to +83 (Note)	UART1 receive	
Software interrupt number 21	+84 to +87 (Note)	Timer A0	
Software interrupt number 22	+88 to +91 (Note)	Timer X0	
Software interrupt number 23	+92 to +95 (Note)	Timer X1	
Software interrupt number 24	+96 to +99 (Note)	Timer X2	
Software interrupt number 25	+100 to +103 (Note)	—	
Software interrupt number 26	+104 to +107 (Note)	Timer B0	
Software interrupt number 27	+108 to +111 (Note)	Timer B1	
Software interrupt number 28	+112 to +115 (Note)	—	
Software interrupt number 29	+116 to +119 (Note)	$\overline{\text{INT0}}$	
Software interrupt number 30	+120 to +123 (Note)	$\overline{\text{INT1}}$	
Software interrupt number 31	+124 to +127 (Note)	—	
Software interrupt number 32 to Software interrupt number 63	+128 to +131 (Note) to +252 to +255 (Note)	Software interrupt	Cannot be masked by I flag

Note : Address relative to address in interrupt table register (INTB).

## Interrupt

### 4.2 Interrupt Control

Descriptions are given here regarding how to enable or disable maskable interrupts and how to set the priority to be accepted. What is described here does not apply to non-maskable interrupts.

Enable or disable a non-maskable interrupt using the interrupt enable flag (I flag), interrupt priority level selection bit, or processor interrupt priority level (IPL). Whether an interrupt request is present or absent is indicated by the interrupt request bit. The interrupt request bit and the interrupt priority level selection bit are located in the interrupt control register of each interrupt. Also, the interrupt enable flag (I flag) and the IPL are located in the flag register (FLG).

Table 4.2.1 shows the memory map of the interrupt control registers, and Table 4.2.2 shows the interrupt control registers.

004D <sub>16</sub>	Key input interrupt control register(KUPIC)
004E <sub>16</sub>	A-D conversion interrupt control register (ADIC)
004F <sub>16</sub>	
0050 <sub>16</sub>	
0051 <sub>16</sub>	UART0 transmit interrupt control register (S0TIC)
0052 <sub>16</sub>	UART0 receive interrupt control register (S0RIC)
0053 <sub>16</sub>	UART1 transmit interrupt control register(S1TIC)
0054 <sub>16</sub>	UART1 receive interrupt control register(S1RIC)
0055 <sub>16</sub>	Timer A0 interrupt control register (TA0IC)
0056 <sub>16</sub>	Timer X0 interrupt control register (TX0IC)
0057 <sub>16</sub>	Timer X1 interrupt control register (TX1IC)
0058 <sub>16</sub>	Timer X2 interrupt control register (TX2IC)
0059 <sub>16</sub>	
005A <sub>16</sub>	Timer B0 interrupt control register (TB0IC)
005B <sub>16</sub>	Timer B1 interrupt control register (TB1IC)
005C <sub>16</sub>	
005D <sub>16</sub>	INT0 interrupt control register (INT0IC)
005E <sub>16</sub>	INT1 interrupt control register (INT1IC)


Table 4.2.1. Memory map of the interrupt control registers



## Interrupt

## Interrupt control register (Note 2)


Symbol	Address	When reset
KUPIC	004D <sub>16</sub>	XXXXX000 <sub>2</sub>
ADIC	004E <sub>16</sub>	XXXXX000 <sub>2</sub>
SiTIC(i=0, 1)	0051 <sub>16</sub> , 0053 <sub>16</sub>	XXXXX000 <sub>2</sub>
SiRIC(i=0, 1)	0052 <sub>16</sub> , 0054 <sub>16</sub>	XXXXX000 <sub>2</sub>
TAiIC(i=0)	0055 <sub>16</sub>	XXXXX000 <sub>2</sub>
TXiIC(i=0 to 2)	0056 <sub>16</sub> to 0058 <sub>16</sub>	XXXXX000 <sub>2</sub>
TBiIC(i=0, 1)	005A <sub>16</sub> , 005B <sub>16</sub>	XXXXX000 <sub>2</sub>



Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0 : Interrupt not requested 1 : Interrupt requested	○	○ (Note 1)
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).

Note 2: To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. For details, see the precautions for interrupts.



Symbol	Address	When reset
INTiIC(i=0, 1)	005D <sub>16</sub> , 005E <sub>16</sub>	XX00X000 <sub>2</sub>

Bit symbol	Bit name	Function	R	W
ILVL0	Interrupt priority level select bit	b2 b1 b0 0 0 0 : Level 0 (interrupt disabled) 0 0 1 : Level 1 0 1 0 : Level 2 0 1 1 : Level 3 1 0 0 : Level 4 1 0 1 : Level 5 1 1 0 : Level 6 1 1 1 : Level 7	○	○
ILVL1			○	○
ILVL2			○	○
IR	Interrupt request bit	0: Interrupt not requested 1: Interrupt requested	○	○ (Note 1)
POL	Polarity select bit	0 : Selects falling edge 1 : Selects rising edge	○	○
Reserved bit		Always set to "0"	○	○
Nothing is assigned. In an attempt to write to these bits, write "0". The value, if read, turns out to be indeterminate.			—	—

Note 1: This bit can only be accessed for reset (= 0), but cannot be accessed for set (= 1).

Note 2: To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. For details, see the precautions for interrupts.

Figure 4.2.2. Interrupt control registers

## Interrupt

### 4.2.1 Interrupt Enable Flag

The interrupt enable flag (I flag) controls the enabling and disabling of maskable interrupts. Setting this flag to "1" enables all maskable interrupts; setting it to "0" disables all maskable interrupts. This flag is set to "0" after reset.

The content is changed when the I flag is changed causes the acceptance of the interrupt request in the following timing:

- When changing the I flag using the REIT instruction, the acceptance of the interrupt takes effect as the REIT instruction is executed.
- When changing the I flag using one of the FCLR, FSET, POPC, and LDC instructions, the acceptance of the interrupt is effective as the next instruction is executed.

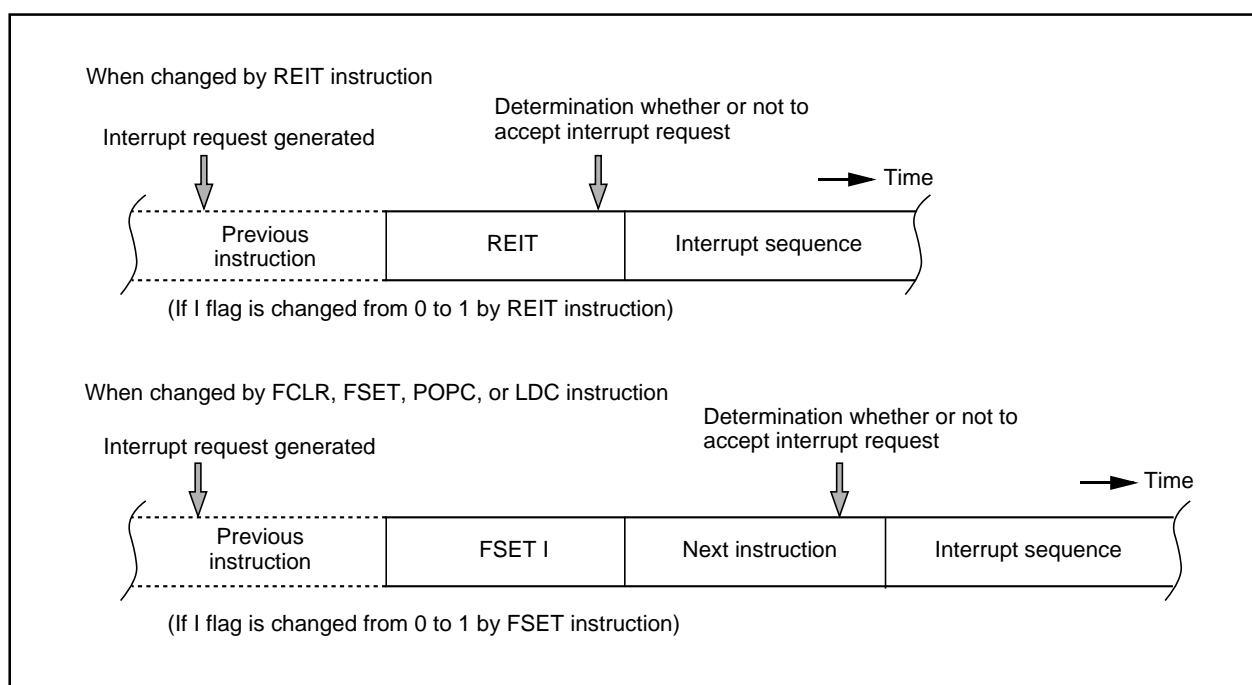


Figure 4.2.3. The timing of reflecting the change in the I flag to the interrupt

### 4.2.2 Interrupt Request Bit

The interrupt request bit is set to "1" by hardware when an interrupt is requested. After the interrupt is accepted and jumps to the corresponding interrupt vector, the request bit is set to "0" by hardware. The interrupt request bit can also be set to "0" by software. (Do not set this bit to "1").

## Interrupt

### 4.2.3 Interrupt Priority Level Select Bit and Processor Interrupt Priority Level (IPL)

Set the interrupt priority level using the interrupt priority level select bit, which is one of the component bits of the interrupt control register. When an interrupt request occurs, the interrupt priority level is compared with the IPL. The interrupt is enabled only when the priority level of the interrupt is higher than the IPL. Therefore, setting the interrupt priority level to "0" disables the interrupt.

Table 4.2.1 shows the settings of interrupt priority levels and Table 4.2.2 shows the interrupt levels enabled, according to the contents of the IPL.

The following are conditions under which an interrupt is accepted:

- interrupt enable flag (I flag) = 1
- interrupt request bit = 1
- interrupt priority level > IPL

The interrupt enable flag (I flag), the interrupt request bit, the interrupt priority select bit, and the IPL are independent, and they are not affected by one another.

**Table 4.2.1. Settings of interrupt priority levels**

Interrupt priority level select bit	Interrupt priority level	Priority order
b2 b1 b0 0 0 0	Level 0 (interrupt disabled)	_____
0 0 1	Level 1	<div style="text-align: center;">           Low            ↓            High         </div>
0 1 0	Level 2	
0 1 1	Level 3	
1 0 0	Level 4	
1 0 1	Level 5	
1 1 0	Level 6	
1 1 1	Level 7	

**Table 4.2.2. Interrupt levels enabled according to the contents of the IPL**

IPL	Enabled interrupt priority levels
IPL <sub>2</sub> IPL <sub>1</sub> IPL <sub>0</sub> 0 0 0	Interrupt levels 1 and above are enabled
0 0 1	Interrupt levels 2 and above are enabled
0 1 0	Interrupt levels 3 and above are enabled
0 1 1	Interrupt levels 4 and above are enabled
1 0 0	Interrupt levels 5 and above are enabled
1 0 1	Interrupt levels 6 and above are enabled
1 1 0	Interrupt levels 7 and above are enabled
1 1 1	All maskable interrupts are disabled

When either the IPL or the interrupt priority level is changed, the new level is reflected to the interrupt in the following timing:

- When changing the IPL using the REIT instruction, the reflection takes effect as of the instruction that is executed in 2 clock cycles after the last clock cycle involved in the REIT instruction.
- When changing the IPL using either the POPC, LDC or LDIPL instruction, the reflection takes effect as of the instruction that is executed in 3 cycles after the last clock cycle involved in the instruction used.
- When changing the interrupt priority level using the MOV or similar instruction, the reflection takes effect as of the instruction that is executed in 2 clock cycles after the last clock cycle involved in the instruction used.

## Interrupt

**4.2.4 Rewrite the interrupt control register**

To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. If there is possibility of the interrupt request occur, rewrite the interrupt control register after the interrupt is disabled. The program examples are described as follow:

**Example 1:**

```
INT_SWITCH1:
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  NOP                     ; Four NOP instructions are required when using HOLD function.
  NOP
  FSET  I           ; Enable interrupts.
```

**Example 2:**

```
INT_SWITCH2:
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  MOV.W MEM, R0     ; Dummy read.
  FSET  I           ; Enable interrupts.
```

**Example 3:**

```
INT_SWITCH3:
  PUSHC FLG         ; Push Flag register onto stack
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  POPC  FLG         ; Enable interrupts.
```

The reason why two NOP instructions (four when using the HOLD function) or dummy read are inserted before FSET I in Examples 1 and 2 is to prevent the interrupt enable flag I from being set before the interrupt control register is rewritten due to effects of the instruction queue.

When a instruction to rewrite the interrupt control register is executed but the interrupt is disabled, the interrupt request bit is not set sometimes even if the interrupt request for that register has been generated. This will depend on the instruction. If this creates problems, use the below instructions to change the register.

Instructions : AND, OR, BCLR, BSET

## Interrupt

### 4.3 Interrupt Sequence

An interrupt sequence — what are performed over a period from the instant an interrupt is accepted to the instant the interrupt routine is executed — is described here.

If an interrupt occurs during execution of an instruction, the processor determines its priority when the execution of the instruction is completed, and transfers control to the interrupt sequence from the next cycle. If an interrupt occurs during execution of either the SMOVB, SMOVF, SSTR or RMPA instruction, the processor temporarily suspends the instruction being executed, and transfers control to the interrupt sequence.

In the interrupt sequence, the processor carries out the following in sequence given:


- (1) CPU gets the interrupt information (the interrupt number and interrupt request level) by reading address 0000016.
- (2) Saves the content of the flag register (FLG) as it was immediately before the start of interrupt sequence in the temporary register (Note) within the CPU.
- (3) Sets the interrupt enable flag (I flag), the debug flag (D flag), and the stack pointer select flag (U flag) to "0" (the U flag, however does not change if the INT instruction, in software interrupt numbers 32 through 63, is executed)
- (4) Saves the content of the temporary register (Note 1) within the CPU in the stack area.
- (5) Saves the content of the program counter (PC) in the stack area.
- (6) Sets the interrupt priority level of the accepted instruction in the IPL.

After the interrupt sequence is completed, the processor resumes executing instructions from the first address of the interrupt routine.

Note: This register cannot be utilized by the user.

#### 4.3.1 Interrupt Response Time

'Interrupt response time' is the period between the instant an interrupt occurs and the instant the first instruction within the interrupt routine has been executed. This time comprises the period from the occurrence of an interrupt to the completion of the instruction under execution at that moment (a) and the time required for executing the interrupt sequence (b). Figure 4.3.1 shows the interrupt response time.

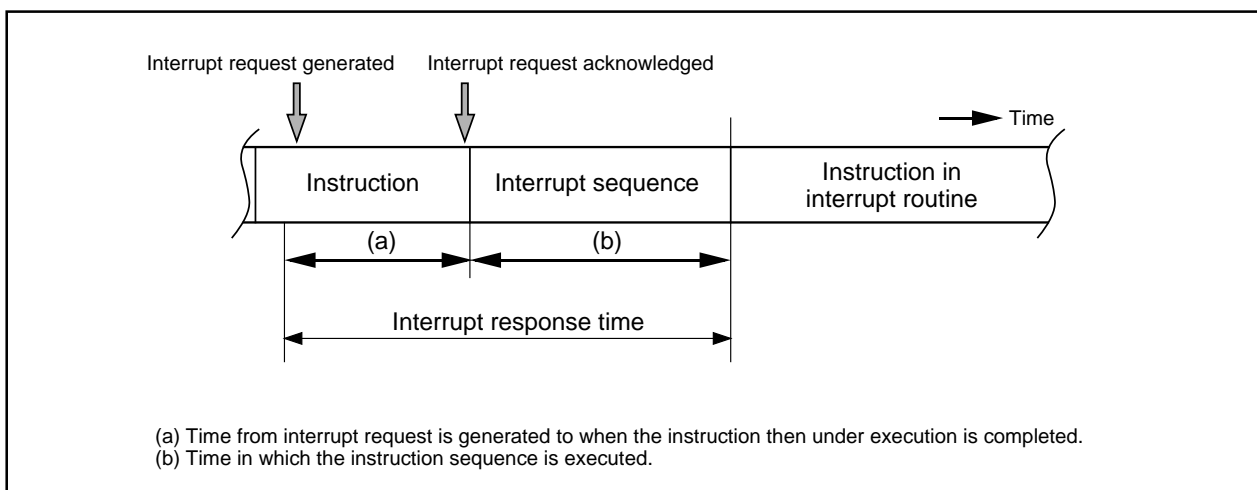

**Figure 4.3.1. Interrupt response time**

## Interrupt

Time (a) is dependent on the instruction under execution. Thirty cycles is the maximum required for the DIVX instruction (without wait).


Time (b) is as shown in Table 4.3.1.

**Table 4.3.1. Time required for executing the interrupt sequence**

Interrupt vector address	Stack pointer (SP) value	16-Bit bus, without wait	8-Bit bus, without wait
Even	Even	18 cycles (Note 1)	20 cycles (Note 1)
Even	Odd	19 cycles (Note 1)	20 cycles (Note 1)
Odd (Note 2)	Even	19 cycles (Note 1)	20 cycles (Note 1)
Odd (Note 2)	Odd	20 cycles (Note 1)	20 cycles (Note 1)

Note 1: Add 2 cycles in the case of a  $\overline{\text{DBC}}$  interrupt; add 1 cycle in the case either of an address coincidence interrupt or of a single-step interrupt.

Note 2: Locate an interrupt vector address in an even address, if possible.

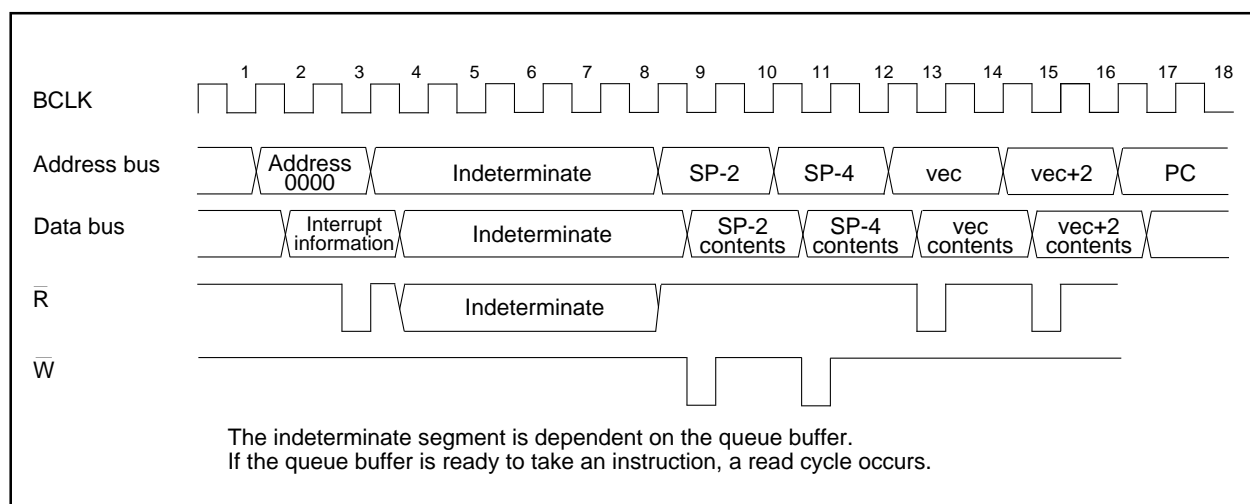

**Figure 4.3.2. Time required for executing the interrupt sequence**

### 4.3.2 Variation of IPL when Interrupt Request is Accepted

If an interrupt request is accepted, the interrupt priority level of the accepted interrupt is set in the IPL.

If an interrupt request, that does not have an interrupt priority level, is accepted, one of the values shown in Table 4.3.2 is set in the IPL.

**Table 4.3.2. Relationship between interrupts without interrupt priority levels and IPL**

Interrupt sources without priority levels	Value set in the IPL
Watchdog timer	7
Reset	0
Other	Not changed


## Interrupt

### 4.3.3 Saving Registers

In the interrupt sequence, only the contents of the flag register (FLG) and that of the program counter (PC) are saved in the stack area.

First, the processor saves the four higher-order bits of the program counter, and 4 upper-order bits and 8 lower-order bits of the FLG register, 16 bits in total, in the stack area, then saves 16 lower-order bits of the program counter. Figure 4.3.3 shows the state of the stack as it was before the acceptance of the interrupt request, and the state the stack after the acceptance of the interrupt request.

Save other necessary registers at the beginning of the interrupt routine using software. Using the PUSHM instruction alone can save all the registers except the stack pointer (SP).

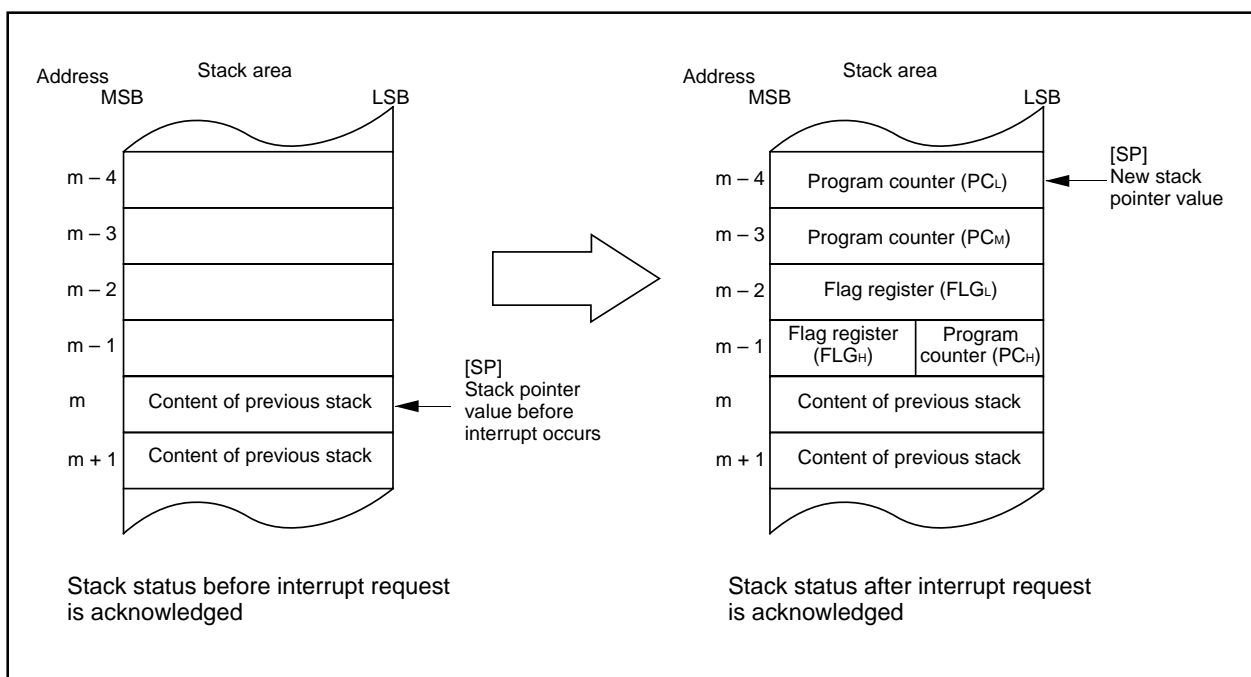

**Figure 4.3.3. State of stack before and after acceptance of interrupt request**

## Interrupt

The operation of saving registers carried out in the interrupt sequence is dependent on whether the content of the stack pointer, at the time of acceptance of an interrupt request, is even or odd. If the content of the stack pointer (Note) is even, the content of the flag register (FLG) and the content of the program counter (PC) are saved, 16 bits at a time. If odd, their contents are saved in two steps, 8 bits at a time. Figure 4.3.4 shows the operation of the saving registers.

Note: Stack pointer indicated by U flag.

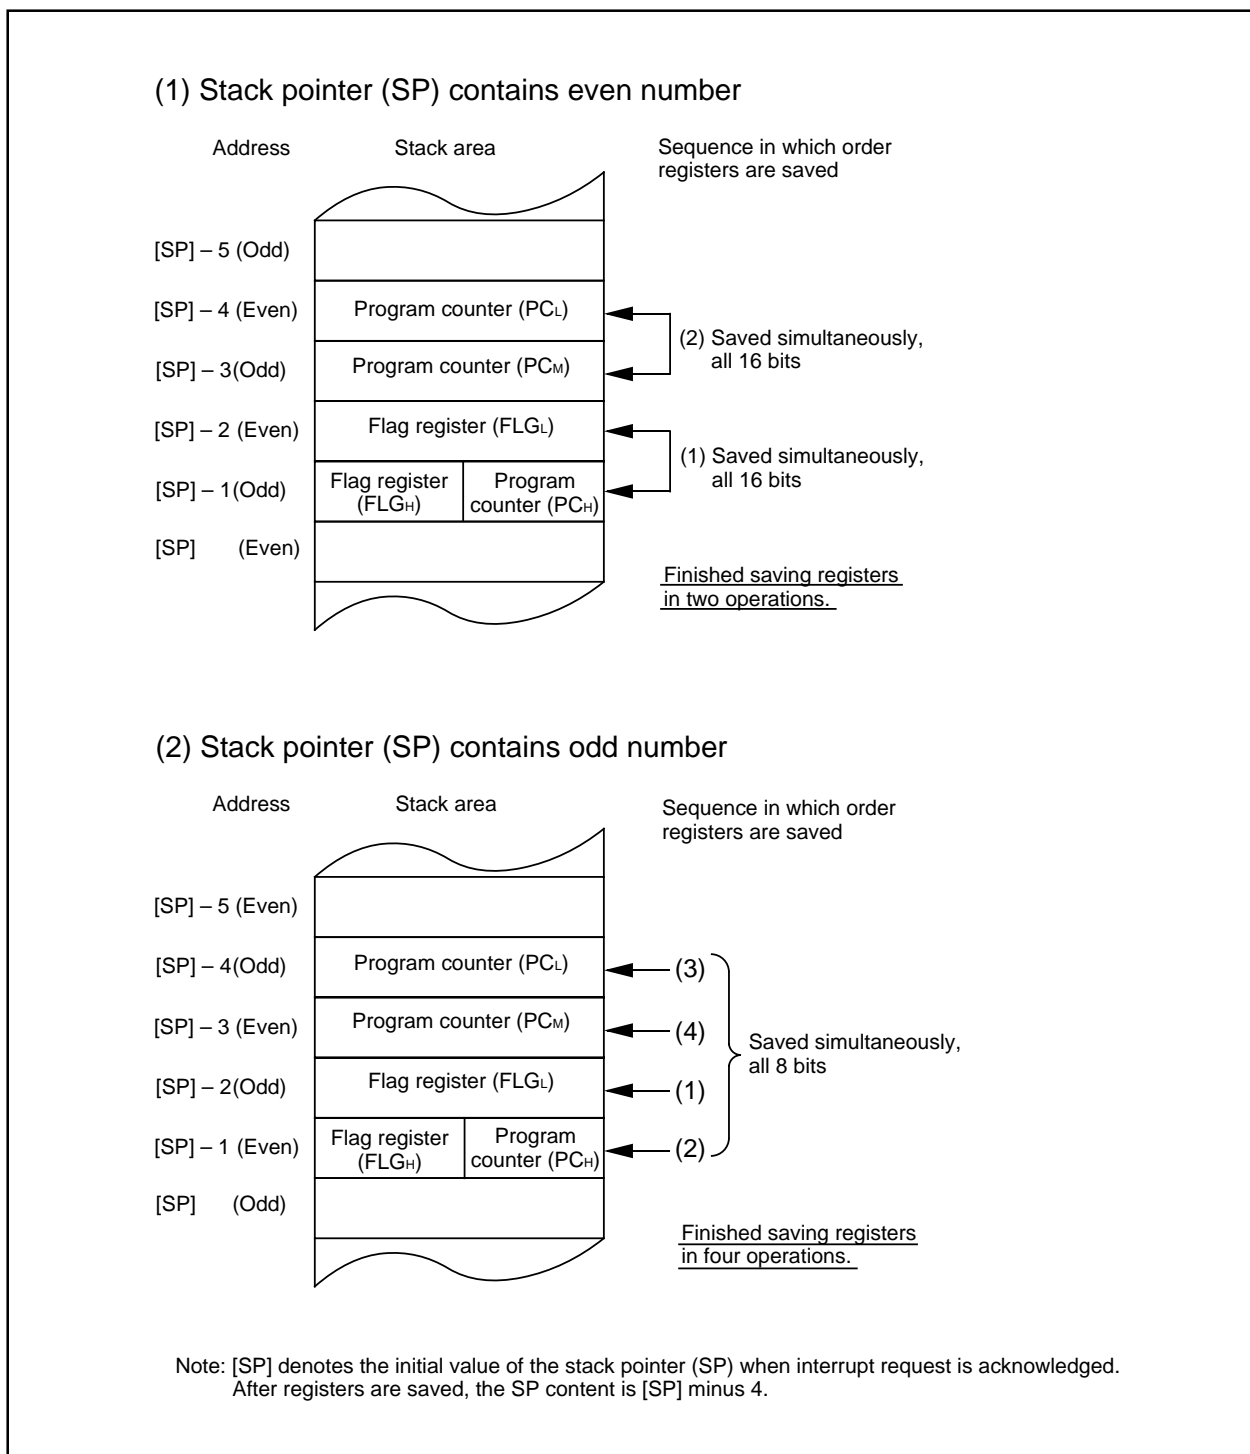


Figure 4.3.4. Operation of saving registers



## Interrupt

---

### 4.4 Returning from an Interrupt Routine

Executing the REIT instruction at the end of an interrupt routine returns the contents of the flag register (FLG) as it was immediately before the start of interrupt sequence and the contents of the program counter (PC), both of which have been saved in the stack area. Then control returns to the program that was being executed before the acceptance of the interrupt request, so that the suspended process resumes.

Return the other registers saved by software within the interrupt routine using the POPM or similar instruction before executing the REIT instruction.

### 4.5 Interrupt Priority

If there are two or more interrupt requests occurring at a point in time within a single sampling (checking whether interrupt requests are made), the interrupt assigned a higher priority is accepted.

Assign an arbitrary priority to maskable interrupts (peripheral I/O interrupts) using the interrupt priority level select bit. If the same interrupt priority level is assigned, however, the interrupt assigned a higher hardware priority is accepted (see Figure 4.5.1).

Priorities of the special interrupts, such as Reset (dealt with as an interrupt assigned the highest priority), watchdog timer interrupt, etc. are regulated by hardware.

Figure 4.5.2 shows the priorities of hardware interrupts.

Software interrupts are not affected by the interrupt priority. If an instruction is executed, control branches invariably to the interrupt routine.

## Interrupt

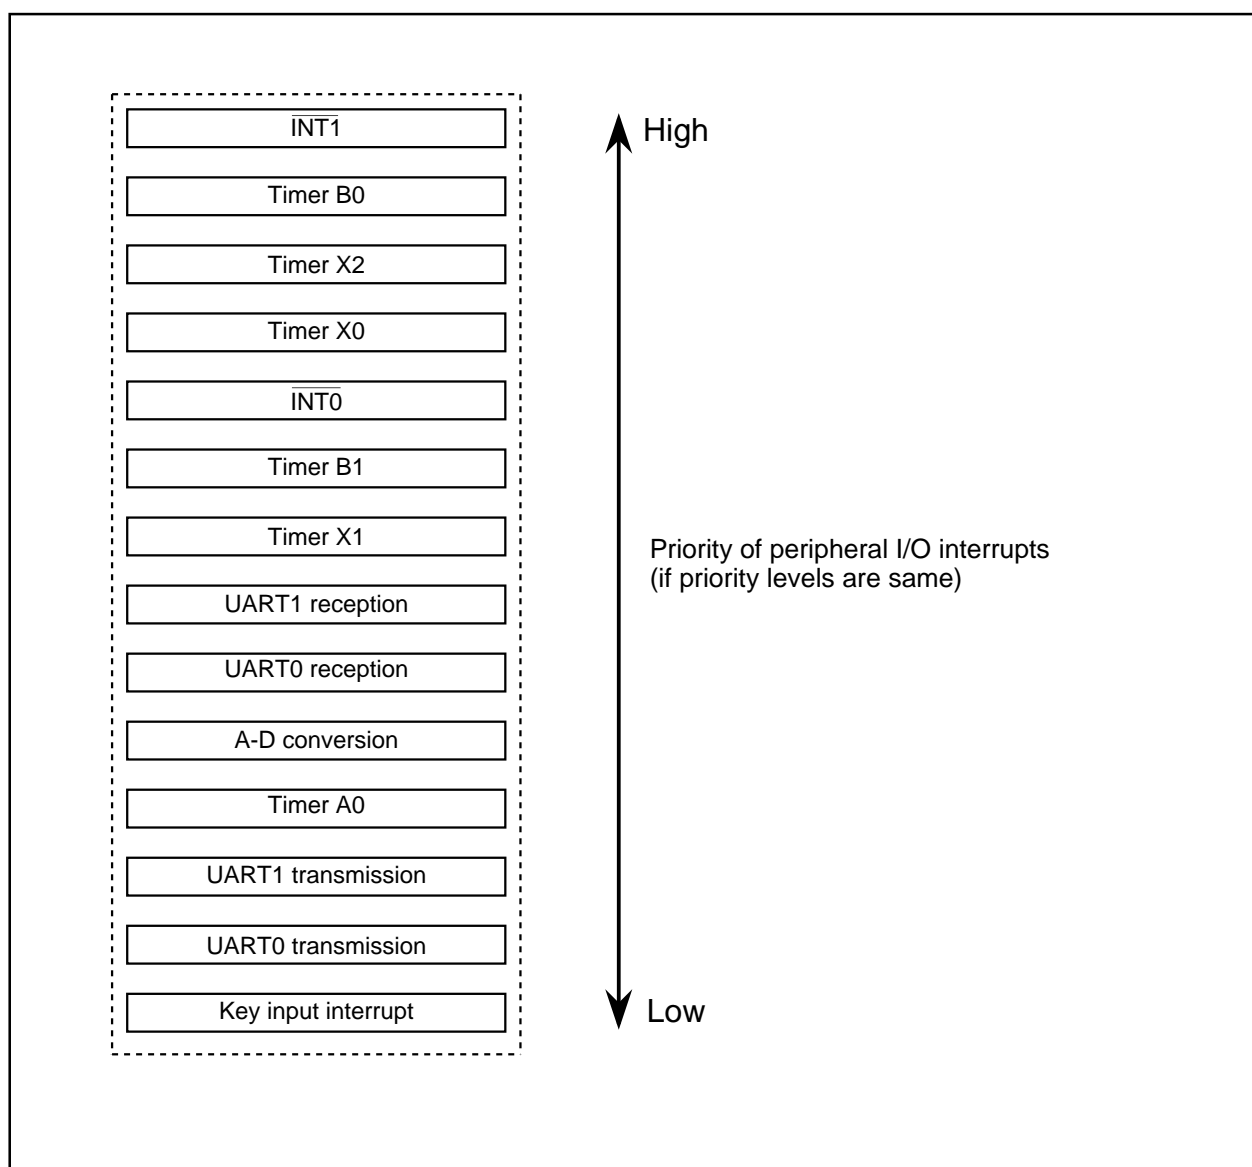


Figure 4.5.1. Maskable interrupts priorities (peripheral I/O interrupts)

Reset >  $\overline{DBC}$  > Watchdog timer > Peripheral I/O > Single step > Address match

Figure 4.5.2. Hardware interrupts priorities

## Interrupt

---

### 4.6 Multiple Interrupts

The state when control branched to an interrupt routine is described below:

- The interrupt enable flag (I flag) is set to "0" (the interrupt is disabled).
- The interrupt request bit of the accepted interrupt is set to "0".
- The processor interrupt priority level (IPL) is assigned to the same interrupt priority level as assigned to the accepted interrupt.

Setting the interrupt enable flag (I flag) to "1" within an interrupt routine allows an interrupt request assigned a priority higher than the IPL to be accepted. Figure 4.6.1 shows the scheme of multiple interrupts.

An interrupt request that is not accepted because of low priority will be held. If the condition following is met when the REIT instruction returns the IPL and the interrupt priority is determined, then the interrupt request being held is accepted.

Interrupt priority level of the interrupt request being held      >      Returned the IPL

## Interrupt

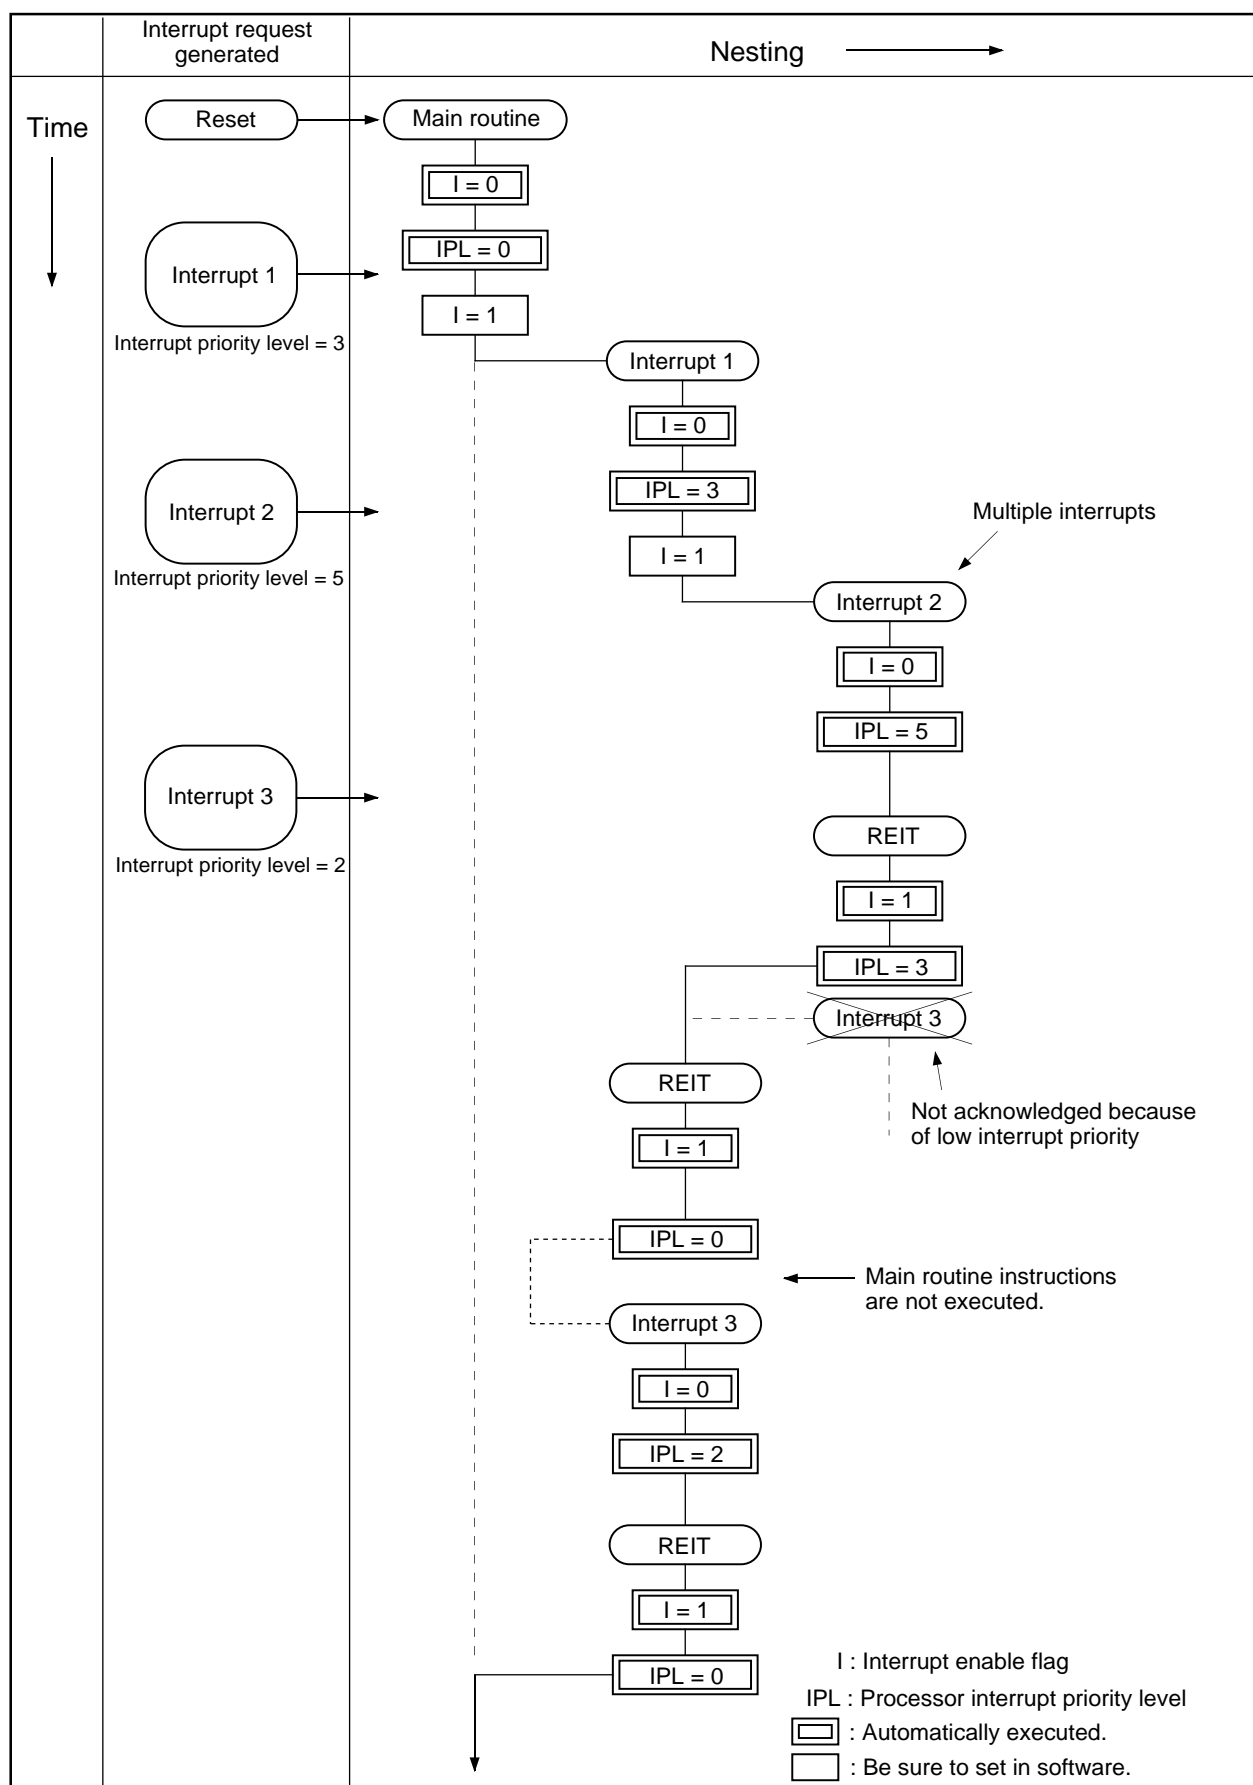


Figure 4.6.1. Multiple interrupts

## Interrupt

### 4.7 Precautions for Interrupts

#### (1) Reading address 00000<sub>16</sub>

- When maskable interrupt is occurred, CPU read the interrupt information (the interrupt number and interrupt request level) in the interrupt sequence.

The interrupt request bit of the certain interrupt written in address 00000<sub>16</sub> will then be set to "0".

Reading address 00000<sub>16</sub> by software sets enabled highest priority interrupt source request bit to "0".

Though the interrupt is generated, the interrupt routine may not be executed.

Do not read address 00000<sub>16</sub> by software.

#### (2) Setting the stack pointer

- The value of the stack pointer immediately after reset is initialized to 0000<sub>16</sub>. Accepting an interrupt before setting a value in the stack pointer may become a factor of runaway. Be sure to set a value in the stack pointer before accepting an interrupt. Concerning the first instruction immediately after reset, generating any interrupts is prohibited.

#### (3) External interrupt

- Either an "L" level or an "H" level of at least 250 ns width is necessary for the signal input to pins  $\overline{\text{INT}}_0$  and  $\overline{\text{INT}}_1$  regardless of the CPU operation clock.
- When the polarity of the  $\overline{\text{INT}}_0$  and  $\overline{\text{INT}}_1$  pins is changed, the interrupt request bit is sometimes set to "1". After changing the polarity, set the interrupt request bit to "0". Figure 4.7.1 shows the procedure for changing the  $\overline{\text{INT}}$  interrupt generate factor.

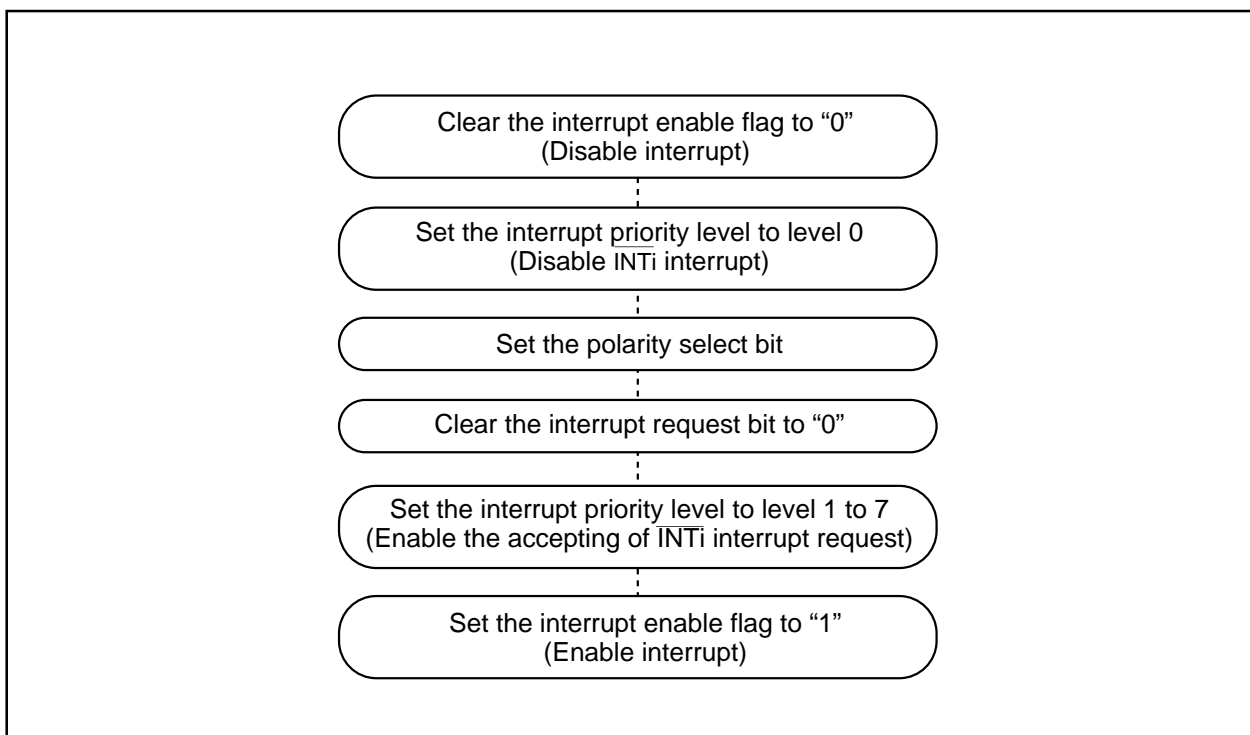


Figure 4.7.1. Switching condition of  $\overline{\text{INT}}$  interrupt request

## Interrupt

**(4) Rewrite the interrupt control register**

- To rewrite the interrupt control register, do so at a point that does not generate the interrupt request for that register. If there is possibility of the interrupt request occur, rewrite the interrupt control register after the interrupt is disabled. The program examples are described as follow:

**Example 1:**

```

INT_SWITCH1:
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  NOP                      ; Four NOP instructions are required when using HOLD function.
  NOP
  FSET  I           ; Enable interrupts.

```

**Example 2:**

```

INT_SWITCH2:
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  MOV.W MEM, R0     ; Dummy read.
  FSET  I           ; Enable interrupts.

```

**Example 3:**

```

INT_SWITCH3:
  PUSHC FLG         ; Push Flag register onto stack
  FCLR  I           ; Disable interrupts.
  AND.B #00h, 0055h ; Clear TA0IC int. priority level and int. request bit.
  POPC  FLG         ; Enable interrupts.

```

The reason why two NOP instructions (four when using the HOLD function) or dummy read are inserted before FSET I in Examples 1 and 2 is to prevent the interrupt enable flag I from being set before the interrupt control register is rewritten due to effects of the instruction queue.

- When a instruction to rewrite the interrupt control register is executed but the interrupt is disabled, the interrupt request bit is not set sometimes even if the interrupt request for that register has been generated. This will depend on the instruction. If this creates problems, use the below instructions to change the register.

Instructions : AND, OR, BCLR, BSET

Interrupt

---

[MEMO]

## Chapter 5

---

### Standard Characteristics



## Standard Characteristics

---


### 5.1 Standard DC Characteristics

The standard characteristics given in this section are examples of M30201M4-XXXFP. The contents of these examples cannot be guaranteed. For standardized values, see “Electric characteristics”.


#### 5.1.1 Standard Ports Characteristics

Figures 5.1.1 through 5.1.6 show the standard ports characteristics.


## Standard Characteristics

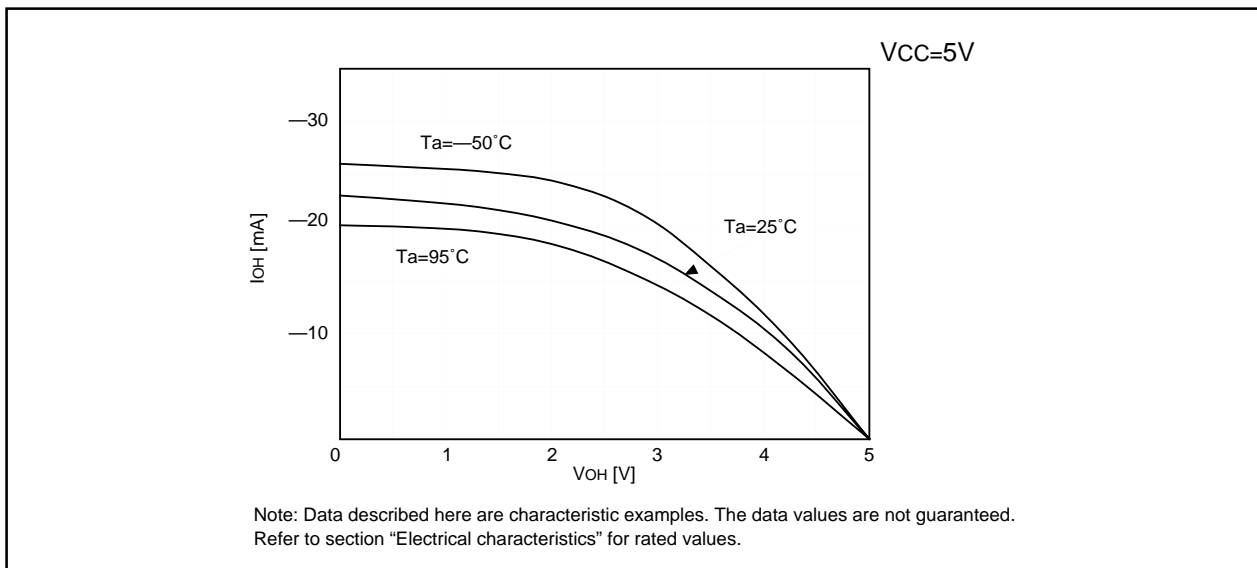

**Figure 5.1.1. IOH - VOH standard characteristics of ports P0 to P7 (VCC = 5V)**

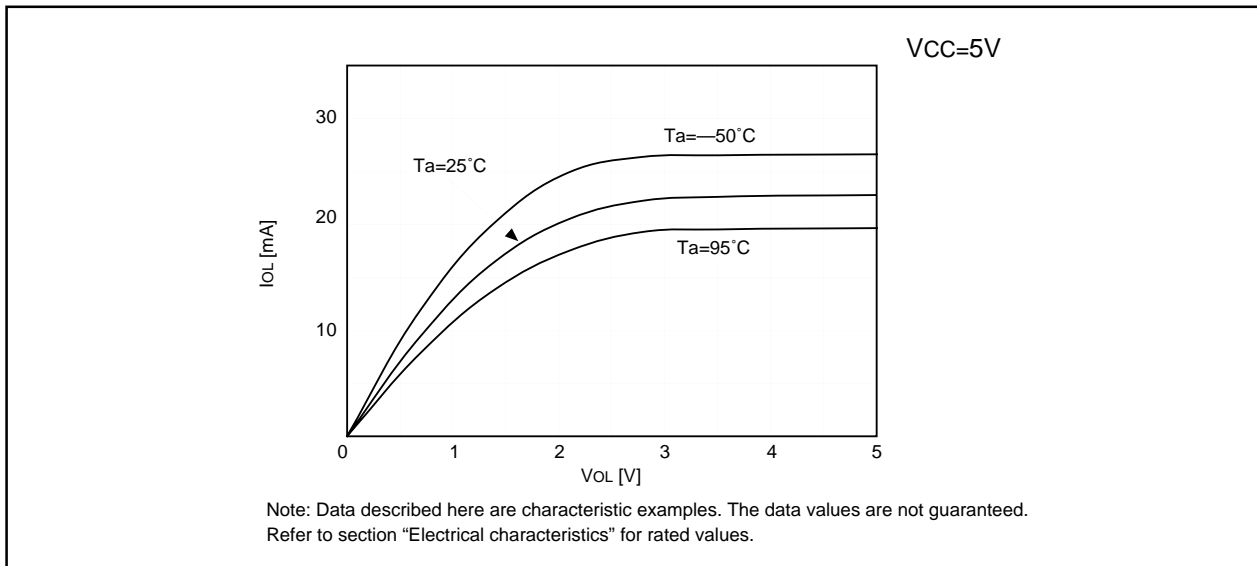


**Figure 5.1.2. IOL - VOL standard characteristics of ports P0 to P7 (VCC = 5V)**

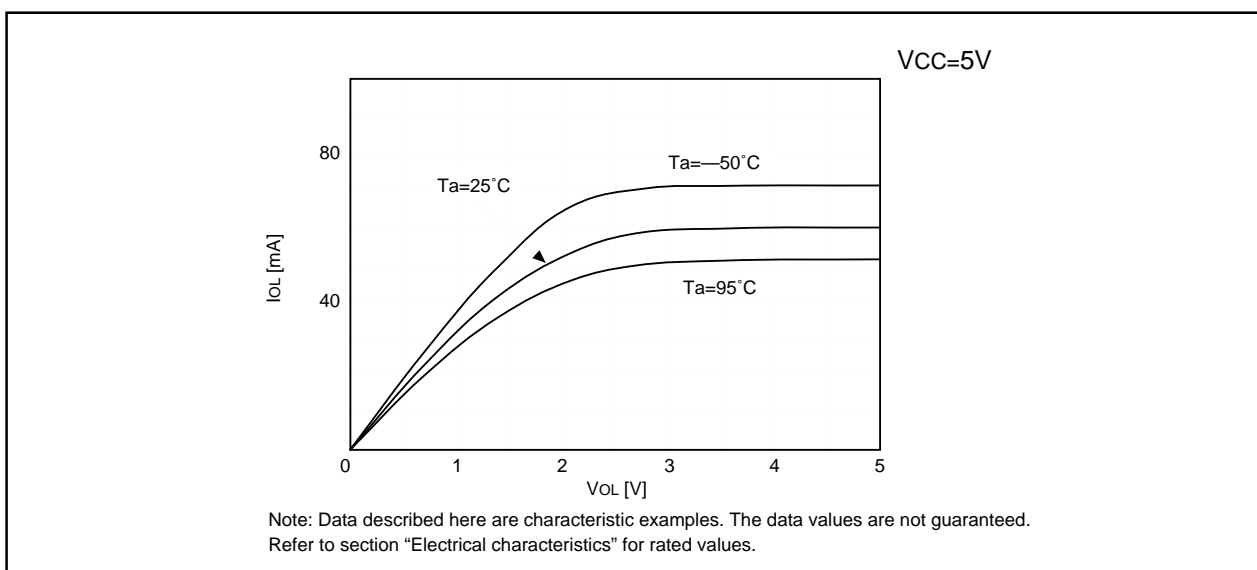


**Figure 5.1.3. IOL - VOL standard characteristics of port P1 (VCC = 5V, HIGH POWER)**


## Standard Characteristics

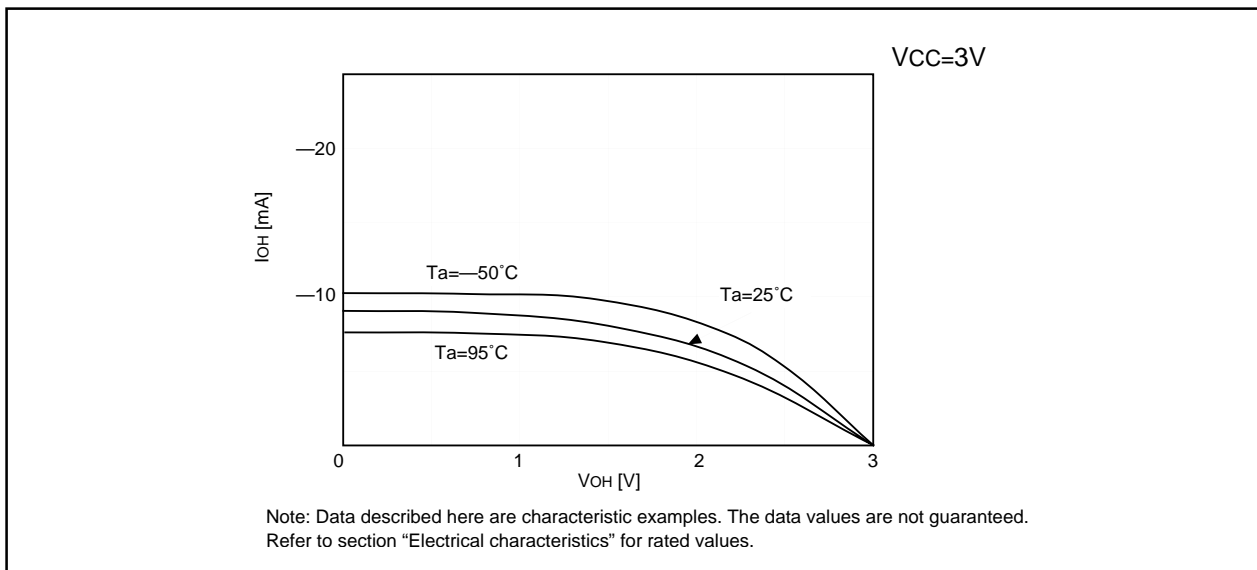

**Figure 5.1.4. IOH - VOH standard characteristics of ports P0 to P7 (VCC = 3V)**

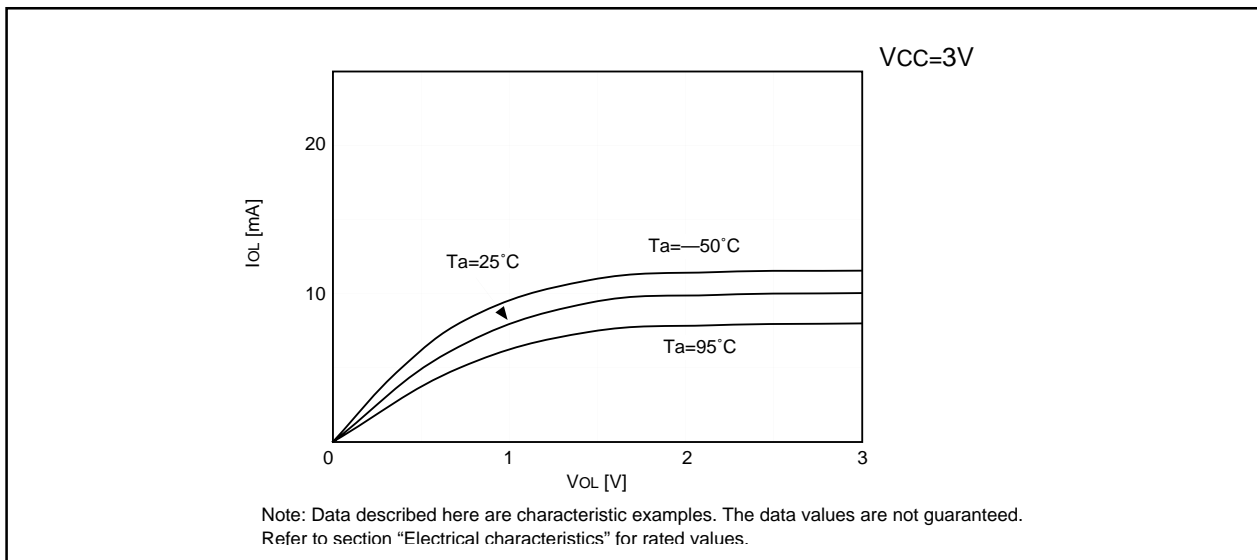

**Figure 5.1.5. IOL - VOL standard characteristics of ports P0 to P7 (VCC = 3V)**

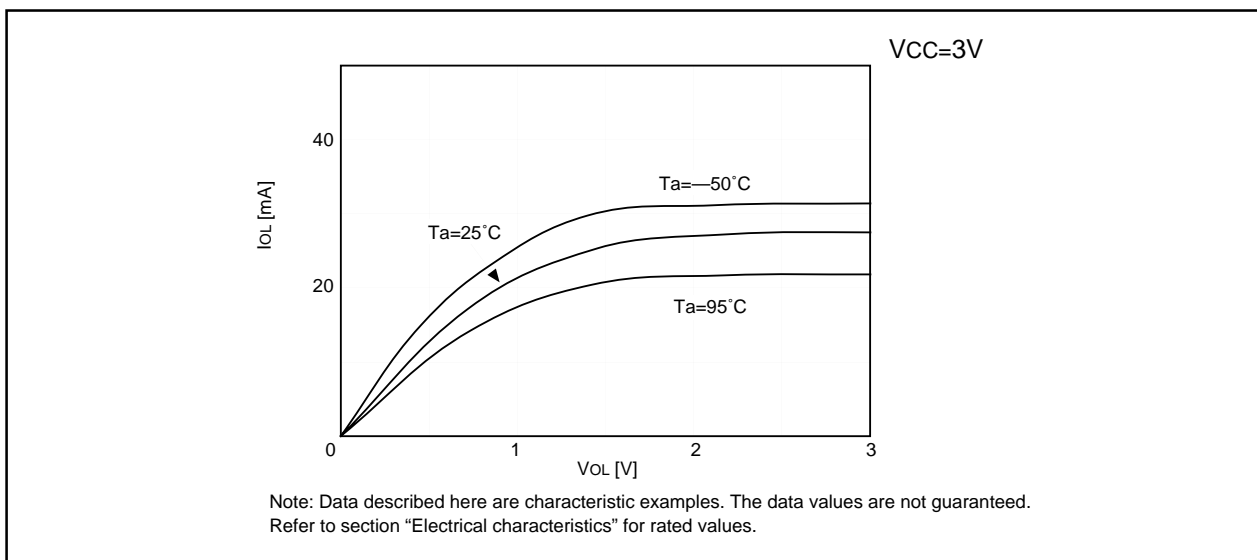


**Figure 5.1.6. IOL - VOL standard characteristics of port P1 (VCC = 3V, HIGH POWER)**

## Standard Characteristics

5.1.2 Standard Characteristics of  $I_{CC}-f(X_{IN})$ 

Figures 5.1.7 and 5.1.8 show the standard characteristics of  $I_{CC}-f(X_{IN})$ . The standard characteristics given in this section are examples of M30201M4-XXXFP. The contents of these examples cannot be guaranteed. For standardized values, see "Electric characteristics".

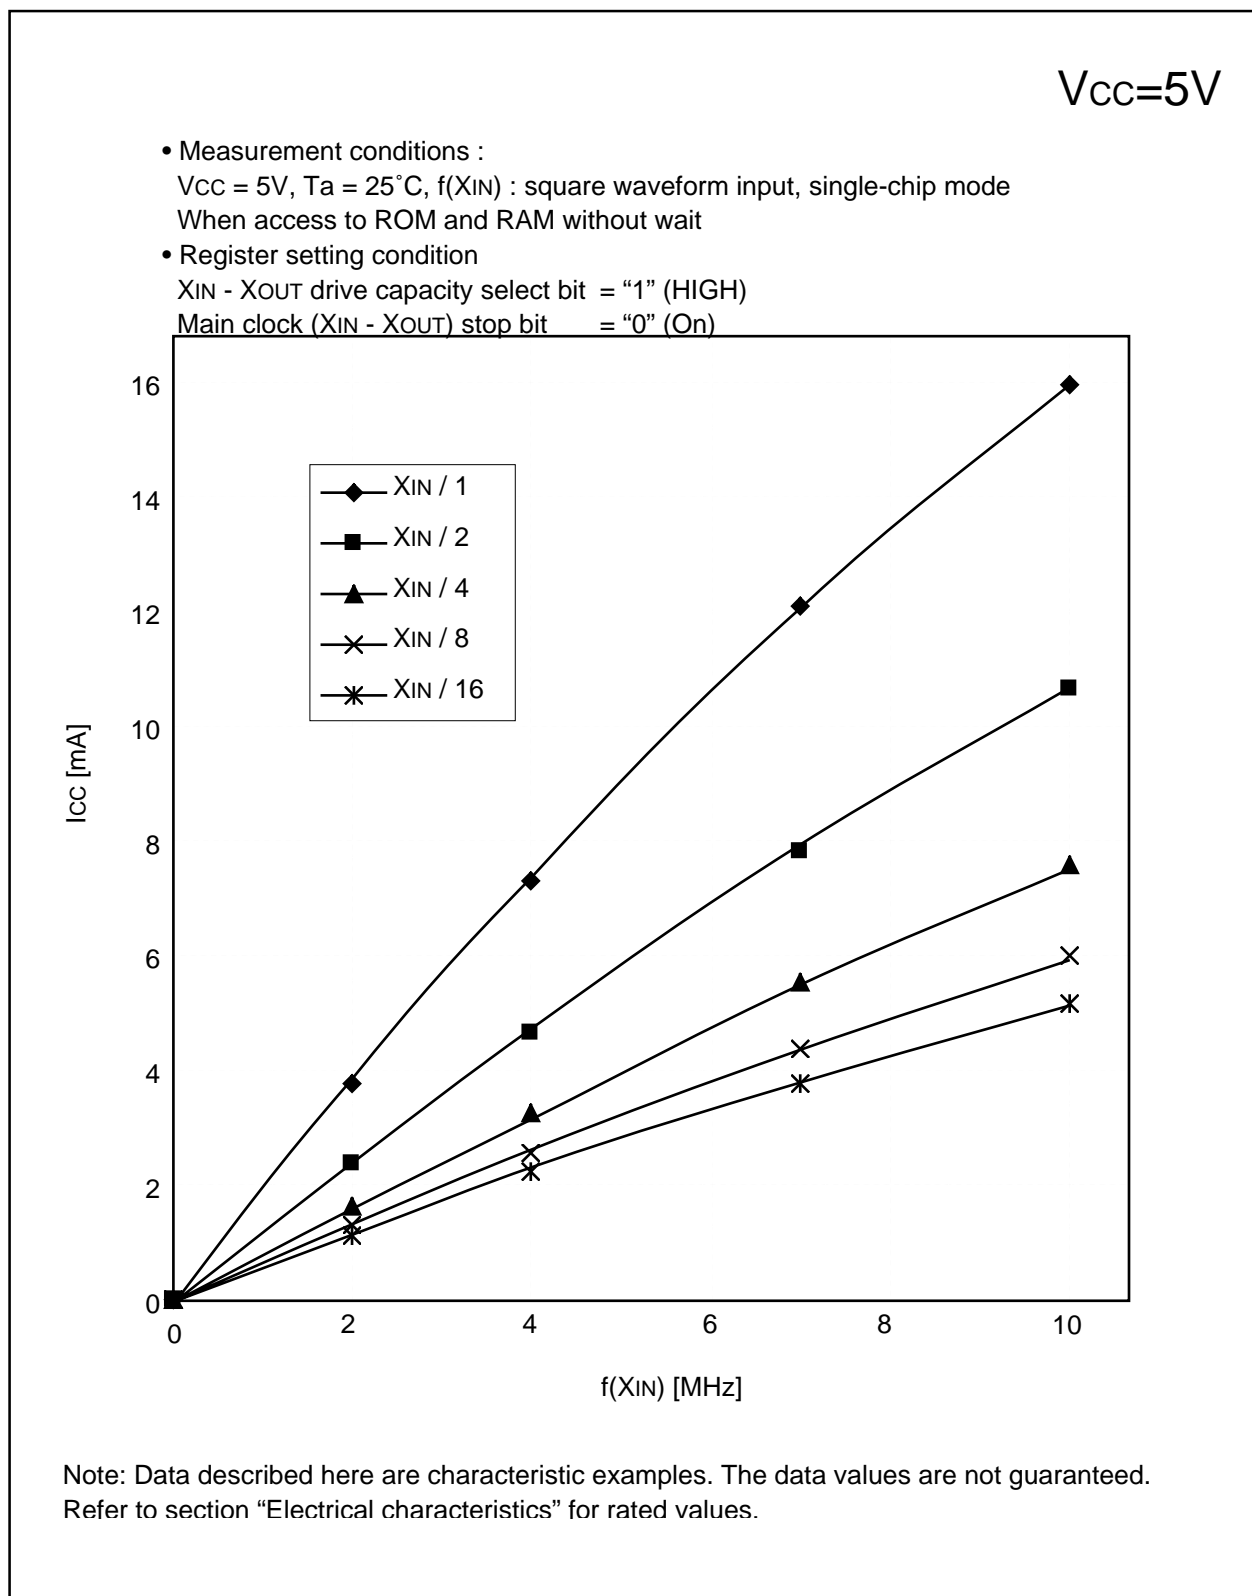


Figures 5.1.7. Standard characteristics of  $I_{CC}-f(X_{IN})$  ( $V_{CC} = 5V$ )

## Standard Characteristics

$V_{CC}=3V$

- Measurement conditions :  
 $V_{CC} = 3V$ ,  $T_a = 25^\circ C$ ,  $f(XIN)$  : square waveform input, single-chip mode  
 When access to ROM and RAM without wait
- Register setting condition  
 $XIN - XOUT$  drive capacity select bit = "1" (HIGH)  
 Main clock ( $XIN - XOUT$ ) stop bit = "0" (On)

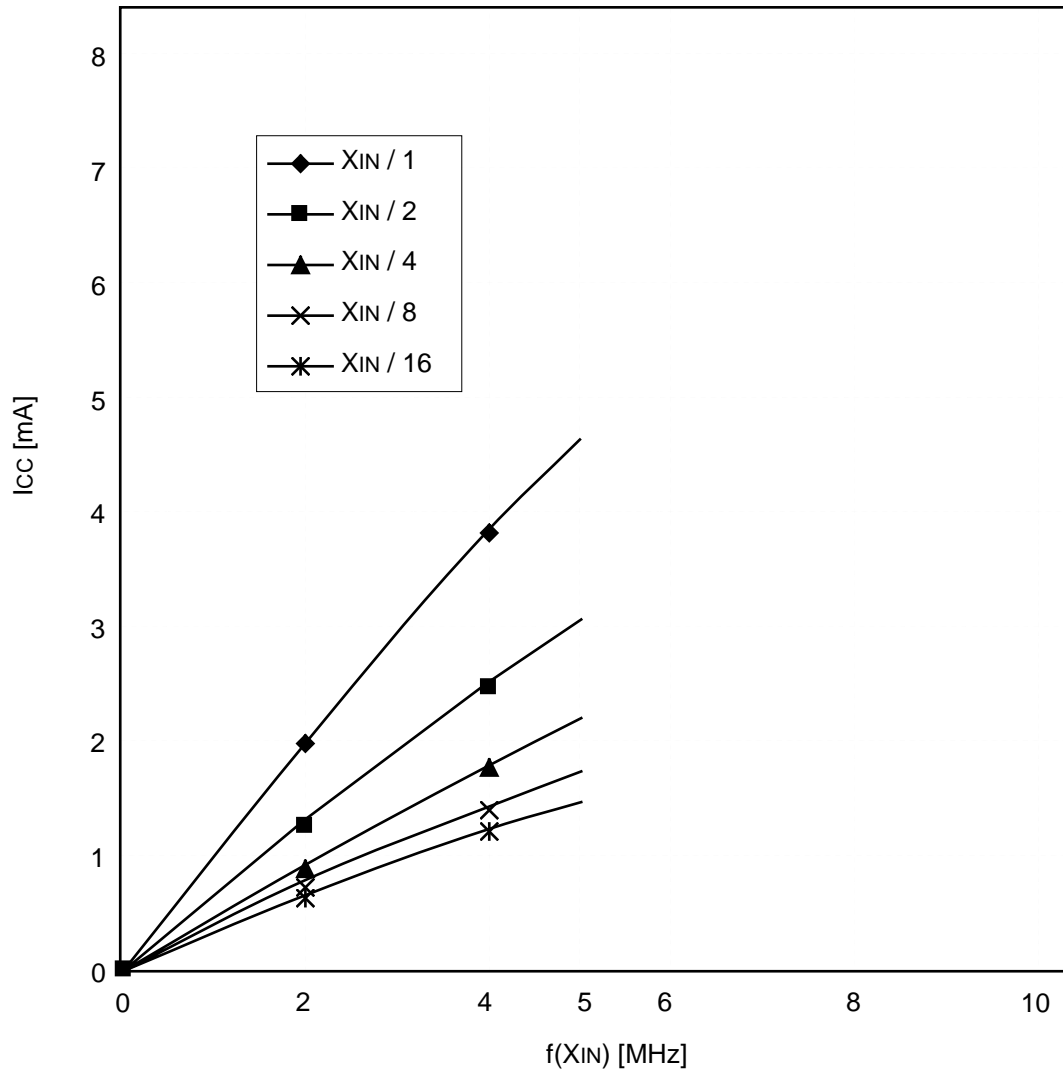

Note: Data described here are characteristic examples. The data values are not guaranteed.  
 Refer to section "Electrical characteristics" for rated values.

Figures 5.1.8. Standard characteristics of  $I_{CC}-f(XIN)$  ( $V_{CC} = 3V$ )

## Standard Characteristics

### 5.2 Standard Characteristics of Pull-Up Resistor

Figure 5.2.1 shows an example of the standard characteristics of the pull-up resistor. The standard characteristics given in this section are examples of M30201M4-XXXFP. The contents of these examples cannot be guaranteed. For standardized values, see "Electric characteristics".

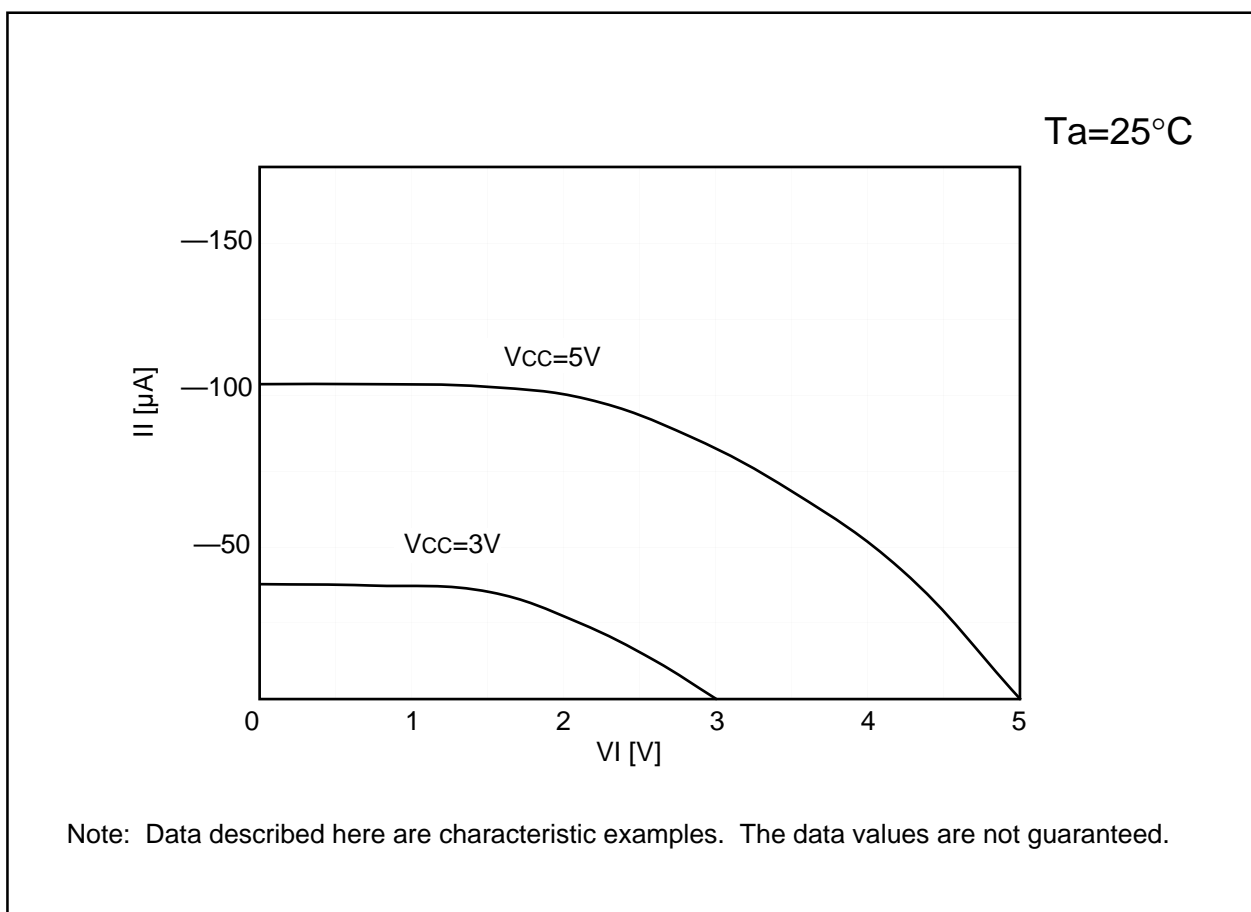


Figure 5.2.1. Example of the standard characteristics of the pull-up resistor

## Standard Characteristics (Flash memory version)

---


### 5.3 Standard DC Characteristics (Flash memory version)

The standard characteristics given in this section are examples of M30201F6FP. The contents of these examples cannot be guaranteed. For standardized values, see "Electric characteristics".


#### 5.3.1 Standard Ports Characteristics

Figures 5.3.1 through 5.3.3 show the standard ports characteristics.


## Standard Characteristics (Flash memory version)

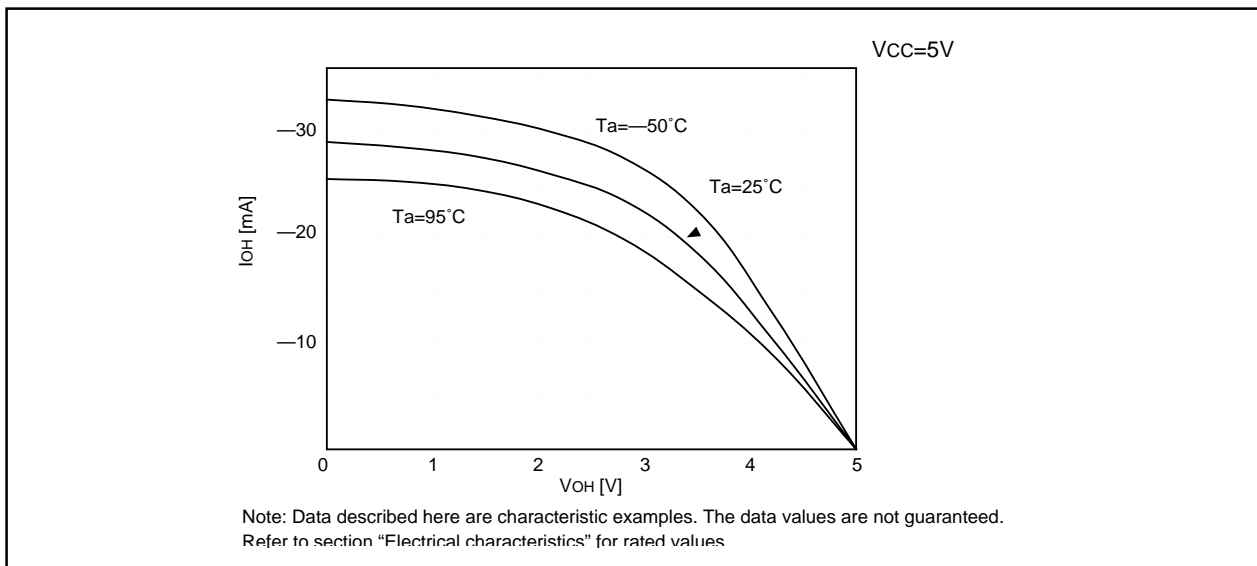

**Figure 5.3.1. IOH - VOH standard characteristics of ports P0 to P7 (VCC = 5V)**

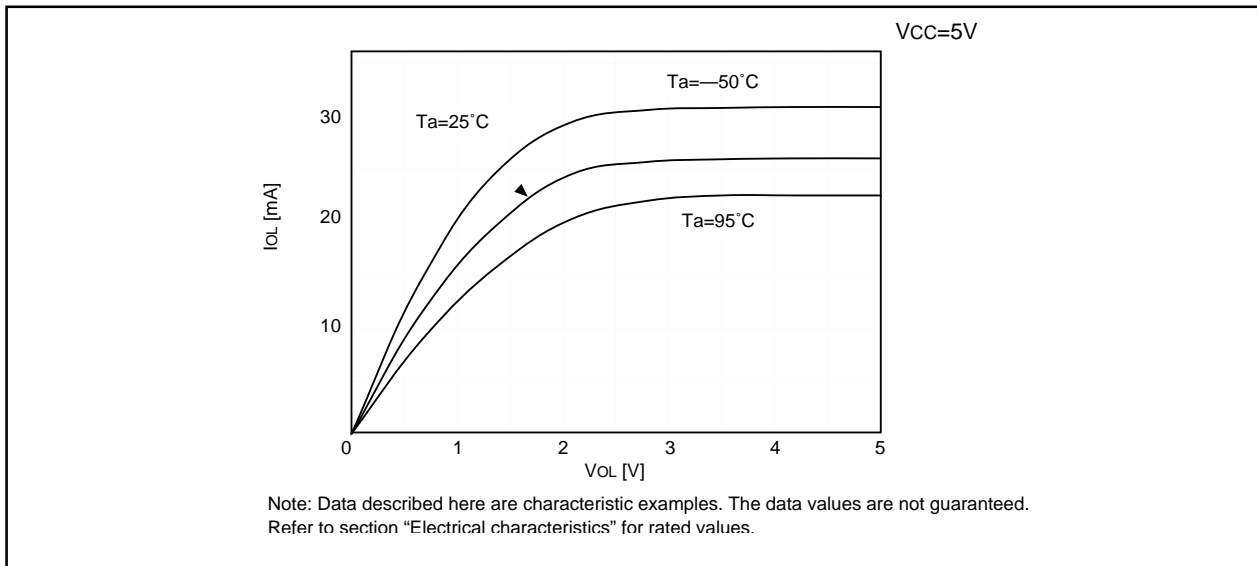

**Figure 5.3.2. IOL - VOL standard characteristics of ports P0 to P7 (VCC = 5V)**

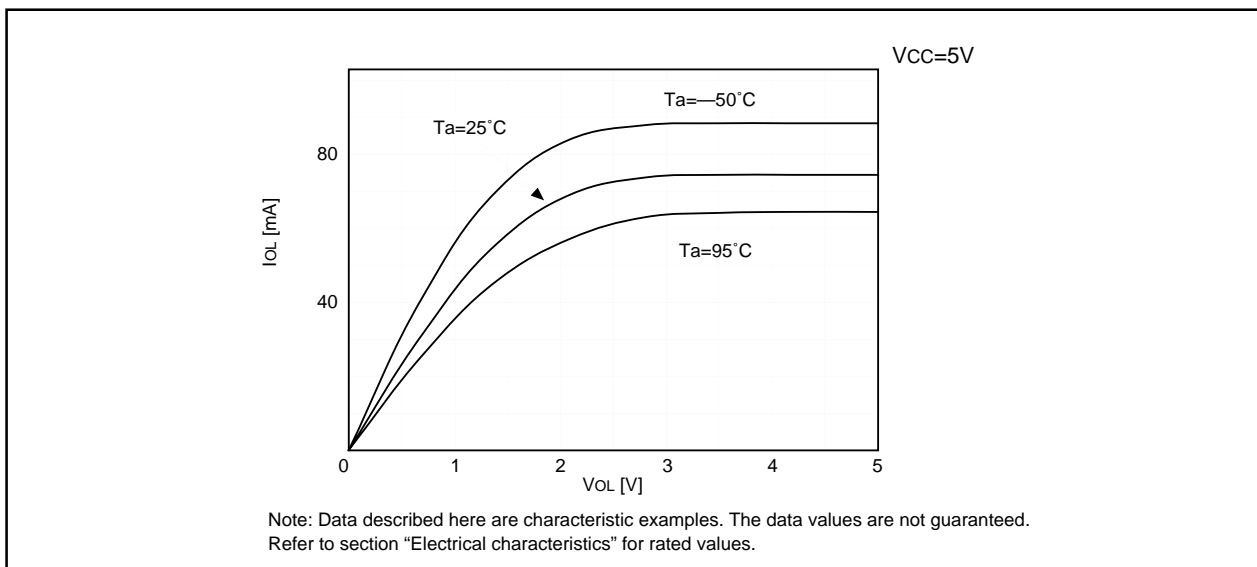


**Figure 5.3.3. IOL - VOL standard characteristics of port P1 (VCC = 5V, HIGH POWER)**



## Standard Characteristics (Flash memory version)

### 5.3.2 Standard Characteristics of $I_{CC}-f(X_{IN})$

Figure 5.3.4 shows the Characteristics of  $I_{CC}-f(X_{IN})$ . The standard characteristics given in this section are examples of M30201F6FP. The contents of these examples cannot be guaranteed. For standardized values, see "Electric characteristics".

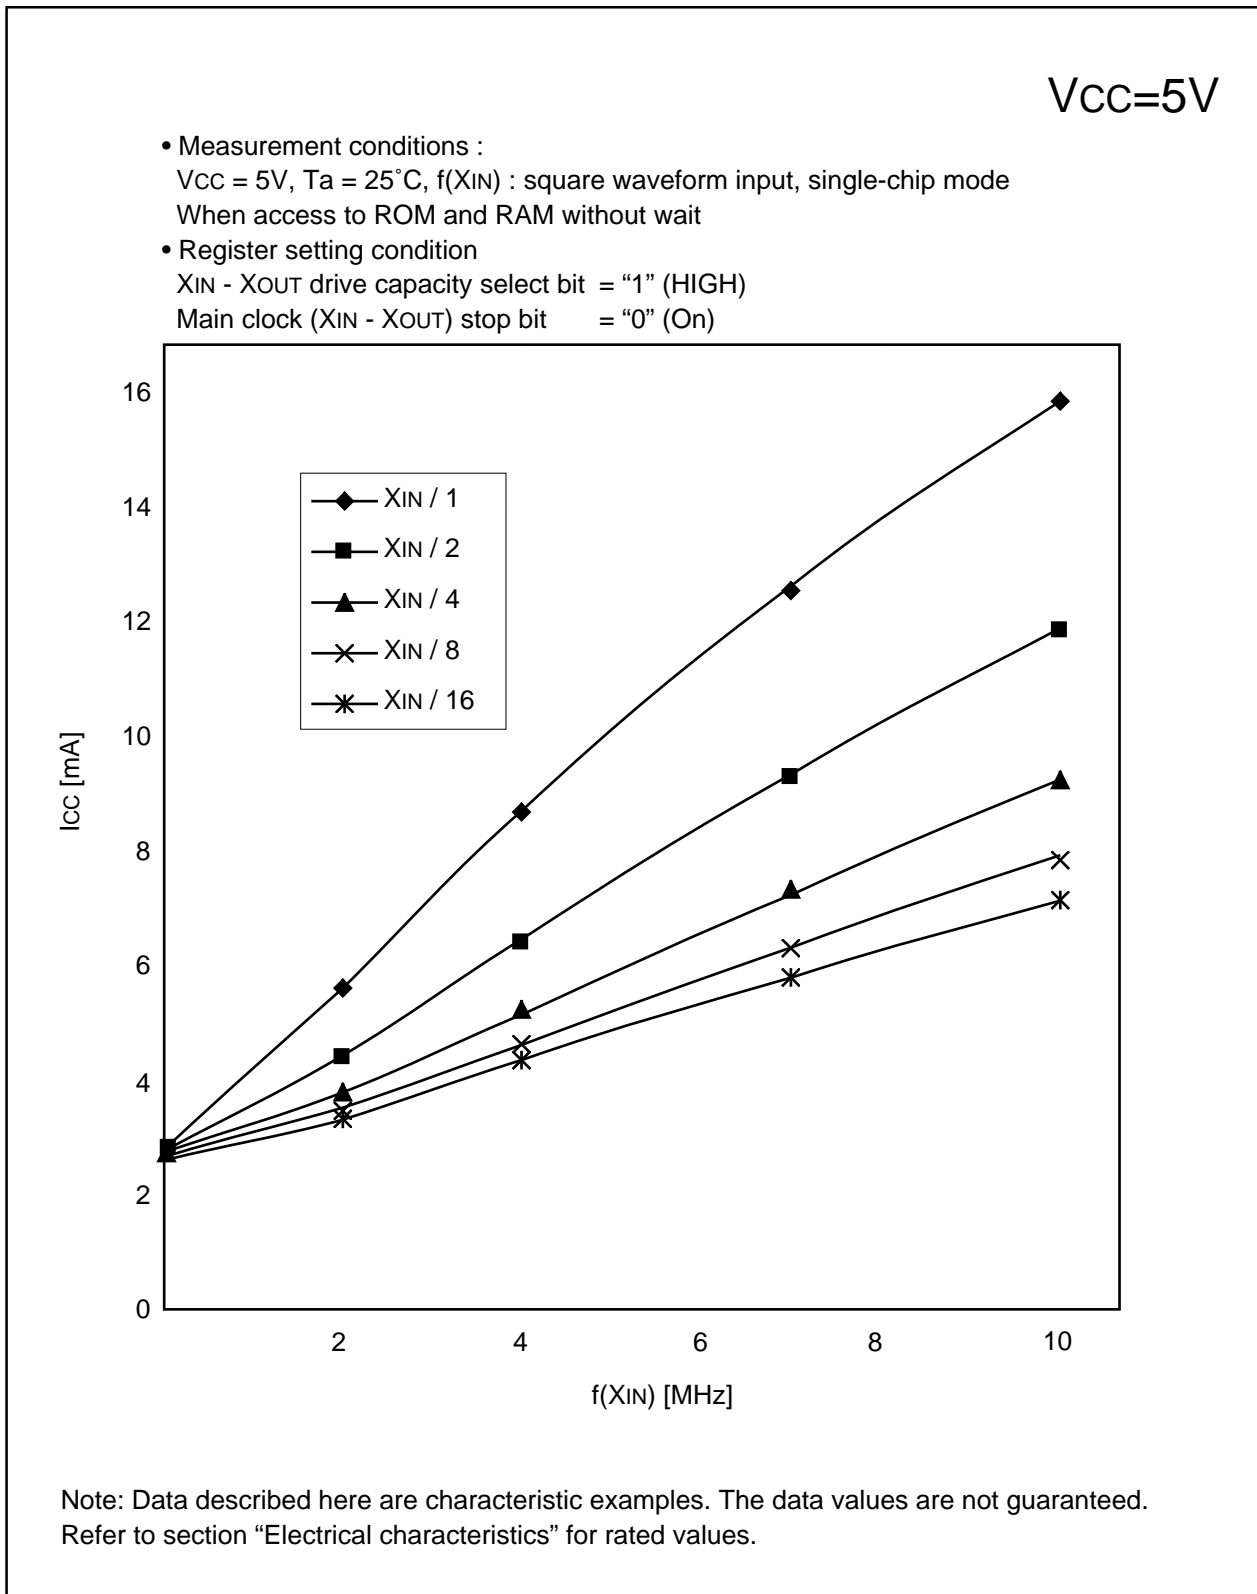

Figures 5.3.4. Standard characteristics of  $I_{CC}-f(X_{IN})$  ( $V_{CC} = 5V$ )

## Standard Characteristics (Flash memory version)

### 5.4 Standard Characteristics of Pull-Up Resistor

Figure 5.4.1 shows an example of the standard characteristics of the pull-up resistor. The standard characteristics given in this section are examples of M30201F6FP. The contents of these examples cannot be guaranteed. For standardized values, see "Electric characteristics".

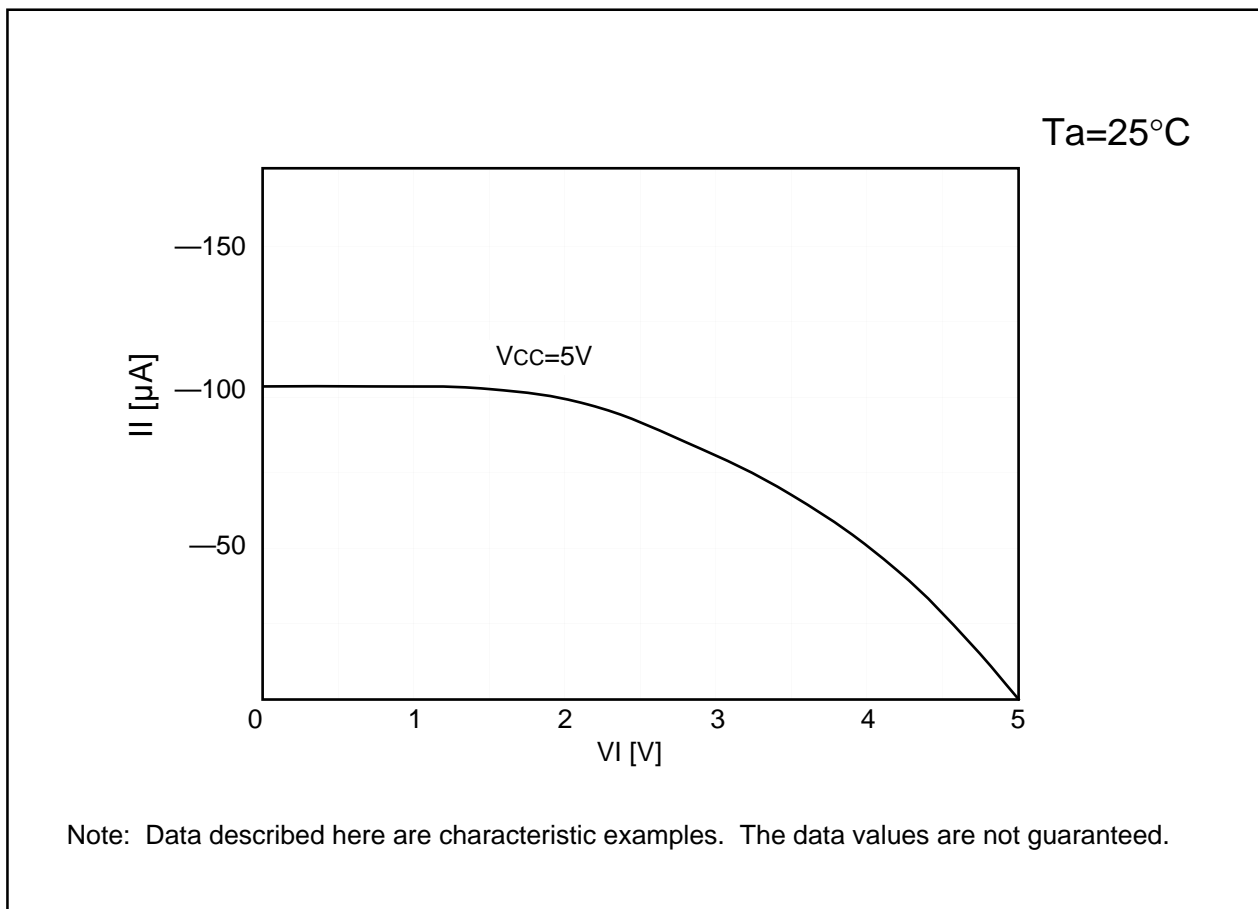


Figure 5.4.1. Example of the standard characteristics of the pull-up resistor

## Appendix 1 Check Sheet

---

### Appendix 1 Check Sheet

The following check sheet was created based on items which had been the source of problems in the past. We recommend you refer to the check sheet when troubleshooting.

#### Checks regarding register initial settings

- ☐ Has the initial setting been made in the interrupt stack pointer (ISP) at the top of the program?
- ☐ Has the initial setting been made in the user stack pointer (USP)? (Only if using the USP)
- ☐ Does the USP overlap the ISP area? (Only if using the USP)
- ☐ Is interrupt enabled after setting the ISP and USP?
- ☐ Is the top address of the variable interrupt vector table set in the interrupt table register (INTB)?
- ☐ Is interrupt enabled after setting the INTB?
- ☐ Has the initial setting been made in the frame base register (FB)? (Only if using the FB)
- ☐ Has the initial setting been made in the stack base register (SB)? (Only if using the SB)

#### Checks regarding the internal memory

- ☐ Does the RAM capacity used in the program exceed the RAM capacity of the microcomputer?
- ☐ Does the ROM capacity used in the program exceed the ROM capacity of the microcomputer?

#### Checks regarding the protect register

- ☐ Is writing enabled in the protect register (address 000A<sub>16</sub>) before writing in the system clock control register (addresses 0006<sub>16</sub> and 0007<sub>16</sub>)?
- ☐ Is writing enabled in the protect register before writing in the processor mode register (addresses 0004<sub>16</sub> and 0005<sub>16</sub>)?
- ☐ Is writing enabled in the protect register before writing in the port P4 direction register (address 03EA<sub>16</sub>)?
- ☐ Is writing effectuated in the port P4 direction register by the next instruction after writing is enabled in the protect register?
- ☐ Does not an interrupt generate between the instruction writing is enabled in the protect register and the instruction writing in the port P4 direction register?

## Appendix 1 Check Sheet

---

### Checks regarding the timer

- ☐ Is the timer started after a value is set in the timer register?

### Checks regarding low power consumption

- ☐ In the low power consumption mode, does not current flow from Vref when the Vref connection bit (bit 5 in address 03D7<sub>16</sub>) is set?
- ☐ Is not voltage level of port floating in the low power consumption mode?

### Checks regarding Interrupt

- ☐ When rewrite the interrupt register, do so at a point that does not generate the interrupt request?

### Checks regarding low voltage

- ☐ When using at low voltage, have you checked recommended operating conditions and changed the wait bit (address 0005<sub>16</sub>, bit 7) to "1"?

### Checks regarding A-D converter

- ☐ Have you selected other than f<sub>AD</sub> (no dividing) for  $\phi_{AD}$  when using the A-D converter at V<sub>CC</sub> = 2.7 - 4.0V?
- ☐ Have you selected no sample & hold function when using the A-D converter at V<sub>CC</sub> = 2.7 - 4.0V?
- ☐ Have you selected 8-bit mode when using the A-D converter at V<sub>CC</sub> = 2.7 - 4.0V?

## Appendix 2 Hexadecimal instruction CODE table

	D7 to D4	0000	0001	0010	0011	0100	0101	0110	0111
D3 to D0		0	1	2	3	4	5	6	7
0000	0	BRK	AND.B:S R0H,R0L	ADD.B:S R0H,R0L	MOV.B:S R0H,A0	BCLR:S 0,11[SB]	BNOT:S 0,11[SB]	JMP.S label	MULU.B src,dest
0001	1	MOV.B:S R0L,dsp:8[SB]	AND.B:S dsp:8[SB],R0L	ADD.B:S dsp:8[SB],R0L	MOV.B:S dsp:8[SB],A0	BCLR:S 1,11[SB]	BNOT:S 1,11[SB]	JMP.S label	MULU.W src,dest
0010	2	MOV.B:S R0L,dsp:8[FB]	AND.B:S dsp:8[FB],R0L	ADD.B:S dsp:8[FB],R0L	MOV.B:S dsp:8[FB],A0	BCLR:S 2,11[SB]	BNOT:S 2,11[SB]	JMP.S label	MOV.B:G src,dest
0011	3	MOV.B:S R0L,abs16	AND.B:S abs16,R0L	ADD.B:S abs16,R0L	MOV.B:S abs16,A0	BCLR:S 3,11[SB]	BNOT:S 3,11[SB]	JMP.S label	MOV.W:G src,dest
0100	4	NOP	AND.B:S R0L,R0H	ADD.B:S R0L,R0H	MOV.B:S R0Çk,A1	BCLR:S 4,11[SB]	BNOT:S 4,11[SB]	JMP.S label	CODE_74
0101	5	MOV.B:S R0H,dsp:8[SB]	AND.B:S dsp:8[SB],R0H	ADD.B:S dsp:8[SB],R0H	MOV.B:S dsp:8[SB],A1	BCLR:S 5,11[SB]	BNOT:S 5,11[SB]	JMP.S label	CODE_75
0110	6	MOV.B:S R0H,dsp:8[FB]	AND.B:S dsp:8[FB],R0H	ADD.B:S dsp:8[FB],R0H	MOV.B:S dsp:8[FB],A1	BCLR:S 6,11[SB]	BNOT:S 6,11[SB]	JMP.S label	CODE_76
0111	7	MOV.B:S R0H,abs16	AND.B:S abs16,R0H	ADD.B:S abs16,R0H	MOV.B:S abs16,A1	BCLR:S 7,11[SB]	BNOT:S 7,11[SB]	JMP.S label	CODE_77
1000	8	MOV.B:S R0H,R0L	OR.B:S R0H,R0L	SUB.B:S R0H,R0L	CMP.B:S R0H,R0L	BSET:S 0,11[SB]	BTST:S 0,11[SB]	JGEU/C label	MUL.B src,dest
1001	9	MOV.B:S dsp:8[SB],R0L	OR.B:S dsp:8[SB],R0L	SUB.B:S dsp:8[SB],R0L	CMP.B:S dsp:8[SB],R0L	BSET:S 1,11[SB]	BTST:S 1,11[SB]	JGTU label	MUL.W src,dest
1010	A	MOV.B:S dsp:8[FB],R0L	OR.B:S dsp:8[FB],R0L	SUB.B:S dsp:8[FB],R0L	CMP.B:S dsp:8[FB],R0L	BSET:S 2,11[SB]	BTST:S 2,11[SB]	JEQ/Z label	CODE_7A
1011	B	MOV.B:S abs16,R0L	OR.B:S abs16,R0L	SUB.B:S abs16,R0L	CMP.B:S abs16,R0L	BSET:S 3,11[SB]	BTST:S 3,11[SB]	JN label	CODE_7B
1100	C	MOV.B:S R0L,R0H	OR.B:S R0L,R0H	SUB.B:S R0L,R0H	CMP.B:S R0L,R0H	BSET:S 4,11[SB]	BTST:S 4,11[SB]	JLTU/NC label	CODE_7C
1101	D	MOV.B:S dsp:8[SB],R0H	OR.B:S dsp:8[SB],R0H	SUB.B:S dsp:8[SB],R0H	CMP.B:S dsp:8[SB],R0H	BSET:S 5,11[SB]	BTST:S 5,11[SB]	JLEU label	CODE_7D
1110	E	MOV.B:S dsp:8[FB],R0H	OR.B:S dsp:8[FB],R0H	SUB.B:S dsp:8[FB],R0H	CMP.B:S dsp:8[FB],R0H	BSET:S 6,11[SB]	BTST:S 6,11[SB]	JNE/JNZ label	CODE_7E
1111	F	MOV.B:S abs16,R0H	OR.B:S abs16,R0H	SUB.B:S abs16,R0H	CMP.B:S abs16,R0H	BSET:S 7,11[SB]	BTST:S 7,11[SB]	JPZ label	

The next instruction is arranged in each CODE.

CODE\_74:STE,MOV,PUSH,NEG,ROT,NOT,LDE,POP,SHL,SHA

CODE\_75:STE,MOV,PUSH,NEG,ROT,NOT,LDE,POP,SHL,SHA

CODE\_76:TST,XOR,AND,OR,ADD,SUB,ADC,SBB,CMP,DIVX,ROL,ROR,CMP,DIVU,DIV,ADCF,ABS

CODE\_77:TST,XOR,AND,OR,ADD,SUB,ADC,SBB,CMP,DIVX,ROL,ROR,CMP,DIVU,DIV,ADCF,ABS

CODE\_7A:XCHG,LDC

CODE\_7B:XCHG,STC

CODE\_7C:MOV *Dir* ,MULU,MUL,EXTS,STC,DIVU,DIV,PUSH,DIVX,DADD,DSUB,DADC,DSBB,SMOVF,SMOV,B,SSTR,ADD,LDCTX,RMPA,ENTER

CODE\_7D:JMPL,JSRI,MULU,MUL,PUSHA,LDIPL,ADD,J *Cnd* ,BMC*Cnd* ,DIVU,DIV,PUSH,DIVX,DADD,DSUB,DADC,DSBB,SMOVF,SMOV,B,SSTR,  
STCTX,RMPA,EXITD,WAIT

CODE\_7E:BTSTC,BM *Cnd* ,BNTST,BAND,BNAND,BOR,BNOR,BCLR,BSET,BNOT,BTST,BXOR,BNXOR

CODE\_7F:SHL,FSET,FCLR,MOVA,LDC,SHA,PUSHC,POPC,INT

## Appendix 2 Hexadecimal instruction CODE table

	D7 to D4	1000	1001	1010	1011	1100	1101	1110	1111
D3 to D0		8	9	A	B	C	D	E	F
0000	0	TST.B src,dest	AND.B:G src,dest	ADD.B:G src,dest	ADC.B src,dest	CMP.B:G src,dest	CMP.B:Q #IMM,dest	ROT.B #IMM,dest	SHA.B #IMM,dest
0001	1	TST.W src,dest	AND.W:G src,dest	ADD.W:G src,dest	ADC.w src,dest	CMP.W:G src,dest	CMP.W:Q #IMM,dest	ROT.W #IMM,dest	SHA.W #IMM,dest
0010	2	PUSH.B:S R0L	POP.B:S R0L	MOV.W:S #IMM,A0	INC.W A0	PUSH.W:S A0	POP.W:S A0	MOV.B:S #IMM,A0	DEC.W A0
0011	3	ADD.B:S #IMM8,R0H	AND.B:S #IMM8,R0H	INC.B R0H	MOV.B:Z #0,R0H	MOV.B:S #IMM8,R0H	STNZ #IMM8,R0H	CMP.B:S #IMM8,R0H	RTS
0100	4	ADD.B:S #IMM8,R0L	AND.B:S #IMM8,R0L	INC.B R0L	MOV.B:Z #0,R0L	MOV.B:S #IMM8,R0L	STNZ #IMM8,R0L	CMP.B:S #IMM8,R0L	JMP.W label
0101	5	ADD.B:S #IMM8,dsp:8[SB]	AND.B:S #IMM8,dsp:8[SB]	INC.B dsp:8[SB]	MOV.B:Z #0,dsp:8[SB]	MOV.B:S #IMM8,dsp:8[SB]	STNZ #IMM8,dsp:8[SB]	CMP.B:S #IMM8,dsp:8[SB]	JSR.W label
0110	6	ADD.B:S #IMM8,dsp:8[FB]	AND.B:S #IMM8,dsp:8[FB]	INC.B dsp:8[FB]	MOV.B:Z #0,dsp:8[FB]	MOV.B:S #IMM8,dsp:8[FB]	STNZ #IMM8,dsp:8[FB]	CMP.B:S #IMM8,dsp:8[FB]	INTO
0111	7	ADD.B:S #IMM8,abs16	AND.B:S #IMM8,abs16	INC.B abs16	MOV.B:Z #0,abs16	MOV.B:S #IMM8,abs16	STNZ #IMM8,abs16	CMP.B:S #IMM8,abs16	
1000	8	XOR.B src,dest	OR.B:G src,dest	SUB.B:G src,dest	SBB.B src,dest	ADD.B:Q #IMM,dest	MOV.B:Q #IMM,dest	SHL.B #IMM,dest	ADJNZ.B #IMM,dest,label
1001	9	XOR.W src,dest	OR.W:G src,dest	SUB.W:G src,dest	SBB.W src,dest	ADD.W:Q #IMM,dest	MOV.W:Q #IMM,dest	SHL.W #IMM,dest	ADJNZ.W #IMM,dest,label
1010	A	PUSH.B:S R0H	POP.B:S R0H	MOV.W:S #IMM,A1	INC.W A1	PUSH.W:S A1	POP.W:S A1	MOV.B:S #IMM,A1	DEC.W A1
1011	B	SUB.B:S #IMM8,R0H	OR.B:S #IMM8,R0H	DEC.B R0H	NOT.B:S R0H	STZ #IMM8,R0H	STZX #IMM8,#IMM8,R0H	CODE_EB	REIT
1100	C	SUB.B:S #IMM8,R0L	OR.B:S #IMM8,R0L	DEC.B R0L	NOT.B:S R0L	STZ #IMM8,R0L	STZX #IMM8,#IMM8,R0L	PUSHM src	JMP.A label
1101	D	SUB.B:S #IMM8,dsp:8[SB]	OR.B:S #IMM8,dsp:8[SB]	DEC.B dsp:8[SB]	NOT.B:S dsp:8[SB]	STZ #IMM8,dsp:8[SB]	STZX #IMM8,#IMM8,dsp:8[SB]	POPM dest	JSR.A label
1110	E	SUB.B:S #IMM8,dsp:8[FB]	OR.B:S #IMM8,dsp:8[FB]	DEC.B dsp:8[FB]	NOT.B:S dsp:8[FB]	STZ #IMM8,dsp:8[FB]	STZX #IMM8,#IMM8,dsp:8[FB]	JMPS #IMM8	JMP.B label
1111	F	SUB.B:S #IMM8,abs16	OR.B:S #IMM8,abs16	DEC.B abs16	NOT.B:S abs16	STZ #IMM8,abs16	STZX #IMM8,#IMM8,abs16	JSRS #IMM8	UND

## Revision History

Version	Contents for change	Revision date
REV.C	<p>Pages 2, 6 internal interrupt 9 -&gt;13</p> <p>Pages 2, 6 2.7 to 5.5V (f(XIN)=<u>7MHz with software one-wait</u>):mask ROM version -&gt;2.7 to 5.5V (f(XIN)=<u>3.5MHz</u>):mask ROM version</p> <p>Page 6 Power consumption <u>18mA</u> (f(XIN)=<u>7MHz</u> with software one-wait, VCC=3V) -&gt;<u>11mA</u> (f(XIN)=<u>3.5MHz</u> , VCC=3V)</p> <p>Page 7 M30201M2-XXXSP/FP, M30201M2T-XXXSP/FP -&gt;Delete M30201M4T-XXXSP, M30201F6T-XXXSP -&gt;Delete M30201M6-XXXFP, M30201M6T-XXXFP -&gt;Addition</p> <p>Pages 10, 11 Figures 1.7 and 1.8 are partly revised.</p> <p>Page 15 Figure 1.11 is partly revised.</p> <p>Page 17 Figure 1.14 is partly revised (Bit 7 of the processor mode register 1). Wait bit -&gt;Reserved bit</p> <p>Page 18 <del>Software wait</del></p> <p>Page 21 Figure 1.18 is partly revised (Note 8 is partly revised).</p> <p>Page 22 Figure 1.19 is partly revised (n=0716 : approx. <u>16.5kHz</u> -&gt; <u>19.5kHz</u>).</p> <p>Page 34 Figure 1.24 is partly revised (Note 2 is added).</p> <p>Page 50 Figure 1.39 is partly revised.</p> <p>Page 78 Figure 1.72 is partly revised (UARTi transmit/receive mode register).</p> <p>Page 79 Figure 1.73 is partly revised.</p> <p>Page 81 Figure 1.74 is partly revised.</p> <p>Page 86 Figure 1.79 is partly revised.</p> <p>Pages 91 to 97 Figures 1.83 to 1.89 are partly revised.</p> <p>Pages 111 to 114, 119 to 123 Tables 1.36 to 1.39 and 1.56 to 1.71 are partly revised.</p> <p>Page 125 Table 1.74 is partly revised (Boot ROM area <u>4 K</u> bytes -&gt; <u>3.5 K</u> bytes) .</p> <p>Page 143 to 169 Standard serial I/O mode 2 is added.</p>	01.4.12
Revision history		M30201 Group User's Manual

Version	Contents for change	Revision date
REV.C	<p>Page 204  2.2.15 Precaution for Timer A (one-shot timer mode) (3) is partly revised.</p> <p>Page 219  2.3.7 Precautions for Timer B (pulse period/pulse width measurement mode) (3) is partly revised.</p> <p>Page 309  Table 2.7.11 and Table 2.7.12 are partly revised.</p> <p>Page 320  Figure 2.10.3 is partly revised.</p> <p>Page 324  Table 2.11.1 is partly revised.</p> <p>Page 328  Figure 2.11.6 is partly revised.</p> <p>Page 329  2.11.4 Precautions in Power Control (b) is partly revised.</p> <p>Page 355  Figure 3.6.2 is partly revised.</p> <p>Page 359  Figure 3.7.2 is partly revised.</p>	01.6.8
Revision history		M30201 Group User's Manual



# M30201 Group User's Manual



**Renesas Electronics Corporation**

1753, Shimonumabe, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8668 Japan